


PrimEvo⁺

Self-contained Waterproof

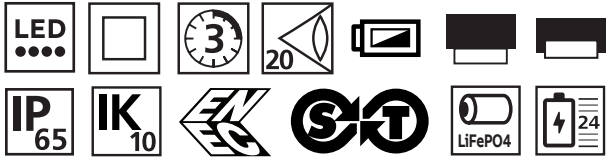


Key benefits :

- Made from recycled materials
- Easy to install
- Push-wire connector
- Installation on the wall or the ceiling, in recess or surface mounted
- Compatible with older generation (XT100ST)



	100 ST	380 ST
Code	6331033/44	6331035/44
GID Code	7TCA309015R0031	7TCA309015R0037
Description	XTE150-M3/ST 20M 100L IP65	XTE150-M3/ST 20M 380L IP65
Input voltage	220 - 240 Vac, 50/60 Hz	220 - 240 Vac, 50/60 Hz
Lamp type	8 LEDs	8 LEDs
Lamp output (lm)	100	380
Maintained/ Non maintained	M/NM	M/NM
Power consumption (W)	2,5	3
Operation duration (hrs)	3	3
Environnement temperature	0°C to 40°C	0°C to 40°C
Dimensions	240 x 115 x 65	240 x 115 x 65
Viewing distance	20m	20m
Life time of the LED	10 years	10 years
Life time of complete product	10 years	10 years
IP	IP65	IP65
IK	IK10	IK10
cd/m ²	> 800	> 1100

Dimensions

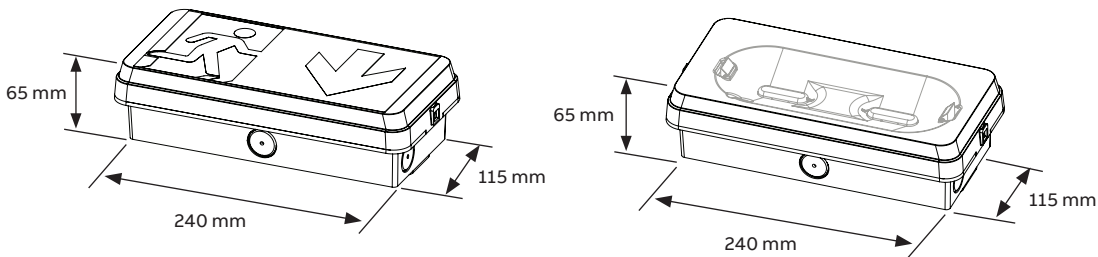

Accessory : Double sided - 663 432

