

Decorative

Outdoor

Technical

# New Products





# **VK Leading Light**

Since 1978

## **New Products 2026**

**Decorative - Outdoor - Technical**



red dot winner 2025



red**dot** winner 2025



red dot winner 2025



red dot winner 2025



reddot winner 2025



reddot winner 2025



# VK Leading Light

Since 1978

**A:** 8 Aristotelous St, Tavros, 177 78 Athens, Greece  
**T:** +30 210 99 69 610-11, +30 210 34 58 072, +30 210 34 58 075  
**F:** +30 210 99 58 374  
**E:** [info@vkleadinglight.gr](mailto:info@vkleadinglight.gr)  
**W:** [vkleadinglight.gr](http://vkleadinglight.gr)

## **Working Hours**

Monday - Friday 8:00 - 18:00


Saturday 9:00 - 14:00



index

# INDEX

Decorative Lights  
pages 32-87



Akrovatis Red  
p. 32




VK/04717/DARK  
p. 40



VK/04717/LIN  
p. 41



VK/04717/SPOT/DA  
p. 42




VK/04717/GL/DA  
p. 42



VK/04717/PE/DA  
p. 44



VK/04717/TUBE  
p. 46




VK/04717/ARC  
p. 47



VK/04717/PE/PS/1  
p. 48




VK/04717/CE/PSI/2  
p. 49



VK/04717/CE/CONL/2  
p. 50




VK/04717/CE/PST/3  
p. 51



VK/04717/CE/CONT/4  
p. 51



VK/04717/PE/CON  
p. 52



VK/04717/RS/CON  
p. 52



VK/04715/PE/D/113  
p. 54



VK/04715/PE/D/163  
p. 56



VK/04715/PE/D/63  
p. 58



VK/02301/PE/D/GD-B  
p. 60



VK/02300/PE/D/W-B  
p. 62



VK/04689/PE/D/CG/40  
p. 66



VK/04689/PE/D/B/60  
p. 68



VK/04690/PE/D/CG/60  
p. 70



VK/04690/PE/D/B/90  
p. 72




VK/04691/PE/D/RGD  
p. 76



VK/04698/PE/D/BS  
p. 78



VK/04698/CAN/CG  
p. 79



VK/04692/B/W  
p. 80



VK/04693/PE/D/CG/W  
p. 84



VK/04694/WA/D/B/W  
p. 86

Decorative Lights  
pages 88-163



VK/04695/CG/W  
p. 88



VK/04701/PE/D/B-G/W  
p. 92




VK/04701/CE/D/B-G/W  
p. 94



VK/04701/WA/D/B-G/W  
p. 96




VK/04687/PE/B-SG/W  
p. 100




VK/04686/PE/B-SG/W  
p. 102



VK/04687/CE/B-SG/W  
p. 104



VK/04686/CE/B-SG/W  
p. 106



VK/04699/PE/D/B/W  
p. 110



VK/04699/WA/D/CG/W  
p. 112



VK/04700/B/W  
p. 114



VK/04696/PE/D/OR/W  
p. 118




VK/04696/WA/D/GR/W  
p. 120



VK/04697/W/W  
p. 122



VK/04714/PE/BS/WW  
p. 126




VK/04714/WA/BS/WW  
p. 128




VK/04713/TL/BS/WW  
p. 130



VK/04713/FL/BS/WW  
p. 132




VK/03370/PE/BS  
p. 136




VK/03370/WA/BS  
p. 138




VK/03370/TL/BS  
p. 140



VK/03370/FL/BS  
p. 142



VK/03362/PE/BS  
p. 146



VK/03363/PE/BS  
p. 148




VK/03364/PE/BS  
p. 150



VK/03362/TL/BS  
p. 152



VK/03363/TL/BS  
p. 154



VK/03364/TL/BS  
p. 156



VK/04679/PE/D/WW-BW  
p. 160



VK/03350/PE/OW-WW  
p. 162

# INDEX

Decorative Lights  
pages 164-225




VK/03349/PE/WW/40  
p. 164



VK/03349/WA/WW  
p. 166



VK/04707/PE/D/W/W  
p. 170



VK/04707/CE/D/B/W  
p. 172



VK/04708/PE/D/B/W  
p. 174



VK/04708/CE/D/W/W  
p. 176



VK/04709/PE/D/RB/W  
p. 180



VK/04709/CE/D/GD/W  
p. 182



VK/04710/CE/D/W/W  
p. 184



VK/04734/WA/B/W  
p. 186



VK/04734/PE/B/W/4  
p. 188



VK/09063/TC  
p. 190




VK/09066/TC  
p. 192



VK/03352/CE/B  
p. 194




VK/03353/CE/B  
p. 194




VK/03354/CE/B  
p. 196




VK/03354/CE/2/BG  
p. 196




VK/03354/CE/3/B  
p. 198



VK/04712/WA/D/TR/W  
p. 202



VK/04711/WA/D/A/W  
p. 204



VK/03351/WA/A/16  
p. 206



VK/04688/WA/D/B/W  
p. 208



VK/03365/WA/BS  
p. 210




VK/03366/WA/BS  
p. 212



VK/04704/DW-B/W  
p. 214



VK/04705/LW-W/W  
p. 216



VK/04706/GD/W  
p. 218



VK/04733/WA/W/W  
p. 220



VK/04703/B/W  
p. 222



VK/03360/B  
p. 224

Decorative Lights  
pages 226-277




VK/03355/WA/W  
p. 226




VK/03356/WA/B  
p. 228




VK/04576/WA/GD/W  
p. 230




VK/04732/WA/B/W  
p. 232



VK/04732/TL/GD/W  
p. 234



VK/04732/PE/B/W  
p. 236



VK/04732/FL/GD/W  
p. 238




VK/04735/WA/W/W  
p. 240




VK/04735/WA/GD/W/USB  
p. 242



VK/04735/TL/B/W  
p. 244




VK/04735/FL/B/W  
p. 246



VK/04735/FL/B/W/3  
p. 248




VK/04735/PE/B/W  
p. 250



VK/04702/GD/W  
p. 252




VK/03357/BG  
p. 254



VK/03358/B  
p. 256



VK/03359/W  
p. 258



VK/03361/B  
p. 260



VK/04685/B/W/180  
p. 262




VK/04678/B/CCT  
p. 264



VK/04666/AIR/BW/ABS  
p. 268



VK/04667/AIR/BW/ABS  
p. 270



VK/04665/AIR/BW  
p. 272



VK/04664/AIR/W  
p. 274



VK/04679/AIR/B  
p. 276

# INDEX

Outdoor Lights  
pages 280-328



VK/02271/RB/W  
p. 280



VK/02272/AN/W  
p. 282



VK/02267/WA/RB  
p. 284



VK/02268/WA/AN  
p. 286




VK/02263/BR  
p. 288



VK/02302/W/CCT  
p. 290



VK/02305/B/CCT  
p. 292



VK/01130/CE/AN  
p. 294



VK/01131/CE/AN  
p. 294



VK/02270/RB/W  
p. 296



VK/02258/G  
p. 298



VK/02292/WA/RB/WW/9  
p. 300



VK/02292/WA/RB/WW/18  
p. 300



VK/02298/WA/GR  
p. 302



VK/02299/WA/AN  
p. 304



VK/01133/W  
p. 306



VK/02273/RB/W/60  
p. 308



VK/02273/AN/W/60  
p. 310



VK/02274/RB/W/30  
p. 312



VK/02274/AN/W/60  
p. 314



VK/02274/RB/W/80  
p. 314



VK/02274/AN/W/80/2  
p. 316



VK/02275/RB/W/30  
p. 318



VK/02275/AN/W/60  
p. 320



VK/02275/RB/W/80  
p. 320




VK/02290/FL/GR/WW/15  
p. 322



VK/02290/WA/RB/WW/15  
p. 324



VK/02290/WA/GR/WW/18  
p. 324



VK/02281/BR/W/25  
p. 326



VK/02281/B/W/30  
p. 328

Outdoor Lights  
pages 330-366



VK/02281/BR/W/35  
p. 330



VK/02280/WA/B/W  
p. 332



VK/02283/RB/W  
p. 334



VK/04727/G/W/30  
p. 336



VK/04727/G/W/50  
p. 336



VK/04727/G/W/90  
p. 336



VK/04727/G/W/30/SPK  
p. 338




VK/04727/G/W/50/SPK  
p. 338



VK/04727/G/W/90/SPK  
p. 338



VK/04726/G/W  
p. 340




VK/04726/G/W/SPK  
p. 340



VK/04728/G/W  
p. 340



VK/02282/B/W  
p. 342



VK/02285/RB/W  
p. 344



VK/02284/RB/W/50  
p. 346



VK/02284/AN/W/65  
p. 346



VK/04729/B/W/40  
p. 348



VK/04729/B/W/60  
p. 348



VK/02289/AN/W/21  
p. 350



VK/02289/RB/W/50  
p. 350




VK/01134/AN  
p. 352



VK/02269/W/W  
p. 354



VK/02286/AN/W  
p. 356



VK/02278/W/W/30  
p. 358



VK/02278/AN/W/50  
p. 358



VK/02278/RB/W/100  
p. 358



VK/02288/AN/W  
p. 360



VK/02287/RB  
p. 362



VK/02277/AN/W/39  
p. 364



VK/02293/RB  
p. 366

# INDEX

Outdoor Lights  
pages 366-397



VK/02294/GR  
p. 366



VK/02295/RB  
p. 368



VK/02296/GR  
p. 370



VK/02296/RB/SPK  
p. 370



VK/02296/GR/AGL  
p. 371



VK/02297/RB  
p. 372



VK/02297/GR/SPK  
p. 372



VK/02297/RB/AGL  
p. 373



VK/02276/RB/W/60  
p. 374



VK/02276/AN/W/80  
p. 374



VK/02291/GR/WW/53  
p. 376



VK/02291/RB/WW/83  
p. 376



VK/02291/GR/WW/113  
p. 376



VK/04716/RB/60  
p. 378



VK/04716/BS/80  
p. 378



VK/04716/RB/100  
p. 378



VK/04716/B/120  
p. 378



VK/04730/RB  
p. 380



VK/04731/RB  
p. 382



VK/01128/W  
p. 384



VK/01129/PE/W/55  
p. 386



VK/04723/MC/W  
p. 388



VK/04724/MC/W  
p. 388




VK/04725/MC/W  
p. 388



VK/02118  
p. 390



VK/01046/TR  
p. 392



VK/01045/ABS  
p. 392



VK/02257  
p. 396



VK/02188,  
VK/02189 p. 396



VK/02190, VK/02265  
p. 397

Technical Lights  
pages 398-430



Keiso 3D  
p. 402-403



Keiso Round  
p. 404-405



Accessories Keiso  
p. 406



Cob 320leds/3W  
p. 408



Cob 320leds/7W  
p. 409



Cob 480leds/10W  
p. 410



Cob 528leds/14W  
p. 411



Cob RGB 14W  
p. 412



Cob Magic 16W  
p. 414



VK/FUTC6  
p. 416



VK/SPIRW5  
p. 416



VK/WL/BOX2  
p. 417



VK/24/.../140/3  
p. 418



VK/24/.../140/6  
p. 419



CCT Warm 1800-3000K  
p. 420



VK/29  
p. 422



VK/30  
p. 422



VK/K29-30  
p. 423



VK/34  
p. 423



VK/18  
p. 424



VK/19  
p. 424



VK/K18-19  
p. 425



VK/28  
p. 426



VK/K28  
p. 427



VK/09  
p. 428



VK/10  
p. 428



VK/K09  
p. 429



VK/K10  
p. 429



VK/32  
p. 430



VK/33  
p. 430

# INDEX


Technical Lights  
pages 432-451



VK/25  
p. 432



VK/22  
p. 434



VK/24  
p. 434



VK/PROF/CON/I  
p. 435



VK/PROF/CON/L  
p. 435



VK/PROF/CON/L/3D  
p. 435



VK/21  
p. 436



VK/20  
p. 436




VK/31  
p. 438



VK/16  
p. 440



VK/17  
p. 440



VK/PROF/SRK  
p. 441



VK/PROF/RES  
p. 441



VK/15  
p. 442



VK/23  
p. 442



VK/11  
p. 444



VK/13  
p. 444



VK/14  
p. 444



VK/26  
p. 446



VK/27  
p. 446



VK/00  
p. 448



VK/00/33  
p. 448



VK/01/SLIM/AL  
p. 448



VK/01/DEEP/SLIM/AL  
p. 448



VK/K01/SLIM  
p. 449



VK/01/AL  
p. 450



VK/02/AL  
p. 450



VK/12/AL  
p. 450



VK/K01  
p. 451



VK/K01/NEON  
p. 451

# INDEX

Technical Lights  
pages 451-482



VK/K01U prismatic  
p. 451



VK/D1/AL  
p. 452



VK/03/SLIM/AL  
p. 452



VK/D2/AL  
p. 452



VK/04R  
p. 454



VK/04  
p. 454



VK/06  
p. 454



VK/K04  
p. 455



VK/01R/DEEP/TRIM-  
LESS/ALL p. 456



VK/07R/DEEP/TRIM-  
LESS/ALL p. 456



VK/K07  
p. 457



VK/04718/CE/W  
p. 460



VK/04719/CE/B  
p. 460



VK/04618/W  
p. 462




VK/04618/2/W  
p. 462




VK/04618/5/W  
p. 464



VK/04618/10/W  
p. 465



VK/04618/15/W  
p. 466



VK/04146/W  
p. 468



VK/04222/B  
p. 468



VK/04720/W  
p. 470



VK/04721/B  
p. 470



VK/04722/W  
p. 472



VK/03341/B  
p. 474



VK/03332/W  
p. 475



VK/03371/B  
p. 476



VK/09075/R  
p. 477



VK/03009G/GD  
p. 478



VK/03302G/CE/G  
p. 480



VK/03006/G  
p. 482

# INDEX

Technical Lights  
pages 483-509



VK/03139CE/G  
p. 483



VK/04604/TR/  
DA/B-B/W p. 485



VK/04682/TR/W/36/  
CCT p. 486



VK/04683/TR/B/36/  
CCT p. 487



VK/04680/TR/W/36/  
CCT p. 488



VK/04680/REF/24  
p. 488



VK/04681/TR/B/36/  
CCT p. 489



VK/04681/REF/60  
p. 489



VK/04684/TR/B/55/  
CCT p. 490



VK/04674/TR/W/36  
p. 492



VK/04674/REF/16  
p. 492



VK/04680/TR/B/36/  
CCT/DALI p. 494



VK/04681/TR/W/36/  
CCT/DALI p. 495



VK/04674/TR/  
DA/B/36 p. 496



VK/04674/REF/24  
p. 496



VK/04556/W  
p. 498



VK/PANEL/SRK/1.5  
p. 499



Slim Round Panel  
CCT LED p. 500



Slim Square Panel  
CCT LED p. 502



VK/02279/B/W/60  
p. 504



VK/02279/W/W/90  
p. 506



VK/02279/B/W/120  
p. 506



SLIM TUBE CCT  
p. 508

Modules, Drivers  
& Lamps  
pages 512-529



Modules 50  
p. 512



Modules 111  
p. 513



Modules 35  
p. 514



CC15W/100-700/DALI  
p. 516



CC23W/100-700/DALI  
p. 516



CC44W/300-1050/DALI  
p. 516



VK/10093  
p. 517



VK/10087/DALI  
p. 517



XLN-60-24DA2  
p. 517



VK/10092  
p. 518



VK/10091  
p. 518



VK/05105, VK/05121  
p. 520



VK/05105, VK/05121  
p. 520



VK/05187  
p. 520



VK/05106, VK/05121  
p. 521




VK/05106, VK/05121  
p. 521



VK/05185, VK/05186  
p. 521



VK/05121 (E14)  
p. 522



VK/05121 (E27)  
p. 523



VK/05122 (E27)  
p. 524



VK/05109, VK/05110  
p. 525



VK/05123  
p. 526



VK/05108  
p. 527



VK/05059/1, VK/05060/1  
p. 528



VK/05059/2, VK/05060/2  
p. 528



VK/S14D  
p. 529



VK/S14D/2  
p. 529















VK/S14S  
p. 529



notes

## Symbols

<b>IP20</b>	IP protection class (indoor)		maximum height		on front side radiant lamp
<b>IP44</b>	IP protection class (outdoor)		adjustable downward radiating luminaire		on both sides radiant lamp (top & bottom)
<b>IP45</b>	IP protection class (outdoor)		gypsum lamps paintable		wall lamp with light beam down
<b>IP54</b>	IP protection class (outdoor)		luminaire type - LED either halogen useable		ceiling downward radiant luminaire
<b>IP65</b>	IP protection class (outdoor)		indicates temperature		upward radiant luminaire
<b>IP68</b>	IP protection class (outdoor)		indicates energy efficiency Class		pendant radiant lamp

## IP Rate

### Αναλυτική επεξήγηση του βαθμού στεγανότητας IPXX

Σίγουρα έχετε δει σε διάφορα φωτιστικά να αναφέρεται κάποιος βαθμός προστασίας IP, όπως IP54, IPX8 κ.λπ. Οι αριθμοί αυτοί υποδηλώνουν μια συγκεκριμένη πιστοποίηση για το φωτιστικό, στο κατά πόσον αυτό είναι αδιάβροχο και προστατευμένο. Για παράδειγμα, ένα φωτιστικό μπορεί να είναι αδιάβροχο όταν ψιχαλίζει, αλλά να μην είναι αδιάβροχο όταν αυτό πέσει/βυθιστεί στο νερό.

Με την κατάλληλη πιστοποίηση, ο καταναλωτής είναι σε θέση να γνωρίζει ακριβώς τον βαθμό αδιαβροχοποίησης του φωτιστικού που αγοράζει και όχι εάν είναι αδιάβροχο, γενικά και αόριστα.

Ο έλεγχος της πιστοποίησης πραγματοποιείται σε εργαστήρια, σύμφωνα με συγκεκριμένες διαδικασίες, οι οποίες ακολουθούν το πρότυπο IEC 60529, ώστε να είναι πάντα οι ίδιες, ανεξαρτήτως του προϊόντος ή του κατασκευαστή. Η κωδικοποίηση IPXX, που ακολουθείται πιο συχνά, έχει 2 ψηφία, τα οποία παίρνουν συγκεκριμένες τιμές και ενημερώνουν τον καταναλωτή για την πιστοποίηση που φέρει το προϊόν.

## Συγκεκριμένα

A. Το πρώτο X πιστοποιεί την προστασία που διαθέτει το προϊόν από την είσοδο στερεών σωματιδίων. Παίρνει τιμές από 0-6, όπως αναλύεται παρακάτω:

0 = Καμία προστασία.

1 = Προστασία από την είσοδο στερεών σωματιδίων με διάμετρο πάχους άνω των 50,00 χιλιοστών.

2 = Προστασία από την είσοδο στερεών σωματιδίων με διάμετρο πάχους άνω των 12,00 χιλιοστών.

3 = Προστασία από την είσοδο στερεών σωματιδίων με διάμετρο πάχους άνω των 2,50 χιλιοστών.

4 = Προστασία από την είσοδο στερεών σωματιδίων με διάμετρο πάχους άνω του 1,00 χιλιοστού.

5 = Προστασία από την ποσότητα της σκόνης όπου θα ήταν ικανή να επηρεάσει τη φυσιολογική λειτουργία της συσκευής.

6 = Δεν μπαίνει καθόλου σκόνη.

B. Το δεύτερο X πιστοποιεί την προστασία που διαθέτει το προϊόν από την είσοδο νερού. Παίρνει τιμές από 0-8, όπως αναλύεται παρακάτω.

0 = Καμία προστασία.

1 = Προστασία από σταγόνες νερού που πέφτουν κατακόρυφα.

2 = Προστασία από απευθείας ψεκαζόμενες σταγόνες νερού, με κλίση έως 15 μοίρες ως προς την κατακόρυφο.

3 = Προστασία από απευθείας ψεκαζόμενες σταγόνες νερού, με κλίση έως 60 μοίρες ως προς την κατακόρυφο.

















4 = Προστασία από νερό που ψεκάζεται από πάσα κατεύθυνση.

5 = Προστασία από πίδακες νερού που πέφτουν υπό χαμηλή πίεση, από πάσα κατεύθυνση.

6 = Προστασία από πίδακες νερού που πέφτουν υπό υψηλή πίεση.

7 = Προστασία από το νερό, σε βύθισμα βάθους από 15 εκατοστά έως ένα μέτρο, έως και 30 λεπτά.

8 = Προστασία από το νερό, σε βύθισμα για μεγάλες χρονικές περιόδους, υπό δοσμένη πίεση.

	dimmable		guaranty		neckline of article
	no dimmable		beam angle		neckline of article
	average service life in hours		grounding		indicates the installation depth
	average service life in clicks		incl. motion sensor		WiFi control
<b>COB</b> 1016	chip on board				indicates rechargeable battery
<b>MAX</b> 50w	max. load on the article				adaptor

## IP Rate

### Analytical explanation of IPXX protection degree

You have certainly seen in some luminaires the reference to some degree of IP protection, such as IPX54, IPX8 etc. These numbers imply a specific certification for the luminaire, whether it is waterproof and protected. For example, a luminaire may be waterproof when it is under drizzling rain, but may not be when dropped/sunk into the water.

With the proper certification, the consumer is able to know the exact degree of water resistance of the luminaire he is buying, not only if it's water resistant, in general.

The certification testing is carried out in laboratories, followed by specific procedures, according to the International Standard IEC 60529, which (procedures) are always the same, regardless of the product or the manufacturer. The most frequently followed IPXX encoding has 2 digits, which get specific values and inform the consumer of the certification that the product carries.

### More specifically

A. The first digit (X) of the IP code indicates the degree of protection of the product against solid particles intruding into an enclosure. It takes values from 0-6, as analyzed below:

0 = No special protection.

1 = Protection from entry by solid particles with a diameter of thickness greater than 50,00mm.

2 = Protection from entry by solid particles with a diameter of thickness greater than 12,00mm.

3 = Protection from entry by solid particles with a diameter of thickness greater than 2,50mm.

4 = Protection from entry by solid particles with a diameter of thickness greater than 1,00mm.

5 = Protection from the amount of dust that would interfere with the operation of the equipment.

6 = Dust tight.

B. The second digit (X) of the IP code indicates the degree of protection of the product inside an enclosure against the harmful entry of various forms of moisture. It takes values from 0-8, as analyzed below:

0 = No special protection.

1 = Protection against vertically falling drops of water.

2 = Protection against direct sprays of water up to 15 degrees from vertical angle.

3 = Protection against direct sprays of water up to 60 degrees from vertical angle.

4 = Protection against water splashed from all directions.

5 = Protection against low pressure jets of water from all directions.

6 = Protection against powerful jets of water.

7 = Protection against the effect of immersion between 15,00cm and 1,00m for up to 30 minutes.

8 = Protection against long periods of immersion under pressure.

## Κλάση I & II

### Κλάση I

Αυτές οι συσκευές πρέπει να έχουν το σασί τους συνδεδεμένο με ηλεκτρική γείωση (ΗΠΑ: γείωση) με ξεχωριστό καλώδιο γείωσης (χρώματος πράσινου/κίτρινου στις περισσότερες χώρες, πράσινου στις ΗΠΑ, τον Καναδά και την Ιαπωνία). Η σύνδεση γείωσης επιτυγχάνεται με ένα καλώδιο τριών αγωγών, το οποίο τυπικά τελειώνει με υποδοχή εναλλασσόμενου ρεύματος (AC) τριών (3) ακίδων, που συνδέεται σε αντίστοιχη έξοδο εναλλασσόμενου ρεύματος. Η βασική απαίτηση είναι ότι καμία απλή αστοχία δεν μπορεί να οδηγήσει σε έκθεση σε επικίνδυνη τάση, ώστε να προκληθεί ηλεκτροπληξία και ότι σε περίπτωση βλάβης, η τροφοδοσία θα αφαιρεθεί αυτόματα [μερικές φορές αναφέρεται ως αυτόματη αποσύνδεση τροφοδοσίας (ADS)].

Ένα σφάλμα στη συσκευή που προκαλεί την επαφή ενός ενεργού αγωγού με το περίβλημα, θα προκαλέσει τη ροή ρεύματος στον αγωγό γείωσης. Εάν είναι αρκετά μεγάλο, αυτό το ρεύμα θα σβήσει μία συσκευή υπερβολικής τάσης ρεύματος [ασφάλεια ή διακόπτης κυκλώματος (CB)] και θα αποσυνδέσει την παροχή. Ο χρόνος αποσύνδεσης πρέπει να είναι αρκετά γρήγορος ώστε να μην επιτρέπεται η έναρξη της μαρμαρυγής εάν ένα άτομο έρχεται σε επαφή με το περίβλημα τη δεδομένη στιγμή. Αυτή τη φορά και η τρέχουσα διαβάθμιση με τη σειρά της επιτρέπει τη μέγιστη αντίσταση γείωσης. Για να παρέχεται συμπληρωματική προστασία έναντι σφαλμάτων υψηλής σύνθεσης αντίστασης, είναι σύνθετες να συνιστούμε μία συσκευή υπολειπόμενου ρεύματος (RCD), γνωστή και ως διακόπτης προστασίας υπολειπόμενου ρεύματος (RCCB), διακόπτης κυκλώματος βλάβης γείωσης (GFCI), ή διακόπτης προστασίας από υπολειμματικό ρεύμα με ενσωματωμένη προστασία υπέρτασης ρεύματος (RCBO), ο οποίος θα διακόψει την παροχή ηλεκτρικού ρεύματος στη συσκευή εάν τα ρεύματα στους δύο πόλους της παροχής δεν είναι ίσα και αντίθετα.

### Κλάση II

Μια ηλεκτρική συσκευή "Κλάσης II" ή με διπλή μόνωση, είναι εκείνη που έχει σχεδιαστεί κατά τέτοιο τρόπο, ώστε να μην απαιτεί τη σύνδεση ασφαλείας σε ηλεκτρική γείωση.

Η βασική απαίτηση είναι ότι καμία απλή αστοχία δεν μπορεί να οδηγήσει στην έκθεση σε επικίνδυνη τάση ώστε να προκληθεί ηλεκτροπληξία και ότι αυτό θα πρέπει να επιτυγχάνεται δίχως να στηρίζεται σε γεωμένο μεταλλικό περίβλημα. Αυτό συνήθως επιτυγχάνεται τουλάχιστον εν μέρει με την ύπαρξη τουλάχιστον δύο στρώσεων μονωτικού υλικού μεταξύ των ενεργών τμημάτων και του χρήστη, ή με τη χρήση ενισχυμένης μόνωσης.

Στην Ευρώπη, μία συσκευή με διπλή μόνωση πρέπει να φέρει την ετικέτα "Κλάση II" (Class II) ή "διπλής μόνωσης" ή να φέρει το σύμβολο διπλής μόνωσης ( ένα τετράγωνο μέσα σε ένα άλλο τετράγωνο).

Τα μονωμένα τροφοδοτικά εναλλασσόμενου ρεύματος (όπως φορτιστές κινητού τηλεφώνου), τυπικά χαρακτηρίζονται ως "Κλάση II", πράγμα που σημαίνει ότι τα καλώδια εξόδου συνεχούς ρεύματος (DC) απομονώνονται από την είσοδο εναλλασσόμενου ρεύματος. Η ονομασία "Κλάση II" δεν πρέπει να συγχέεται με την ονομασία "Κλάση 2", καθώς η τελευταία δεν σχετίζεται με τη μόνωση (προέρχεται από το πρότυπο UL 1310, καθορίζοντας τα όρια μέγιστης τάσης/ρεύματος/ισχύος).

### Colour Codes

### Decoding our colours



ABS  
Bronze



ACOP  
Antique  
Copper



PCOP  
Pink  
Copper



BBS  
Brushed  
Brass



BS  
Brass



MC  
Brushed  
Chrome



NB  
Natural  
Brass



BR  
Rust  
Brown



AL  
Aluminium



C  
Chrome



G  
Grey



GD  
Gold



COP  
Copper



AN  
Anthracite



TC  
Terracotta



GB  
Golden  
Black



R  
Red



GR  
Green



BL  
Blue



Y  
Yellow



B  
Black



W  
White

## Class I & II

### Class I

These appliances must have their chassis connected to electrical earth (US: ground) by a separate earth conductor (colored green/ yellow in most countries, green in the US, Canada and Japan). The earth connection is achieved with a 3-conductor mains cable, typically ending with 3-prong AC connector which plugs into corresponding AC outlet. The basic requirement is that no single failure can result in dangerous voltage becoming exposed so that it might cause an electric shock and that if a fault occurs the supply will be removed automatically (this is sometimes referred to as ADS = Automatic Disconnection of Supply).

A fault in the appliance which causes a live conductor to contact the casing will cause a current to flow in the earth conductor. If large enough, this current will trip an over current device [fuse or circuit breaker (CB)] and disconnect the supply. The disconnection time has to be fast enough not to allow fibrillation to start if a person is in contact with the casing at the time. This time and the current rating in turn sets a maximum earth resistance permissible. To provide supplementary protection against high-impedance faults, it is common to recommend a residual current operated circuit-breaker with integral over-current protection (RCBO), which will cut off the supply of electricity to the appliance if the currents in the two poles of the supply are not equal and opposite.

### Class II

A Class II or double insulated electrical appliance, is one which has been designed in such a way that it does not require a safety connection to electrical earth (ground).

The basic requirement is that no single failure can result in dangerous voltage becoming exposed so that it might cause an electric shock and that is achieved without relying on an earthed metal casing. This is usually achieved at least in part by having at least two layers of insulating material between live parts and the user, or by using reinforced insulation.

In Europe, a double insulated appliance must be labelled "Class II" or double insulated or bear the double insulation symbol (a square inside another square).

Insulated AC/DC power supplies (such as cell-phone chargers), are typically designated as "Class II", meaning that the DC output wires are isolated from the AC input. The designation "Class II" should not be confused with the designation of "Class 2", as the latter is unrelated to insulation (it originates from standard UL 1310, setting limits on maximum output voltage/ current/ power).



# Categories

Architectural Decorative Lights

Pendant Lights

Plafo & Ceiling Lights

Reading Lights

Wall Decorative Lights

Floor & Table Lights

Ceiling Fans

Cabinet Lights

Outdoor Lights

Ledstrips-Profiles

Track lights

Recessed spots

Panels

Mirror Wall Lights

Modules

Drivers

Led Lamps






reddot

## Red Dot Design Award Winner

Inspired by the graceful balance of an acrobat, Akrovatis is a minimalist ceiling pendant that combines geometry, movement, and light. Its dual light sources—one diffuse and one focused—provide both ambient illumination and directional precision.

The modular structure and rotating elements allow adaptable configurations, making it suitable for a wide range of interior applications. A lighting object designed to feel balanced, dynamic, and timeless.

**Akrovatis Red**

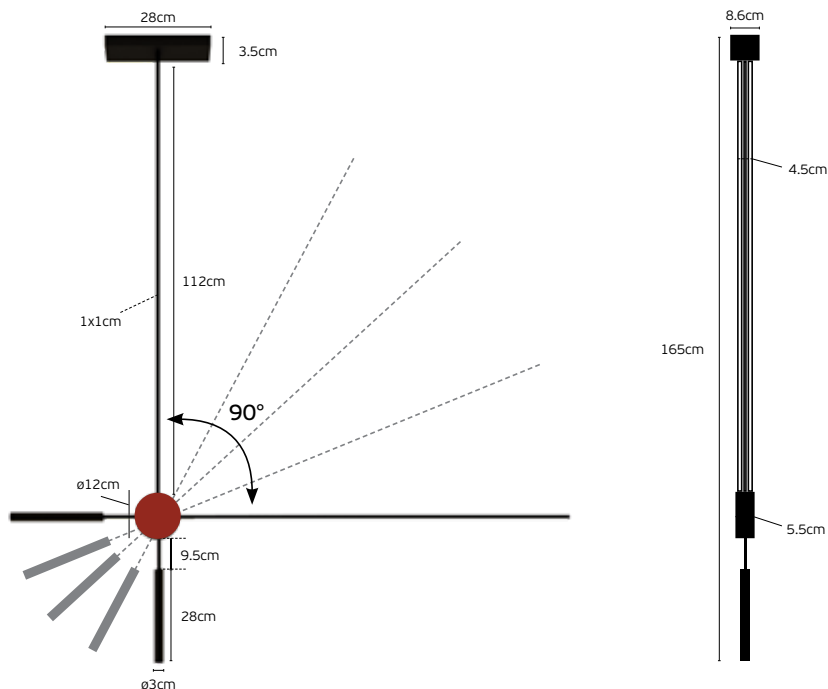

Introducing “Akrovatis Red”, our latest special edition lamp that epitomizes elegance and functionality. What truly sets “Akrovatis Red” apart is its exceptional design, crafted to be a statement piece in any room.

Details

Color **Black/red**  
 Kelvin **3000K/4000K**  
 Watt **5W+15W**  
 Lumen **350lm+533lm/425lm+592lm**  
 CRI >90  
 AC220-240V 50/60Hz.  
 LED spotlight + floodlight **Bridgelux**.

Driver **Meanwell**.  
 Angle **24°+120°**.  
**No Dimmable**.  
 Lifetime **20.000 hrs**.  
 Working temperature **-20°C-45°C**.  
 Material **Aluminium**.  
 Installation **Surface-Mounted**.

**5 years guarantee**



**IP20**

**Online order only**

# Akrovatis Red






**Decorative**  
Lighting Collection



Design in light.  
Our decorative lighting range blends form and function with modern style. Sleek shapes, bold details and thoughtful design create striking accents that elevate any space. Light becomes more than illumination — it becomes a contemporary statement.

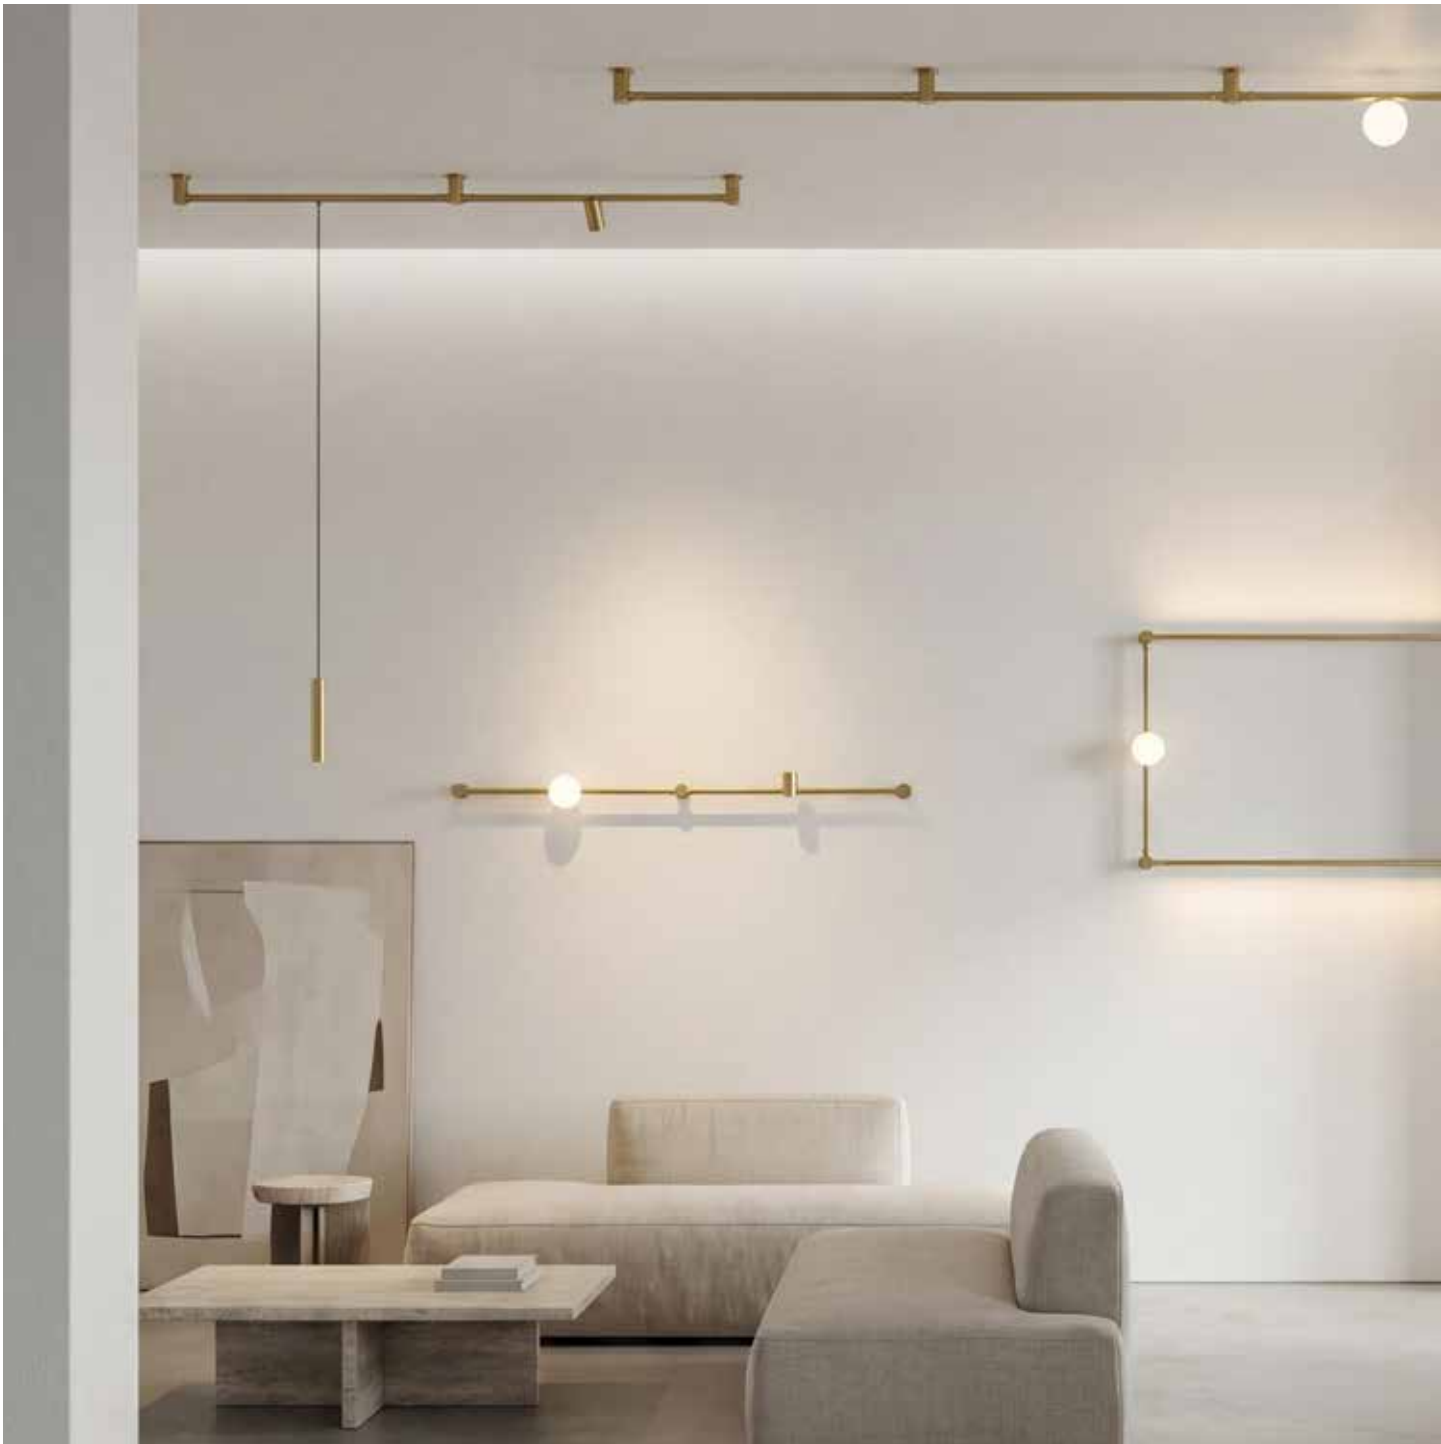

**Loop**  
Track Collection




Where light meets elegance.  
The **LOOP** Track range combines sleek modern lines with glamorous finishes, offering a refined lighting solution for high-end interiors. Designed to enhance spaces with precision and style, it delivers both functionality and a contemporary, luxurious aesthetic.

# Led Track Lights CRI>90. DALI.


Loop



VK/04717/DARK2/DA/GDB/W/60



VK/04717/DARK3/DA/GDB/W/90



## VK/04717/DARK

Code	Model	Box
71164-248721	VK/04717/DARK2/DA/GDB/W/60 ● Satin Gold+black. 3000K. 766lm. 10W. CRI>90. 60cm	20pcs
71164-249721	VK/04717/DARK3/DA/GDB/W/90 ● Satin Gold+black. 3000K. 1220lm. 15W. CRI>90. 90cm	20pcs

### Details

Led track light  
Input voltage DC48V  
Dimmable Dali  
Beam Angle 40°

Type of Led Bridgelux BXEX 2835  
Lifetime 50.000 hrs  
Working temperature -20°C → 45°C  
Material Aluminium



**3** years guarantee




IP20

# Led Track Lights CRI>90. DALI.


Loop



VK/04717/LIN/DA/GDB/W/60



VK/04717/LIN/DA/GDB/W/90



## VK/04717/LIN

Code	Model	Box
71164-250721	VK/04717/LIN/DA/GDB/W/60 ● Satin Gold+black. 3000K. 506lm. 10W. CRI>90. 60cm	20pcs
71164-251721	VK/04717/LIN/DA/GDB/W/90 ● Satin Gold+black. 3000K. 692lm. 10W. CRI>90. 90cm	20pcs

### Details

Led track light  
Input voltage **DC48V**  
Dimmable **Dali**  
Beam Angle 110°

Type of Led **Bridgelux BXEX 2835**  
Lifetime **50.000 hrs**  
Working temperature **-20°C → 45°C**  
Material **Aluminium**



**3** years guarantee




**IP20**

# Led Track Lights **CRI>90**. DALI.


## Loop



VK/04717/SPOT/DA/GDB/W/60



VK/04717/GL/DA/GDB/W/60

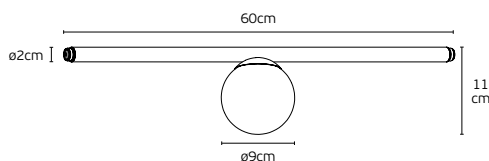

### VK/04717

Code	Model	Box
71164-252721	VK/04717/SPOT/DA/GDB/W/60 ● Satin Gold+black. 3000K. 346lm. 7W. CRI>90. 60cm	20pcs
71164-253721	VK/04717/GL/DA/GDB/W/60 ● Satin Gold+black. 3000K. 367lm. 7W. CRI>90. 60cm	20pcs

#### Details

Led track light  
Input voltage **DC48V**  
Dimmable **Dali**  
Beam Angle **24° / Diffuse Light**

Type of Led **Bridgelux E6 CA-A**  
Lifetime **50.000 hrs**  
Working temperature **-20°C → 45°C**  
Material **Aluminium**

**3** years guarantee





**IP20**

# Loop



# Led Track Lights **CRI>90**. DALI.

## Loop

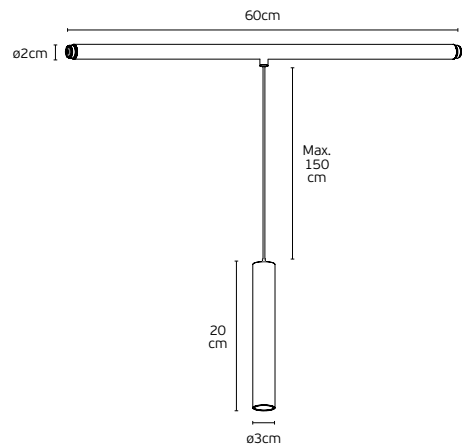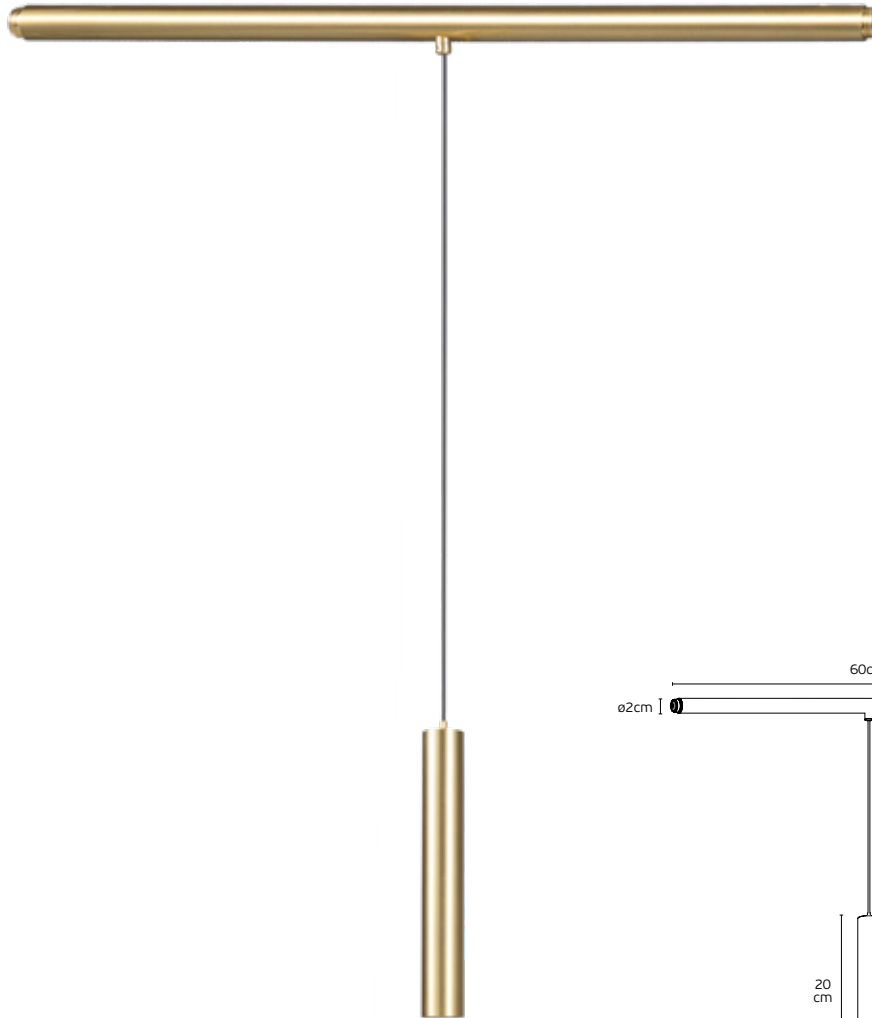

VK/04717/PE/DA/GDB/W/60

### VK/04717/PE

Code  
71164-254721

Model  
VK/04717/PE/DA/GDB/W/60  
● Satin Gold+black. 3000K. 351lm. 7W. CRI>90

Box  
20pcs

### Details

Led track light  
Input voltage **DC48V**  
Dimmable **Dali**  
Beam Angle **24°**

Type of Led **Bridgelux E6 CA-A**  
Lifetime **50.000 hrs**  
Working temperature **-20°C → 45°C**  
Material **Aluminium**

**3** years guarantee



**IP20**

# Loop




# Connection Accessories for Led Track Lights **CRI>90**. DALI.


## Loop



VK/04717/TUBE/GDB/60



VK/04717/TUBE/GDB/90



---

### VK/04717/TUBE

Code	Model	Box
71164-255721	VK/04717/TUBE/GDB/60 ● Satin Gold. 60cm	20pcs
71164-256721	VK/04717/TUBE/GDB/90 ● Satin Gold. 90cm	20pcs

#### Details

Straight Pipe


Material **Aluminium**

# Connection Accessories for Led Track Lights **CRI>90**. DALI.

## Loop



VK/04717/ARC/GDB/R30

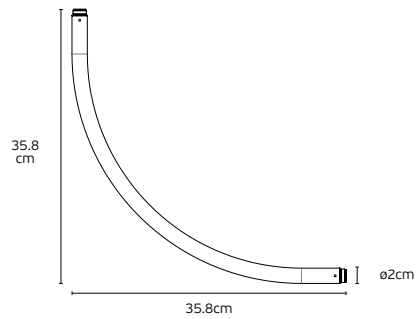

---

### VK/04717/ARC

Code  
71164-257721

Model  
VK/04717/ARC/GDB/R30  
● Satin Gold

Box  
20pcs

---

#### Details

Curve Pipe R300

Material **Aluminium**

# Connection Accessories for Led Track Lights.

## Loop






VK/04717/CE/PS/1



VK/04717/PE/PS/1



VK/04717/CE/CON/1

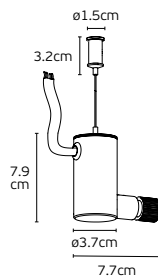

### VK/04717

Code 71164-258721	Model VK/04717/CE/PS/1 ● Satin Gold. Surface mounted power socket	Box 30pcs
----------------------	---	--------------

71164-259721	VK/04717/PE/PS/1 ● Satin Gold. Ceiling mounted power socket	30pcs
--------------	--	-------

#### Details

With male connector For use in open designs	Power supply function Material <b>Aluminium</b>
--	--

71164-260721	VK/04717/CE/CON/1 ● Satin Gold. Surface mounted plug	30pcs
--------------	---	-------

#### Details

Without male connector. For use in open design (tail section).	Material <b>Aluminium</b>
---	---------------------------

# Connection Accessories for Led Track Lights. Type I.

## Loop






VK/04717/CE/PSI/2



VK/04717/PE/PSI/2



VK/04717/CE/CONI/2

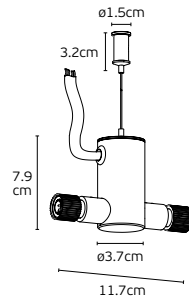

### VK/04717

Code	Model	Box
71164-261721	VK/04717/CE/PSI/2 ● Satin Gold. Surface mounted power socket - type I	30pcs

71164-262721	VK/04717/PE/PSI/2 ● Satin Gold. Ceiling-mounted Power socket - type I	30pcs
--------------	--	-------

#### Details

One end has a male connector, the other end does not. For closed designs with rounded corners.  
Material **Aluminium**

71164-263721	VK/04717/CE/CONI/2 ● Satin Gold. Surface mounted Connector - type I	30pcs
--------------	--	-------

#### Details

With male connectors on both ends, for direct connection between modules.  
Material **Aluminium**

# Connection Accessories for Led Track Lights. Type L.

## Loop






VK/04717/CE/PSL/2



VK/04717/PE/PSL/2



VK/04717/CE/CONL/2

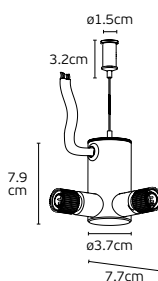

### VK/04717

Code 71164-264721	Model VK/04717/CE/PSL/2 ● Satin Gold. Surface mounted power socket - type L	Box 30pcs
----------------------	---	--------------

71164-265721	VK/04717/PE/PSL/2 ● Satin Gold. Ceiling mounted power socket - type L	30pcs
--------------	--	-------

#### Details

One end has a male connector, the other end does not. Used for right-angled, enclosed designs.

Material **Aluminium**

71164-266721	VK/04717/CE/CONL/2 ● Satin Gold. Surface mounted Connector - type L	30pcs
--------------	--	-------

#### Details

With male connectors on both ends, used for module-to-module L connection.

Material **Aluminium**

# Connection Accessories for Led Track Lights. Type T & +.



## Loop



VK/04717/CE/PST/3



VK/04717/CE/CONT/4



### VK/04717

Code	Model	Box
71164-267721	VK/04717/CE/PST/3 ● Satin Gold. Surface mounted Connector - type T	30pcs

#### Details

Three-heads connector with male connector, Material **Aluminium**  
used for module-to-module T connection

Code	Model	Box
71164-268721	VK/04717/CE/CONT/4 ● Satin Gold. Surface mounted Connector - type +	30pcs

#### Details

Four-heads connector with male connector, Material **Aluminium**  
used for module to module + connection.

# Connection Accessories for Led Track Lights. Power Supply Box


## Loop






VK/04717/PE/CON



VK/04717/RS/CON

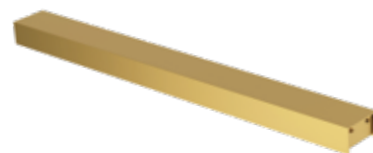

VK/04717/PS/150W

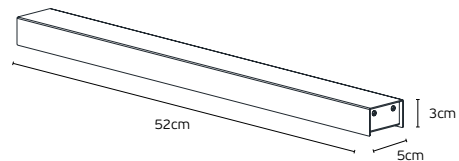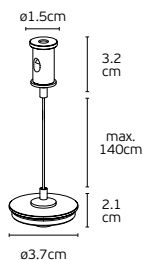

### VK/04717

Code 71164-269721	Model VK/04717/PE/CON ● Satin Gold. Hoisting Assembly	Box 100pcs
----------------------	---	---------------

#### Details

Install it on top of the connector to make it a drop wire configuration. Material **Aluminium**

71164-270721	VK/04717/RS/CON ● Satin Gold. Embedded Component	30pcs
--------------	---	-------

#### Details


Embedded mounting box for use when the power supply is external. Material **Aluminium**

71164-271721	VK/04717/PS/150W ● Satin Gold. Long Strip Power Box	12pcs
--------------	--	-------

#### Details

Surface Rectangular Electrical Box. Material **Aluminium**  
Includes a KEGU 150W power supply

# Loop

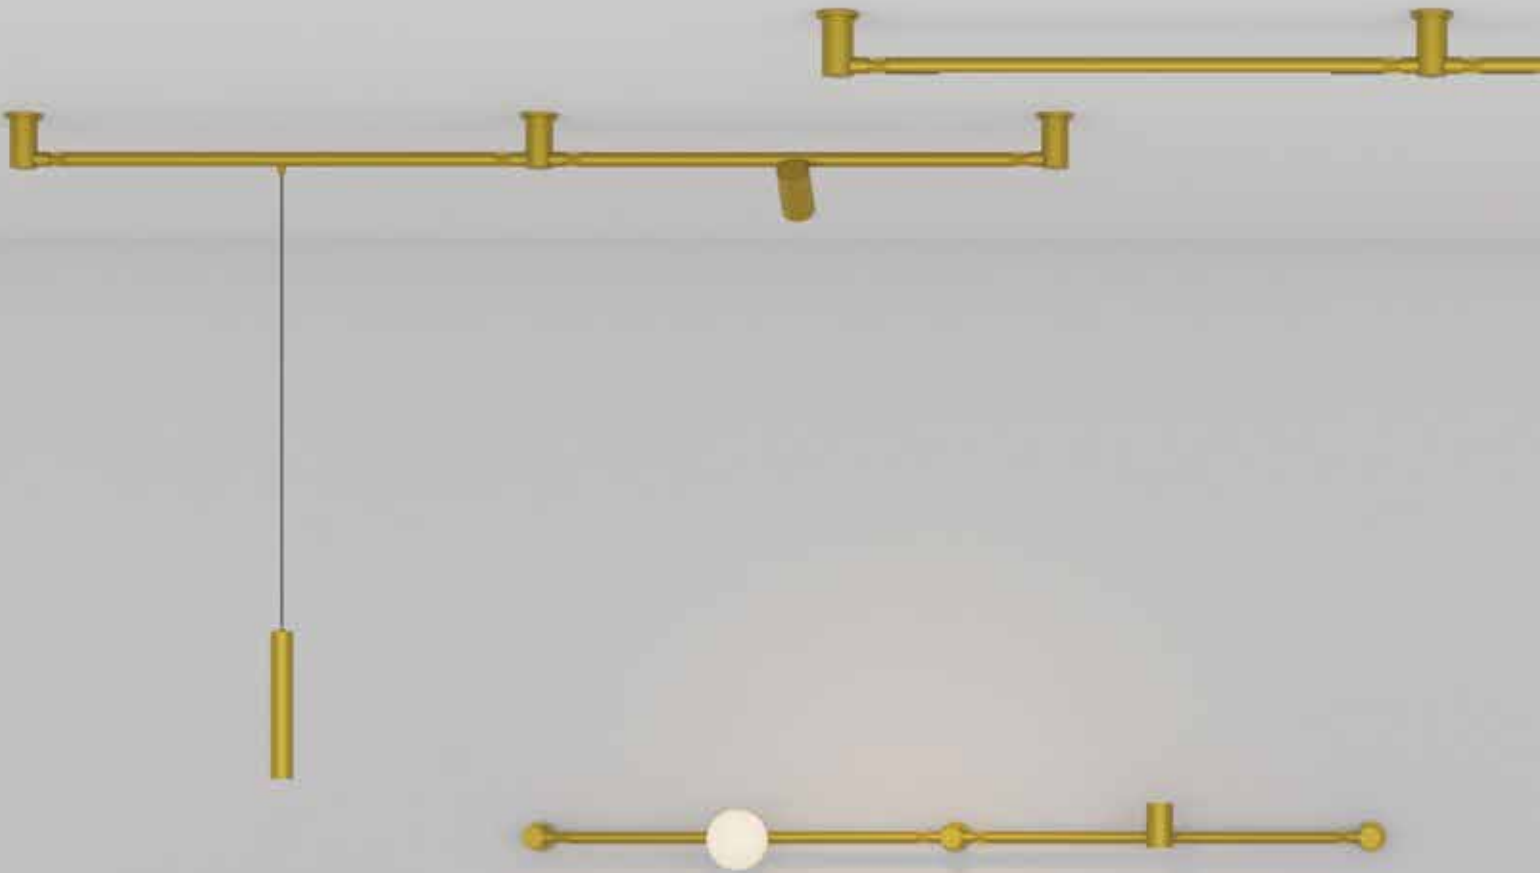



Core



VK/04715/PE/D/GDB/W/113



VK/04715/PE/D/B/W/113

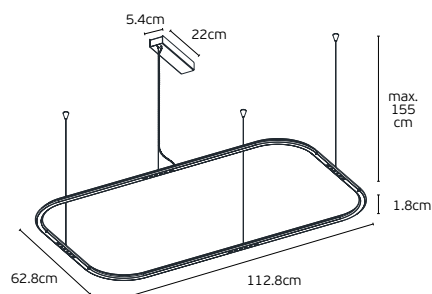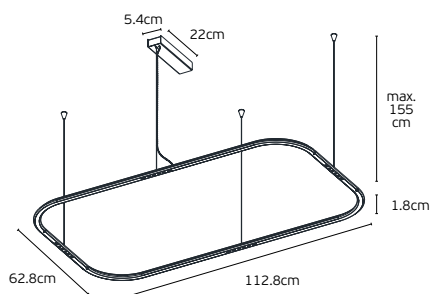

**VK/04715/PE/.../113**

Code	Model		Box
71164-244721	VK/04715/PE/D/GDB/W/113	●● Gold/Black. 3000K. 25W. 4x338lm.	1pc
71164-245721	VK/04715/PE/D/B/W/113	● Black. 3000K. 25W. 4x338lm.	1pc

Details

Material **Aluminium**  
 Voltage **AC200-240V**  
 Beam angle **36°**  
 Type of Led **Brigelux 3030**  
 Location **Ceiling**

Working temperature **< 45°C**  
 Lifetime **50.000hrs**  
 Dimmable **Yes, Triac Dimmable**  
 CRI **>90**

**3** years guarantee



**IP20**

Core





Core



VK/04715/PE/D/GDB/W/163



VK/04715/PE/D/B/W/163

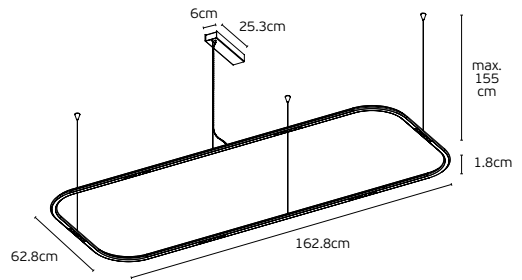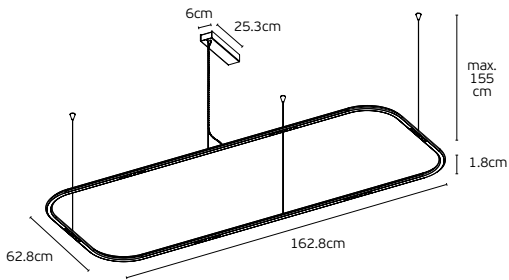

**VK/04715/PE/.../163**

Code	Model		Box
71164-246721	VK/04715/PE/D/GDB/W/163	●● Gold/Black. 3000K. 38W. 6x338lm.	1pc
71164-247721	VK/04715/PE/D/B/W/163	● Black. 3000K. 38W. 6x338lm.	1pc

Details

Material **Aluminium**  
 Voltage **AC200-240V**  
 Beam angle **36°**  
 Type of Led **Brigelix 3030**  
 Location **Ceiling**

Working temperature **< 45°C**  
 Lifetime **50.000hrs**  
 Dimmable **Yes, Triac Dimmable**  
 CRI **>90**

**3** years guarantee



**IP20**

# Core





Core



VK/04715/PE/D/GDB/W/63



VK/04715/PE/D/B/W/63

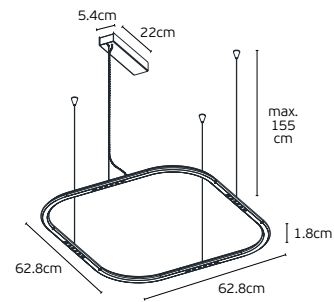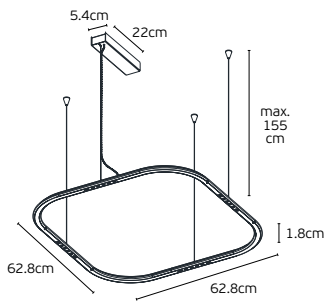

**VK/04715/PE/.../63**

Code	Model		Box
71164-242721	VK/04715/PE/D/GDB/W/63	●● Gold/Black. 3000K. 25W. 4x338lm.	1pc
71164-243721	VK/04715/PE/D/B/W/63	● Black. 3000K. 25W. 4x338lm.	1pc

Details

Material **Aluminium**  
 Voltage **AC200-240V**  
 Beam angle **36°**  
 Type of Led **Brigelux 3030**  
 Location **Ceiling**

Working temperature **< 45°C**  
 Lifetime **50.000hrs**  
 Dimmable **Yes, Triac Dimmable**  
 CRI **>90**

**3** years guarantee



**IP20**

# Core





Iris



VK/02301/PE/D/W-B

VK/02301/PE/D/GD-B

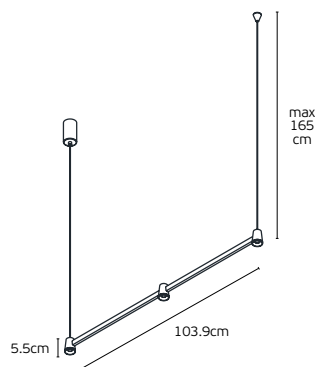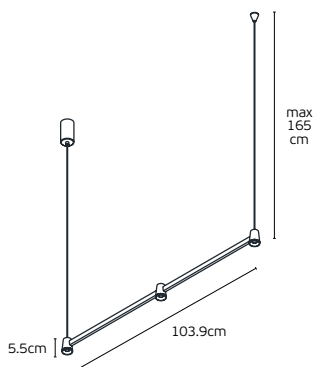

**VK/02301/PE**

Code  
64174-271721  
64174-272721

Model  
VK/02301/PE/D/W-B/W  
VK/02301/PE/D/GD-B/W

● Sand White/Black. 3000K. 3x5W. 3x394lm. 35°.  
● Gold/Black. 3000K. 3x5W. 3x394lm. 35°.

Box  
8pcs  
8pcs

Details

Material **Aluminum**  
Voltage **AC200-240V**  
**DC30-40V 300mA**  
Type of Led **Bridgelux**  
Location **Ceiling**

Working temperature **< 45°C**  
Lifetime **50.000hrs**  
Dimmable **Yes, Triac Dimmable**  
CRI**>90**

**3** years guarantee



**IP20**


Iris





Iris



VK/02300/PE/D/W-B

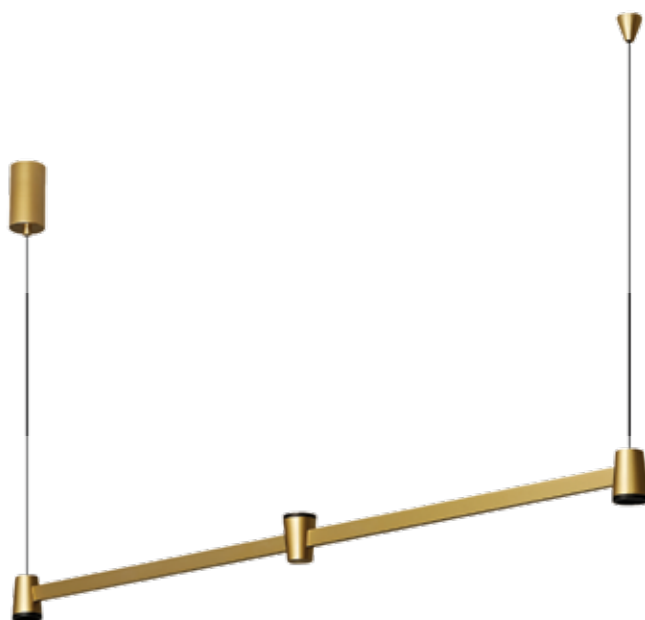

VK/02300/PE/D/GD-B

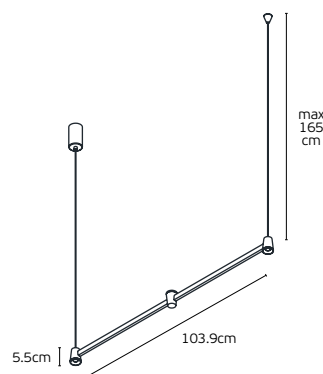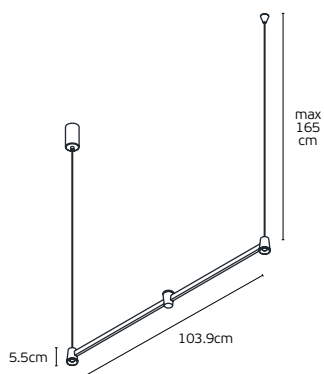

Up/down

VK/02300/PE

Code  
64174-269721  
64174-270721

Model  
VK/02300/PE/D/W-B/W  
VK/02300/PE/D/GD-B/W

○ ● Sand White/Black. 3000K. 3x5W. 3x394lm. 20° + 35° + 20°.  
● ● Gold/Black. 3000K. 3x5W. 3x394lm. 20° + 35° + 20°.

Box  
8pcs  
8pcs

Details

Material **Aluminum**  
Voltage **AC200-240V**  
**DC30-40V 300mA**  
Type of Led **Bridgelux**  
Location **Ceiling**

Working temperature **< 45°C**  
Lifetime **50.000hrs**  
Dimmable **Yes, Triac Dimmable**  
CRI**>90**

**3** years guarantee



**IP20**

Iris






**Aria**




The **ARIA** lighting range is designed to enhance spaces with refined accent and atmospheric illumination. Blending elegance with subtle performance, **ARIA** creates a warm, inviting ambience while highlighting architectural details with precision and style.



# Aria

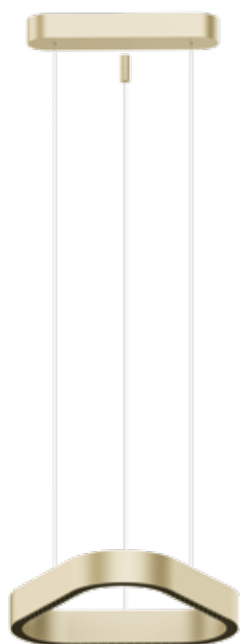

VK/04689/PE/D/CG/W/40

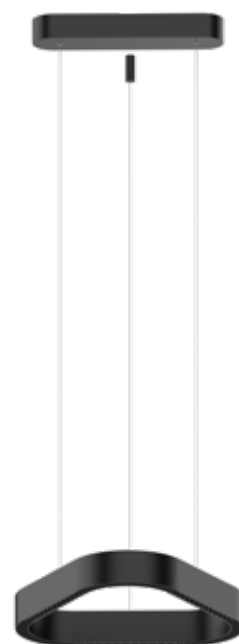

VK/04689/PE/D/B/W/40

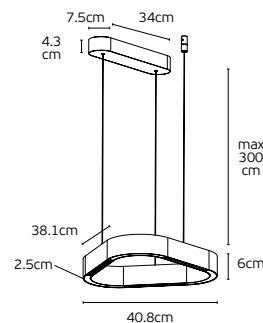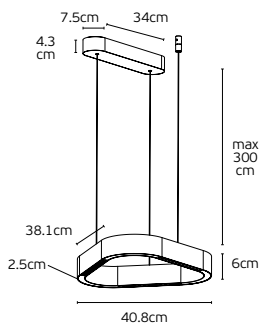

## VK/04689/PE/.../40

Code	Model
71164-104776	VK/04689/PE/D/CG/W/40
71164-105776	VK/04689/PE/D/B/W/40


- Champagne Gold. 3000K. 40W. 3147lm.
- Black. 3000K. 40W. 3147lm.

Box  
1pc  
1pc

### Details

Material **Aluminum+silicone**  
 Voltage **AC220-240V**  
 Beam angle **Up80° Down45°**  
 Type of Led **Brigelux SMD**  
 Driver **Anway**  
 Location **Ceiling**


Working temperature **-20°C → 45°C**  
 Lifetime **50.000hrs**  
 Clicks **20.000**  
 Dimmable **Yes, Triac Dimmable**  
 CRI **>90**  
 Guarantee **2 Years**




# Aria





# Aria

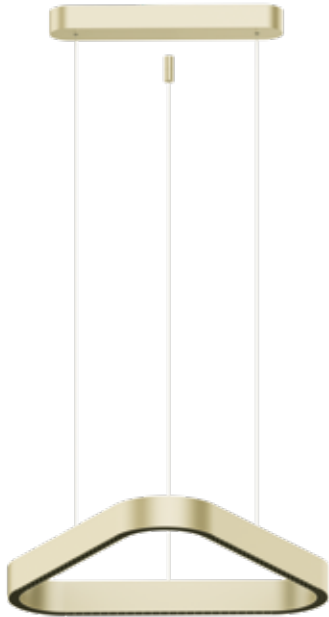

VK/04689/PE/D/CG/W/60

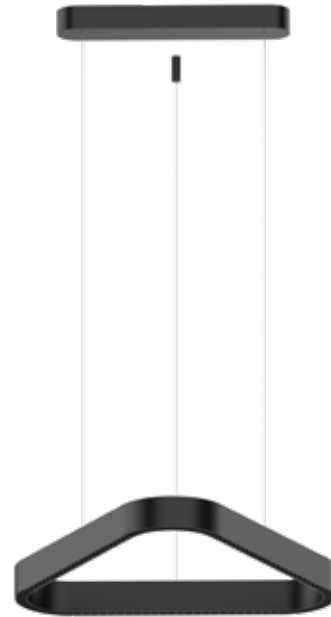

VK/04689/PE/D/B/W/60

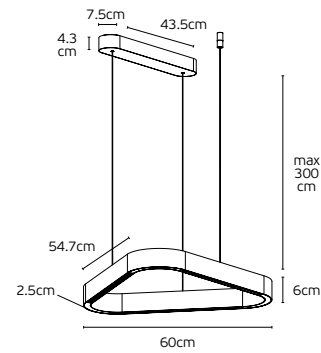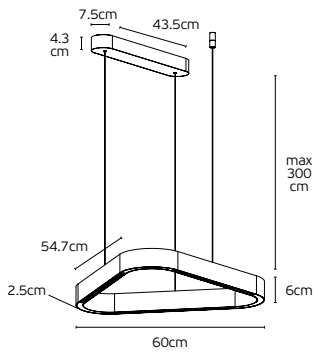

## VK/04689/PE/.../60

Code	Model
71164-106776	VK/04689/PE/D/CG/W/60
71164-107776	VK/04689/PE/D/B/W/60


- Champagne Gold. 3000K. 60W. 4667lm.
- Black. 3000K. 60W. 4667lm.

Box  
1pc  
1pc

### Details

Material **Aluminum+silicone**  
 Voltage **AC220-240V**  
 Beam angle **Up80° Down45°**  
 Type of Led **Brigelux SMD**  
 Driver **Anway**  
 Location **Ceiling**


Working temperature **-20°C → 45°C**  
 Lifetime **50.000hrs**  
 Clicks **20.000**  
 Dimmable **Yes, Triac Dimmable**  
 CRI**>90**  
 Guarantee **2 Years**




Aria





# Aria

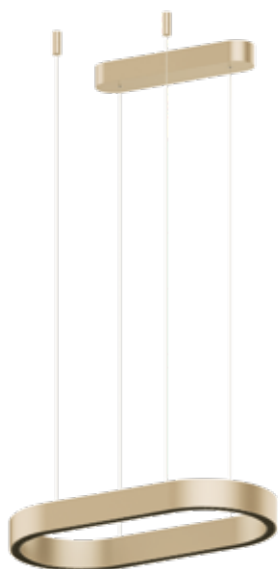

VK/04690/PE/D/CG/W/60

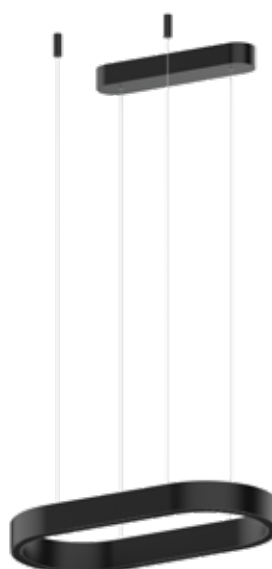

VK/04690/PE/D/B/W/60

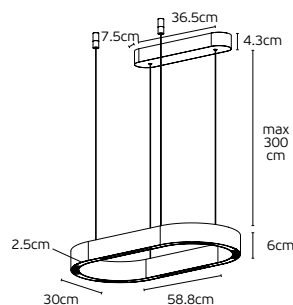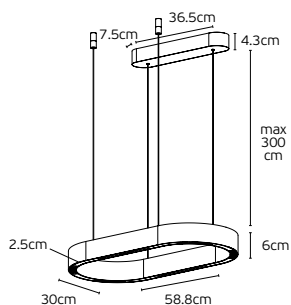

## VK/04690/PE/.../60

Code	Model
71164-108776	VK/04690/PE/D/CG/W/60
71164-109776	VK/04690/PE/D/B/W/60

- Champagne Gold. 3000K. 60W. 4310lm.
- Black. 3000K. 60W. 4310lm.

Box  
1pc  
1pc

### Details

Material **Aluminum+silicone**  
 Voltage **AC220-240V**  
 Beam angle **Up80° Down45°**  
 Type of Led **TOYONIA SMD**  
 Driver **Anway**  
 Location **Ceiling**

Working temperature **-20°C → 45°C**  
 Lifetime **50.000hrs**  
 Clicks **20.000**  
 Dimmable **Yes, Triac Dimmable**  
 CRI **>90**  
 Guarantee **2 Years**



Aria





# Aria



VK/04690/PE/D/CG/W/90



VK/04690/PE/D/B/W/90

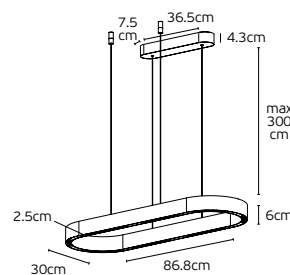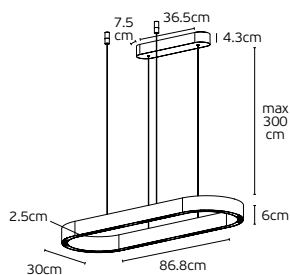


## VK/04690/PE/.../90

Code	Model		Box
71164-110776	VK/04690/PE/D/CG/W/90	● Champagne Gold. 3000K. 80W. 6213lm.	1pc
71164-111776	VK/04690/PE/D/B/W/90	● Black. 3000K. 80W. 6213lm.	1pc

## Details

Material **Aluminum+silicone**  
 Voltage **AC220-240V**  
 Beam angle **Up80° Down45°**  
 Type of Led **TOYONIA SMD**  
 Driver **Anway**  
 Location **Ceiling**

Working temperature **-20°C → 45°C**  
 Lifetime **50.000hrs**  
 Clicks **20.000**  
 Dimmable **Yes, Triac Dimmable**  
 CRI **>90**  
 Guarantee **2 Years**




Aria





**Aura**

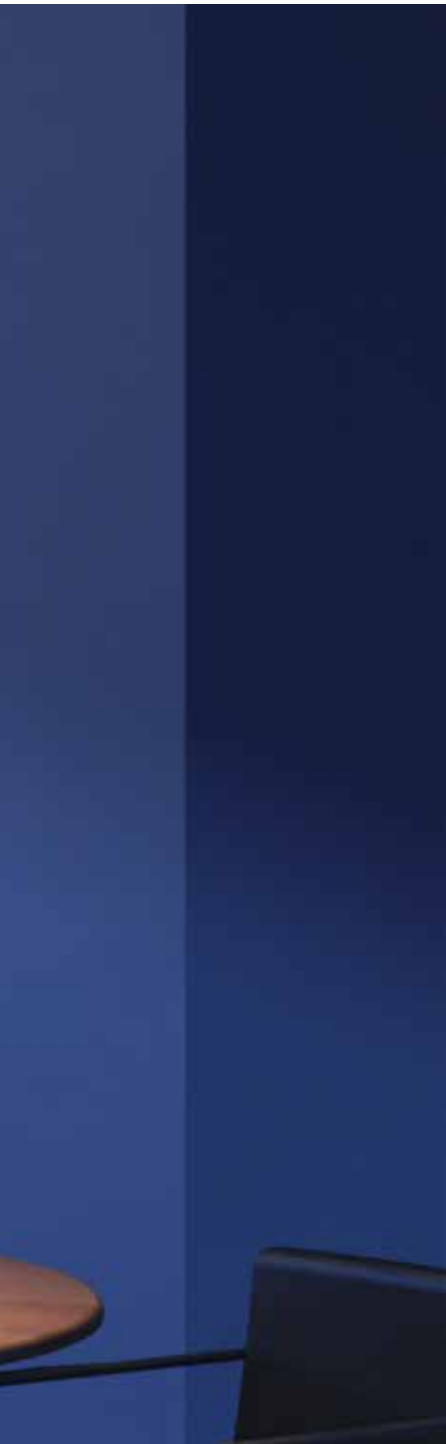

The **AURA** lighting range brings a soft, atmospheric glow that elevates spaces with a sense of harmony and sophistication. Designed for ambient and accent lighting, **AURA** enhances mood and depth, creating an elegant and immersive lighting experience.

# Aura






VK/04691/PE/D/W/W



VK/04691/PE/D/B/W



VK/04691/PE/D/RGD/W

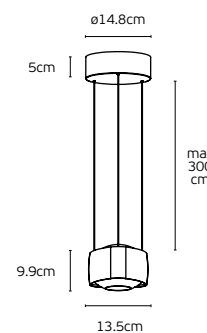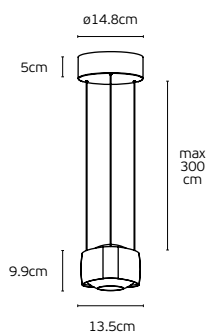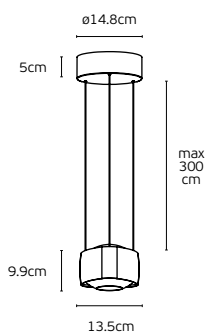

## VK/04691/PE

Code	Model
71164-112776	VK/04691/PE/D/W/W
71164-113776	VK/04691/PE/D/B/W
71164-114776	VK/04691/PE/D/RGD/W


- White. 3000K. 20W. 1958lm.
- Black. 3000K. 20W. 1958lm.
- Rose Gold. 3000K. 20W. 1958lm.

Box  
1pc  
1pc  
1pc

### Details

Material **Aluminum+glass**  
 Voltage **AC220-240V**  
 Beam angle **Up70° Down45°**  
 Type of Led **Bridgelux COB**  
 Driver **KGP**  
 Location **Ceiling**

Working temperature **-20°C → 45°C**  
 Lifetime **50.000hrs**  
 Clicks **20.000**  
 Dimmable **Yes, Triac Dimmable**  
 CRI **>90**  
 Guarantee **2 Years**



**IP20**

Aura



# Aura







VK/04698/PE/D/BS/W

VK/04698/PE/D/CG/W

VK/04698/PE/D/RGD/W

VK/04698/PE/D/B/W

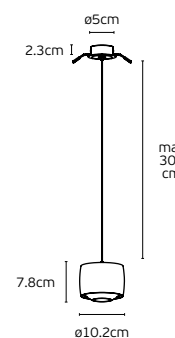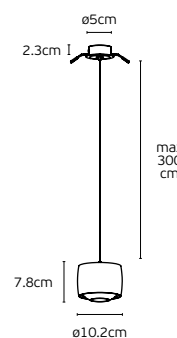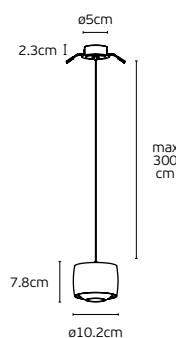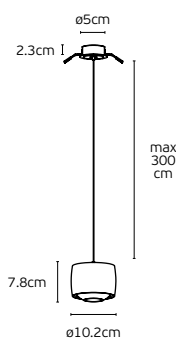

## VK/04698/PE

Code  
71164-120776  
71164-122776  
71164-124776  
71164-126776

Model  
VK/04698/PE/D/BS/W  
VK/04698/PE/D/CG/W  
VK/04698/PE/D/RGD/W  
VK/04698/PE/D/B/W


● **Bronze.** 3000K. 10W. 989lm.  
● **Champagne gold.** 3000K. 10W. 989lm.  
● **Rose gold.** 3000K. 10W. 989lm.  
● **Black.** 3000K. 10W. 989lm.

Box  
1pc  
1pc  
1pc  
1pc

### Details

Material **Aluminum+PC**  
Voltage **AC220-240V**  
Beam angle **45°**  
Type of Led **Brigelux COB**  
Driver **KGP**  
Location **Ceiling**

Working temperature **-20°C → 45°C**  
Lifetime **50.000hrs**  
Clicks **20.000**  
Dimmable **Yes, triac dimmable**  
CRI **>90**  
Guarantee **2 Years**




**IP20**


## Accessories - Ceiling Canopy for LED Pendant Light




VK/04698/CAN/BS




VK/04698/CAN/CG



VK/04698/CAN/RGD



VK/04698/CAN/B




### VK/04698/CAN

Code  
71164-121776  
71164-123776  
71164-125776  
71164-127776

Model  
VK/04698/CAN/BS  
VK/04698/CAN/CG  
VK/04698/CAN/RGD  
VK/04698/CAN/B


- Bronze.
- Champagne gold.
- Rose gold.
- Black.

Box  
1pc  
1pc  
1pc  
1pc

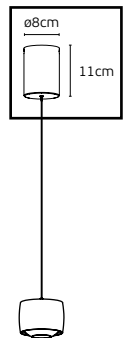

### Details


Material **Metal**  
Ceiling Canopy for LED Pendant Light

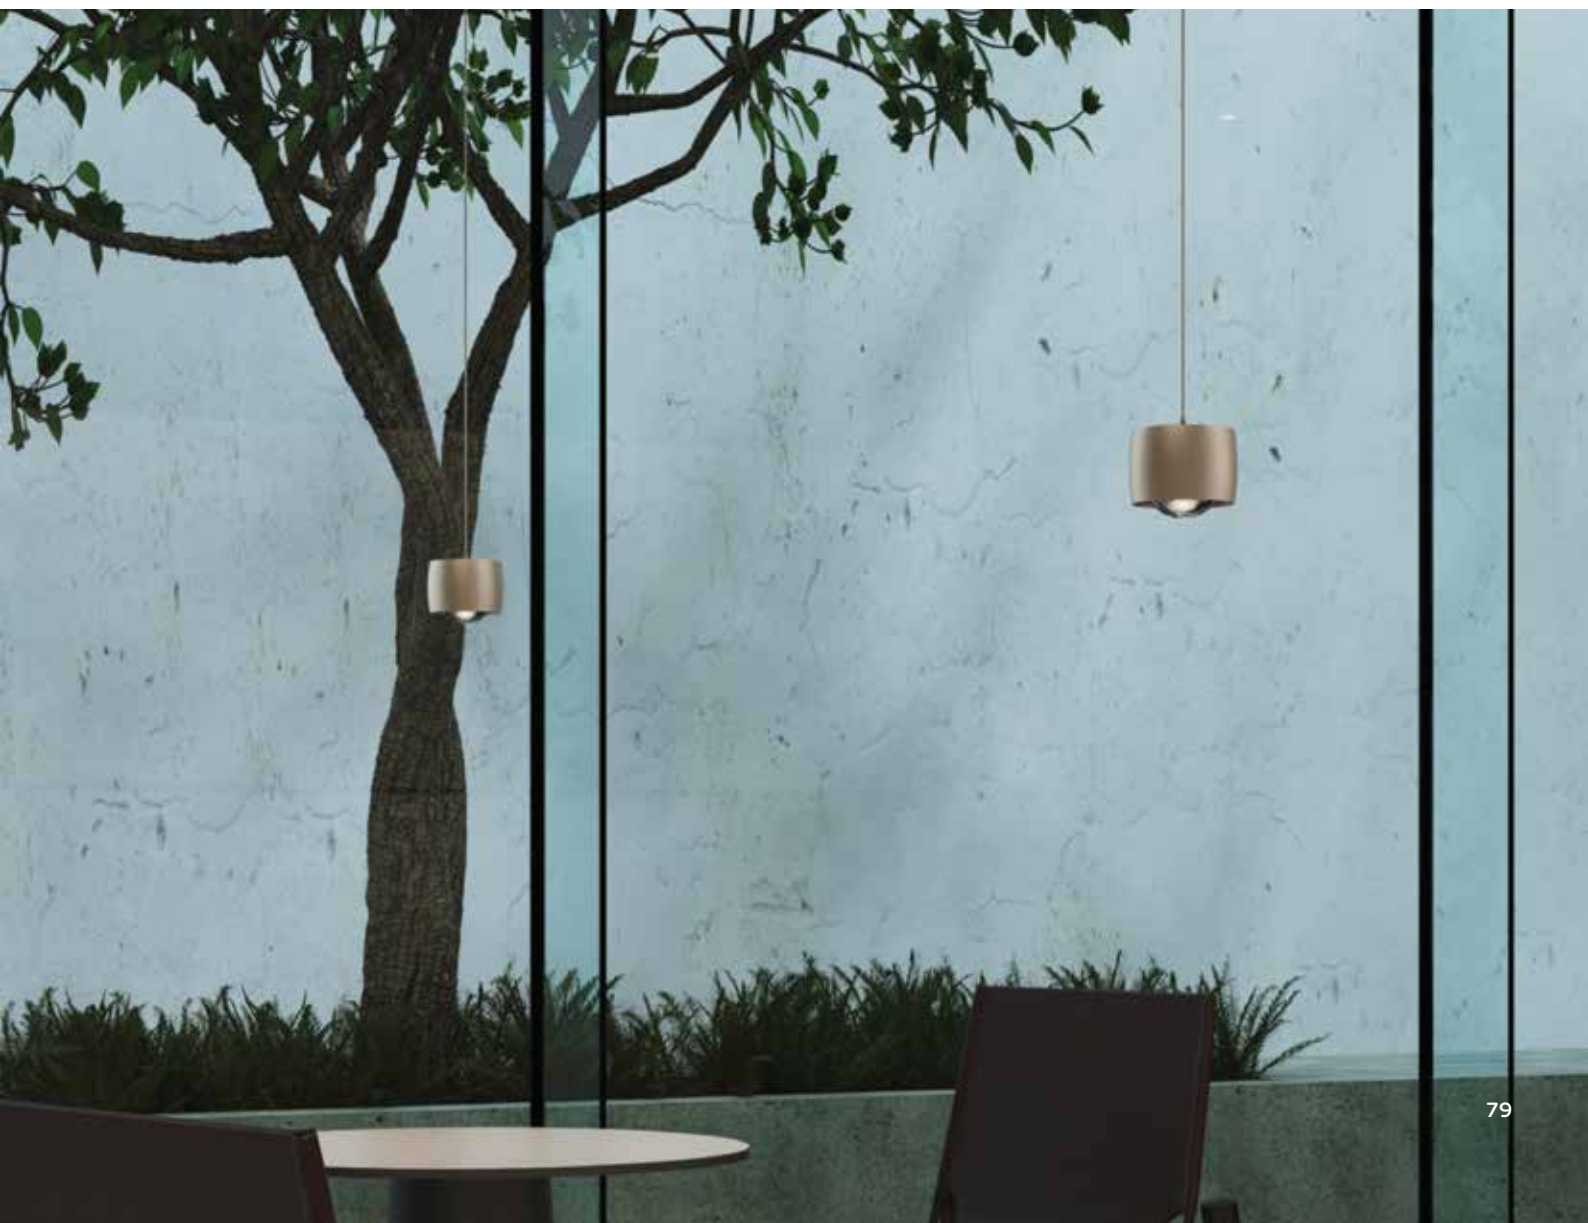


# Aura




VK/04692/W/W

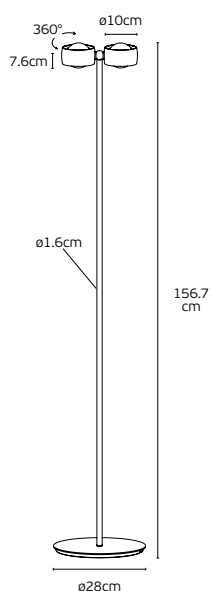

VK/04692/B/W

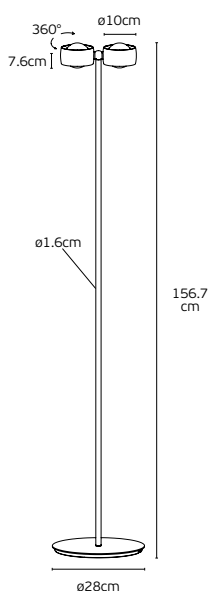

VK/04692/RGD/W

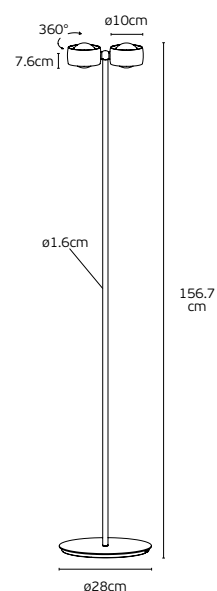

## VK/04692

Code  
75169-001776  
75169-002776  
75169-003776

Model  
VK/04692/W/W  
VK/04692/B/W  
VK/04692/RGD/W

○ White. 3000K. 2x10W. 2096lm.  
● Black. 3000K. 2x10W. 2096lm.  
● Rose Gold. 3000K. 2x10W. 2096lm.

Box  
1pc  
1pc  
1pc

## Details

Material Aluminum+glass  
Voltage AC220-240V  
Beam angle 70°  
Type of chip Bridgelux COB  
Adaptor Hopestar  
Location Floor

Working temperature -20°C → 45°C  
Lifetime 50.000hrs  
Clicks 20.000  
Dimmable Yes, Triac Dimmable  
CRI>90, Guarantee 2 Years  
Foot Dimming



Aura





Amelie



The **AMELIE** lighting range offers versatile wall and ceiling solutions, combining clean design with soft, atmospheric light. Designed to enhance both vertical and overhead surfaces, **AMELIE** brings balance, elegance, and a refined lighting presence to any space.



# Amelie



VK/04693/PE/D/CG/W



VK/04693/PE/D/B/W

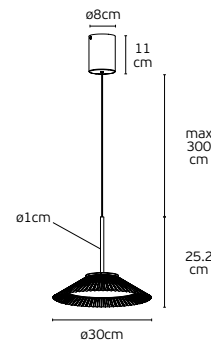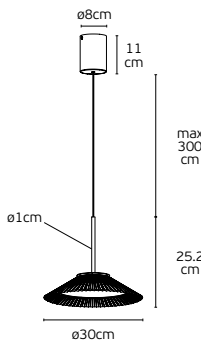

## VK/04693/PE

Code  
71164-115776  
71164-116776

Model  
VK/04693/PE/D/CG/W  
VK/04693/PE/D/B/W

● Champagne Gold. 3000K. 18W. 1833lm.  
● Black. 3000K. 18W. 1833lm.

Box  
1pc  
1pc

### Details

Material Aluminium+PC  
Voltage AC220-240V  
Beam angle 85°  
Type of Led Bridgelux  
Driver KGP  
Location Ceiling

Working temperature -20°C → 45°C  
Lifetime 50.000hrs  
Clicks 20.000  
Dimmable Yes, triac dimmable  
CRI>90  
Guarantee 2 Years




# Amelie





# Amelie



VK/04694/WA/D/CG/W

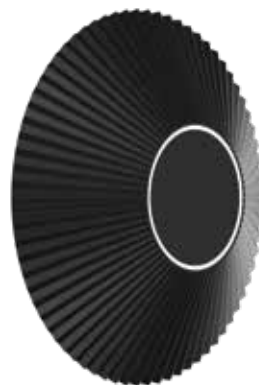

VK/04694/WA/D/B/W

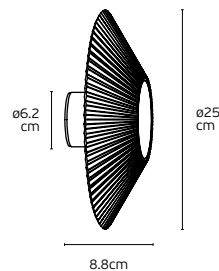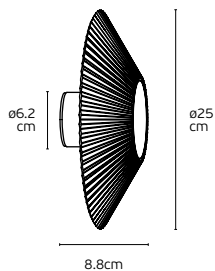

## VK/04694/WA

Code  
75169-004776  
75169-005776

Model  
VK/04694/WA/D/CG/W  
VK/04694/WA/D/B/W

● Champagne Gold. 3000K. 15W. 1546lm.  
● Black. 3000K. 15W. 1546lm.

Box  
1pc  
1pc

## Details

Material Aluminium+PC  
Voltage AC220-240V  
Beam angle 85°  
Type of Led Bridgelux  
Driver KGP  
Location Wall

Working temperature -20°C → 45°C  
Lifetime 50.000hrs  
Clicks 20.000  
Dimmable Yes, triac dimmable  
CRI>90  
Guarantee 2 Years



IP20

# Amelie





# Amelie



VK/04695/CG/W



VK/04695/B/W

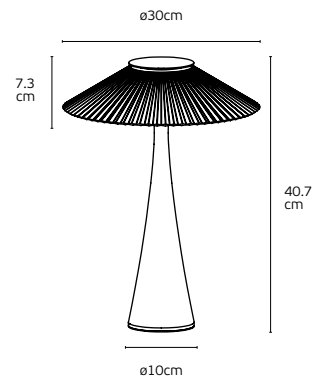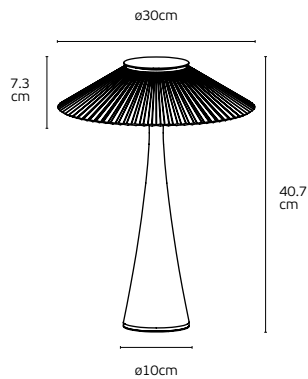

## VK/04695

Code  
75169-008776  
75169-009776

Model  
VK/04695/CG/W  
VK/04695/B/W

● Champagne Gold. 3000K. 18W. 2044lm.  
● Black. 3000K. 18W. 2044lm.

Box  
1pc  
1pc

### Details

Material Aluminium+PC  
Voltage AC220-240V  
Type of chip Bridgelux  
Driver Xing Yuan  
Location Table  
Working temperature -20°C → 45°C

Lifetime 50.000hrs  
Clicks 20.000  
Dimmable No  
CRI>90  
Guarantee 2 Years  
With on/off switch



# Amelie





Elise




The **ELISE** lighting range evokes a gentle interplay of light and shadow, softly shaping spaces with elegance and emotion. Designed to create a calm, atmospheric glow, **ELISE** transforms light into a subtle expression of warmth, balance, and timeless beauty.

# Elise



VK/04701/PE/D/B-G/W

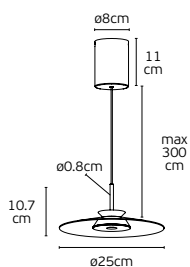

## VK/04701/PE

Code  
71164-130776

Model  
VK/04701/PE/D/B-G/W

● Black/Champagne Gold. 3000K. 10W. 867lm.

Box  
1pc

### Details

Material **Aluminum**  
Voltage **AC220-240V**  
Beam angle **25°**  
Type of Led **Cree+Edison+Sanan**  
Driver **KGP**  
Location **Ceiling**

Working temperature **-20°C → 45°C**  
Lifetime **50.000hrs**  
Clicks **20.000**  
Dimmable **Yes, triac dimmable**  
CRI **>90**  
Guarantee **2 Years**



**IP20**


# Elise



# Elise



VK/04701/CE/D/B-G/W

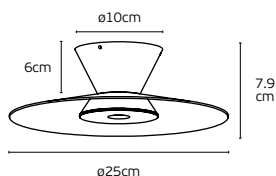

## VK/04701/CE

Code  
71164-131776

Model  
VK/04701/CE/D/B-G/W

● ● Black/Champagne Gold. 3000K. 10W. 1002lm.

Box  
1pc

### Details

Material **Aluminum**  
Voltage **AC220-240V**  
Beam angle **45°**  
Type of Led **Cree+Edison+Sanan**  
Driver **KGP**  
Location **Ceiling**

Working temperature **-20°C → 45°C**  
Lifetime **50.000hrs**  
Clicks **20.000**  
Dimmable **Yes, triac dimmable**  
CRI **>90**  
Guarantee **2 Years**



**IP20**


Elise



# Elise



VK/O4701/WA/D/B-G/W

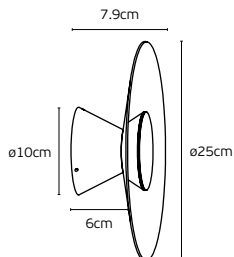

## VK/O4701/WA

Code  
71164-132776

Model  
VK/O4701/WA/D/B-G/W

● Black/ Champagne Gold. 3000K. 8W. 1173lm.

Box  
1pc

### Details

Material **Aluminum**  
Voltage **AC220-240V**  
Beam angle **30°**  
Type of Led **Cree+Edison+Sanan**  
Driver **KGP**  
Location **Wall**

Working temperature **-20°C → 45°C**  
Lifetime **50.000hrs**  
Clicks **20.000**  
Dimmable **Yes, triac dimmable**  
CRI **>90**  
Guarantee **2 Years**



**IP20**

Elise





lori



The **IORI** lighting range celebrates transparency and glass, allowing light to flow freely through space. With a delicate balance of clarity and reflection, **IORI** creates an ethereal glow that feels light, pure, and effortlessly refined.

lori






VK/04687/PE/B-SG/W/20



VK/04687/PE/B-SG/W/24



VK/04687/PE/B-SG/W/28

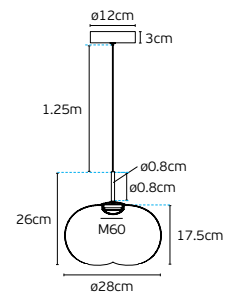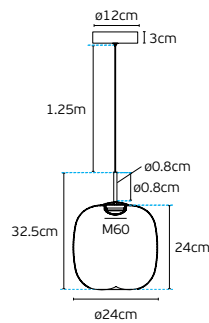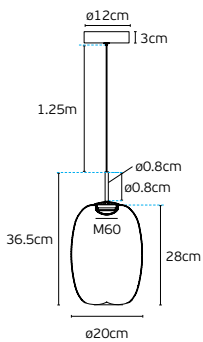

**VK/04687/PE**

Code	Model	Color	Box
71164-017807	VK/04687/PE/B-SG/W/20	● Black+smoky grey. 3000K. 8W. 911lm. <b>ø20cm</b>	50pcs
71164-016807	VK/04687/PE/B-SG/W/24	● Black+smoky grey. 3000K. 8W. 911lm. <b>ø24cm</b>	50pcs
71164-015807	VK/04687/PE/B-SG/W/28	● Black+smoky grey. 3000K. 8W. 911lm. <b>ø28cm</b>	50pcs

Details

Material **Metal canopy + glass**  
 Voltage **AC220-240V**  
 Beam angle **120°**  
 Driver **Eaglerise**  
 Location **Ceiling**

Working temperature **-45°C → 70°C**  
 Lifetime **25.000hrs**  
 Dimmable **No**  
 CRI **>80**

**3** years guarantee



**IP20**


lori




lori



VK/04686/PE/B-SG/W/40

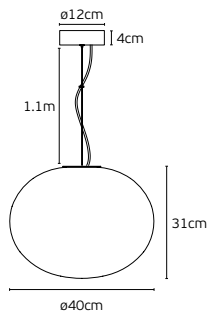

VK/04686/PE/W-W/W/50

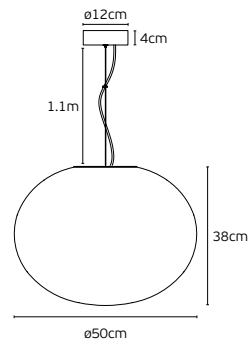

**VK/04686/PE**


Code	Model	Options	Box
71164-001807	VK/04686/PE/B-SG/W/20	● Black+smoky grey. 3000K. 5W. 574lm. <b>ø20cm</b>	50pcs
71164-002807	VK/04686/PE/W-W/W/20	○ White+opal. 3000K. 5W. 574lm. <b>ø20cm</b>	50pcs
71164-003807	VK/04686/PE/B-SG/W/30	● Black+smoky grey. 3000K. 8W. 872lm. <b>ø30cm</b>	50pcs
71164-004807	VK/04686/PE/W-W/W/30	○ White+opal. 3000K. 8W. 872lm. <b>ø30cm</b>	50pcs
71164-005807	VK/04686/PE/B-SG/W/40	● Black+smoky grey. 3000K. 11W. 1.176lm. <b>ø40cm</b>	50pcs
71164-006807	VK/04686/PE/W-W/W/40	○ White+opal. 3000K. 11W. 1.176lm. <b>ø40cm</b>	50pcs
71164-007807	VK/04686/PE/B-SG/W/50	● Black+smoky grey. 3000K. 15W. 1.677lm. <b>ø50cm</b>	50pcs
71164-008807	VK/04686/PE/W-W/W/50	○ White+opal. 3000K. 15W. 1.677lm. <b>ø50cm</b>	50pcs

Details

Material **Metal canopy + glass**  
 Voltage **AC220-240V**  
 Beam angle **120°**  
 Driver **Eaglerise**  
 Location **Ceiling**

Working temperature **-45°C → 70°C**  
 Lifetime **25.000hrs**  
 Dimmable **No**  
 CRI **>80**

**3** years guarantee



**IP20**


lori



lori



VK/04687/CE/B-SG/W/24



**VK/04687/CE**

Code  
71164-018807

Model  
VK/04687/CE/B-SG/W/24


● Black+smoky grey, 3000K, 8W, 911lm, ø24cm

Box  
50pcs

Details

Material **Metal base + glass**  
Voltage **AC220-240V**  
Beam angle **120°**  
Driver **Eaglerise**  
Location **Ceiling**

Working temperature **-45°C → 70°C**  
Lifetime **25.000hrs**  
Dimmable **No**  
CRI **>80**

 **years guarantee**



**IP20**


lori




lori




VK/04686/CE/B-SG/W/20



VK/04686/CE/W-W/W/30



VK/04686/CE/B-SG/W/40



**VK/04686/CE**


Code	Model	Options	Box
71164-009807	VK/04686/CE/B-SG/W/20	● Black+smoky grey. 3000K. 5W. 619lm. <b>ø20cm</b>	50pcs
71164-010807	VK/04686/CE/W-W/W/20	○ White+opal. 3000K. 5W. 619lm. <b>ø20cm</b>	50pcs
71164-011807	VK/04686/CE/B-SG/W/30	● Black+smoky grey. 3000K. 8W. 872lm. <b>ø30cm</b>	50pcs
71164-012807	VK/04686/CE/W-W/W/30	○ White+opal. 3000K. 8W. 872lm. <b>ø30cm</b>	50pcs
71164-013807	VK/04686/CE/B-SG/W/40	● Black+smoky grey. 3000K. 11W. 1.176lm. <b>ø40cm</b>	50pcs
71164-014807	VK/04686/CE/W-W/W/40	○ White+opal. 3000K. 11W. 1.176lm. <b>ø40cm</b>	50pcs

Details

Material **Metal base + glass**  
 Voltage **AC220-240V**  
 Beam angle **120°**  
 Driver **Eaglerise**  
 Location **Ceiling**

Working temperature **-45°C → 70°C**  
 Lifetime **25.000hrs**  
 Dimmable **No**  
 CRI **>80**

**3 years guarantee**



**IP20**

lori






Arbor





The **ARBOR** lighting range brings glass to life with a soft, glowing presence. Light dances through its luminous surfaces, creating a warm, playful atmosphere that feels organic, joyful, and quietly enchanting.


# Arbor

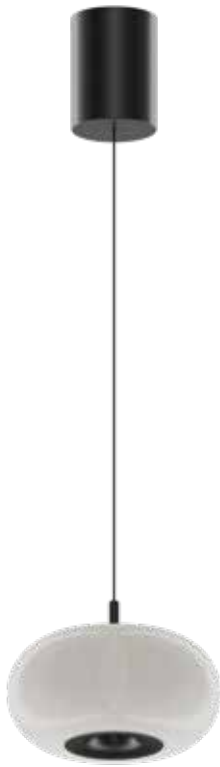

VK/04699/PE/D/B/W

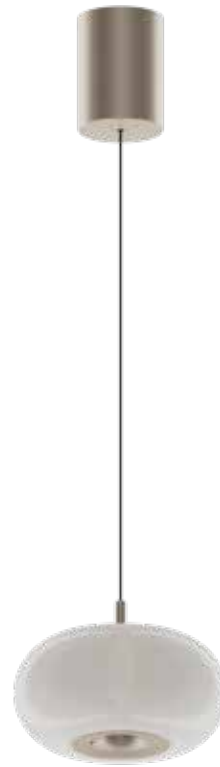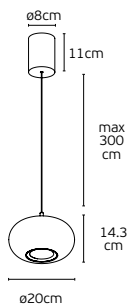

VK/04699/PE/D/CG/W

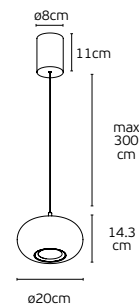

## VK/04699/PE

Code  
71164-128776  
71164-129776

Model  
VK/04699/PE/D/B/W  
VK/04699/PE/D/CG/W


○ ● White/Black. 3000K. 12W. 1307lm.  
○ ● White/Champagne Gold. 3000K. 12W. 1307lm.

Box  
1pc  
1pc

### Details

Material **Glass+Aluminum**  
Voltage **AC220-240V**  
Beam angle **36°**  
Type of Led **Brigelux+Sanan**  
Driver **KGP**  
Location **Ceiling**

Working temperature **-20°C → 45°C**  
Lifetime **50.000hrs**  
Clicks **20.000**  
Dimmable **Yes, triac dimmable**  
CRI **>90**  
Guarantee **2 Years**



**IP20**

# Arbor





# Arbor



VK/04699/WA/D/B/W



VK/04699/WA/D/CG/W



## VK/04699/WA

Code  
75169-020776  
75169-021776

Model  
VK/04699/WA/D/B/W  
VK/04699/WA/D/CG/W

○● White/Black. 3000K. 9W. 932lm.  
○● White/Champagne Gold. 3000K. 9W. 932lm.

Box  
1pc  
1pc

### Details

Material **Glass+aluminum**  
Voltage **AC220-240V**  
Beam angle **120°**  
Type of Led **SMD SANAN**  
Driver **KGP**  
Location **Wall**

Working temperature **-20°C → 45°C**  
Lifetime **50.000hrs**  
Clicks **20.000**  
Dimmable **Yes, triac dimmable**  
CRI **>90**  
Guarantee **2 Years**



# Arbor





# Arbor



VK/04700/B/W



VK/04700/CG/W

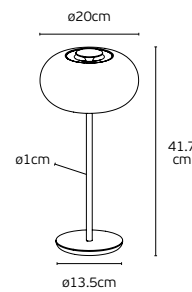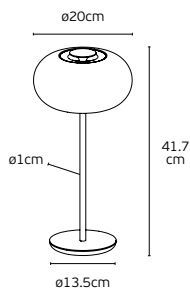

## VK/04700

Code  
75169-022776  
75169-023776

Model  
VK/04700/B/W  
VK/04700/CG/W


● White/Black. 3000K. 10W. 1041lm.  
● White/Champagne Gold. 3000K. 10W. 1041lm.

Box  
1pc  
1pc

### Details

Material **Glass+Aluminum**  
Voltage **AC220-240V**  
Type of Led **SMD SANAN**  
Driver **Xing Yuan**  
Location **Table**  
Working temperature **-20°C → 45°C**

Lifetime **50.000hrs**  
Clicks **20.000**  
Dimmable **No**  
CRI **>90**  
Guarantee **2 Years**  
With **on/off switch**



**IP20**

# Arbor






Sora



Quiet luxury in light.  
The **SORA** lighting range embodies understated elegance, diffusing light with softness and precision. Its refined presence brings a sense of calm sophistication, shaping spaces with a timeless glow and effortless grace.




## Sora

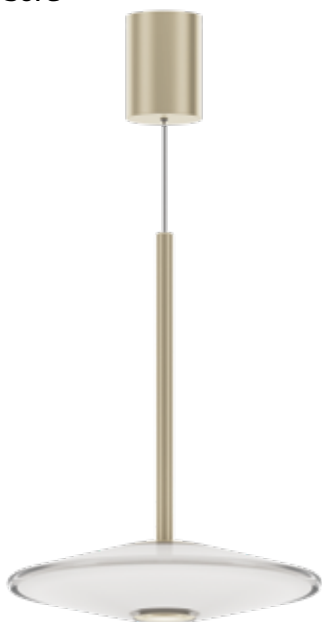

VK/04696/PE/D/W/W

VK/04696/PE/D/GR/W

VK/04696/PE/D/OR/W

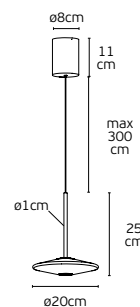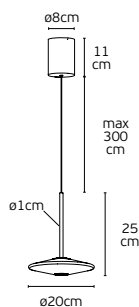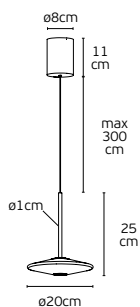

### VK/04696/PE

Code	Model
71164-117776	VK/04696/PE/D/W/W
71164-118776	VK/04696/PE/D/GR/W
71164-119776	VK/04696/PE/D/OR/W


- White. 3000K. 10W. 823lm.
- Green. 3000K. 10W. 823lm.
- Orange. 3000K. 10W. 823lm.

Box
1pc
1pc
1pc

### Details

Material **Glass+Aluminum**  
 Voltage **AC220-240V**  
 Beam angle **36°**  
 Type of Led **Brigelux COB**  
 Driver **KGP**  
 Location **Ceiling**

Working temperature **-20°C → 45°C**  
 Lifetime **50.000hrs**  
 Clicks **20.000**  
 Dimmable **Yes, triac dimmable**  
 CRI **>90**  
 Guarantee **2 Years**



**IP20**

Sora



# Sora






VK/04696/WA/D/W/W



VK/04696/WA/D/GR/W



VK/04696/WA/D/OR/W



## VK/04696/WA

Code	Model
75169-016776	VK/04696/WA/D/W/W
75169-017776	VK/04696/WA/D/GR/W
75169-018776	VK/04696/WA/D/OR/W

- White. 3000K. 8W. 778lm.
- Green. 3000K. 8W. 778lm.
- Orange. 3000K. 8W. 778lm.

Box  
1pc  
1pc  
1pc

### Details

Material **Glass+Aluminum**  
 Voltage **AC220-240V**  
 Type of Led **SANAN 2835**  
 Driver **KGP**  
 Location **Wall**  
 Working temperature **-20°C → 45°C**

Lifetime **50.000hrs**  
 Clicks **20.000**  
 Dimmable **Yes, triac dimmable**  
 CRI **>90**  
 Guarantee **2 Years**




Sora



## Sora



VK/04697/W/W

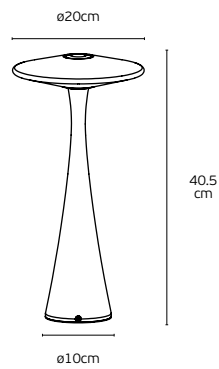

### VK/04697

Code  
75169-019776

Model  
VK/04697/W/W

○ ● White/Champagne Gold. 3000K. 10W. 880lm.

Box  
1pc

#### Details

Material **Glass+Aluminum**  
Voltage **AC220-240V**  
Type of Led **2835**  
Driver **Hopestar**  
Location **Table**  
Working temperature **-20°C → 45°C**

Lifetime **50.000hrs**  
Clicks **20.000**  
Dimmable **No**  
CRI **>90**  
Guarantee **2 Years**  
With **on/off switch**



**IP20**

Sora







**Mira**



Gilded elegance in every detail. The **MIRA** lighting range combines sleek metal with golden accents, creating a luminous statement of refined luxury. Polished surfaces meet elegant form, casting a warm, radiant glow that transforms any space into a timeless experience.

# Mira

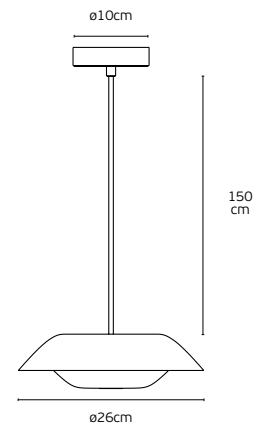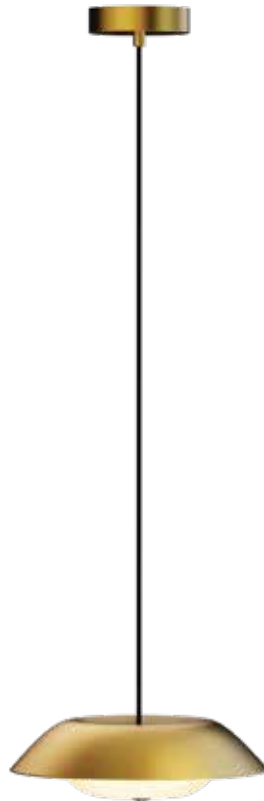

VK/04714/PE/BS/WW

## VK/04714/PE

Code  
64174-002162

Model  
VK/04714/PE/BS/WW

● Matt Brass. 2700K. 8W. 800lm.

Box  
1pc

### Details

Material **iron+glass**  
Voltage **AC220-240V**  
Type of Led **Cree COB**  
Beam Angle **25°**  
Location **Ceiling**

Working temperature **-25°C → 40°C**  
Lifetime **25.000hrs**  
Dimmable **No**  
CRI **>80**  
Guarantee **2 Years**




**IP20**

Mira





VK/04714/WA/BS/WW



**VK/04714/WA**

Code  
64174-001162

Model  
VK/04714/WA/BS/WW

● Matt Brass. 2700K. 4W. 500lm.

Box  
1pc

Details

Material **iron+glass**  
Voltage **AC220-240V**  
Type of Led **Cree COB**  
Beam Angle **25°**  
Location **Wall**

Working temperature **-25°C → 40°C**  
Lifetime **25.000hrs**  
Dimmable **No**  
CRI **>80**  
Guarantee **2 Years**




Mira



## Mira



VK/04713/TL/BS/WW

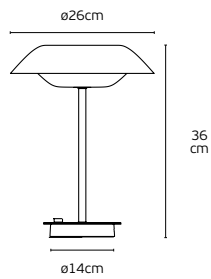

### VK/04713/TL

Code  
61171-001162

Model  
VK/04713/TL/BS/WW

● Matt Brass. 2700K. 8W. 800lm.

Box  
1pc

### Details

Material **iron+glass**  
Voltage **AC220-240V**  
Type of Led **Cree COB**  
Beam Angle **25°**  
Location **Table**  
Working temperature **-25°C → 40°C**

Lifetime **25.000hrs**  
Dimmable **No**  
CRI **>80**  
Guarantee **2 Years**  
**With knob switch.**




**IP20**

Mira



# Mira

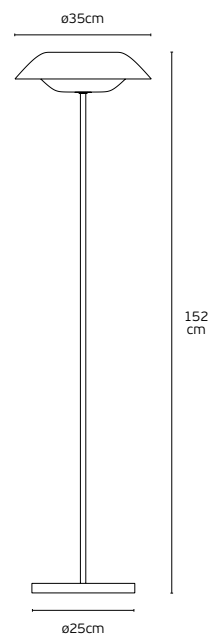

VK/04713/FL/BS/WW

## VK/04713/FL

Code  
61171-002162

Model  
VK/04713/FL/BS/WW

● Matt Brass. 2700K. 8W. 800lm.

Box  
1pc

### Details

Material **iron+glass**  
Voltage **AC220-240V**  
Type of Led **Cree COB**  
Beam Angle **25°**  
Location **Floor**  
Working temperature **-25°C → 40°C**

Lifetime **25.000hrs**  
Dimmable **No**  
CRI **>80**  
Guarantee **2 Years**  
**With foot on/off switch.**



Mira






**Nala**



Glamour in every glow.  
The **NALA** lighting range unites metal, glass and golden accents to create a dazzling, luxurious presence. Sleek lines and luminous surfaces reflect light with elegance, bringing a bold, glamorous touch to any interior.

# Nala

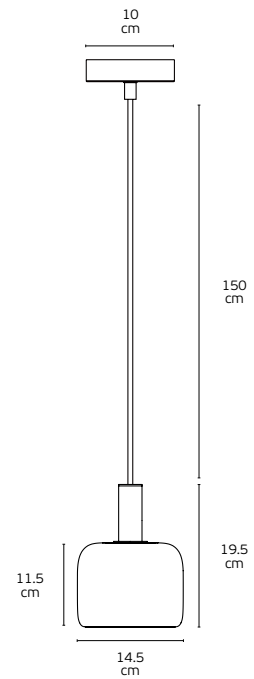

VK/03370/PE/BS

## VK/03370/PE

Code  
64174-009162

Model  
VK/03370/PE/BS


● Matt Brass. E14. Max 9W (LED)

Box  
1pc

### Details

Material **Material Glass (lamp shade)**  
**+ Iron (base)**  
Lampholder **E14**  
Max. Power LED lamp **9W**

Voltage **AC220-240V**  
Location **Ceiling**  
Working temperature **-25°C → 50°C**  
CRI **>80**



**IP20**


Nala



# Nala



VK/03370/WA/BS

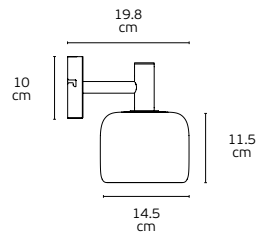

## VK/03370/WA

Code  
64174-008162

Model  
VK/03370/WA/BS

● Matt Brass. E14. Max 9W (LED)

Box  
1pc

### Details

Material **Material Glass (lamp shade)  
+ Iron (base)**  
Lampholder **E14**  
Max. Power LED lamp **9W**

Voltage **AC220-240V**  
Location **Wall**  
Working temperature **-25°C → 50°C**  
CRI **>80**




# Nala



## Nala



VK/03370/TL/BS

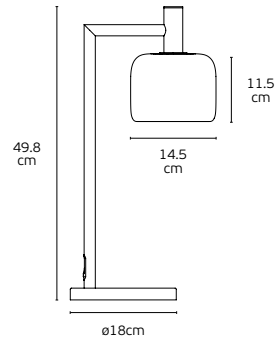

### VK/03370/TL

Code  
61171-006162

Model  
VK/03370/TL/BS

● Matt Brass. E14. Max 9W (LED)

Box  
1pc

#### Details

Material **Material Glass (lamp shade)**  
**+ Iron (base)**  
Lampholder **E14**  
Max. Power LED lamp **9W**  
Voltage **AC220-240V**


Location **Table**  
Working temperature **-25°C → 50°C**  
**CRI>80**  
**On/Off switch on plug cable.**



Nala



# Nala

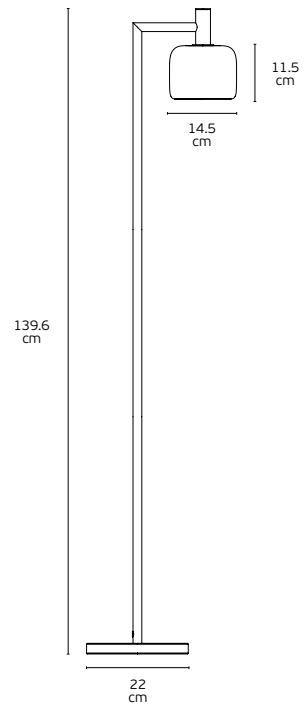

VK/03370/FL/BS

## VK/03370/FL

Code  
61171-007162

Model  
VK/03370/FL/BS


● Matt Brass. E14. Max 9W (LED)

Box  
1pc

### Details

Material **Material Glass (lamp shade)  
+ Iron (base)**  
Lampholder **E14**  
Max. Power LED lamp **9W**

Voltage **AC220-240V**  
Location **Floor**  
Working temperature **-25°C → 50°C**  
CRI **>80**



# Nala






Pero



Whispers of calm light.  
The **PERO** lighting range evokes a serene, poetic atmosphere, gently illuminating spaces with soft, harmonious glow. Its delicate design transforms light into a quiet expression of balance, warmth, and timeless tranquility.

# Pero

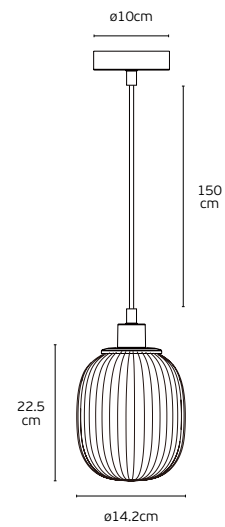

VK/03362/PE/BS

## VK/03362/PE

Code  
64174-005162

Model  
VK/03362/PE/BS

● Matt Brass. G9. Max 8W (LED)

Box  
1pc

### Details

Material **Material Glass (lamp shade)**  
**+ Iron (base)**  
Lampholder **G9**  
Max. Power LED lamp **8W**


Voltage **AC220-240V**  
Location **Ceiling**  
Working temperature **-25°C → 50°C**  
CRI **>80**



Pero



# Pero

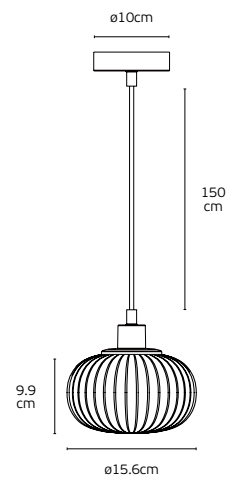

VK/03363/PE/BS

## VK/03363/PE

Code  
64174-006162

Model  
VK/03363/PE/BS

● Matt Brass. G9. Max 8W (LED)

Box  
1pc

### Details

Material **Material Glass (lamp shade)**  
**+ Iron (base)**  
Lampholder **G9**  
Max. Power LED lamp **8W**


Voltage **AC220-240V**  
Location **Ceiling**  
Working temperature **-25°C → 50°C**  
CRI **>80**



Pero



# Pero

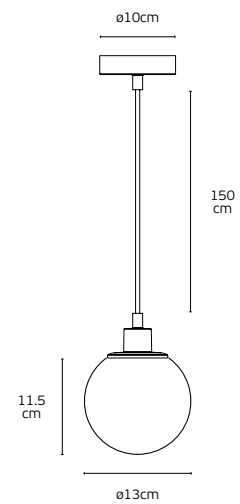

VK/03364/PE/BS

## VK/03364/PE

Code  
64174-007162

Model  
VK/03364/PE/BS

● Matt Brass. G9. Max 8W (LED)

Box  
1pc

### Details

Material **Material Glass (lamp shade)**  
**+ Iron (base)**  
Lampholder **G9**  
Max. Power LED lamp **8W**

Voltage **AC220-240V**  
Location **Ceiling**  
Working temperature **-25°C → 50°C**  
CRI **>80**




Pero



## Pero



VK/03362/TL/BS

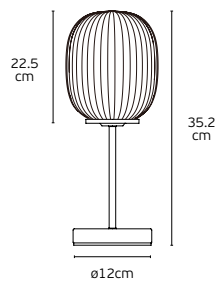

### VK/03362/TL

Code  
61171-003162

Model  
VK/03362/TL/BS

● Matt Brass. G9. Max 8W (LED)

Box  
1pc

#### Details

Material **Material Glass (lamp shade)**  
**+ Iron (base)**  
Lampholder **G9**  
Max. Power LED lamp **8W**  
Voltage **AC220-240V**

Location **Table**  
Working temperature **-25°C → 50°C**  
**CRI>80**  
**On/Off switch on plug cable.**


  **IP20**

Pero





VK/03363/TL/BS

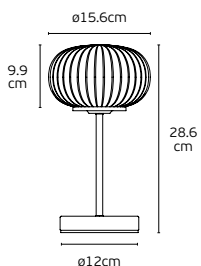

VK/03363/TL

Code  
61171-004162

Model  
VK/03363/TL/BS

● Matt Brass. G9. Max 8W (LED)

Box  
1pc

Details

Material **Material Glass (lamp shade)**  
**+ Iron (base)**  
Lampholder **G9**  
Max. Power LED lamp **8W**  
Voltage **AC220-240V**

Location **Table**  
Working temperature **-25°C → 50°C**  
**CRI>80**  
**On/Off switch on plug cable.**




Pero





VK/03364/TL/BS

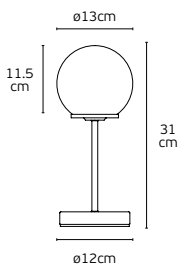

**VK/03364/TL**

Code  
61171-005162

Model  
VK/03364/TL/BS

● Matt Brass. G9. Max 8W (LED)

Box  
1pc

Details

Material **Material Glass (lamp shade)  
+ Iron (base)**  
Lampholder **G9**  
Max. Power LED lamp **8W**  
Voltage **AC220-240V**

Location **Table**  
Working temperature **-25°C → 50°C**  
**CRI>80**  
**On/Off switch on plug cable.**



Pero





**Halo**




Crafted with natural wood and a fashion-forward attitude, the **HALO** lighting range blends warmth with contemporary elegance. Organic textures meet refined design, creating a statement light that feels tactile, stylish, and effortlessly modern.

# Halo



VK/04679/PE/D/WW-BW/W

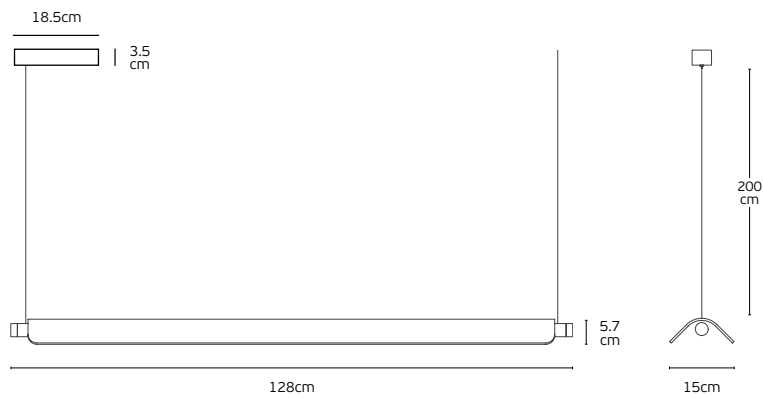

## VK/04679/PE

Code  
75169-026775

Model  
VK/04679/PE/D/WW-BW/W

● Walnut wood. 3000K. 20W. 2800lm

Box  
1pc

### Details

Material **Walnut wood, fabric cable, metal canopy**  
Voltage **AC220-240V**  
Type of Led **Ledstrip**  
Driver **Eaglerise**  
Location **Ceiling**

Working temperature **-20°C → 45°C**  
Lifetime **30.000hrs**  
Dimmable **Yes Triac**  
Cable **2m**  
CRI **>80**  
Guarantee **2 Years**



**IP20**


Halo



# Halo



VK/03350/PE/OW-WM

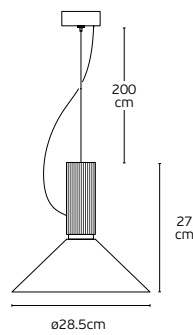

## VK/03350/PE

Code  
64174-020775

Model  
VK/03350/PE/OW-WM

○ ● White/Wood. E27. Max 20W (LED)

Box  
1pc

### Details

Voltage **240V**.  
Lampholder **E27**.  
Working temperature **-20°C ~ 40°C**.  
Location **Ceiling**


Cable **2m**  
Material **Oak wood**,  
**fabric cable**, **metal canopy**.  
IP Rating **IP20**.




Halo



# Halo

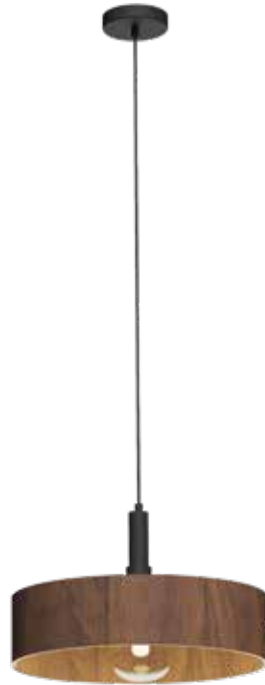

VK/03349/PE/WW/40

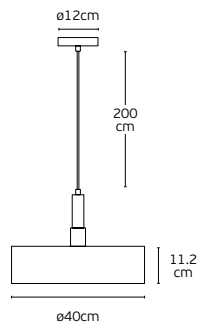

## VK/03349/PE

Code  
64174-017775

Model  
VK/03349/PE/WW/40

● Walnut wood. E27. Max 20W (LED)

Box  
1pc

### Details

Voltage **240V**.  
Lampholder **E27**.  
Working temperature **-20°C ~ 40°C**.  
Location **Ceiling**

Cable **2m**  
Material **Walnut wood**,  
**fabric cable, metal canopy**.



Halo





# Halo



VK/03349/WA/WW/30



VK/03349/WA/WW/40

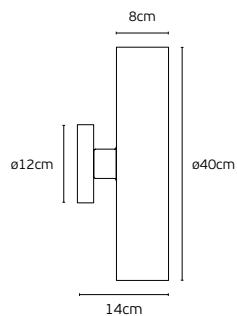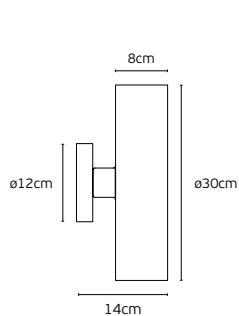

## VK/03349/WA

Code  
64174-018775  
64174-019775

Model  
VK/03349/WA/WW/30  
VK/03349/WA/WW/40

- Walnut wood. E27. Max 20W (LED).
- Walnut wood. E27. Max 20W (LED).

Box  
1pc  
1pc

## Details

Voltage 240V.  
Lampholder E27.

Location Wall  
Material Walnut wood, metal base.



Halo





**Aelia**



Light with attitude.

The **AELIA** lighting range brings playful energy to any space, combining bold shapes and dynamic design with vibrant, modern style. Fun, fresh, and effortlessly cool, **AELIA** turns light into a statement.



# Aelia



VK/04707/PE/D/W/W



VK/04707/PE/D/B/W

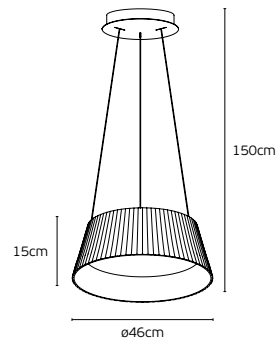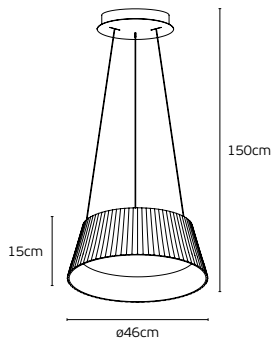

## VK/04707/PE

Code  
71164-003808  
71164-004808

Model  
VK/04707/PE/D/W/W  
VK/04707/PE/D/B/W

○ White/wood grain. 3000K. 30W. 1680lm.  
● Black /wood grain. 3000K. 30W. 1680lm.

Box  
1pc  
1pc

## Details

Material **Metal + acrylic**  
Voltage **AC220-240V**  
Beam angle **120°**  
Type of Led **SMD2835**  
Driver **Eaglerise**  
Location **Ceiling**

Working temperature **-20°C → 60°C**  
Lifetime **50.000hrs**  
Dimmable **Yes, Triac Dimmable**  
CRI **>80**  
Guarantee **2 Years**



**IP20**

# Aelia





# Aelia



VK/04707/CE/D/W/W



VK/04707/CE/D/B/W



## VK/04707/CE

Code  
71164-001808  
71164-002808

Model  
VK/04707/CE/D/W/W  
VK/04707/CE/D/B/W

○ White/wood grain. 3000K. 30W. 1860lm.  
● Black/wood grain. 3000K. 30W. 1860lm.

Box  
1pc  
1pc

## Details

Material **Metal + acrylic**  
Voltage **AC220-240V**  
Beam angle **120°**  
Type of Led **SMD2835**  
Driver **Eaglerise**  
Location **Ceiling**

Working temperature **-20°C → 60°C**  
Lifetime **50.000hrs**  
Dimmable **Yes, triac dimmable**  
CRI **>80**  
Guarantee **2 Years**



**IP20**

Aelia





# Aelia



VK/04708/PE/D/W/W



VK/04708/PE/D/B/W

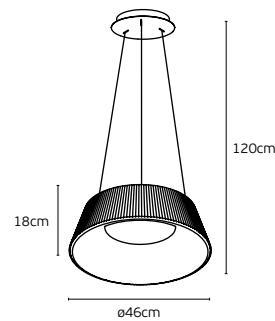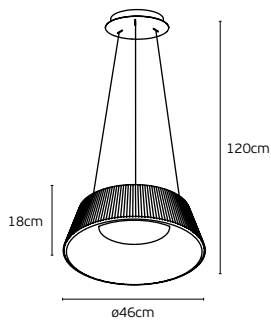

## VK/04708/PE

Code  
71164-007808  
71164-008808

Model  
VK/04708/PE/D/W/W  
VK/04708/PE/D/B/W

○ White. 3000K. 30W. 1650lm.  
● Black. 3000K. 30W. 1650lm.

Box  
1pc  
1pc

## Details

Material **Metal + acrylic**  
Voltage **AC220-240V**  
Beam angle **120°**  
Type of Led **SMD2835**  
Driver **Eaglerise**  
Location **Ceiling**

Working temperature **-20°C → 60°C**  
Lifetime **50.000hrs**  
Dimmable **Yes, Triac Dimmable**  
CRI **>80**  
Guarantee **2 Years**



**IP20**

Aelia





## Aelia



VK/04708/CE/D/W/W



VK/04708/CE/D/B/W



### VK/04708/CE

Code  
71164-005808  
71164-006808

Model  
VK/04708/CE/D/W/W  
VK/04708/CE/D/B/W

○ White. 3000K. 30W. 1830lm.  
● Black. 3000K. 30W. 1830lm.

Box  
1pc  
1pc

### Details

Material **Metal + acrylic**  
Voltage **AC220-240V**  
Beam angle **120°**  
Type of Led **SMD2835**  
Driver **Eaglerise**  
Location **Ceiling**

Working temperature **-20°C → 60°C**  
Lifetime **50.000hrs**  
Dimmable **Yes, triac dimmable**  
CRI **>80**  
Guarantee **2 Years**



**IP20**

Aelia





Enya, Oak & Diva



Curves in glossy motion.  
The **ENYA**, **OAK**, and **DIVA** lighting range celebrates bold, flowing shapes with sleek, reflective surfaces. Each piece plays with light and shadow, turning curves into a playful, elegant statement that brings energy, style, and luminous charm to any space.



# Enya



VK/04709/PE/D/RB/W



VK/04709/PE/D/GD/W

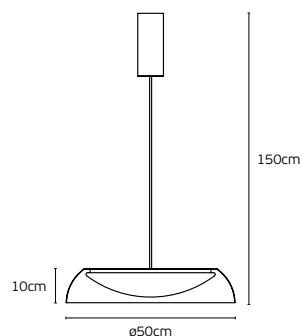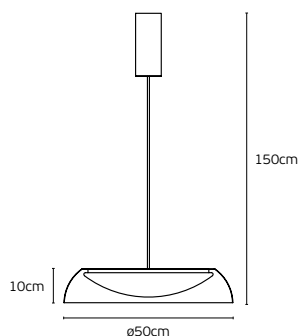

## VK/04709/PE

Code  
71164-011808  
71164-012808

Model  
VK/04709/PE/D/RB/W  
VK/04709/PE/D/GD/W

● **Brown.** 3000K. 40W. 2440lm.  
● **Gold.** 3000K. 40W. 2440lm.

Box  
1pc  
1pc

## Details

Material **Aluminium + acrylic**  
Voltage **AC220-240V**  
Beam angle **120°**  
Type of Led **SMD2835**  
Driver **Eaglerise**  
Location **Ceiling**

Working temperature **-20°C → 60°C**  
Lifetime **50.000hrs**  
Dimmable **Yes, Triac Dimmable**  
CRI **>80**  
Guarantee **2 Years**



**IP20**

Enya







VK/04709/CE/D/RB/W



VK/04709/CE/D/GD/W



**VK/04709/CE**

Code  
71164-009808  
71164-010808

Model  
VK/04709/CE/D/RB/W  
VK/04709/CE/D/GD/W

● **Brown.** 3000K. 40W. 2720lm.  
● **Gold.** 3000K. 40W. 2720lm.

Box  
1pc  
1pc

Details

Material **Aluminium + acrylic**  
Voltage **AC220-240V**  
Beam angle **120°**  
Type of Led **SMD2835**  
Driver **Eaglerise**  
Location **Ceiling**

Working temperature **-20°C → 60°C**  
Lifetime **50.000hrs**  
Dimmable **Yes, triac dimmable**  
CRI **>80**  
Guarantee **2 Years**



**IP20**

Enya



Oak






VK/04710/CE/D/W/W/20



VK/04710/CE/D/W/W/35



VK/04710/CE/D/W/W/50



**VK/04710/CE**

Code	Model	Options	Box
71164-013808	VK/04710/CE/D/W/W/20	○ White/wood grain. 3000K. 12W. 840lm. <b>ø20cm</b>	1pc
71164-014808	VK/04710/CE/D/W/W/35	○ White/wood grain. 3000K. 30W. 2130lm. <b>ø35cm</b>	1pc
71164-015808	VK/04710/CE/D/W/W/50	○ White/wood grain. 3000K. 40W. 2880lm. <b>ø50cm</b>	1pc

Details

Material **Metal + PVC**  
 Voltage **AC220-240V**  
 Beam angle **120°**  
 Type of Led **SMD2835**  
 Driver **Eaglerise**  
 Location **Ceiling**

Working temperature **-20°C → 60°C**  
 Lifetime **50.000hrs**  
 Dimmable **Yes, triac dimmable**  
 CRI **>80**  
 Guarantee **2 Years**



**IP20**


Oak





# Diva



VK/04734/WA/B/W



VK/04734/WA/W/W



## VK/04734/WA

Code  
64171-293727  
64171-294727

Model  
VK/04734/WA/B/W  
VK/04734/WA/W/W


● **Black.** 3000K. 5W. 323lm.  
○ **White.** 3000K. 5W. 323lm.

Box  
18pcs  
18pcs

### Details

Material **Aluminium + PC**  
Voltage **AC220-240V**  
Beam angle **120°**  
Type of LED **Lumileds**  
Driver **Eaglerise**

Location **Wall**  
Working temperature **-20°C → 50°C**  
Lifetime **50.000hrs**, Clicks **40.000**  
Dimmable **No**  
CRI **>80**

 **3 years guarantee**



**IP20**

Diva





# Diva



VK/04734/PE/B/W/4



VK/04734/PE/W/W/4

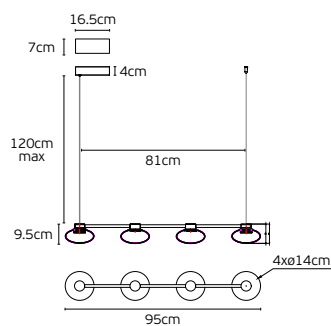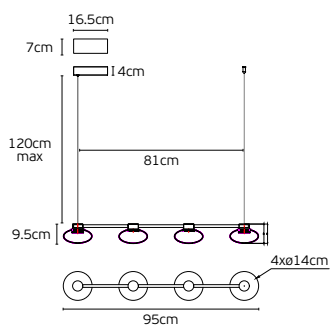

## VK/04734/PE

Code  
71164-003727  
71164-004727

Model  
VK/04734/PE/B/W/4  
VK/04734/PE/W/W/4

● **Black.** 3000K. 27W. 2195lm.  
○ **White.** 3000K. 27W. 2195lm.

Box  
1pc  
1pc

### Details

Material **Aluminum**  
Voltage **AC220-240V**  
Beam angle **120°**  
Type of Led **Lumileds**  
Driver **Eaglerise**

Location **Ceiling**  
Working temperature **-20°C → 50°C**  
Lifetime **50.000hrs, Clicks 40.000**  
Dimmable **No**  
CRI **>80**

**3** years guarantee



**IP20**

# Diva





# Remy



VK/09063



VK/09063/TC



## VK/09063

Code  
64174-292131  
64174-354131 new

Model  
VK/09063  
VK/09063/TC

● Grey. E27. Max 20W (LED).  
● Terracotta. E27. Max 20W (LED).

Box  
4pcs  
4pcs

### Details

Input voltage AC220-240V  
Lampholder E27  
Working temperature -20°C ~ 40°C.

Cable 1.20 m + ceiling plate.  
Material Concrete.  
Possibility to paint.



IP20

Remy





# Remy



VK/09066



VK/09066/TC



## VK/09066

Code  
64174-295131  
64174-356131 new

Model  
VK/09066  
VK/09066/TC

○ White. E27. Max 20W (LED).  
● Terracotta. E27. Max 20W (LED).

Box  
4pcs  
4pcs

### Details

Input voltage AC220-240V  
Lampholder E27  
Working temperature -20°C ~ 40°C.

Cable 1.20 m + ceiling plate.  
Material Gypsum.  
Possibility to paint.



Remy





# Eos



VK/03352/CE/B



VK/03353/CE/B



## VK/03352/CE VK/03353/CE

Code	Model		Box
75169-297108	VK/03352/CE/W	○ White. E27. Max. 20W. (LED). ø13x15cm	4pcs
75169-298108	VK/03352/CE/B	● Black. E27. Max. 20W. (LED). ø13x15cm	4pcs
75169-299108	VK/03353/CE/W	○ White. 3xG9. Max. 3x8W. (LED). ø13x9cm	4pcs
75169-300108	VK/03353/CE/B	● Black. 3xG9. Max. 3x8W. (LED). ø13x9cm	4pcs

### Details

Material **Iron+aluminium+acrylic**  
 Location **Ceiling**  
 Input voltage **AC220-240V**  
 Lampholder **E27 (VK/03352/CE), 3xG9 (VK/03353/CE)**

Working temperature **-20°C - 40°C**  
 Grounding **Class II (VK/03352)**  
**Class I (VK/03353)**



Eos







VK/03354/CE/B



VK/03354/CE/2/BG

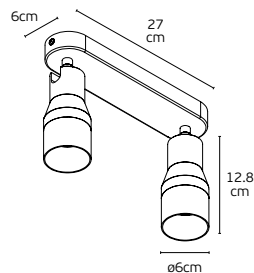

**VK/03354/CE**  
**VK/03354/CE/2**

Code  
64174-040108  
64174-041108

Model  
VK/03354/CE/BG  
VK/03354/CE/B

● Beige. GU10. Max. 12W. (LED).  
● Black. GU10. Max. 12W. (LED).

Box  
32pcs  
32pcs

64174-042108  
64174-043108

VK/03354/CE/2/BG  
VK/03354/CE/2/B

● Beige. GU10x2. Max. 2x12W. (LED).  
● Black. GU10x2. Max. 2x12W. (LED).

20pcs  
20pcs

Details

Material **Iron+aluminium**  
Location **Ceiling/Wall**  
Input voltage **AC220-240V**

Lampholder **GU10**  
Working temperature **-20°C - 40°C**




Iluma





VK/03354/CE/3/B

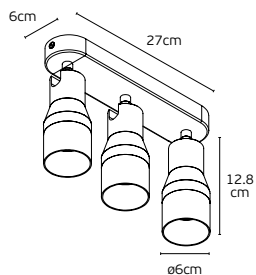

**VK/03354/CE/3**

Code  
64174-044108  
64174-045108

Model  
VK/03354/CE/3/BG  
VK/03354/CE/3/B

● Beige. GU10x3. Max. 3x12W. (LED).  
● Black. GU10x3. Max. 3x12W. (LED).

Box  
20pcs  
20pcs

Details

Material **Iron+aluminium**  
Location **Ceiling/Wall**  
Input voltage **AC220-240V**

Lampholder **GU10x3**  
Working temperature **-20°C - 40°C**




Iluma





**Wall, Reading, Table & Floor  
Lights Collection**

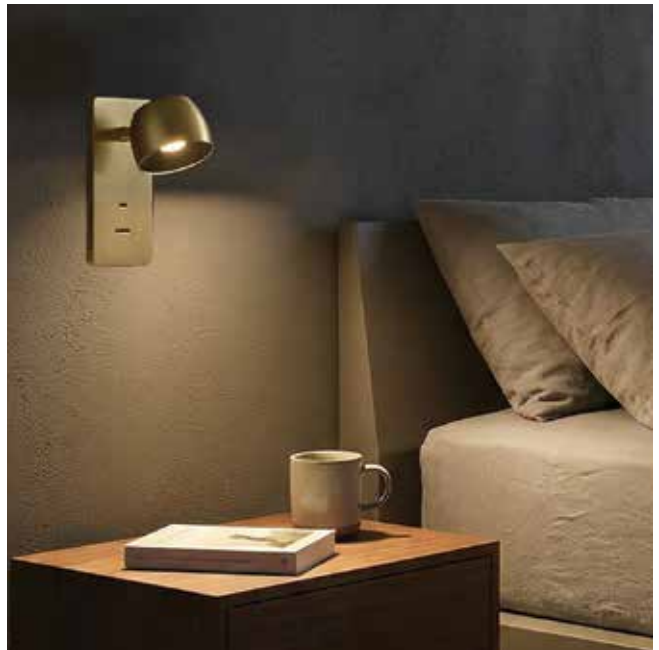

Chic solutions for every space. Our Wall, Reading, Table & Floor lights combine elegance with versatility, offering stylish, functional illumination for hotels, villas, and contemporary homes. Thoughtfully designed to enhance both ambiance and practicality, they deliver refined light exactly where it's needed, blending fashion-forward design with everyday usability.

## Glance




VK/04712/WA/D/TR/W



VK/04712/WA/D/A/W



VK/04712/WA/D/SG/W



### VK/04712/WA

Code  
64174-004808  
64174-005808  
64174-006808

Model  
VK/04712/WA/D/TR/W  
VK/04712/WA/D/A/W  
VK/04712/WA/D/SG/W

○ Transparent. 3000K. 5W. 195lm.  
● Amber. 3000K. 5W. 195lm.  
● Smoky grey. 3000K. 5W. 195lm.

Box  
4pcs  
4pcs  
4pcs

### Details

Material Aluminium + glass  
Voltage AC220-240V  
Beam angle 120°  
Type of Led SMD2835  
Driver Eaglerise  
Location Wall

Working temperature -20°C → 60°C  
Lifetime 50.000hrs  
Dimmable Yes, triac dimmable  
CRI>80  
Guarantee 2 Years



IP20


Glace




## Glance




VK/04711/WA/D/TR/W



VK/04711/WA/D/A/W



VK/04711/WA/D/SG/W



### VK/04711/WA

Code  
64174-001808  
64174-002808  
64174-003808

Model  
VK/04711/WA/D/TR/W  
VK/04711/WA/D/A/W  
VK/04711/WA/D/SG/W

○ Transparent. 3000K. 5W. 180lm.  
● Amber. 3000K. 5W. 180lm.  
● Smoky grey. 3000K. 5W. 180lm.

Box  
4pcs  
4pcs  
4pcs

### Details

Material Aluminium + glass  
Voltage AC220-240V  
Beam angle 120°  
Type of Led SMD2835  
Driver Eaglerise  
Location Wall

Working temperature -20°C → 60°C  
Lifetime 50.000hrs  
Dimmable Yes, triac dimmable  
CRI>80  
Guarantee 2 Years




IP20

Glace





# Tori



VK/03351/WA/A/16



VK/03351/WA/GR/16



## VK/03351/WA

Code  
71164-019807  
71164-020807

Model  
VK/03351/WA/A/16  
VK/03351/WA/GR/16

- Honey+opal. G9. Max 8W (LED).
- Green+opal. G9. Max 8W (LED).

Box  
1pc  
1pc

### Details

Voltage 220-240V.  
Lampholder G9.  
Beam Angle 120°.

Working temperature -45°C → 70°C  
Material Metal base + opal glass.  
Guarantee 2 Years.



Tori





# Aleria



VK/04688/WA/D/BG/W



VK/04688/WA/D/B/W

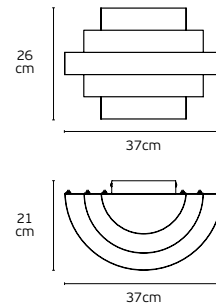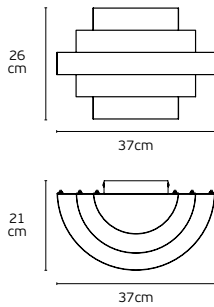

Dimmable

## VK/04688/WA

Code  
75169-301108  
75169-302108

Model  
VK/04688/WA/D/BG/W  
VK/04688/WA/D/B/W

● Beige. 3000K. 1.200lm. 11W. CRI>80  
● Black. 3000K. 1.200lm. 11W. CRI>80

Box  
1pc  
1pc

## Details

Input voltage AC220-240V  
Beam Angle 180°.  
Dimmable Yes, 3-step dimmable  
Type of Led SMD

Lifetime 30.000hrs.  
Working temperature -20°C → 40°C  
Material Iron.  
Guarantee 2 Years.




Aleria



## Pero



VK/03365/WA/BS



### VK/03365/WA

Code  
64174-003162

Model  
VK/03365/WA/BS

● Matt Brass. G9. Max 8W (LED)

Box  
1pc

### Details

Material **Material Glass (lamp shade)**  
**+ Iron (base)**  
Lampholder **G9**  
Max. Power LED lamp **8W**

Voltage **AC220-240V**  
Location **Wall**  
Working temperature **-25°C → 50°C**  
CRI **>80**


  **IP20**

Pero





VK/03366/WA/BS



**VK/03366/WA**

Code  
64174-004162

Model  
VK/03366/WA/BS

● Matt Brass. G9. Max 8W (LED)

Box  
1pc

Details

Material **Material Glass (lamp shade)**  
**+ Iron (base)**  
Lampholder **G9**  
Max. Power LED lamp **8W**  
Voltage **AC220-240V**

Location **Wall**  
Working temperature **-25°C → 50°C**  
**CRI>80**  
**With knob switch.**



Pero





# Novel



VK/04704/LW-W/W



VK/04704/DW-B/W

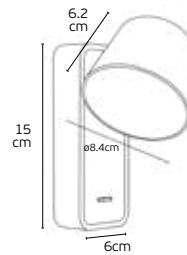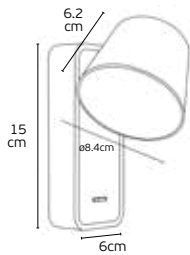

## VK/04704

Code  
64171-307115  
64171-308115

Model  
VK/04704/LW-W/W  
VK/04704/DW-B/W


○ White+Wood. 3000K. 228lm. 6W. CRI>80  
● Black+Wood. 3000K. 228lm. 6W. CRI>80

Box  
20pcs  
20pcs

### Details

Material **Aluminum**  
Type of Led **OSRAM**  
Voltage **AC220-240V**  
Location **Wall**  
Color led **3000K**  
Beam angle **87°**

Working temperature **≤35°C**  
Working life **3 years**  
On/off cycles **5000**  
Dimmable **No**  
Guarantee **2 Years**  
**With on/off switch.**



# Novel





Novel



VK/04705/LW-W/W



VK/04705/DW-B/W



**VK/04705**

Code  
64171-309115  
64171-310115

Model  
VK/04705/LW-W/W  
VK/04705/DW-B/W

○ White+Wood. 3000K. 230lm. 3W. CRI>80  
● Black+Wood. 3000K. 230lm. 3W. CRI>80

Box  
50pcs  
50pcs

Details

Material **Aluminum**  
Type of Led **CREE**  
Voltage **AC220-240V**  
Location **Wall**  
Color led **3000K**  
Beam angle **30°**

Working temperature **≤35°C**  
Working life **3 years**  
On/off cycles **5000**  
Dimmable **No**  
Guarantee **2 Years**  
**With on/off switch.**



# Novel



## Nook



VK/04706/B/W







VK/04706/W/W



VK/04706/GD/W



VK/04706/BR/W



### VK/04706

Code	Model
64171-311115	VK/04706/B/W
64171-312115	VK/04706/W/W
64171-313115	VK/04706/GD/W
64171-314115	VK/04706/BR/W

- **Black.** 3000K. 690lm. 6W. CRI>80
- **White.** 3000K. 690lm. 6W. CRI>80
- **Gold.** 3000K. 690lm. 6W. CRI>80
- **Brown.** 3000K. 690lm. 6W. CRI>80

Box  
20pcs  
20pcs  
20pcs  
20pcs

### Details

Material **Aluminum+Iron**  
Type of Led **Bridgelux**  
Voltage **AC220-240V**  
Location **Wall**  
Color led **3000K**  
Beam angle **28°**

Working temperature **≤35°C**  
Working life **3 years**  
On/off cycles **5000**  
Dimmable **No**  
Guarantee **2 Years**  
**With on/off switch.**



Nook





# Trek



VK/04733/WA/W/W



VK/04733/WA/B/W



## VK/04733/WA

Code  
64171-292727  
64171-291727

Model  
VK/04733/WA/W/W  
VK/04733/WA/B/W

○ White. 3000K. 405lm. 6W. CRI>90  
● Black. 3000K. 405lm. 6W. CRI>90

Box  
20pcs  
20pcs

### Details

Material **Aluminium**  
Lighting source **Cree COB**  
Driver **Kegu**  
Voltage **AC220-240V**  
Location **Wall**

Beam angle **38°**  
Working temperature **-20°C - 50°C**  
Lifetime **50.000hrs**  
Clicks **40.000**  
Dimmable **No**

**3** years guarantee



**IP20**

Trek





# Lopi



VK/04703/B/W



VK/04703/W/W



## VK/04703

Code  
64171-305115  
64171-306115

Model  
VK/04703/B/W  
VK/04703/W/W

● **Black.** 3000K. 560lm. 8W. CRI>80  
○ **White.** 3000K. 560lm. 8W. CRI>80

Box  
20pcs  
20pcs

## Details

Material **Aluminum+PMMA**  
Type of Led **SANAN**  
Voltage **AC220-240V**  
Location **Wall**  
Color led **3000K**  
Beam angle **100°**

Working temperature **≤35°C**  
Working life **3 years**  
On/off cycles **5000**  
Dimmable **No**  
Guarantee **2 Years**  
**With press button.**




Lopi





VK/03360/B

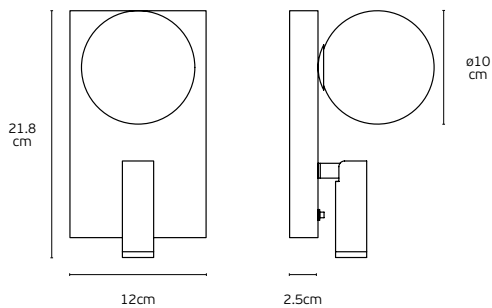

**VK/03360**

Code  
77161-319144

Model  
VK/03360/B

● Black. G9. Max 8W (LED). 3000K. 190lm. 3W. CRI>80

Box  
1pc

Details

Input voltage AC220-240V  
Beam Angle 350°.  
Dimmable No  
Type of Led COB

Lifetime 30.000hrs.  
Working temperature -65°C → 80°C  
Material Metal+Glass.  
Guarantee 2 Years.



Vivo





Sole



VK/03355/WA/W



VK/03355/WA/B

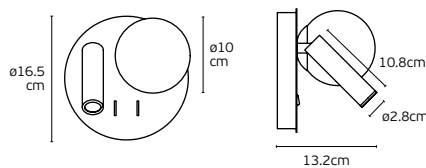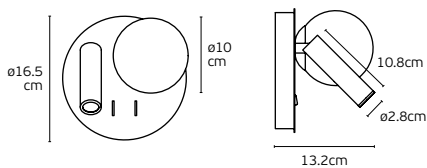

**VK/03355/WA**

Code  
64174-046108  
64174-047108

Model  
VK/03355/WA/W  
VK/03355/WA/B

○ White. G9. Max 8W (LED). 3000K. 200lm. 3W. CRI>80  
● Black. G9. Max 8W (LED). 3000K. 200lm. 3W. CRI>80

Box  
4pcs  
4pcs

Details

Input voltage AC220-240V  
Beam Angle 60°.  
Dimmable Yes, 3-step dimmable  
Type of Led COB

Lifetime 30.000hrs.  
Working temperature -20°C → 40°C  
Material Iron+aluminium+glass.  
Guarantee 2 Years.




Sole



Nero



VK/03356/WA/B

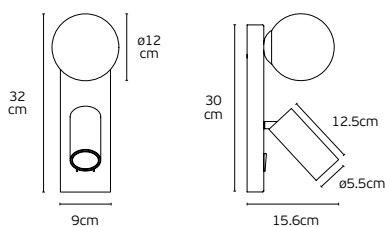

**VK/03356/WA**

Code  
64174-048108

Model  
VK/03356/WA/B

● Black. G9. Max 8W (LED) + GU10. Max 12W (LED)

Box  
10pcs

Details

Material **iron+aluminium+glass**  
Location **Wall**  
Input voltage **AC220-240V**

Lampholders **GU10+G9**  
Working temperature **-20°C - 40°C**  
**With 2 slim switches**

 **IP20**

Nero



# Aira






VK/04576/WA/W/W



VK/04576/WA/B/W



VK/04576/WA/GD/W

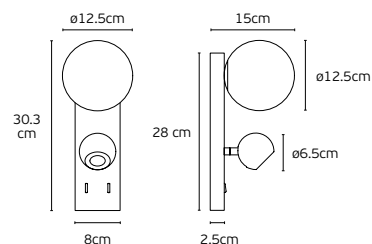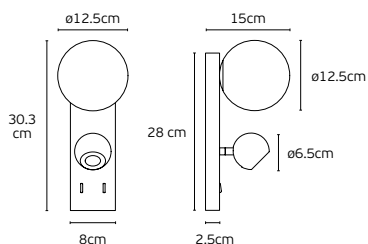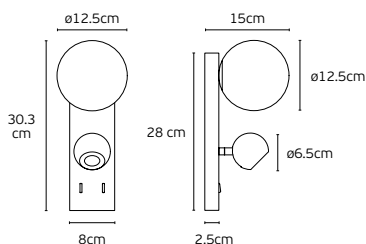

## VK/04576/WA

Code  
 64171-284727  
 64171-285727  
 64171-287727

Model  
 VK/04576/WA/W/W  
 VK/04576/WA/B/W  
 VK/04576/WA/GD/W

○ White. G9 Max 8W (LED) + 6W LED. 3000K. 460lm. CRI>90  
 ● Black. G9 Max 8W (LED) + 6W LED. 3000K. 460lm. CRI>90  
 ● Gold. G9 Max 8W (LED) + 6W LED. 3000K. 460lm. CRI>90

Box  
 8pcs  
 8pcs  
 8pcs

### Details

Material **Aluminium, iron & glass**  
 Lighting source **Cree COB + G9**  
 Led driver **Eaglerise 6W 500mA**  
 Driver output **5-18V**  
 Voltage **AC220-240V**

Location **Wall**  
 Beam angle **25°**  
 Working temperature **-20°C - 50°C**  
 Lifetime **50.000hrs, Clicks 40.000**  
 Dimmable **No**

**3 years guarantee**



**IP20**

Aira



# Aira






VK/04732/WA/W/W



VK/04732/WA/B/W



VK/04732/WA/GD/W

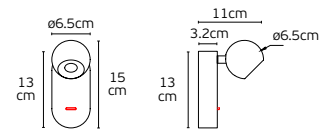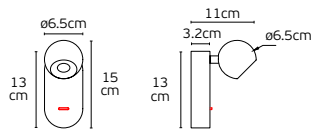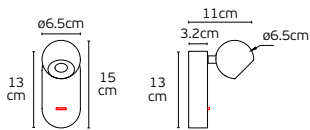

## VK/04732/WA

Code	Model
64171-289727	VK/04732/WA/W/W
64171-288727	VK/04732/WA/B/W
64171-290727	VK/04732/WA/GD/W

- **White.** 3000K. 468lm. 5.6W. CRI>90
- **Black.** 3000K. 468lm. 5.6W. CRI>90
- **Gold.** 3000K. 468lm. 5.6W. CRI>90

Box  
20pcs  
20pcs  
20pcs

### Details

Material **Aluminium**  
Lighting source **Cree COB**  
Driver **Eaglerise**  
Voltage **AC220-240V**  
Location **Wall**

Beam angle **25°**  
Working temperature **-20°C - 50°C**  
Lifetime **50.000hrs**  
Clicks **40.000**  
Dimmable **No**

**3** years guarantee



**IP20**

Aira





# Aira



VK/04732/TL/B/W



VK/04732/TL/GD/W

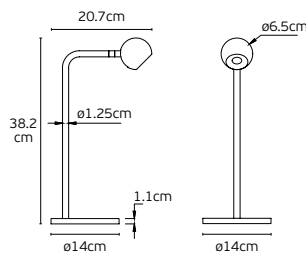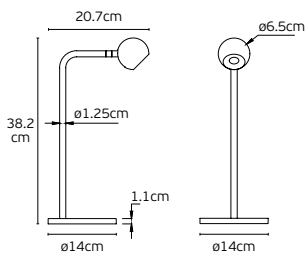

## VK/04732/TL

Code  
75169-001727  
75169-002727

Model  
VK/04732/TL/B/W  
VK/04732/TL/GD/W

● **Black.** 3000K. 5.6W. 468lm.  
● **Gold.** 3000K. 5.6W. 468lm.

Box  
6pcs  
6pcs

### Details

Material **Aluminum**  
Voltage **AC220-240V**  
Type of Led **Cree COB**  
Driver **Waiberlon**  
Beam angle **25°**

Location **Table**  
Working temperature **-20°C → 50°C**  
Lifetime **50.000hrs**, Clicks **40.000**  
Dimmable **No**  
CRI **>90**

**3** years guarantee

 **IP20**

Aira





# Aira



VK/04732/PE/B/W



VK/04732/PE/GD/W

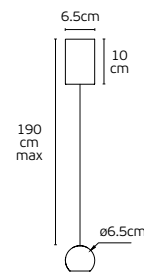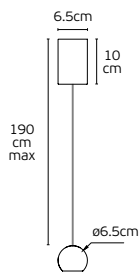

## VK/04732/PE

Code  
71164-001727  
71164-002727

Model  
VK/04732/PE/B/W  
VK/04732/PE/GD/W


● **Black.** 3000K. 5.6W. 468lm.  
● **Gold.** 3000K. 5.6W. 468lm.

Box  
20pcs  
20pcs

### Details

Material **Aluminum**  
Voltage **AC220-240V**  
Beam angle **25°**  
Type of Led **Cree COB**  
Driver **Eaglerise**

Location **Ceiling**  
Working temperature **-20°C → 50°C**  
Lifetime **50.000hrs**, Clicks **40.000**  
Dimmable **No**  
CRI **>90**

 **3 years guarantee**




**IP20**


Aira



# Aira

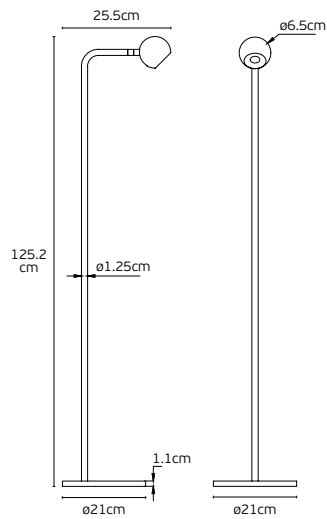

VK/04732/FL/B/W

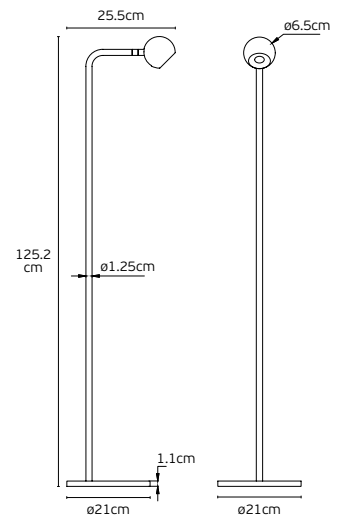

VK/04732/FL/GD/W

## VK/04732/FL

Code  
75169-003727  
75169-004727

Model  
VK/04732/FL/B/W  
VK/04732/FL/GD/W

● **Black.** 3000K. 5.6W. 468lm.  
● **Gold.** 3000K. 5.6W. 468lm.

Box  
1pc  
1pc

### Details

Material **Aluminum**  
Voltage **AC220-240V**  
Type of Led **Cree COB**  
Driver **Waiberlon**  
Beam angle **25°**

Location **Floor**  
Working temperature **-20°C → 50°C**  
Lifetime **50.000hrs, Clicks 40.000**  
Dimmable **No**  
CRI **>90**

**3** years guarantee



**IP20**

Aira



# Pop






VK/04735/WA/W/W



VK/04735/WA/B/W



VK/04735/WA/GD/W



## VK/04735/WA

Code  
 64171-296727  
 64171-295727  
 64171-297727

Model  
 VK/04735/WA/W/W  
 VK/04735/WA/B/W  
 VK/04735/WA/GD/W

○ **White.** 3000K. 443lm. 5.8W. CRI>90  
 ● **Black.** 3000K. 443lm. 5.8W. CRI>90  
 ● **Gold.** 3000K. 443lm. 5.8W. CRI>90

Box  
 20pcs  
 20pcs  
 20pcs

### Details

Material **Aluminium**  
 Lighting source **Cree COB**  
 Driver **Eaglerise**  
 Voltage **AC220-240V**  
 Location **Wall**

Beam angle **25°**  
 Working temperature **-20°C - 50°C**  
 Lifetime **50.000hrs**  
 Dimmable **No**

**3 years guarantee**



**IP20**

Pop



Pop






VK/04735/WA/W/W/USB



VK/04735/WA/B/W/USB



VK/04735/WA/GD/W/USB



**VK/04735/WA/USB**

Code  
64171-299727  
64171-298727  
64171-300727

Model  
VK/04735/WA/W/W/USB  
VK/04735/WA/B/W/USB  
VK/04735/WA/GD/W/USB

○ **White**. 3000K. 443lm. 5.8W. CRI>90. USB  
● **Black**. 3000K. 443lm. 5.8W. CRI>90. USB  
● **Gold**. 3000K. 443lm. 5.8W. CRI>90. USB

Box  
20pcs  
20pcs  
20pcs

Details

Material **Aluminium**  
Lighting source **Cree COB**  
Driver **Eaglerise**  
Voltage **AC220-240V**  
Location **Wall**

Beam angle **25°**  
Working temperature **-20°C - 50°C**  
Lifetime **50.000hrs**, Clicks **40.000**  
Dimmable **No**  
Contains a **USB port**

**3 years guarantee**



**IP20**


Pop



# Pop



VK/04735/TL/B/W



## VK/04735/TL

Code  
75169-005727

Model  
VK/04735/TL/B/W

● Black. 3000K. 5.8W. 443lm.

Box  
4pcs

### Details

Material **Aluminum**  
Voltage **AC220-240V**  
Type of Led **Cree COB**  
Driver **Waiberlon**  
Beam angle **25°**


Location **Table**  
Working temperature **-20°C → 50°C**  
Lifetime **50.000hrs, Clicks 40.000**  
Dimmable **No**  
CRI **>90**

**3** years guarantee  **IP20**

Pop



# Pop

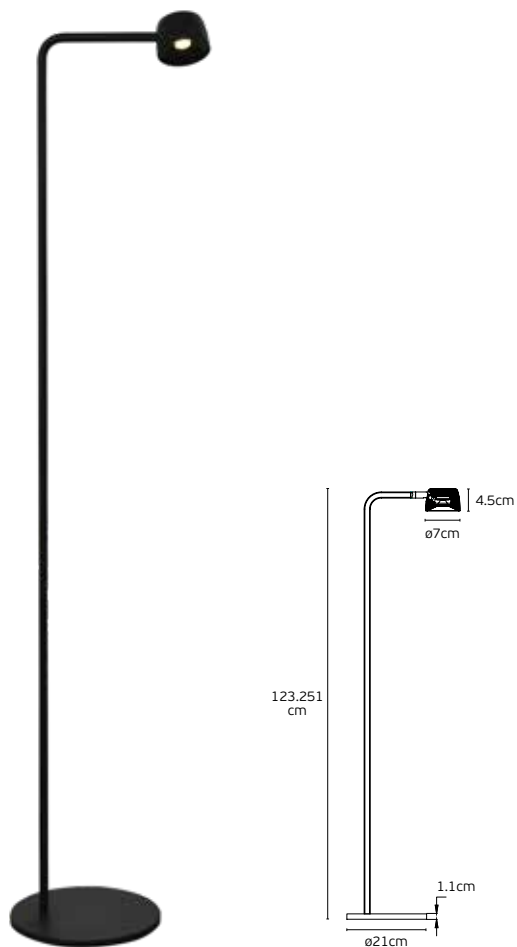

VK/04735/FL/B/W

## VK/04735/FL

Code  
75169-006727

Model  
VK/04735/FL/B/W


● Black. 3000K. 5.8W. 443lm.

Box  
1pc

### Details

Material **Aluminum**  
Voltage **AC220-240V**  
Type of Led **Cree COB**  
Driver **Waiberlon**  
Beam angle **25°**

Location **Floor**  
Working temperature **-20°C → 50°C**  
Lifetime **50.000hrs**, Clicks **40.000**  
Dimmable **No**  
CRI **>90**


 **3 years guarantee**

 **IP20**

Pop



# Pop

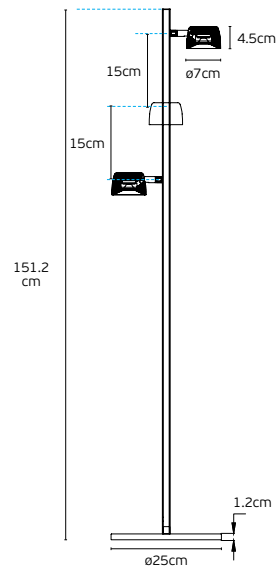

VK/04735/FL/B/W/3

## VK/04735/FL/3

Code  
75169-007727

Model  
VK/04735/FL/B/W/3


● Black. 3000K. 17.8W. 1250lm.

Box  
1pc

### Details

Material **Aluminum**  
Voltage **AC220-240V**  
Type of Led **Cree COB**  
Driver **Waiberlon**  
Beam angle **25°**

Location **Floor**  
Working temperature **-20°C → 50°C**  
Lifetime **50.000hrs, Clicks 40.000**  
Dimmable **No**  
CRI **>90**

 **3 years guarantee**



**IP20**


Pop



# Pop



VK/04735/PE/B/W

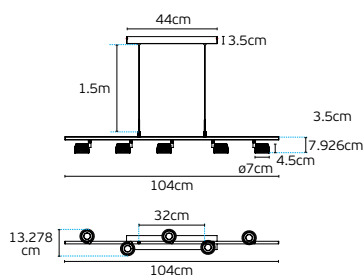

## VK/04735/PE

Code  
71164-005727

Model  
VK/04735/PE/B/W

● Black. 3000K. 28W. 1190lm.

Box  
1pc

### Details

Material **Aluminum**  
Voltage **AC220-240V**  
Beam angle **25°**  
Type of Led **Cree COB**  
Driver **Eaglerise**

Location **Ceiling**  
Working temperature **-20°C → 50°C**  
Lifetime **50.000hrs, Clicks 40.000**  
Dimmable **No**  
CRI **>80**

**3** years guarantee



**IP20**

Pop



# Jak






VK/04702/B/W



VK/04702/W/W



VK/04702/GD/W



## VK/04702

Code  
64171-302115  
64171-303115  
64171-304115

Model  
VK/04702/B/W  
VK/04702/W/W  
VK/04702/GD/W

● **Black.** 3000K. 229lm. 3W. CRI>80  
○ **White.** 3000K. 229lm. 3W. CRI>80  
● **Gold.** 3000K. 229lm. 3W. CRI>80

Box  
50pcs  
50pcs  
50pcs

### Details

Material **Aluminium & iron**  
Lighting source **CREE**  
Voltage **AC220-240V**  
Location **Wall**  
Color led **3000K**  
Beam angle **50°**

Working temperature **≤35°C**  
Working life **3 years**  
On/off cycles **5000**  
Dimmable **No**  
Guarantee **2 Years**  
**With on/off switch.**



IP20


Jak



# Arch



VK/03357/BG



## VK/03357

Code  
61171-001108

Model  
VK/03357/BG

○ Beige. E27. Max. 20W. (LED)

Box  
1pc

## Details

Voltage 220-240V.  
Lampholder E27.

Working temperature -20°C → 40°C  
Material Resin+linen fabric.




Arch



Otto



VK/03358/B



**VK/03358**

Code  
61171-002108

Model  
VK/03358/B

● Black/grey. E27. Max. 20W. (LED)

Box  
1pc

Details

Voltage 220-240V.  
Lampholder E27.

Working temperature -20°C → 40°C  
Material Resin+linen fabric.




Otto



Ami



VK/03359/W



**VK/03359**

Code  
**61171-003108**

Model  
**VK/03359/W**

○ **White.** E27. Max. 20W. (LED)

Box  
**1pc**

Details

Voltage **220-240V.**  
Lampholder **E27.**

Working temperature **-20°C → 40°C**  
Material **Iron+TC fabric.**



**IP20**


Ami



Vivo



VK/03361/B



**VK/03361**

Code  
77161-320144

Model  
VK/03361/B

● Black. G9. Max. 8W. (LED)

Box  
1pc

Details

Voltage 220-240V.  
Lampholder G9.

Working temperature -65°C → 80°C  
Material Metal+Glass.



IP20


Vivo




Still



VK/04685/W/W/180

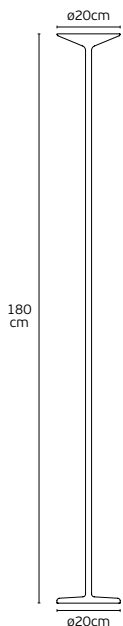

VK/04685/B/W/180

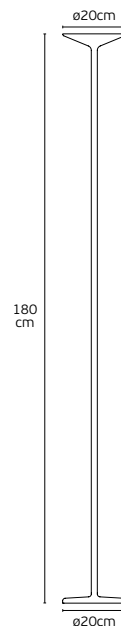

**VK/04685/180**

Code  
75169-413695  
75169-414695

Model  
VK/04685/W/W/180  
VK/04685/B/W/180


○ **White.** 3000K. 1558lm. 19W. 180°. CRI>90  
● **Black.** 3000K. 1558lm. 19W. 180°. CRI>90

Box  
4pcs  
4pcs

Details

Voltage **220-240V.**  
Type of LED **Philips.**  
Working temperature **-20°C → 60°C.**

Lifetime **50.000hrs.**  
Clicks **10.000.**  
Material **Aluminium.**

 **3 years guarantee**



**IP20**


Still



# Nia



VK/04678/B/CCT

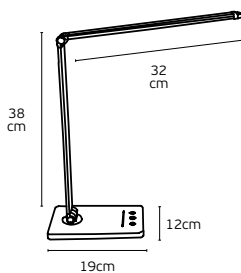

## VK/04678

Code  
58610-105647  
58610-104647

Model  
VK/04678/W/CCT  
VK/04678/B/CCT

○ White. 3000K-6000K. 450lm. 7W. CRI>90  
● Black. 3000K-6000K. 450lm. 7W. CRI>90

Box  
24pcs  
24pcs

### Details

Voltage 220-240V.  
Type of LED SMD.  
Working temperature -20°C → 45°C.  
Lifetime 10.000hrs.

Clicks 25.000.  
Material Aluminium, ABS, PC.  
Guarantee 2 Years.



IP20

# Nia





Fans Collection




Light. Air. Motion.  
The Fans Collection blends sleek design with subtle movement, delivering both illumination and airflow in a modern, minimalist form. Effortlessly stylish, functional, and contemporary.

# Air



VK/04666/AIR/BW/ABS

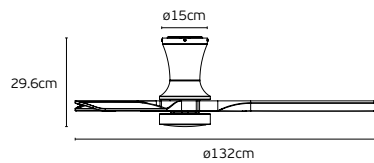

## VK/04666/AIR

Code  
77161-482777

Model  
VK/04666/AIR/BW/ABS

● Black+Wooden grain. 3000K-6000K. 22W. 1980lm. DC35W (moter). RPM 90-170.

Box  
1pc

### Details

Voltage **AC100-240V, DC35W.**  
Material **Iron & ABS (3pcs blades).**  
Location **Ceiling.**  
Power of moter **DC35W.**  
RPM **90-170.**

Power of Light **22W.**  
Kelvin **3000K-6000K.**  
Lumen **1980lm.**  
Included **Remote control & wall control.**  
IP Rating **IP20.**



Remote control &  
Wall control Included

**3** years guarantee




**IP20**

Air





VK/04667/AIR/BW/ABS

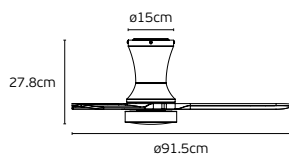

**VK/04667/AIR**

Code  
77161-483777

Model  
VK/04667/AIR/BW/ABS

● Black+Wooden grain. 3000K-6000K. 22W. 1980lm. DC25W (moter). RPM 180-280.

Box  
1pc

Details

Voltage **AC100-240V, DC35W.**  
Material **Iron & ABS (3pcs blades).**  
Location **Ceiling.**  
Power of moter **DC25W.**  
RPM **180-280.**

Power of Light **22W.**  
Kelvin **3000K-6000K.**  
Lumen **1980lm.**  
Included **Remote control & wall control.**  
IP Rating **IP20.**



Remote control &  
Wall control Included

**3** years guarantee




**IP20**

Air





VK/04665/AIR/BW

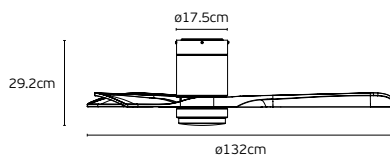

**VK/04665/AIR**

Code  
77161-481777

Model  
VK/04665/AIR/BW

● Black+Walnut. 3000K-6000K. 20W. 1800lm. DC35W (moter). RPM 90-170.

Box  
1pc

Details

Voltage **AC100-240V, DC35W.**  
Material **Iron & Solid wood (3pcs blades).**  
Location **Ceiling.**  
Power of moter **DC35W.**  
RPM **90-170.**

Power of Light **20W.**  
Kelvin **3000K-6000K.**  
Lumen **1800lm.**  
Included **Remote control & wall control.**  
IP Rating **IP20.**



Remote control &  
Wall control Included

**3** years guarantee



**IP20**

Air





# Air



VK/04664/AIR/B



VK/04664/AIR/W

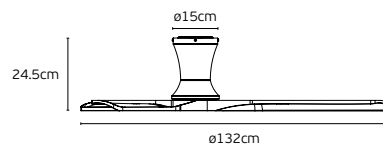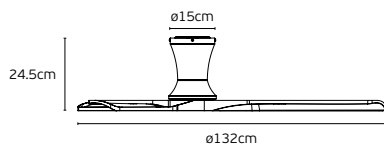

## VK/04664/AIR

Code  
77161-480777  
77161-485777

Model  
VK/04664/AIR/B  
VK/04664/AIR/W

● **Black.** DC35W (moter). RPM 75-140.  
○ **White.** DC35W (moter). RPM 75-140.

Box  
1pc  
1pc

### Details

Voltage **AC100-240V, DC35W.**  
Material **Iron & ABS (3pcs blades).**  
Location **Ceiling.**

Included **Remote control & wall control.**  
IP Rating **IP20.**



**3** years guarantee

Remote control &  
Wall control Included


**IP20**

Air





VK/04679/AIR/B

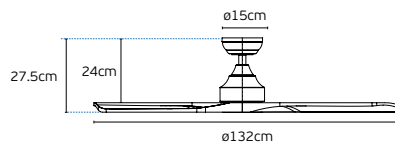

**VK/04679/AIR**

Code  
77161-484777

Model  
VK/04679/AIR/B

● Black. DC60W (moter). RPM 70-140.

Box  
1pc

Details

Voltage AC100-240V, DC60W.  
Material Iron & ABS (3pcs blades).  
Location Ceiling.

Included Remote control & wall control.  
IP Rating IP20.



**3** years guarantee

Remote control &  
Wall control Included

**IP20**

Air





**Outdoor**  
Lighting Collection



Designed for the outdoors.

Outdoor lighting solutions with modern character and distinctive design. Clean lines, durable materials, and unique forms enhance exterior spaces with style and a contemporary presence.



# Shade



VK/02271/RB/W



VK/02271/AN/W



## VK/02271

Code  
75169-368695  
75169-369695

Model  
VK/02271/RB/W  
VK/02271/AN/W


- **Rust Brown.** 3000K. 453lm. 12W. 180°. CRI>90.
- **Anthracite.** 3000K. 453lm. 12W. 180°. CRI>90.

Box  
20pcs  
20pcs

### Details

Voltage 220-240V.  
Type of Led **PHILIPS**.  
Lifetime 50.000hrs.  
Clicks 10.000

**Dimmable No.**  
Working temperature -20°C→60°C.  
Material **Aluminum**.  
Location **Outdoor wall**.

 **3 years guarantee**



**IP65**

# Shade





## Shade



VK/02272/RB/W



VK/02272/AN/W



### VK/02272

Code  
75169-370695  
75169-371695

Model  
VK/02272/RB/W  
VK/02272/AN/W


● **Rust Brown.** 3000K. 612lm. 12W. 180°. CRI>90.  
● **Anthracite.** 3000K. 612lm. 12W. 180°. CRI>90.

Box  
20pcs  
20pcs

### Details

Voltage 220-240V.  
Type of Led PHILIPS.  
Lifetime 50.000hrs.  
Clicks 10.000

**Dimmable No.**  
Working temperature -20°C→60°C.  
Material Aluminum.  
Location Outdoor wall.

 **3 years guarantee**



**IP65**

Shade



## Neon






VK/02267/WA/W



VK/02267/WA/AN



VK/02267/WA/RB



### VK/02267/WA

Code  
75169-394997  
75169-393997  
75169-395997

Model  
VK/02267/WA/W/W  
VK/02267/WA/AN/W  
VK/02267/WA/RB/W

○ **White.** 3000K. 1600lm. 12W. CRI>80  
● **Anthracite.** 3000K. 1600lm. 12W. CRI>80  
● **Brown.** 3000K. 1600lm. 12W. CRI>80

Box  
304pcs  
304pcs  
304pcs

### Details

Voltage **AC220-240V.**  
Type of Led **SMD 2835.**  
Lifetime **30.000hrs.**  
Clicks **20.000.**  
Beam angle **120°.**

**Dimmable No.**  
Working temperature **-20°C→45°C.**  
Material **Aluminum + Diffuser PC.**  
Location **Outdoor wall.**  
Guarantee **2 years.**



**IP65**


Neon




## Neon




VK/02268/WA/W



VK/02268/WA/AN



VK/02268/WA/RB



### VK/02268/WA

Code  
75169-397997  
75169-396997  
75169-398997

Model  
VK/02268/WA/W/W  
VK/02268/WA/AN/W  
VK/02268/WA/RB/W

○ White. 3000K. 686lm. 9W. CRI>80  
● Anthracite. 3000K. 686lm. 9W. CRI>80  
● Brown. 3000K. 686lm. 9W. CRI>80

Box  
304pcs  
304pcs  
304pcs

### Details

Voltage AC220-240V.  
Type of Led SMD.  
Lifetime 30.000hrs.  
Clicks 20.000.  
Beam angle 120°.

**Dimmable No.**  
Working temperature -20°C→45°C.  
Material Aluminum + Diffuser PC.  
Location Outdoor wall.  
Guarantee 2 years.



IP65

Neon



Tod






VK/02263/W



VK/02263/AN



VK/02263/BR



### VK/02263

Code  
75169-564271  
75169-563271  
75169-392997 new

Model  
VK/02263/W/W  
VK/02263/AN/W  
VK/02263/BR/W

○ White. 3000K. 686lm. 9W. CRI>80  
● Anthracite. 3000K. 686lm. 9W. CRI>80  
● Brown. 3000K. 686lm. 9W. CRI>80

Box  
1pc  
1pc  
1pc

#### Details

Voltage 220-240V.  
Type of Led SMD.  
Lifetime 30.000hrs.  
Clicks 20.000.  
Beam Angle 120°.

**Dimmable No.**  
Working temperature -20°C→45°C.  
Material Aluminium + Diffuser PC.  
Location Outdoor wall.  
Guarantee 2 years.



Tod



Path



CCT



VK/02302/W/CCT



VK/02303/B/CCT



VK/02302

VK/02303

Code  
75169-515742  
75169-516742

Model  
VK/02302/W/CCT  
VK/02302/B/CCT

○ White. CCT 3000K/4000K/6000K. 1200lm. 12W. 120°. CRI>80.  
● Black. CCT 3000K/4000K/6000K. 1200lm. 12W. 120°. CRI>80.

Box  
40pcs  
40pcs

75169-517742  
75169-518742

VK/02303/W/CCT  
VK/02303/B/CCT

○ White. CCT 3000K/4000K/6000K. 1800lm. 18W. 120°. CRI>80.  
● Black. CCT 3000K/4000K/6000K. 1800lm. 18W. 120°. CRI>80.

40pcs  
40pcs

Details

Voltage 175-265V.  
Type of Led SMD 2835.  
Lifetime 30.000.  
Clicks 20.000.  
Dimmable No.

Working temperature -35°C → 35°C.  
Material Aluminum.  
Location Outdoor wall.  
Guarantee 2 years.



IP54

Path



Path



CCT



VK/02304/W/CCT



VK/02305/B/CCT



**VK/02304**

**VK/02305**

Code  
75169-519742  
75169-520742

Model  
VK/02304/W/CCT  
VK/02304/B/CCT

○ **White.** CCT 3000K/4000K/6000K. 1200lm. 12W. 120°. CRI>80.  
● **Black.** CCT 3000K/4000K/6000K. 1200lm. 12W. 120°. CRI>80.

Box  
40pcs  
40pcs

75169-521742  
75169-522742

VK/02305/W/CCT  
VK/02305/B/CCT

○ **White.** CCT 3000K/4000K/6000K. 1800lm. 18W. 120°. CRI>80.  
● **Black.** CCT 3000K/4000K/6000K. 1800lm. 18W. 120°. CRI>80.

20pcs  
20pcs

Details

Voltage 175-265V.  
Type of Led SMD 2835.  
Lifetime 30.000.  
Clicks 20.000.  
Dimmable No.

Working temperature -35°C → 35°C.  
Material Aluminum.  
Location Outdoor wall.  
Guarantee 2 years.



# Path





# Lito



VK/01130/CE/AN



VK/01131/CE/AN



## VK/01130/CE, VK/01131/CE

Code  
75169-390997

Model  
VK/01130/CE/AN

● Anthracite. E27. Max 20W (LED). **ø15cm**

Box  
600pcs

75169-391997

VK/01131/CE/AN


● Anthracite. E27. Max 20W (LED). **ø16cm**

600pcs

### Details

Input voltage **220-240V**  
Lampholder **E27 (included)**  
Working temperature **-20°C → 45°C.**

Material **Aluminium.**  
Diffuser **PE roto-molding.**  
Location **Outdoor Ceiling/wall**



**IP54**

Lito






## Dust



VK/02270/W/W

VK/02270/RB/W

VK/02270/AN/W



### VK/02270

Code  
75169-365695  
75169-366695  
75169-367695

Model  
VK/02270/W/W  
VK/02270/RB/W  
VK/02270/AN/W


- Sand White. 3000K. 331lm. 2x6W. CRI>90.
- Rust Brown. 3000K. 331lm. 2x6W. CRI>90.
- Anthracite. 3000K. 331lm. 2x6W. CRI>90.

Box  
20pcs  
20pcs  
20pcs

### Details

Voltage 220-240V.  
Type of Led Sanan.  
Lifetime 50.000hrs.  
Clicks 10.000

**Dimmable No.**  
Working temperature -20°C→60°C.  
Material Aluminum.  
Location Outdoor wall.

 **3 years guarantee**



**IP65**

# Dust



## Lun



VK/02258/W







VK/02258/AN



VK/02258/G



VK/02258/RB



### VK/02258

Code  
75169-374997  
75169-376997  
75169-375997  
75169-373997

Model  
VK/02258/W/W  
VK/02258/AN/W  
VK/02258/G/W  
VK/02258/RB/W

○ **White.** 3000K. 121lm. 3W. CRI>80  
● **Anthracite.** 3000K. 121lm. 3W. CRI>80  
● **Grey.** 3000K. 121lm. 3W. CRI>80  
● **Rust Brown.** 3000K. 121lm. 3W. CRI>80

Box  
1pc  
1pc  
1pc  
1pc

#### Details

Voltage **220-240V.**  
Type of Led **SMD 2835.**  
Beam Angle **115°.**  
Lifetime **30.000hrs.**  
Clicks **20.000.**

**Dimmable No.**  
Working temperature **-20°C→45°C.**  
Material **Aluminium.**  
Location **Outdoor wall.**  
Guarantee **2 years.**




Lun




Wop



VK/02292/WA/RB/WW/9



VK/02292/WA/RB/WW/18



**VK/02292/WA**

Code	Model		Box
75169-167721	VK/02292/WA/RB/WW/9	● Rust Brown. 2700K. 65lm. 3W. CRI>90.	30pcs
75169-168721	VK/02292/WA/RB/WW/18	● Rust Brown. 2700K. 88lm. 3W. CRI>90.	20pcs

Details

Voltage AC220-240V,  
 DC9-15V 200mA (VK/02292/WA/RB/WW/9)  
 DC6-11V 300mA (VK/02292/WA/RB/WW/18).  
 Type of Led Bridgelux.  
 Lifetime 50,000hrs.  
 Beam angle Diffuse Light

Dimmable No.  
 Working temperature -20°C→45°C.  
 Material Aluminum + Acrylic.  
 Location Outdoor wall.

**3 years guarantee**



Wop




# Pit



VK/02298/WA/GR



VK/02298/WA/RB



VK/02298/WA/AN



## VK/02298/WA

Code	Model
75169-193721	VK/02298/WA/GR/WW
75169-194721	VK/02298/WA/GR/W
75169-195721	VK/02298/WA/RB/WW
75169-196721	VK/02298/WA/RB/W
75169-197721	VK/02298/WA/AN/WW
75169-198721	VK/02298/WA/AN/W

- Sand Green. 2700K. 130lm. 3W. CRI>90.
- Sand Green. 3000K. 136lm. 3W. CRI>90.
- Rust Brown. 2700K. 130lm. 3W. CRI>90.
- Rust Brown. 3000K. 136lm. 3W. CRI>90.
- Anthracite. 2700K. 130lm. 3W. CRI>90.
- Anthracite. 3000K. 136lm. 3W. CRI>90.

Box  
30pcs  
30pcs  
30pcs  
30pcs  
30pcs  
30pcs

### Details

Voltage **AC85-265V**  
**DC2-4V 600mA.**  
 Type of Led **Bridgelux.**  
 Lifetime **50.000hrs.**  
 Beam angle **Diffuse Light.**

**Dimmable No.**  
 Working temperature **-20°C→45°C.**  
 Material **Aluminum.**  
 Location **Outdoor wall.**

**3** years guarantee




**IP65**

Pit



Pit



VK/02299/WA/GR



VK/02299/WA/RB



VK/02299/WA/AN



VK/02299/WA

Code	Model		Box
75169-199721	VK/02299/WA/GR/WW	● Sand Green. 2700K. 130lm. 3W. CRI>90.	30pcs
75169-200721	VK/02299/WA/GR/W	● Sand Green. 3000K. 136lm. 3W. CRI>90.	30pcs
75169-201721	VK/02299/WA/RB/WW	● Rust Brown. 2700K. 130lm. 3W. CRI>90.	30pcs
75169-202721	VK/02299/WA/RB/W	● Rust Brown. 3000K. 136lm. 3W. CRI>90.	30pcs
75169-203721	VK/02299/WA/AN/WW	● Anthracite. 2700K. 130lm. 3W. CRI>90.	30pcs
75169-204721	VK/02299/WA/AN/W	● Anthracite. 3000K. 136lm. 3W. CRI>90.	30pcs

Details

Voltage **AC85-265V**  
**DC2-4V 600mA.**  
 Type of Led **Bridgelux.**  
 Lifetime **50,000hrs.**  
 Beam angle **Diffuse Light.**

**Dimmable No.**  
 Working temperature **-20°C→45°C.**  
 Material **Aluminum.**  
 Location **Outdoor wall.**

**3 years guarantee**



**IP65**

Pit



## Kupo






VK/01133/W



VK/01133/B



VK/01133/RB



### VK/01133

Code  
75169-362695  
75169-363695  
75169-364695

Model  
VK/01133/W  
VK/01133/B  
VK/01133/RB

○ Sand White. GU10. max 12W (LED).  
● Sand Black. GU10. max 12W (LED).  
● Rust Brown. GU10. max 12W (LED).

Box  
20pcs  
20pcs  
20pcs

#### Details

Input voltage **220-240V**.  
Lampholder **GU10**.  
Location **Outdoor wall**.

Working temperature **-20°C → 60°C**.  
Material **Aluminium**.



**IP65**

Kupo





# Kover



VK/02273/RB/W/60



VK/02273/AN/W/60

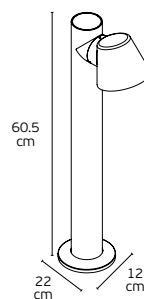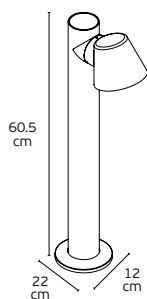

## VK/02273/60

Code  
75169-372695  
75169-373695

Model  
VK/02273/RB/W/60  
VK/02273/AN/W/60


- Rust Brown. 3000K. 566lm. 12W. 87°. CRI>90.
- Anthracite. 3000K. 566lm. 12W. 87°. CRI>90.

Box  
6pcs  
6pcs

### Details

Voltage 220-240V.  
Type of Led PHILIPS.  
Lifetime 50.000hrs.  
Clicks 10.000

Dimmable No.  
Working temperature -20°C→60°C.  
Material Aluminum.  
Location Outdoor Ground.

 3 years guarantee



IP65


Kover




# Kover



VK/02273/RB/W/100/2

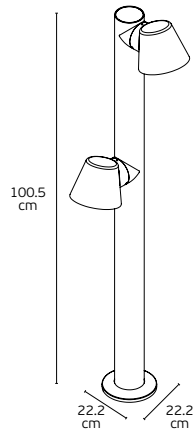

VK/02273/AN/W/100/2

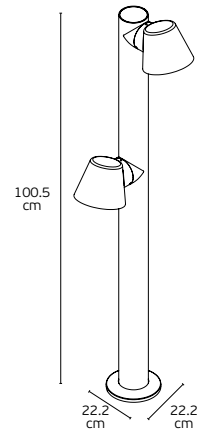

## VK/02273/100/2

Code  
75169-374695  
75169-375695

Model  
VK/02273/RB/W/100/2  
VK/02273/AN/W/100/2


● **Rust Brown.** 3000K. 886lm. 2x12W. 70°. CRI>90.  
● **Anthracite.** 3000K. 886lm. 2x12W. 70°. CRI>90.

Box  
4pcs  
4pcs

## Details

Voltage 220-240V.  
Type of Led PHILIPS.  
Lifetime 50.000hrs.  
Clicks 10.000

**Dimmable No.**  
Working temperature -20°C→60°C.  
Material Aluminum.  
Location Outdoor Ground.

 **3 years guarantee**



**IP65**

Kover





# Korn



VK/02274/RB/W/30



VK/02274/AN/W/30



## VK/02274/30

Code  
75169-376695  
75169-377695

Model  
VK/02274/RB/W/30  
VK/02274/AN/W/30


- Rust Brown. 3000K. 209lm. 6W. 120°. CRI>90.
- Anthracite. 3000K. 209lm. 6W. 120°. CRI>90.

Box  
12pcs  
12pcs

### Details

Voltage 220-240V.  
Type of Led CREE.  
Lifetime 50.000hrs.  
Clicks 10.000

Dimmable No.  
Working temperature -20°C→60°C.  
Material Aluminum.  
Location Outdoor ground.

 **3 years guarantee**

  **IP65**

Korn



# Korn



VK/02274/RB/W/60







VK/02274/AN/W/60



VK/02274/RB/W/80



VK/02274/AN/W/80



## VK/02274/60, VK/02274/80

Code  
75169-378695  
75169-379695

Model  
VK/02274/RB/W/60  
VK/02274/AN/W/60

- Rust Brown. 3000K. 205lm. 6W. 120°. CRI>90.
- Anthracite. 3000K. 205lm. 6W. 120°. CRI>90.

Box  
8pcs

75169-380695  
75169-381695

VK/02274/RB/W/80  
VK/02274/AN/W/80


- Rust Brown. 3000K. 275lm. 6W. 120°. CRI>90.
- Anthracite. 3000K. 275lm. 6W. 120°. CRI>90.

6pcs  
6pcs

### Details

Voltage 220-240V.  
Type of Led CREE.  
Lifetime 50.000hrs.  
Clicks 10.000

Dimmable No.  
Working temperature -20°C→60°C.  
Material Aluminum.  
Location Outdoor ground.

 3 years guarantee



IP65

Korn





Korn



VK/02274/RB/W/80/2



VK/02274/AN/W/80/2



**VK/02274/80/2**

Code  
75169-382695  
75169-383695

Model  
VK/02274/RB/W/80/2  
VK/02274/AN/W/80/2

- Rust Brown. 3000K. 471lm. 2x6W. 116°. CRI>90.
- Anthracite. 3000K. 471lm. 2x6W. 116°. CRI>90.


Box  
6pcs  
6pcs

Details

Voltage 220-240V.  
Type of Led CREE.  
Lifetime 50.000hrs.  
Clicks 10.000

Dimmable No.  
Working temperature -20°C→60°C.  
Material Aluminum.  
Location Outdoor ground.

**3 years guarantee**



Korn





# Korn



VK/02275/RB/W/30



VK/02275/AN/W/30



## VK/02275/30

Code  
75169-384695  
75169-385695

Model  
VK/02275/RB/W/30  
VK/02275/AN/W/30


- Rust Brown. 3000K. 237lm. 6W. 142°. CRI>90.
- Anthracite. 3000K. 237lm. 6W. 142°. CRI>90.



Box  
16pcs  
16pcs

## Details

Voltage 220-240V.  
Type of Led CREE.  
Lifetime 50.000hrs.  
Clicks 10.000

Dimmable No.  
Working temperature -20°C→60°C.  
Material Aluminum.  
Location Outdoor ground.

 3 years guarantee

  IP65

Korn



Korn




VK/02275/RB/W/60

VK/02275/AN/W/60

VK/02275/RB/W/80

VK/02275/AN/W/80

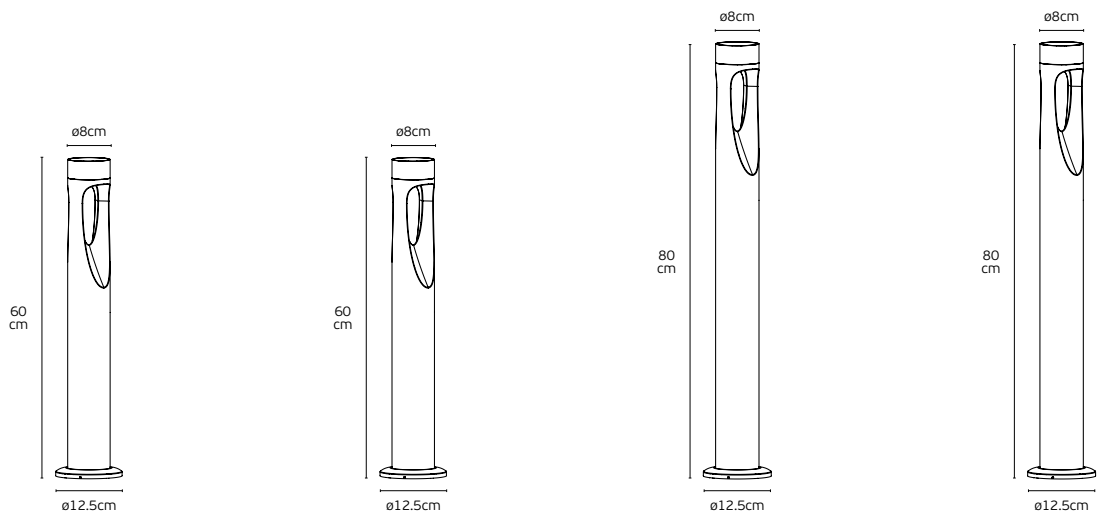

**VK/02275/60, VK/02275/80**

Code 75169-386695 75169-387695	Model VK/02275/RB/W/60 VK/02275/AN/W/60	● Rust Brown. 3000K. 253lm. 6W. 142°. CRI>90. ● Anthracite. 3000K. 253lm. 6W. 142°. CRI>90.	Box 8pcs 8pcs
75169-388695 75169-389695	VK/02275/RB/W/80 VK/02275/AN/W/80	● Rust Brown. 3000K. 259lm. 6W. 142°. CRI>90. ● Anthracite. 3000K. 259lm. 6W. 142°. CRI>90.	8pcs 8pcs

Details

Voltage 220-240V.  
Type of Led CREE.  
Lifetime 50.000hrs.  
Clicks 10.000

Dimmable No.  
Working temperature -20°C→60°C.  
Material Aluminum.  
Location Outdoor ground.

**3 years guarantee**

IP65


Korn




## Jade



VK/02290/FL/GR/WW/15

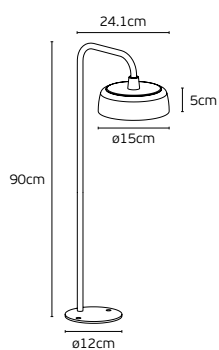

VK/02290/FL/RB/WW/15

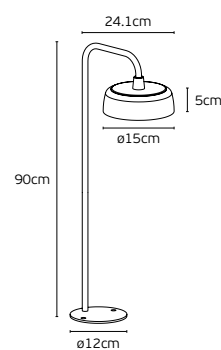

### VK/02290/FL

Code  
75169-159721  
75169-160721

Model  
VK/02290/FL/GR/WW/15  
VK/02290/FL/RB/WW/15


● Sand Green. 2700K. 513lm. 8W. CRI>90. ø15cm  
● Rust Brown. 2700K. 513lm. 8W. CRI>90. ø15cm

Box  
2pcs  
2pcs

### Details

Voltage AC220-240V.  
Type of Led Bridgelux.  
Lifetime 50.000hrs.  
Beam angle Diffuse Light

Dimmable No.  
Working temperature -20°C→45°C.  
Material Aluminum + Acrylic.  
Location Outdoor floor.



 3 years guarantee

  IP65

Jade



# Jade



## VK/02290/WA

Code  
75169-155721  
75169-156721

Model  
VK/02290/WA/GR/WW/15  
VK/02290/WA/RB/WW/15

● Sand Green. 2700K. 513lm. 8W. CRI>90. **ø15cm**  
● Rust Brown. 2700K. 513lm. 8W. CRI>90. **ø15cm**

Box  
8pcs  
8pcs

75169-157721  
75169-158721

VK/02290/WA/GR/WW/18  
VK/02290/WA/RB/WW/18

● Sand Green. 2700K. 787lm. 12W. CRI>90. **ø18cm**  
● Rust Brown. 2700K. 787lm. 12W. CRI>90. **ø18cm**

4pcs  
4pcs

### Details

Voltage 220-240V.  
Type of Led **Bridgelux**.  
Lifetime **50.000hrs**.  
Beam angle **Diffuse Light**

**Dimmable No.**  
Working temperature **-20°C→45°C**.  
Material **Aluminum + Acrylic**.  
Location **Outdoor wall**.

**3 years guarantee**



Jade





## Amelie



VK/02281/B/W/25



VK/02281/BR/W/25



### VK/02281/25

Code  
75169-010776  
75169-013776

Model  
VK/02281/B/W/25  
VK/02281/BR/W/25

● **Black.** 3000K. 1752lm. 15W. CRI>90.  
● **Brown.** 3000K. 1752lm. 15W. CRI>90.

Box  
1pc  
1pc

### Details

Material **Aluminium+PC**  
Voltage **AC220-240V**  
Beam angle **85°**  
Type of Led **Bridgelux**  
Driver **Eaglerise**  
Lifetime **50.000hrs**

Clicks **20.000**  
**Dimmable No.**  
Working temperature **-20°C → 45°C**  
CRI **>90**  
Location **Lown**  
Guarantee **2 Years**



**IP65**

Amelie





# Amelie



VK/02281/B/W/30



VK/02281/BR/W/30



## VK/02281/30

Code  
75169-011776  
75169-014776

Model  
VK/02281/B/W/30  
VK/02281/BR/W/30

● **Black.** 3000K. 1752lm. 15W. CRI>90.  
● **Brown.** 3000K. 1752lm. 15W. CRI>90.

Box  
1pc  
1pc

## Details

Material **Aluminium+PC**  
Voltage **AC220-240V**  
Beam angle **85°**  
Type of Led **Bridgelux**  
Driver **Eaglerise**  
Lifetime **50.000hrs**

Clicks **20.000**  
**Dimmable No.**  
Working temperature **-20°C → 45°C**  
CRI **>90**  
Location **Low**  
Guarantee **2 Years**



**IP65**


# Amelie




# Amelie



VK/02281/B/W/35



VK/02281/BR/W/35



## VK/02281/35

Code  
75169-012776  
75169-015776

Model  
VK/02281/B/W/35  
VK/02281/BR/W/35

● **Black.** 3000K. 1752lm. 15W. CRI>90.  
● **Brown.** 3000K. 1752lm. 15W. CRI>90.

Box  
1pc  
1pc

## Details

Material **Aluminium+PC**  
Voltage **AC220-240V**  
Beam angle **85°**  
Type of Led **Bridgelux**  
Driver **Eaglerise**  
Lifetime **50.000hrs**

Clicks **20.000**  
**Dimmable No.**  
Working temperature **-20°C → 45°C**  
CRI**>90**  
Location **Lown**  
Guarantee **2 Years**




**IP65**

# Amelie





# Amelie

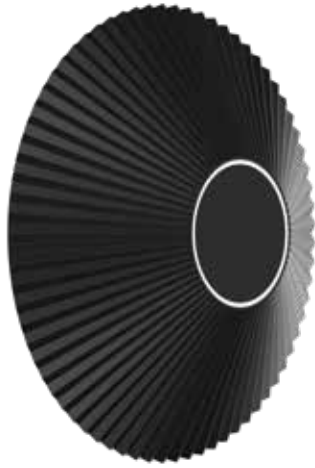

VK/02280/WA/B/W



VK/02280/WA/BR/W



## VK/02280/WA

Code  
75169-006776  
75169-007776

Model  
VK/02280/WA/B/W  
VK/02280/WA/BR/W

● **Black.** 3000K. 1546lm. 15W. CRI>90.  
● **Brown.** 3000K. 1546lm. 15W. CRI>90.

Box  
1pc  
1pc

## Details

Material **Aluminium+PC**  
Voltage **AC220-240V**  
Beam angle **85°**  
Type of Led **Bridgelux**  
Driver **Eaglerise**  
Lifetime **50.000hrs**

Clicks **20.000**  
**Dimmable No.**  
Working temperature **-20°C → 45°C**  
CRI **>90**  
Location **Outdoor wall**  
Guarantee **2 Years**



**IP65**

# Amelie





# Lip



VK/02283/AN/W



VK/02283/RB/W



## VK/02283

Code  
75169-423694  
75169-424694

Model  
VK/02283/AN/W  
VK/02283/RB/W


- Anthracite. 3000K. 400lm. 5.5W. CRI>80
- Rust brown. 3000K. 400lm. 5.5W. CRI>80

Box  
6pcs  
6pcs

### Details

Voltage 220-240V.  
Type of Led CREE 1304.  
Beam Angle 82°.  
Lifetime 30.000hrs.  
Clicks 25.000

**Dimmable No.**  
Working temperature -20°C→45°C.  
Material Die-casting luminum+Glass.  
Location Outdoor floor.


 **3 years guarantee**



**IP65**

Lip



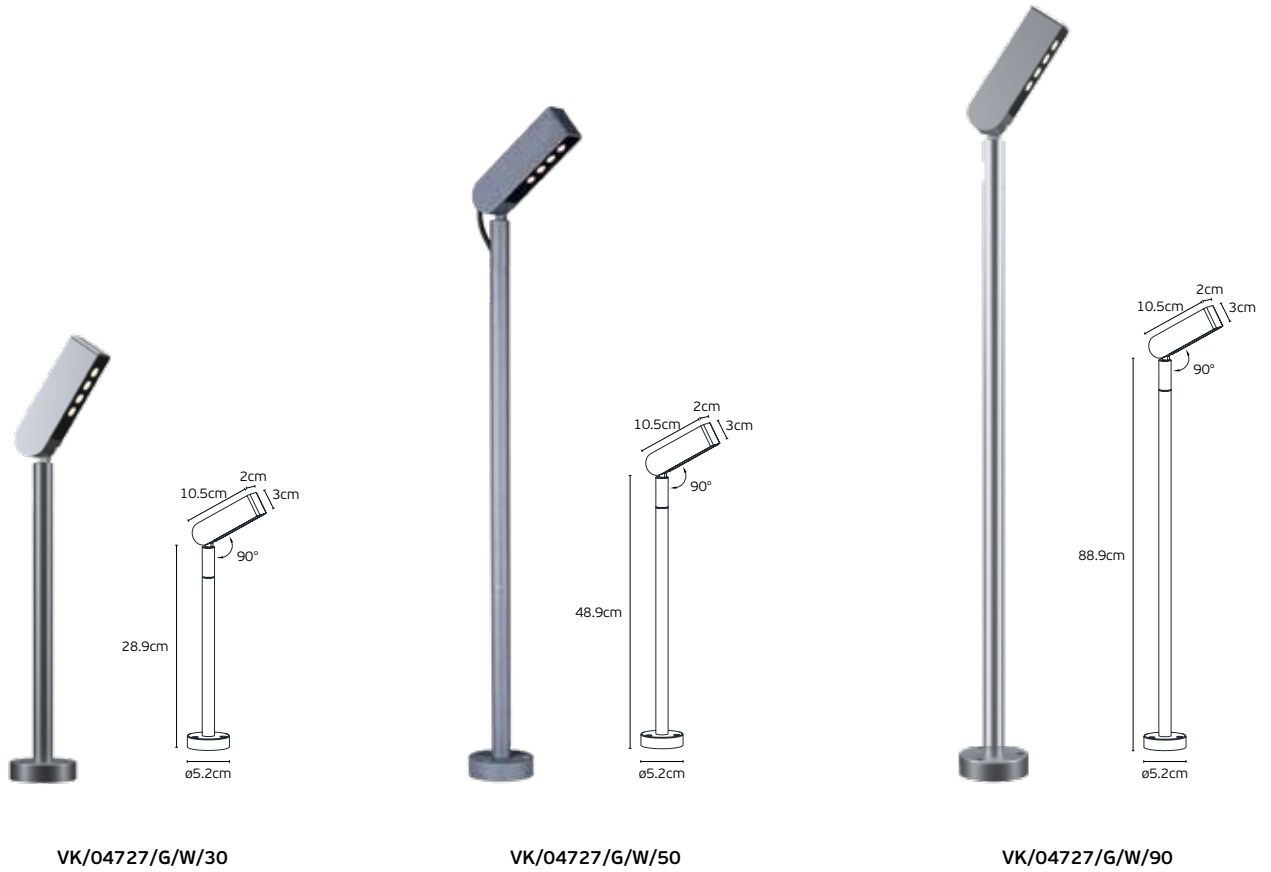

VK/04727/G/W/30

VK/04727/G/W/50

VK/04727/G/W/90

**VK/04727**

Code	Model		Box
75169-214721	VK/04727/G/W/30	● Sand Grey. 3000K. 226lm. 5W. CRI>90. H28.9cm	20pcs
75169-216721	VK/04727/G/W/50	● Sand Grey. 3000K. 226lm. 5W. CRI>90. H48.9cm	20pcs
75169-218721	VK/04727/G/W/90	● Sand Grey. 3000K. 226lm. 5W. CRI>90. H88.9cm	20pcs

Details

Voltage DC 24V.  
 Type of Led Luminus MP-3030.  
 Lifetime 50.000hrs.  
 Beam angle 24°

Dimmable No.  
 Working temperature -20°C→45°C.  
 Material Aluminum.  
 Location Outdoor ground.

**3** years guarantee



Robi





VK/04727/G/W/30/SPK

VK/04727/G/W/50/SPK

VK/04727/G/W/90/SPK

**VK/04727/SPK**

Code	Model		Box
75169-215721	VK/04727/G/W/30/SPK	● Sand Grey. 3000K. 226lm. 5W. CRI>90. H28.5cm	20pcs
75169-217721	VK/04727/G/W/50/SPK	● Sand Grey. 3000K. 226lm. 5W. CRI>90. H48.5cm	20pcs
75169-219721	VK/04727/G/W/90/SPK	● Sand Grey. 3000K. 226lm. 5W. CRI>90. H88.5cm	20pcs

Details

Voltage DC 24V.  
 Type of Led Luminus MP-3030.  
 Lifetime 50.000hrs.  
 Beam angle 24°

Dimmable No.  
 Working temperature -20°C→45°C.  
 Material Aluminum (included spike).  
 Location Outdoor ground.

**3** years guarantee

  IP65

Robi








VK/04726/G/W



VK/04726/G/W/SPK



VK/04728/G/W



**VK/04726, VK/04728**

Code	Model		Box
75169-212721	VK/04726/G/W	● Sand Grey. 3000K. 226lm. 5W. CRI>90.	30pcs
75169-213721	VK/04726/G/W/SPK	● Sand Grey. 3000K. 226lm. 5W. CRI>90.	20pcs
75169-220721	VK/04728/G/W	● Sand Grey. 3000K. 239lm. 5W. CRI>90.	30pcs

Details

Voltage **VK/04726: DC 24V**  
 Voltage **VK/04728: AC100-240V**  
 DC 25-40V 200mA.  
 Type of Led Luminus MP-3030.  
 Lifetime **50.000hrs.**  
 Beam angle **24°**  
 Dimmable **No.**

Working temperature **-20°C→45°C.**  
 Material **Aluminum**  
 (VK/04726/G/W/SPK included spike).  
 Class III (VK/04726), I (VK/04728)  
 Location **Outdoor ground (VK/04726),**  
**Outdoor Wall (VK/04728)**

**3 years guarantee**



**IP65**

Robi



# Ora

## Portable






VK/02282/W/W



VK/02282/B/W



VK/02282/GD/W



### VK/02282

Code  
61171-263694  
61171-264694  
61171-265694

Model  
VK/02282/W/W  
VK/02282/B/W  
VK/02282/GD/W

○ **Glossy White.** CCT 2200K/2700K/3000K. 2.2W. 140/150/160lm. CRI>80  
● **Glossy Black.** CCT 2200K/2700K/3000K. 2.2W. 140/150/160lm. CRI>80  
● **Matt Gold.** CCT 2200K/2700K/3000K. 2.2W. 140/150/160lm. CRI>80

Box  
12pcs  
12pcs  
12pcs

### Details

2x2200mah lithium battery  
Type of Led lumileds 4014  
Voltage (input) AC 100-240V  
(output) DCSV 1A  
Material Die-casting aluminum, PC  
Location Outdoor Portable  
Color led CCT 2200K/2700K/3000K  
Beam angle 120°

Charge time 4-5 hours  
Work time 11-12 hours  
With Touch switch  
Working temperature 0°C - 40°C  
Lifetime 30.000hrs  
Clicks 25.000  
Dimmable Yes 5-100%  
Without adapter



included charging base

**3 years guarantee**



**IP65**

Ora





# Ora



VK/02285/AN/W



VK/02285/RB/W



## VK/02285

Code  
75169-431694  
75169-432694

Model  
VK/02285/AN/W  
VK/02285/RB/W


● Anthracite. 3000K. 1071lm. 10W. CRI>80  
● Rust brown. 3000K. 1071lm. 10W. CRI>80

Box  
4pcs  
4pcs

### Details

Voltage 100-227V.  
Type of Led Lumileds 4014.  
Beam Angle 101°.  
Lifetime 30.000hrs.  
Clicks 25.000

**Dimmable No.**  
Working temperature -20°C→45°C.  
Material Die-casting aluminum.  
Location Outdoor floor.

 **3 years guarantee**



**IP65**

Ora





# Zen



VK/02284/RB/W/50



VK/02284/AN/W/65



## VK/02284

Code  
75169-425694  
75169-426694

Model  
VK/02284/AN/W/50  
VK/02284/RB/W/50

- Anthracite. 3000K. 1071lm. 10W. CRI>80
- Rust brown. 3000K. 1071lm. 10W. CRI>80

Box  
4pcs  
4pcs

75169-427694  
75169-428694

VK/02284/AN/W/65  
VK/02284/RB/W/65

- Anthracite. 3000K. 1071lm. 10W. CRI>80
- Rust brown. 3000K. 1071lm. 10W. CRI>80

4pcs  
4pcs

### Details

Voltage 220-240V.  
Type of Led Lumileds 4014.  
Beam Angle 92°.  
Lifetime 30.000hrs.  
Clicks 25.000

**Dimmable No.**  
Working temperature -20°C→45°C.  
Material Die-casting luminum+Glass.  
Location Outdoor Ground.

**3 years guarantee**



**IP65**

Zen





## Brace



VK/04729/B/W/40



VK/04729/B/W/60

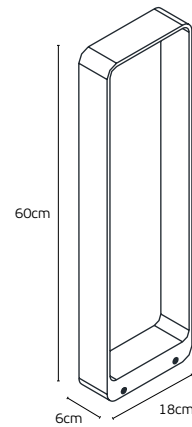

### VK/04729

Code  
75169-221721

Model  
VK/04729/B/W/40

● Sand Black. 3000K. 311lm. 6W. CRI>80. H40cm

Box  
6pcs

75169-222721

VK/04729/B/W/60

● Sand Black. 3000K. 311lm. 6W. CRI>80. H60cm



6pcs

#### Details

Voltage AC 85-265V  
DC15-25V 300mA.  
Type of Led Edison SMD.  
Lifetime 50.000hrs.  
Beam angle 120°

Dimmable No.  
Working temperature -20°C→45°C.  
Material Aluminum.  
Location Outdoor Ground.

**3** years guarantee

  IP65

# Brace





Void



VK/02289/AN/W/21



VK/02289/RB/W/50

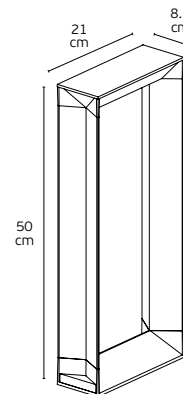

**VK/02289**

Code  
75169-440694  
75169-441694

Model  
VK/02289/AN/W/21  
VK/02289/RB/W/21

- Anthracite. 3000K. 750lm. 8.5W. CRI>80
- Rust brown. 3000K. 750lm. 8.5W. CRI>80

Box  
4pcs  
4pcs

75169-442694  
75169-443694

VK/02289/AN/W/50  
VK/02289/RB/W/50

- Anthracite. 3000K. 750lm. 8.5W. CRI>80
- Rust brown. 3000K. 750lm. 8.5W. CRI>80

4pcs  
4pcs


Details

Voltage 100-277V.  
Type of Led Lumileds 4014  
Beam Angle 174°.  
Lifetime 30.000hrs.  
Clicks 25.000

**Dimmable No.**  
Working temperature -20°C→45°C.  
Material Die-casting aluminum+Glass.  
Location Outdoor Ground.



**3 years guarantee**



# Void





# Upo



VK/01134/AN



VK/01134/RB



## VK/01134

Code  
75169-429694  
75169-430694

Model  
VK/01134/AN  
VK/01134/RB

● Anthracite. GU10. Max 12W (LED).  
● Rust brown. GU10. Max 12W (LED).

Box  
6pcs  
6pcs

### Details

Input voltage **100-277V**  
Lampholder **GU10**  
Working temperature **-20°C → 45°C.**

Beam Angle **13°**  
Material **Die-casting aluminum+Glass.**  
Location **Outdoor Ground.**

adjustable



**3** years guarantee



**IP67**

Upo





# Pint



VK/02269/B/W



VK/02269/W/W

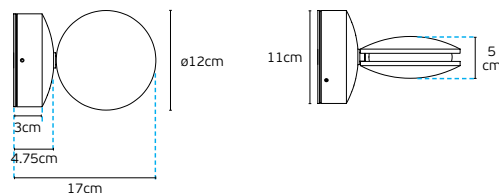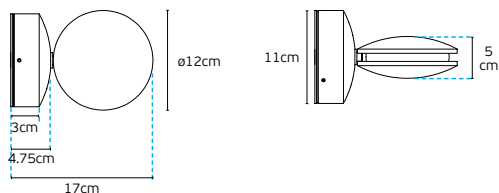

## VK/02269

Code  
75169-360695  
75169-361695

Model  
VK/02269/W/W  
VK/02269/B/W


○ **White.** 3000K. 192.7lm. 8W. CRI>80  
● **Black.** 3000K. 192.7lm. 8W. CRI>80

Box  
20pcs  
20pcs

### Details

Voltage 220-240V.  
Type of Led **CREE**.  
Lifetime **50.000hrs**.  
Clicks **10.000**

**Dimmable No.**  
Working temperature **-20°C→60°C**.  
Material **Aluminum**.  
Location **Outdoor wall**.

 **3 years guarantee**



**IP54**


Pint



## Cape



VK/02286/AN/W

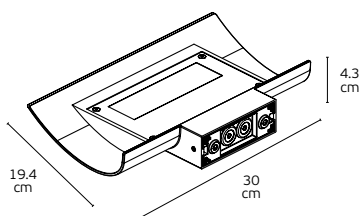

### VK/02286

Code  
75169-433694  
75169-434694  
75169-435694

Model  
VK/02286/AN/W  
VK/02286/RB/W  
VK/02286/W/W


- Anthracite. 3000K. 1.318lm. 10W. CRI>80
- Rust brown. 3000K. 1.318lm. 10W. CRI>80
- White. 3000K. 1.318lm. 10W. CRI>80

Box  
6pcs  
6pcs  
6pcs

### Details

Voltage 100-227V.  
Type of Led Lumileds 4014.  
Beam Angle 112°.  
Lifetime 30.000hrs.  
Clicks 25.000

**Dimmable No.**  
Working temperature -20°C→45°C.  
Material Die-casting aluminum+glass.  
Location Outdoor wall.

 **3 years guarantee**




**IP65**

# Cape







VK/02278/W/W/30



VK/02278/AN/W/50



VK/02278/RB/W/100



**VK/02278/30, VK/02278/50, VK/02278/100**

Code	Model	Options	Box
75169-398695	VK/02278/W/W/30	<ul style="list-style-type: none"> <li>○ White. 3000K. 94lm. 6W. 180°. CRI&gt;90. <b>L30cm</b></li> <li>● Rust Brown. 3000K. 94lm. 6W. 180°. CRI&gt;90. <b>L30cm</b></li> <li>● Anthracite. 3000K. 94lm. 6W. 180°. CRI&gt;90. <b>L30cm</b></li> </ul>	20pcs
75169-399695	VK/02278/RB/W/30		20pcs
75169-400695	VK/02278/AN/W/30		20pcs
75169-401695	VK/02278/W/W/50	<ul style="list-style-type: none"> <li>○ White. 3000K. 150lm. 10W. 180°. CRI&gt;90. <b>L50cm</b></li> <li>● Rust Brown. 3000K. 150lm. 10W. 180°. CRI&gt;90. <b>L50cm</b></li> <li>● Anthracite. 3000K. 150lm. 10W. 180°. CRI&gt;90. <b>L50cm</b></li> </ul>	20pcs
75169-402695	VK/02278/RB/W/50		20pcs
75169-403695	VK/02278/AN/W/50		20pcs
75169-404695	VK/02278/W/W/100	<ul style="list-style-type: none"> <li>○ White. 3000K. 270lm. 20W. 180°. CRI&gt;90. <b>L100cm</b></li> <li>● Rust Brown. 3000K. 270lm. 20W. 180°. CRI&gt;90. <b>L100cm</b></li> <li>● Anthracite. 3000K. 270lm. 20W. 180°. CRI&gt;90. <b>L100cm</b></li> </ul>	10pcs
75169-405695	VK/02278/RB/W/100		10pcs
75169-406695	VK/02278/AN/W/100		10pcs

Details

Voltage AC 220-240V.  
 Type of Led Sanan.  
 Lifetime 50.000hrs.  
 Clicks 10.000

Dimmable No.  
 Working temperature -20°C→60°C.  
 Material Aluminum.  
 Location Outdoor wall.

**3 years guarantee**



**IP54**

Lina





Run



VK/02288/AN/W



VK/02288/RB/W

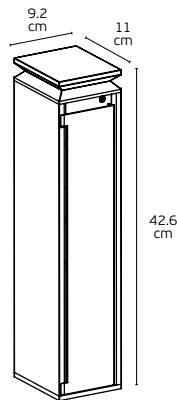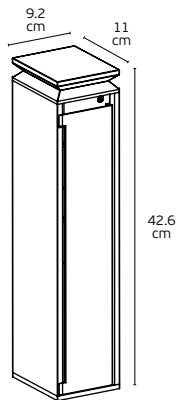

**VK/02288**

Code  
75169-438694  
75169-439694

Model  
VK/02288/AN/W  
VK/02288/RB/W

- Anthracite. With 2 sockets type F (schuko) Max. 2x2200W. 3000K. 355lm. 5W. CRI>80
- Rust brown. With 2 sockets type F (schuko) Max. 2x2200W. 3000K. 355lm. 5W. CRI>80

Box  
4pcs  
4pcs

Details

Voltage AC220V-240V.  
Beam Angle 52°.  
Lifetime 30.000hrs.  
Clicks 25.000  
Dimmable No.

Working temperature -20°C→45°C.  
Material Die-casting  
aluminum+Silicon rubber gasket.  
Location Outdoor ground.  
Used as socket & LED light.

**3** years guarantee

IP54

Run





# Run



VK/02287/AN



VK/02287/RB

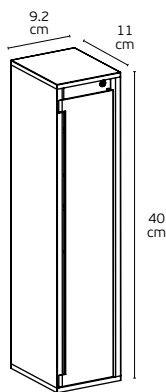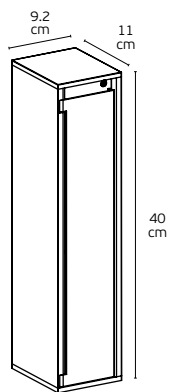

## VK/02287

Code  
75169-436694  
75169-437694

Model  
VK/02287/AN  
VK/02287/RB


- Anthracite. With 2 sockets type F (schuko) Max. 2x2000W
- Rust brown. With 2 sockets type F (schuko) Max. 2x2000W

Box  
4pcs  
4pcs

### Details

Voltage 220-240V.  
Working temperature -20°C→45°C.  
Material Die-casting

aluminum+Silicon rubber gasket.  
Location Outdoor ground.  
Used only as socket.

 **3 years guarantee**

 **IP54**

Run



## Tree



Suitable for tree



VK/02277/AN/W/39



VK/02277/RB/W/49




### VK/02277/39, VK/02277/49

Code	Model		Box
75169-394695	VK/02277/RB/W/39	● Rust Brown. 3000K. 213lm. 3W. 32.7°. CRI>90.	20pcs
75169-395695	VK/02277/AN/W/39	● Anthracite. 3000K. 213lm. 3W. 32.7°. CRI>90.	20pcs
75169-396695	VK/02277/RB/W/49	● Rust Brown. 3000K. 317lm. 7W. 34.7°. CRI>90.	20pcs
75169-397695	VK/02277/AN/W/49	● Anthracite. 3000K. 317lm. 7W. 34.7°. CRI>90.	20pcs

#### Details

Voltage AC 220-240V, DC24V.  
Type of Led Sanan.  
Lifetime 50.000hrs.  
Clicks 10.000

Dimmable No.  
Working temperature -20°C→60°C.  
Material Aluminum.  
Location Tree or column.

 3 years guarantee



IP65

Tree







VK/02293/RB



VK/02294/GR



**VK/02293, VK/02294**

Code	Model		Box
75169-169721	VK/02293/GR/WW	● Sand Green. 2700K. 144lm. 3W. CRI>90.	30pcs
75169-170721	VK/02293/GR/W	● Sand Green. 3000K. 154lm. 3W. CRI>90.	30pcs
75169-171721	VK/02293/RB/WW	● Rust Brown. 2700K. 144lm. 3W. CRI>90.	30pcs
75169-172721	VK/02293/RB/W	● Rust Brown. 3000K. 154lm. 3W. CRI>90.	30pcs
75169-173721	VK/02294/GR/WW	● Sand Green. 2700K. 306lm. 5W. CRI>90.	30pcs
75169-174721	VK/02294/GR/W	● Sand Green. 3000K. 392lm. 5W. CRI>90.	30pcs
75169-175721	VK/02294/RB/WW	● Rust Brown. 2700K. 306lm. 5W. CRI>90.	30pcs
75169-176721	VK/02294/RB/W	● Rust Brown. 3000K. 392lm. 5W. CRI>90.	30pcs

Details

Voltage **AC85-265V.**  
 DC 2-4V 600mA (VK/02293)  
 DC 3-12V 500mA (VK/02294)  
 Type of Led **Bridgelux.**  
 Lifetime **50.000hrs.**

Beam angle **36°**  
**Dimmable No.**  
 Working temperature **-20°C→45°C.**  
 Material **Aluminum (included spike).**  
 Location **Outdoor ground.**

**3 years guarantee**



Sui







VK/02295/GR



VK/02295/RB



**VK/02295**

Code  
 75169-177721  
 75169-178721  
 75169-179721  
 75169-180721

Model  
 VK/02295/GR/WW  
 VK/02295/GR/W  
 VK/02295/RB/WW  
 VK/02295/RB/W

- Sand Green. 2700K. 519lm. 9W. CRI>90.
- Sand Green. 3000K. 537lm. 9W. CRI>90.
- Rust Brown. 2700K. 519lm. 9W. CRI>90.
- Rust Brown. 3000K. 537lm. 9W. CRI>90.

Box  
 30pcs  
 30pcs  
 30pcs  
 30pcs

Details

Voltage **AC85-265V**  
 DC 25-40V 200mA.  
 Type of Led **Bridgelux**.  
 Lifetime **50.000hrs**.  
 Beam angle **30°**

**Dimmable No.**  
 Working temperature **-20°C→45°C**.  
 Material **Aluminum (included spike)**.  
 Location **Outdoor ground**.

**3 years guarantee**



**IP65**

Sui





VK/02296/GR







VK/02296/RB



VK/02296/GR/SPK



VK/02296/RB/SPK



**VK/02296, VK/02296/SPK**

Code	Model		Box
75169-181721	VK/02296/GR/WW	● Sand Green. 2700K. 431lm. 7W. CRI>90.	30pcs
75169-182721	VK/02296/RB/WW	● Rust Brown. 2700K. 431lm. 7W. CRI>90.	30pcs
75169-183721	VK/02296/GR/WW/SPK	● Sand Green. 2700K. 431lm. 7W. CRI>90. With spike.	30pcs
75169-184721	VK/02296/RB/WW/SPK	● Rust Brown. 2700K. 431lm. 7W. CRI>90. With spike	30pcs

Details

Voltage **AC85-265V**  
**DC15-28V 300mA.**  
 Type of Led **Bridgelux.**  
 Lifetime **50.000hrs.**  
 Beam angle **36°**

**Dimmable No.**  
 Working temperature **-20°C→45°C.**  
 Material **Aluminum.**  
 Location **Outdoor ground.**

**3 years guarantee**



**IP65**


# Sui



## Accessories - Anti-glare covers for LED Spots Lights VK/02296



VK/02296/GR/AGL



VK/02296/RB/AGL



### VK/02296/AGL

Code  
75169-185721  
75169-186721

Model  
VK/02296/GR/AGL  
VK/02296/RB/AGL

- Sand Green. Anti-glare cover.
- Rust Brown. Anti-glare cover.

Box  
50pcs  
50pcs

Details

Material **Aluminum.**

Matches with **VK/02296.**

Sui



VK/02297/GR







VK/02297/RB



VK/02297/GR/SPK



VK/02297/RB/SPK

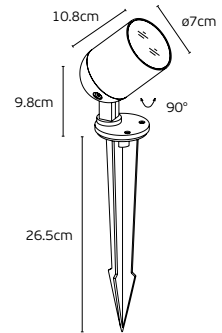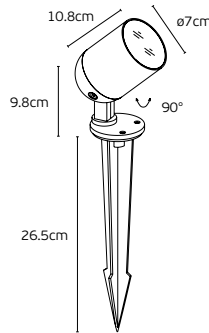

**VK/02297, VK/02297/SPK**

Code  
75169-187721  
75169-188721

Model  
VK/02297/GR/WW  
VK/02297/RB/WW

● Sand Green. 2700K. 857lm. 12W. CRI>90.  
● Rust Brown. 2700K. 857lm. 12W. CRI>90.

Box  
30pcs  
30pcs

75169-189721  
75169-190721

VK/02297/GR/WW/SPK  
VK/02297/RB/WW/SPK

● Sand Green. 2700K. 857lm. 12W. CRI>90. **With spike.**  
● Rust Brown. 2700K. 857lm. 12W. CRI>90. **With spike**

12pcs  
12pcs

Details

Voltage **AC85-265V**  
**DC25-40V 300mA.**  
Type of Led **Bridgelux.**  
Lifetime **50.000hrs.**  
Beam angle **30°**

**Dimmable No.**  
Working temperature **-20°C→45°C.**  
Material **Aluminum.**  
Location **Outdoor ground.**

**3 years guarantee**




# Sui




## Accessories - Anti-glare covers for LED Spots Lights VK/02297



VK/02297/GR/AGL



VK/02297/RB/AGL



### VK/02297/AGL

Code  
75169-191721  
75169-192721

Model  
VK/02297/GR/AGL  
VK/02297/RB/AGL

● Sand Green. Anti-glare cover.  
● Rust Brown. Anti-glare cover.

Box  
30pcs  
30pcs

Details


Material **Aluminum.**

Matches with **VK/02297.**


# Mush



VK/02276/RB/W/60

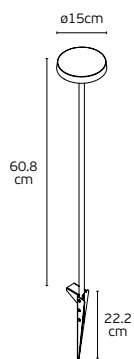

VK/02276/AN/W/80

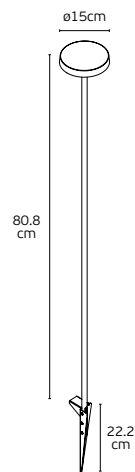

## VK/02276/60, VK/02276/80

Code	Model	Color	Light Output	Beam Angle	Height	Box
75169-390695	VK/02276/RB/W/60	Rust Brown	3000K, 463lm, 8W	180°	60.8cm	20pcs
75169-391695	VK/02276/AN/W/60	Anthracite	3000K, 463lm, 8W	180°	60.8cm	20pcs
75169-392695	VK/02276/RB/W/80	Rust Brown	3000K, 463lm, 8W	180°	80.8cm	20pcs
75169-393695	VK/02276/AN/W/80	Anthracite	3000K, 463lm, 8W	180°	80.8cm	20pcs

### Details

Voltage DC24V.  
Type of Led Philips.  
Lifetime 50.000hrs.  
Clicks 10.000

Dimmable No.  
Working temperature -20°C→60°C.  
Material Aluminum.  
Location Outdoor ground.

**3 years guarantee**




IP65

Mush



# Jade

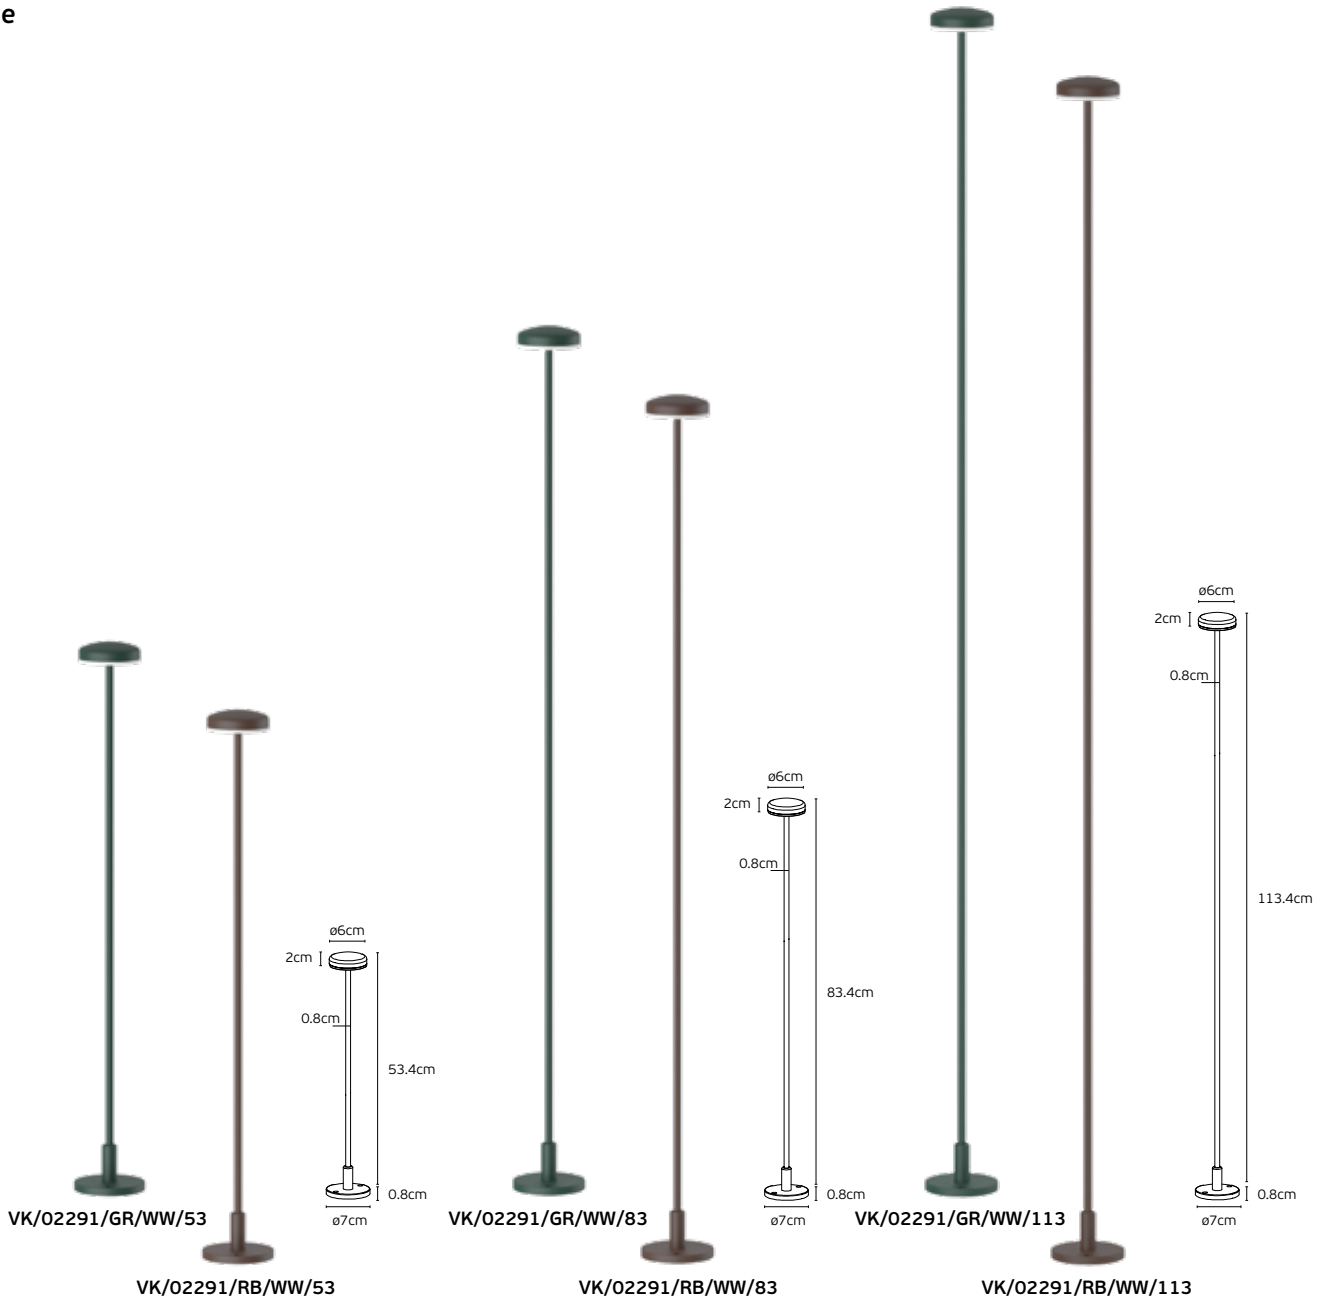

## VK/02291

Code	Model	Color	Height	Box
75169-161721	VK/02291/GR/WW/53	Sand Green. 2700K. 182lm. 1W. CRI>90.	53.4cm	20pcs
75169-162721	VK/02291/RB/WW/53	Rust Brown. 2700K. 182lm. 1W. CRI>90.	53.4cm	20pcs
75169-163721	VK/02291/GR/WW/83	Sand Green. 2700K. 182lm. 1W. CRI>90.	83.4cm	20pcs
75169-164721	VK/02291/RB/WW/83	Rust Brown. 2700K. 182lm. 1W. CRI>90.	83.4cm	20pcs
75169-165721	VK/02291/GR/WW/113	Sand Green. 2700K. 182lm. 1W. CRI>90.	113.4cm	20pcs
75169-166721	VK/02291/RB/WW/113	Rust Brown. 2700K. 182lm. 1W. CRI>90.	113.4cm	20pcs

### Details

Voltage AC220-240V, DC24V.  
 Type of Led Bridgelux.  
 Lifetime 50.000hrs.  
 Beam angle Diffuse Light  
 Dimmable No.

Working temperature -20°C→45°C.  
 Material Aluminum + Acrylic.  
 Location Outdoor ground.  
 Included Spike & base.



Spike Included

**3 years guarantee**




IP65

# Jade



# Mim

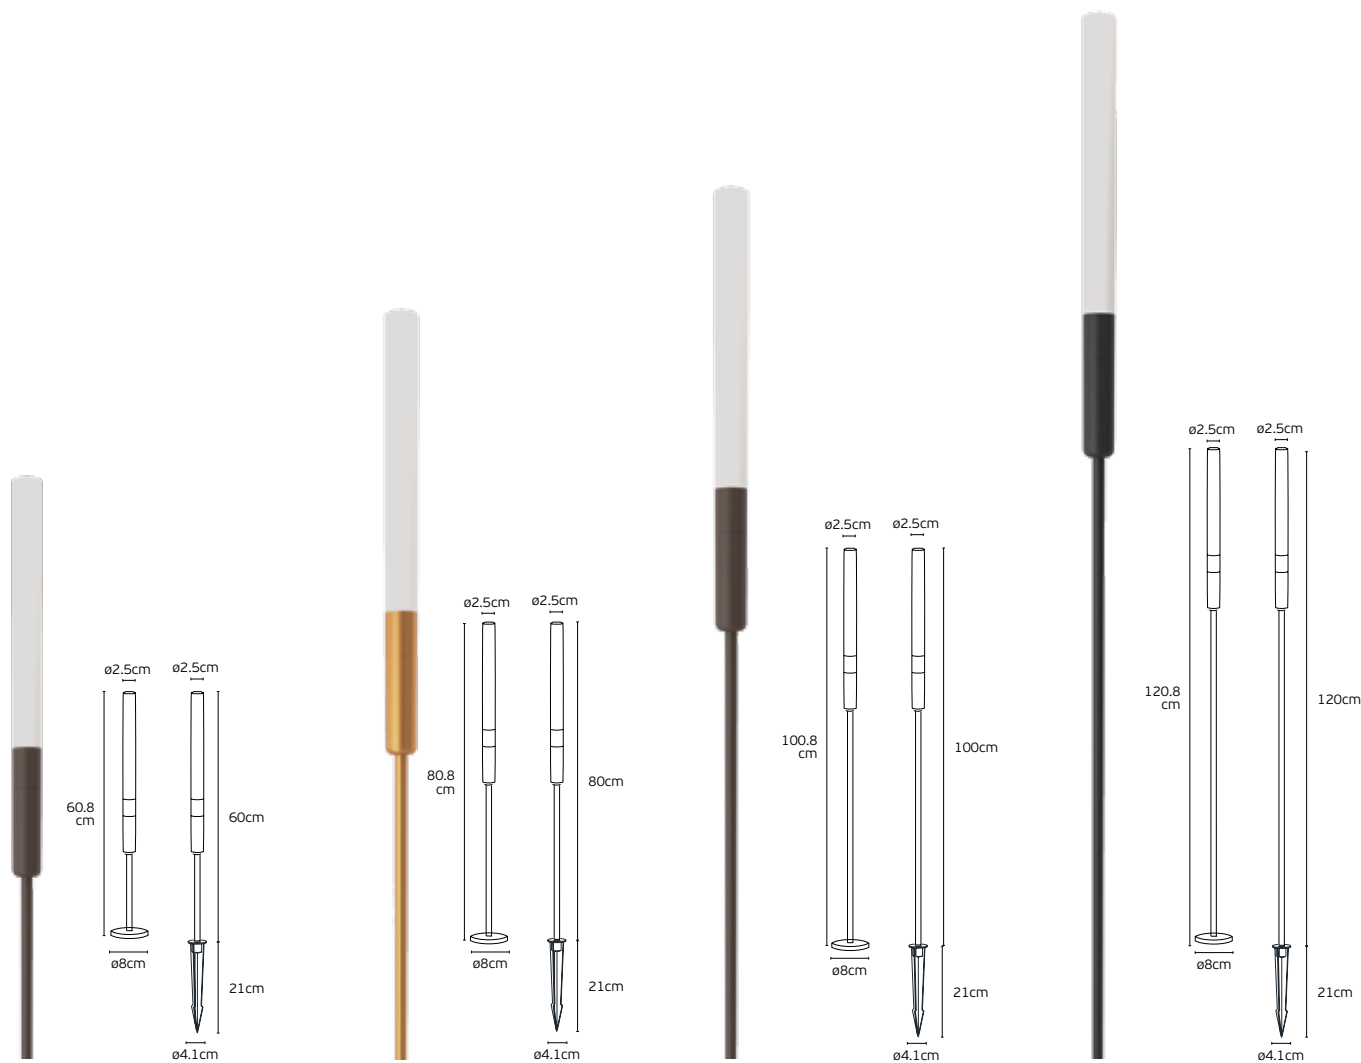

VK/04716/RB/60

VK/04716/BS/80

VK/04716/RB/100

VK/04716/B/120

## VK/04716/60, VK/04716/80, VK/04716/100, VK/04716/120

Code	Model		Box
75169-143721	VK/04716/B/W/60	● Sand Black. 3000K. 74lm. 1W. CRI>90. 60cm	30pcs
75169-144721	VK/04716/RB/W/60	● Rust Brown. 3000K. 74lm. 1W. CRI>90. 60cm	30pcs
75169-145721	VK/04716/BS/W/60	● Brass. 3000K. 74lm. 1W. CRI>90. 60cm	30pcs
75169-146721	VK/04716/B/W/80	● Sand Black. 3000K. 74lm. 1W. CRI>90. 80cm	30pcs
75169-147721	VK/04716/RB/W/80	● Rust Brown. 3000K. 74lm. 1W. CRI>90. 80cm	30pcs
75169-148721	VK/04716/BS/W/80	● Brass. 3000K. 74lm. 1W. CRI>90. 80cm	30pcs
75169-149721	VK/04716/B/W/100	● Sand Black. 3000K. 74lm. 1W. CRI>90. 100cm	30pcs
75169-150721	VK/04716/RB/W/100	● Rust Brown. 3000K. 74lm. 1W. CRI>90. 100cm	30pcs
75169-151721	VK/04716/BS/W/100	● Brass. 3000K. 74lm. 1W. CRI>90. 100cm	30pcs
75169-152721	VK/04716/B/W/120	● Sand Black. 3000K. 74lm. 1W. CRI>90. 120cm	30pcs
75169-153721	VK/04716/RB/W/120	● Rust Brown. 3000K. 74lm. 1W. CRI>90. 120cm	30pcs
75169-154721	VK/04716/BS/W/120	● Brass. 3000K. 74lm. 1W. CRI>90. 120cm	30pcs

### Details

Voltage DC24V.  
Type of Led Bridgelux.  
Lifetime 50.000hrs.  
Beam angle Diffuse Light  
Dimmable No.

Working temperature -20°C→45°C.  
Material Aluminum + Acrylic.  
Location Outdoor ground.  
Included Spike & base



Spike Included

**3 years guarantee**




IP65

Mim



## Rose

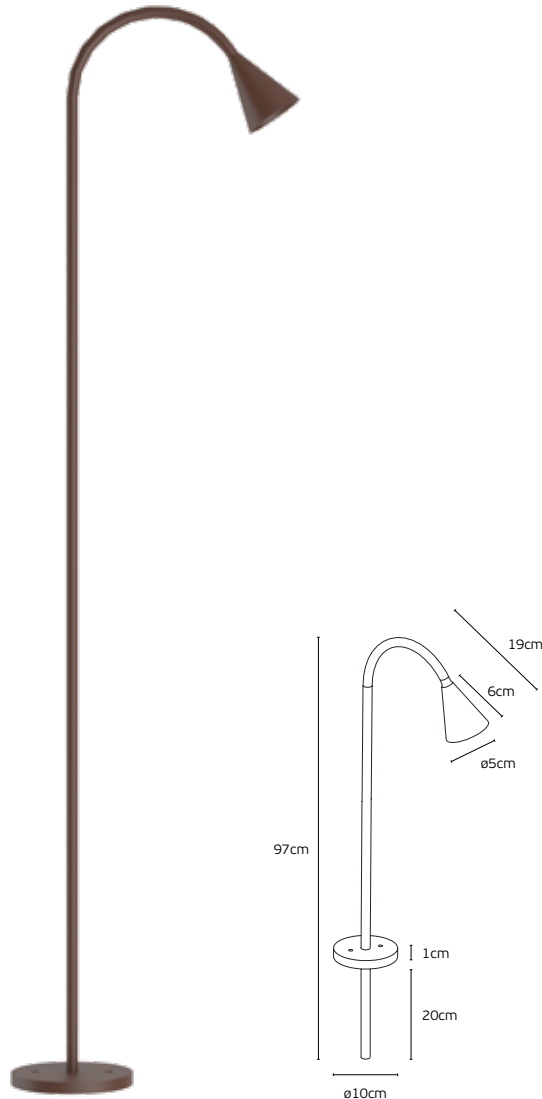

VK/04730/RB

### VK/04730

Code  
75169-223721

Model  
VK/04730/RB/WW

● Rust Brown. 2700K. 196lm. 5W. CRI>90.

Box  
5pcs

#### Details

Voltage **DC24V**  
**DC18V 250mA.**  
Type of Led **Bridgelux.**  
Lifetime **50.000hrs.**  
Beam angle **90°**

**Dimmable No.**  
Working temperature **-20°C→45°C.**  
Material **Aluminum.**  
Location **Outdoor ground.**

**3** years guarantee




**IP65**

Rose



# Rose

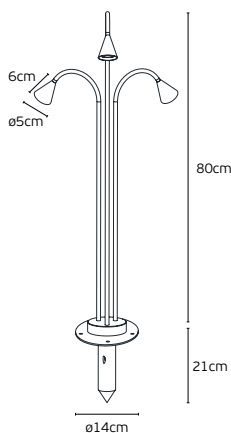

VK/04731/RB

## VK/04731

Code  
75169-224721

Model  
VK/04731/RB/WW

● Rust Brown. 2700K. 3 x 196lm. 3 x 4.5W. CRI>90.

Box  
2pcs

### Details

Voltage **DC24V**  
**DC18V 250mA.**  
Type of Led **Bridgelux.**  
Lifetime **50.000hrs.**  
Beam angle **90°**

**Dimmable No.**  
Working temperature **-20°C→45°C.**  
Material **Aluminum.**  
Location **Outdoor ground.**

**3 years guarantee**



**IP65**

# Rose



## Bala



VK/01128/W/25







VK/01128/W/35



VK/01128/W/45



VK/01128/W/55

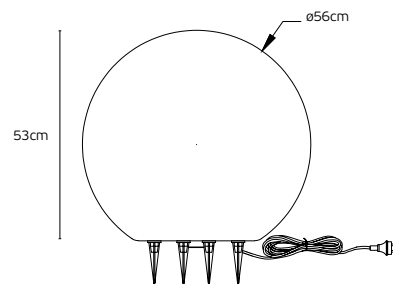

### VK/01128

Code  
75169-383997  
75169-384997  
75169-385997  
75169-386997

Model  
VK/01128/W/25  
VK/01128/W/35  
VK/01128/W/45  
VK/01128/W/55

○ White. E27. Max 20W (LED). **ø25cm**  
○ White. E27. Max 20W (LED). **ø35cm**  
○ White. E27. Max 20W (LED). **ø45cm**  
○ White. E27. Max 20W (LED). **ø56cm**

Box  
56pcs  
50pcs  
25pcs  
25pcs

#### Details

Input voltage 220-240V  
Lampholder E27 (included)  
Working temperature -20°C → 45°C.

Cable with plug 1.5m & 4 spikes  
Material PE.  
Location **Outdoor ground.**



**IP65**


# Bala



# Bala



VK/01129/PE/W/55

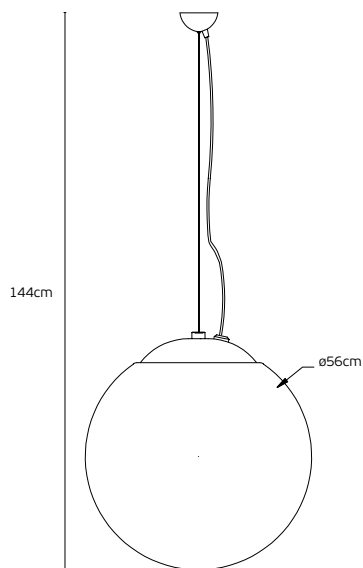

## VK/01129/PE

Code	Model
75169-387997	VK/01129/PE/W/35
75169-388997	VK/01129/PE/W/45
75169-389997	VK/01129/PE/W/55


- White. E27. Max 20W (LED). ø35cm
- White. E27. Max 20W (LED). ø45cm
- White. E27. Max 20W (LED). ø56cm

Box  
25pcs  
25pcs  
25pcs

### Details

Input voltage 220-240V  
Lampholder E27 (included)  
Working temperature -20°C → 45°C.

Cable 1m & Hanging steel wire 0.8m  
Material PE.  
Location Outdoor Ceiling



IP54

# Bala



Moom




VK/04723/MC/W




VK/04724/MC/W




VK/04725/MC/W




Cut hole



Cut hole



Cut hole



**VK/04723, VK/04724, VK/04725**

Code	Model	Specifications	Box
75169-209721	VK/04723/MC/W	● Silver. 3000K. 61lm. 3W. CRI>90. <b>ø3.6cm</b>	4pcs
75169-210721	VK/04724/MC/W	● Silver. 3000K. 231lm. 5W. CRI>90. <b>ø4.6cm</b>	4pcs
75169-211721	VK/04725/MC/W	● Silver. 3000K. 381lm. 9W. CRI>90. <b>ø5.1cm</b>	4pcs

Details

Voltage **AC85-265V**  
 DC2-4V 600mA (VK/04723/MC/W)  
 DC3-12V 500mA (VK/04724/MC/W)  
 DC25-40V 200mA (VK/04725/MC/W).  
 Type of Led **Bridgelux**.  
 Lifetime **50.000hrs**.

Beam angle **24°**.  
 Dimmable **No**.  
 Working temperature **-20°C→45°C**.  
 Material **Stainless steel + aluminium**.  
 Location **Outdoor ground**.  
 Included **Honeycomb**.

**3 years guarantee**



**IP67**

# Moom




Blak

2700K



VK/02118

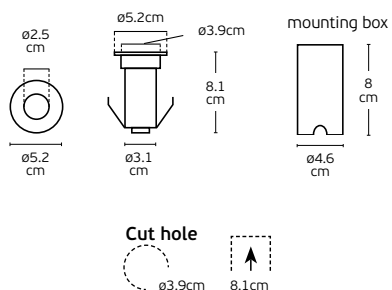

### VK/02118

Code	Model		Box
74168-241704	VK/02118/WW/10	● Steel. 2700K. 180lm. 2.2W. 10°. CRI>80	50pcs
74168-240704	VK/02118/WW/60	● Steel. 2700K. 180lm. 2.2W. 60°. CRI>80	50pcs

#### Details

AC Driver **100-240V (Included)**.  
Type of Led **EPISTAR**.  
Lifetime **50.000hrs**.  
Working temperature **-20°C→45°C**.  
Dimmable **No**.

Material **Stainless steel**.  
Included **Recessed plastic box ø4.6cm**.  
Location **Outdoor ground/Pool**.  
Guarantee **2 years**.



**IP68**

Blak





## Braso



VK/01046/TR



VK/01045/ABS



### VK/01046

### VK/01045

Code	Model		Box
74168-200677	VK/01046/304/MC	● <b>Brushed Chrome.</b> Stainless 304. GU10x2. <b>Up/down.</b>	10pcs
74168-291677	VK/01046/316/MC	● <b>Brushed Chrome.</b> Stainless 316. GU10x2. <b>Up/down.</b>	10pcs
74168-299677	<b>new</b> VK/01046/316/W	○ <b>White.</b> Stainless 316. GU10x2. <b>Up/down.</b>	10pcs
74168-199677	VK/01046/ABS	● <b>Bronze.</b> Brass/Glass. GU10x2. <b>Up/down.</b>	10pcs
74168-156677	VK/01046/NB	● <b>Natural Brass.</b> Brass/Glass. GU10x2. <b>Up/down.</b>	10pcs
74168-227677	VK/01046/TR	● <b>Terracotta.</b> Brass/Glass. GU10x2. <b>Up/down.</b>	10pcs
74168-201677	VK/01045/304/MC	● <b>Brushed Chrome.</b> Stainless 304. GU10. Fixed. <b>Downlight.</b>	10pcs
74168-290677	VK/01045/316/MC	● <b>Brushed Chrome.</b> Stainless 316. GU10. Fixed. <b>Downlight.</b>	10pcs
74168-300677	<b>new</b> VK/01045/316/W	○ <b>White.</b> Stainless 316. GU10. Fixed. <b>Downlight.</b>	10pcs
74168-202677	VK/01045/ABS	● <b>Bronze.</b> Brass/Glass. GU10. Fixed. <b>Downlight.</b>	10pcs
74168-158677	VK/01045/NB	● <b>Natural Brass.</b> Brass/Glass. GU10. Fixed. <b>Downlight.</b>	10pcs
74168-225677	VK/01045/TC	● <b>Terracotta.</b> Brass/Glass. GU10. Fixed. <b>Downlight.</b>	10pcs

### Details

Included lampholder GU10x2 (VK/01046), GU10 (VK/01045).  
Match also with: lamps GU10/50,

Par16 (max 12W LED).  
Material **Stainless / Brass/Glass**  
Location **Wall**



# Braso












VK/02257/C



VK/02188/C



VK/02189/C



**VK/02257/C, VK/02188/C, VK/02189/C**

Code <b>63158-289140</b>	Model <b>VK/02257/C</b> ● Grey. 60W. 8.400lm. 4000K. CRI Ra>80	Box <b>1pc</b>
<b>63158-286140</b>	<b>VK/02188/C</b> ● Grey. 100W. 11.000lm. 4000K. CRI Ra>80	<b>1pc</b>
<b>63158-287140</b>	<b>VK/02189/C</b> ● Grey. 130W. 14.300lm. 4000K. 70°-140°	<b>1pc</b>

Details

Material **Aluminium**  
Voltage **AC100-250V**  
Beam Angle **70°-140°**  
Type of Led **SMD 3030**


Hours **40.000hrs**  
Working Temperature **-40°C → 50°C**  
Clicks **100.000**  
Guarantee **2 years**




**IP66**



VK/02190/C



VK/02265/C

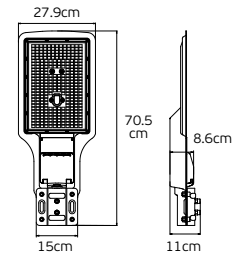

**VK/02190/C, VK/02265/C**

Code <b>63158-288140</b>	Model <b>VK/02190/C</b> ● Grey. 150W. 21.000lm. 4000K. 135°-225°	Box <b>1pc</b>
<b>63158-290140</b>	<b>VK/02265/C</b> ● Grey. 200W. 28.000lm. 4000K. 135°-225°	<b>1pc</b>

Details

Material **Aluminium**  
Voltage **AC100-250V**  
CRI **Ra>80**  
Type of Led **SMD 3030**

Hours **40.000hrs**  
Working Temperature **-40°C → 50°C**  
Clicks **100.000**  
Guarantee **2 years**



**IP66**



**Ledstrips & Profiles**  
Collection



The LED Strips & Profiles collection combines flexibility and precision, delivering seamless illumination for any space. Sleek lines and versatile forms allow light to highlight architecture, enhance ambiance, and create modern, refined environments.



# Keiso 3D LED Light Tube

The Keiso 3D LED Light Tube is a bright, flexible, and durable lighting solution suitable for outdoor applications. It is fully waterproof and designed to withstand various weather conditions.

Thanks to its 3D flexibility, it bends easily in all directions, making it ideal for creative designs, architectural lighting, signage, and decorative projects.

With strong, consistent illumination, it effectively covers a wide range of lighting needs, offering reliable and versatile lighting solutions.




3D

# Keiso 3D Top bend Neoflex

Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications such as stairs, flower beds, window frames, light floor lining, and many more.

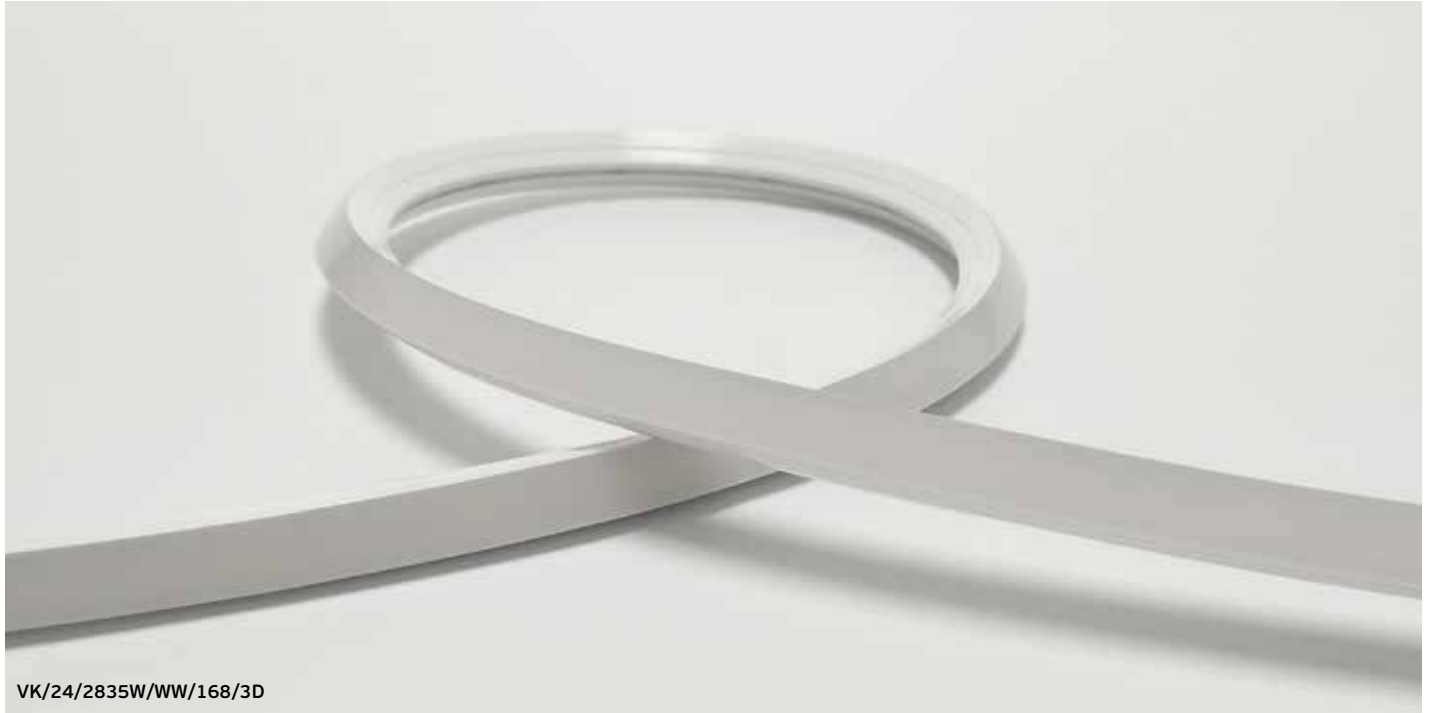



VK/24/2835W/WW/168/3D

## VK/24/2835W/168/3D 24V

Code	Model	Voltage	Kelvin	Lumen/m	Cut every	Watt/m	Box
78001-775724	VK/24/2835W/WW/168/3D	24V	2700K	626lm/m	35.7mm	12W/m	10m/roll
78001-776724	VK/24/2835W/W/168/3D	24V	3000K	660lm/m	35.7mm	12W/m	10m/roll
78001-777724	VK/24/2835W/C/168/3D	24V	4000K	680lm/m	35.7mm	12W/m	10m/roll
78001-778724	VK/24/2835W/D/168/3D	24V	6000K	675lm/m	35.7mm	12W/m	10m/roll
78001-779724	VK/24/2835W/RGB/168/3D	24V	RGB	299lm/m	41.67mm	12W/m	10m/roll


### Details

Led type SMD 2835, SMD 3838 (RGB). Led qty 168pcs/m, 144pcs/m (RGB). CRI>90 (RGB: No CRI). Working temperature -20°C → 45°C. Storage temperature -20°C → 60°C. Lifetime 50.000hrs. 4pcs plug out top side, 4pcs end cap without holes, 30pcs standard buckle, 1pc silicon glue including in the package.


 **IP67.**  
 **5 years guarantee**



Cut every 35.7mm  
 RGB: Cut every 41.67mm



in the box

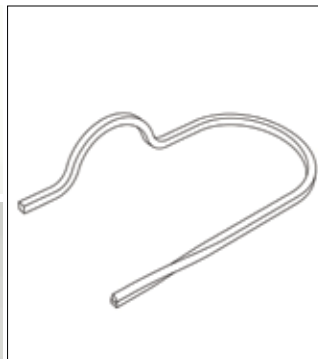




High quality, flexible silicone LED phototube waterproof appl


High quality, flexible, LED, silicone phototube suitable for waterproof applications. Can be used in hidden, outdoor lighting applications such as stairs, pool overflow perimeters, flower beds, window frames, luminous floor linings, and many more.

# Keiso™

by VK Leading Light




Keiso Neon Led Flexible Strip



# Keiso Round Neoflex

Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications such as stairs, perimeter in pool overflow, flower beds, window frames, light floor lining, and many more.

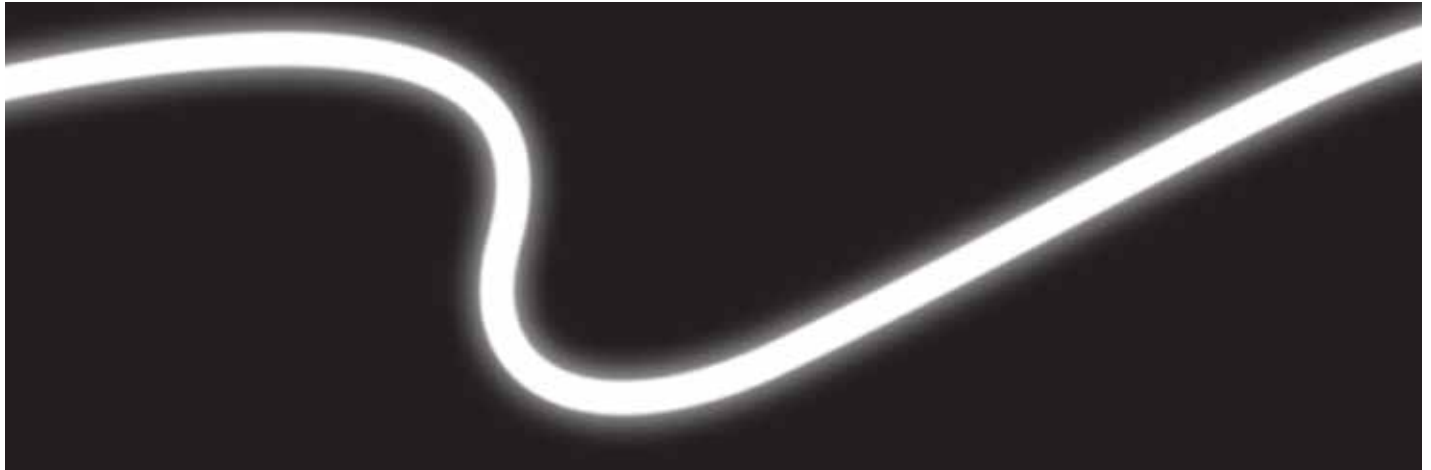

## VK/24/2835W/.../240 24V

Code	Model	Voltage	Kelvin	Lumen/m	Cut every	Watt/m	Box
78001-699115	VK/24/2835W/W/240	24V	3000K	1285.2lm/m	35.71mm	23.8W/m	5m/roll
78001-695115	VK/24/2835W/C/240	24V	4000K	1361.2lm/m	35.71mm	24.2W/m	5m/roll


### Details

Led type **SMD 2835**. Led qty **168pcs/m**. CRI>90. Dimmable **yes**. Working temperature **-25°C → 60°C**.



Storage temperature **-40°C → 80°C**. Silicon end-cups, 10 standard buckles and many screws including in the package.

Lifetime **50.000hrs**.

 **IP67.**

 **5 years guarantee**

Cut every 35.71mm

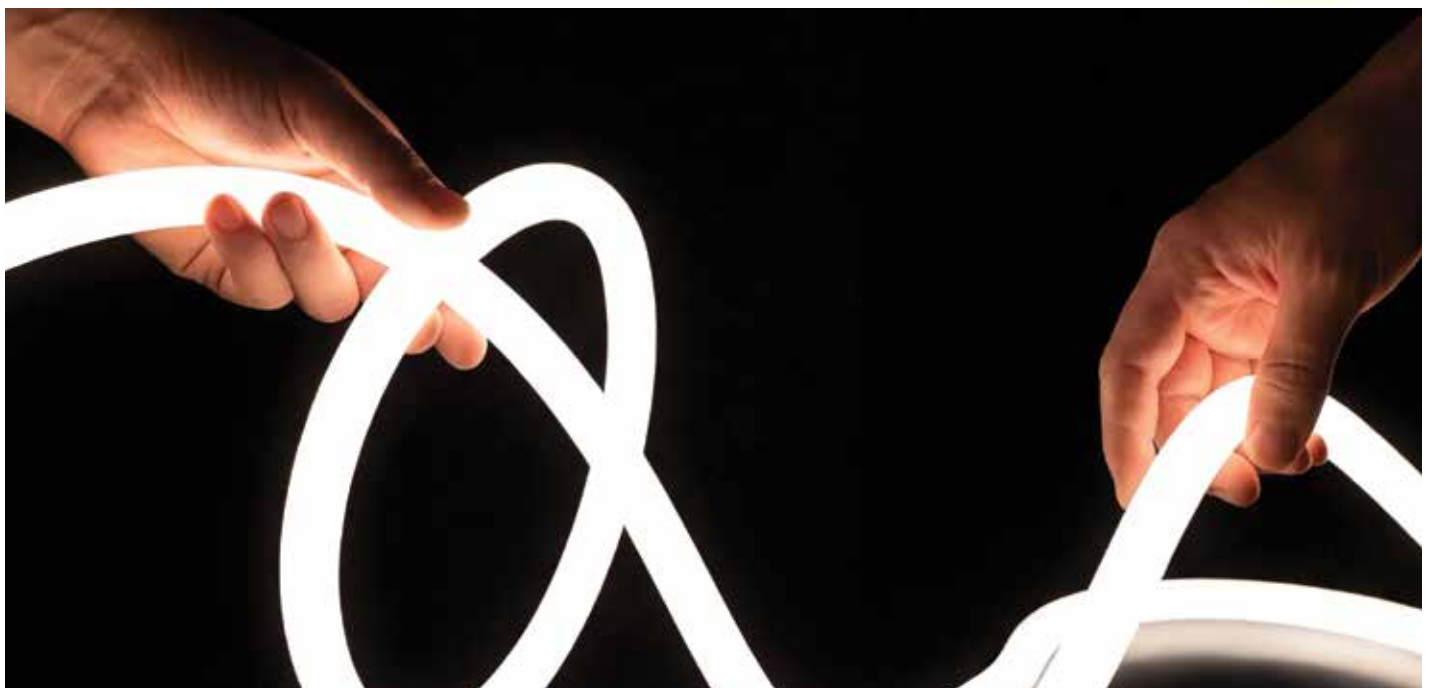



# Keiso Round Neoflex Accessories

Ledstrips Keiso Collection

Keiso. Suitable for use in hidden outdoor lighting applications such as stairs, perimeter in pool overflow, flower beds, window frames, light floor lining, and many more.



## VK/24/2835W/ACCESSORIES

Code	Model	Descriptions	Box
78001-696115	VK/24/2835W/EC	End cup	500pcs
78001-700115	VK/24/2835W/POTS	Plug out top side	500pcs
78001-697115	VK/24/2835W/SRK	Half wrap buckle (hanging)	250pcs
78001-694115	VK/24/2835W/CE	Standard buckle	250pcs
78001-698115	VK/24/2835W/SRK/1	1m suspension wire kit	250pcs
78001-701115	new VK/24/2835W/CP/W	Ceiling relatives (white)	200pcs

### Details


Accessories for Flexible Led tube.





# Ledstrips COB CRI>90. IP20/IP65.

Ledstrips CRI>90 Collection

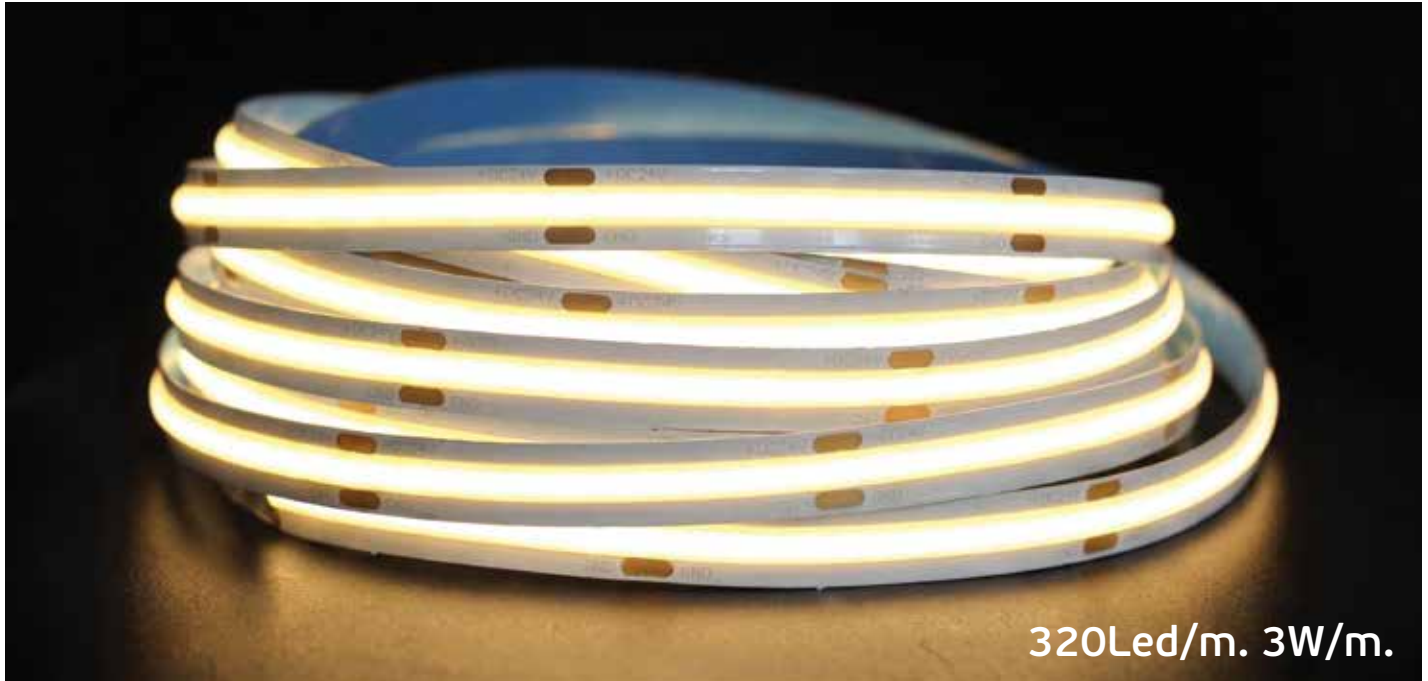

## VK/24/COB/320/3W, VK/24/COBW/320/3W 24V

Code	Model	Voltage	IP	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-680126	VK/24/COB/927/320/3W	24V	IP20	2700K	300lm/m	CRI>90	3W/m	5m/roll
78001-681126	VK/24/COB/930/320/3W	24V	IP20	3000K	310lm/m	CRI>90	3W/m	5m/roll
78001-682126	VK/24/COB/940/320/3W	24V	IP20	4000K	320lm/m	CRI>90	3W/m	5m/roll
78001-683126	VK/24/COB/965/320/3W	24V	IP20	6500K	340lm/m	CRI>90	3W/m	5m/roll
78001-684126	VK/24/COBW/927/320/3W	24V	IP65	2700K	300lm/m	CRI>90	3W/m	5m/roll
78001-685126	VK/24/COBW/930/320/3W	24V	IP65	3000K	310lm/m	CRI>90	3W/m	5m/roll
78001-686126	VK/24/COBW/940/320/3W	24V	IP65	4000K	320lm/m	CRI>90	3W/m	5m/roll
78001-687126	VK/24/COBW/965/320/3W	24V	IP65	6500K	340lm/m	CRI>90	3W/m	5m/roll

### Details


Led type COB 320. Led qty 320pcs/m. CRI>90. Tape on back 3M. Working temperature -40°C → 80°C. Storage temperature -25°C → 60°C.

 IP20/IP65.  5 years guarantee



24V

8mm

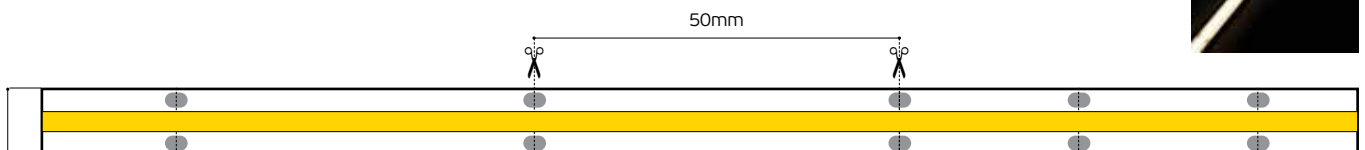

H2.1mm

IP20


H2.5mm

IP65

408

# Ledstrips COB CRI>90. IP20/IP65.

Ledstrips CRI>90 Collection

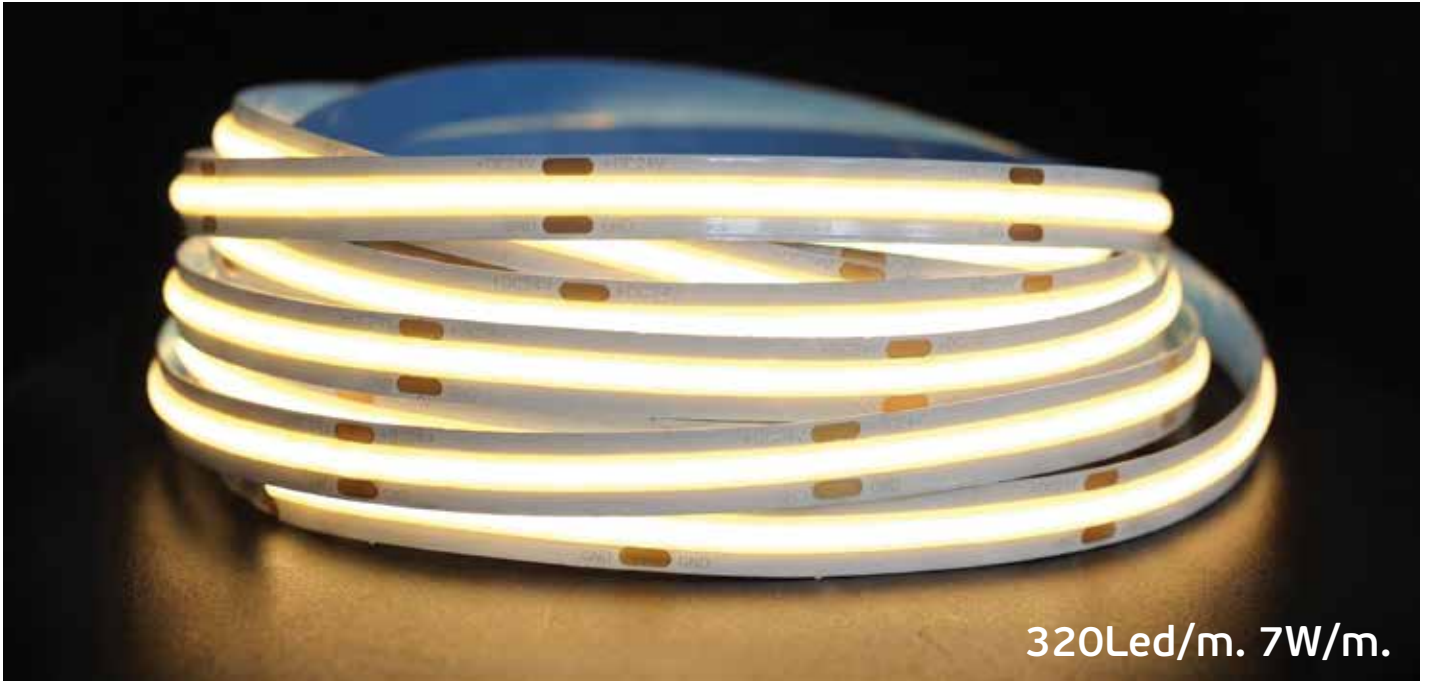

320Led/m. 7W/m.



## VK/24/COB/320, VK/24/COBW/320 24V

Code	Model	Voltage	IP	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-688126	VK/24/COB/927/320	24V	IP20	2700K	710lm/m	CRI>90	7W/m	5m/roll
78001-689126	VK/24/COB/930/320	24V	IP20	3000K	750lm/m	CRI>90	7W/m	5m/roll
78001-690126	VK/24/COB/940/320	24V	IP20	4000K	800lm/m	CRI>90	7W/m	5m/roll
78001-691126	VK/24/COB/965/320	24V	IP20	6500K	850lm/m	CRI>90	7W/m	5m/roll
78001-692126	VK/24/COBW/927/320	24V	IP65	2700K	710lm/m	CRI>90	7W/m	5m/roll
78001-693126	VK/24/COBW/930/320	24V	IP65	3000K	750lm/m	CRI>90	7W/m	5m/roll
78001-694126	VK/24/COBW/940/320	24V	IP65	4000K	800lm/m	CRI>90	7W/m	5m/roll
78001-695126	VK/24/COBW/965/320	24V	IP65	6500K	850lm/m	CRI>90	7W/m	5m/roll

### Details


Led type COB 320. Led qty 320pcs/m. CRI>90. Tape on back 3M. Working temperature -40°C → 80°C. Storage temperature -25°C → 60°C.

 IP20/IP65.  5 years warranty

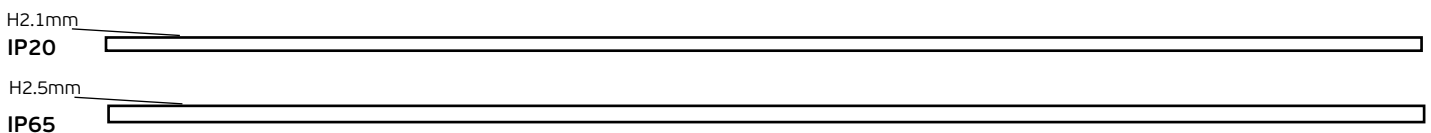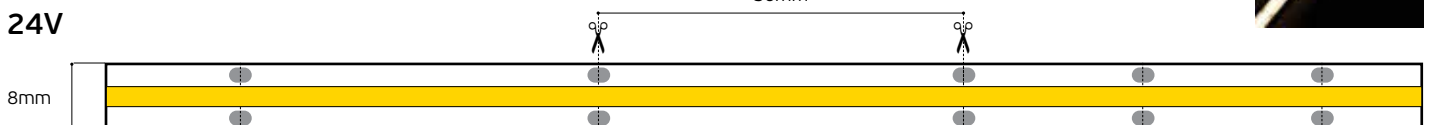

# Ledstrips COB CRI>90. IP20/IP65.

Ledstrips CRI>90 Collection

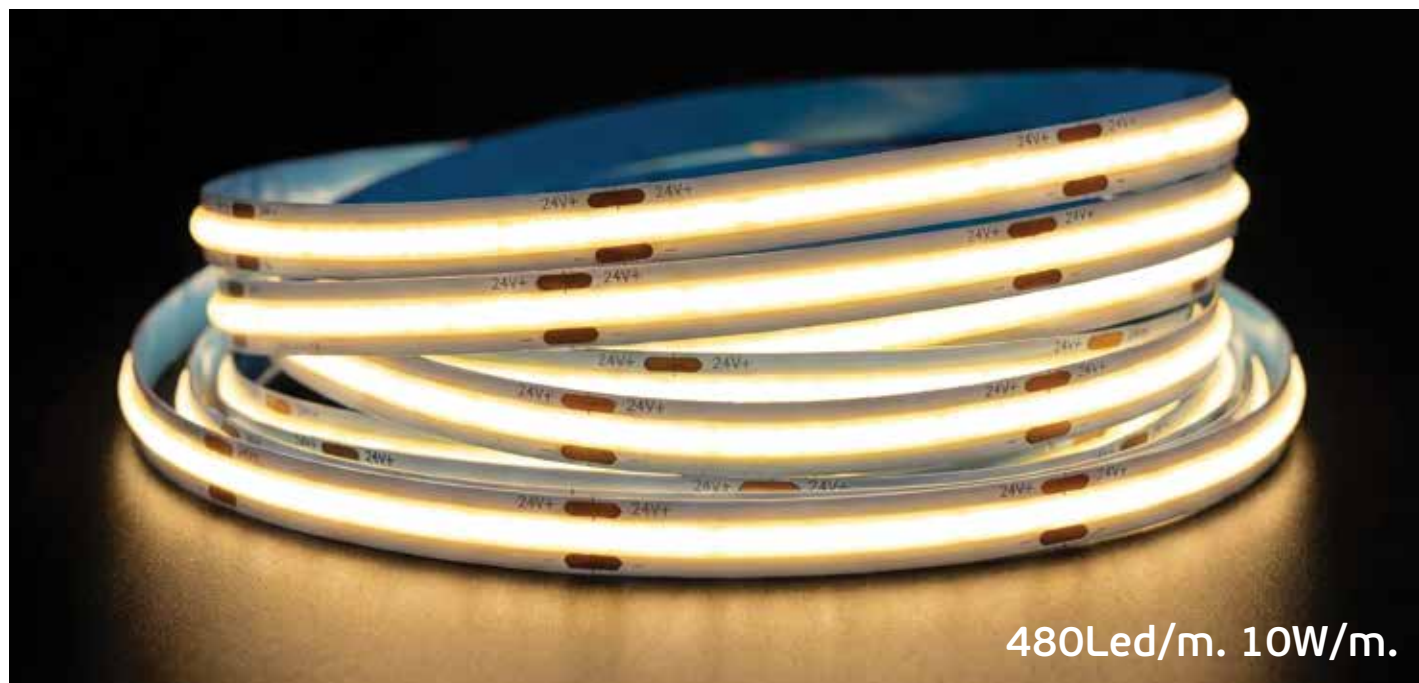

480Led/m. 10W/m.



## VK/24/COB/480, VK/24/COBW/480 24V

Code	Model	Voltage	IP	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-696126	VK/24/COB/927/480	24V	IP20	2700K	1000lm/m	CRI>90	10W/m	5m/roll
78001-697126	VK/24/COB/930/480	24V	IP20	3000K	1050lm/m	CRI>90	10W/m	5m/roll
78001-698126	VK/24/COB/940/480	24V	IP20	4000K	1100lm/m	CRI>90	10W/m	5m/roll
78001-699126	VK/24/COB/965/480	24V	IP20	6500K	1150lm/m	CRI>90	10W/m	5m/roll
78001-700126	VK/24/COBW/927/480	24V	IP65	2700K	1000lm/m	CRI>90	10W/m	5m/roll
78001-701126	VK/24/COBW/930/480	24V	IP65	3000K	1050lm/m	CRI>90	10W/m	5m/roll
78001-702126	VK/24/COBW/940/480	24V	IP65	4000K	1100lm/m	CRI>90	10W/m	5m/roll
78001-703126	VK/24/COBW/965/480	24V	IP65	6500K	1150lm/m	CRI>90	10W/m	5m/roll

### Details

Led type COB 480. Led qty 480pcs/m. CRI>90. Tape on back 3M. Working temperature -40°C → 80°C. Storage temperature -25°C → 60°C.

 IP20/IP65.  5 years guarantee

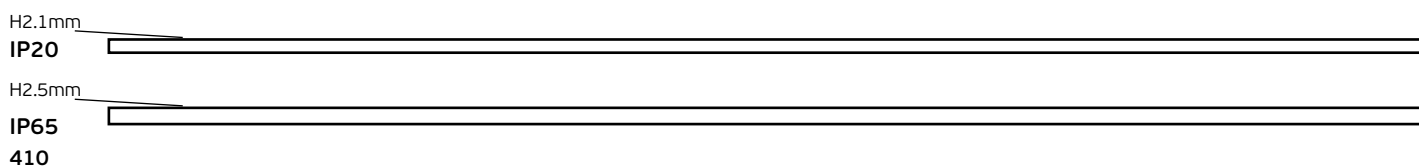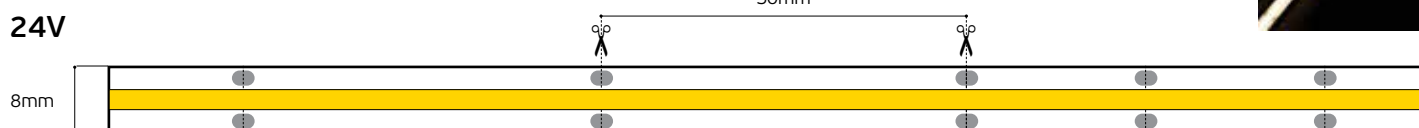

# Ledstrips COB CRI>90. IP20/IP65.

Ledstrips CRI>90 Collection



528Led/m. 14W/m.



## VK/24/COB/528, VK/24/COBW/528 24V

Code	Model	Voltage	IP	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-704126	VK/24/COB/927/528	24V	IP20	2700K	1400lm/m	CRI>90	14W/m	5m/roll
78001-705126	VK/24/COB/930/528	24V	IP20	3000K	1430lm/m	CRI>90	14W/m	5m/roll
78001-706126	VK/24/COB/940/528	24V	IP20	4000K	1470lm/m	CRI>90	14W/m	5m/roll
78001-707126	VK/24/COB/965/528	24V	IP20	6500K	1500lm/m	CRI>90	14W/m	5m/roll
78001-708126	VK/24/COBW/927/528	24V	IP65	2700K	1400lm/m	CRI>90	14W/m	5m/roll
78001-709126	VK/24/COBW/930/528	24V	IP65	3000K	1430lm/m	CRI>90	14W/m	5m/roll
78001-710126	VK/24/COBW/940/528	24V	IP65	4000K	1470lm/m	CRI>90	14W/m	5m/roll
78001-711126	VK/24/COBW/965/528	24V	IP65	6500K	1500lm/m	CRI>90	14W/m	5m/roll

### Details

Led type COB 528. Led qty 528pcs/m. CRI>90. Tape on back 3M. Working temperature -40°C → 80°C. Storage temperature -25°C → 60°C.

 IP20/IP65.  5 years warranty

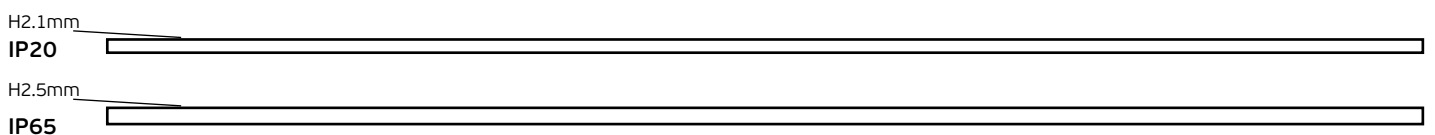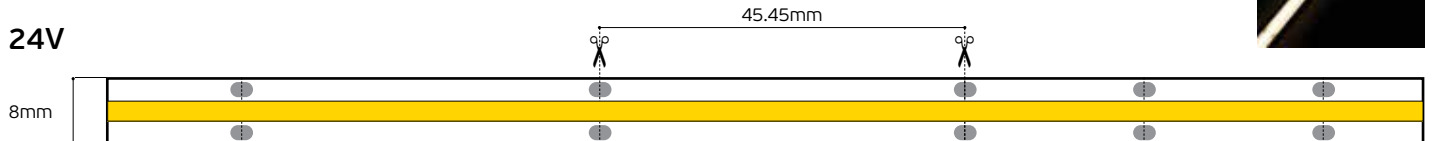

# Ledstrips COB/RGB CRI>90. IP20/IP65.

Ledstrips CRI>90 Collection




## VK/24/COB/RGB/576 24V


Code	Model	Voltage	IP	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-712126	VK/24/COB/RGB/576	24V	IP20	RGB	398.44lm/m	CRI>90	14W/m	5m/roll
78001-713126	VK/24/COBW/RGB/576	24V	IP65	RGB	398.44lm/m	CRI>90	14W/m	5m/roll

### Details

Led type **COB 576**. Led qty **576pcs/m**. CRI>90. Tape on **back 3M**. Working temperature **-40°C → 80°C**. Storage temperature **-25°C → 60°C**. 2 years guarantee.

 **IP20/IP65.**

 **5 years guarantee**

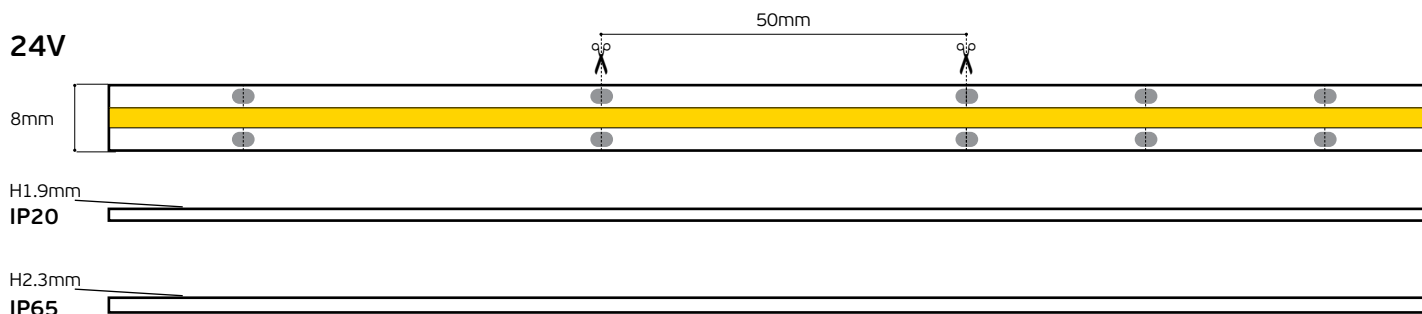



# Ledstrips COB/Magic CRI>90. IP20/IP65.

Ledstrips CRI>90 Collection




## VK/24/COB/MAGIC/720 24V


Code	Model	Voltage	IP	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-714126	VK/24/COB/MAGIC/720	24V	IP20	RGB	387.07lm/m	CRI>90	16W/m	10m/roll
78001-715126	VK/24/COBW/MAGIC/720	24V	IP65	RGB	387.07lm/m	CRI>90	16W/m	10m/roll

### Details

Led type COB 720. Led qty 720pcs/m. CRI>90. Tape on back 3M. Working temperature -40°C → 80°C. Storage temperature -25°C → 60°C.

 IP20/IP65.

 5 years guarantee

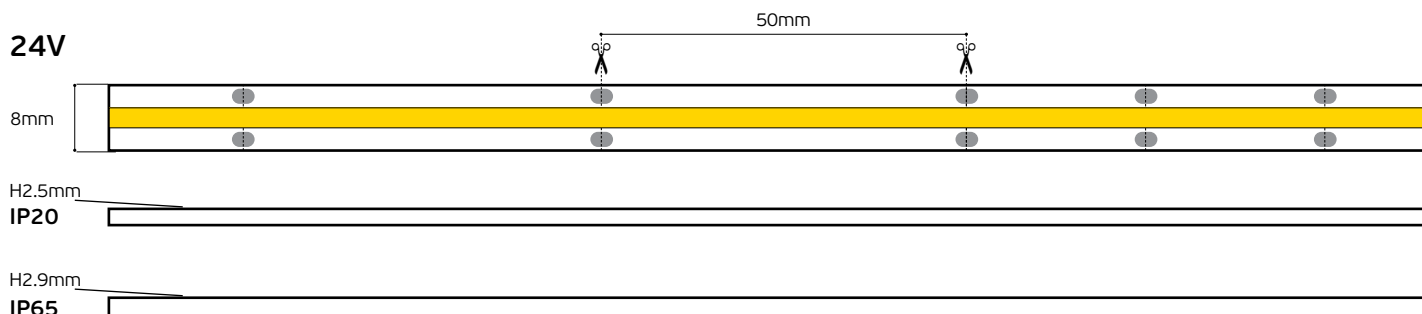



# Ledstrips Magic Controllers

Ledstrips controllers

## VK/FUTC6 Remote controller Magic LEDSTRIPS

Code  
78001-798911

Model  
VK/FUTC6  
2.4GHz. 3V. 6dBm. 30m.


Box  
1pc



### Details

Voltage **3V (AAAx2pcs)**. Frequency **2.4GHz**.  
Transmitting power **6dBm**.  
Distance **30m**.  
Material **Plastic**.  
**ONLY FOR Magic LEDSTRIPS.**  
Working temperature **-10~40°C**.  
Included holder **97x49x8mm**  
Guarantee **2 years**.

### IP20.

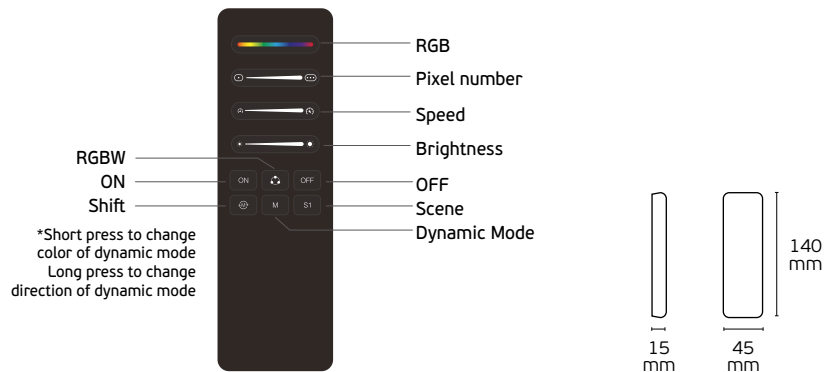

## VK/SPIRW5 5 in 1 Controller Magic LEDSTRIPS

Code  
78000-788911

Model  
VK/SPIRW5  
DC5-24V. 20mA. Max 10A.

Box  
200pcs




### Details

Input Voltage **DC5-24V**.  
Output **6A/channel**.  
Output current **Max 10A**.  
**2.4G RF RGB+CCT**  
Standby current **20mA**.  
Protocol **Wifi+RF 2.4GHz**  
**28 kinds of white color, 80 kind of RGB, can change color, brightness, width and those modes**  
**8 kinds of music mode work with internal microphone & smart phone microphone**  
**Setting up boot animation via Tuya app**  
Distance **30m**.  
Material **Plastic**.  
**Dimmable Single, CCT, RGB, RGBW, RGB+CCT.**  
Working temperature **-10~40°C**.  
Guarantee **2 years**.



Match VK/FUTC6



# Ledstrips Magic Controllers

Ledstrips controllers

**VK/WL/BOX2**

Code  
78000-688734

Model  
VK/WL/BOX2  
5V/500mA. 2.4GHz. WiFi 802.11 b/g/n.

Box  
1pc



## Details

Voltage **5V/500mA**.  
Wireless technology **Wi-Fi IEEE 802.11b/g/n 2.4GHz**  
Transmitting power **6dBm**  
2.4G RF control distance **30m**  
Material **Plastic**.  
Working temperature **-10°C → 40°C**

Included USB  
cable




It's compatible with 2.4GHz RF products. It communicate icloud with smartphone via Wi-Fi network, user can do remote control for connected lights via "Tuya Smart". Support third party voice control, meet every smart application in your home.

WiFi Android iOS Tuya Smart IP20.

Pairing with all controllers & receivers of  
VK/FUT series

**5 years guarantee**



# Ledstrips CRi>90. IP20.

Ledstrips CRi>90 Collection



## VK/24/2835/140/3 24V

Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-677126	VK/24/2835/927/140/3	24V	2700K	415lm/m	CRI>90	3W/m	5m/roll
78001-678126	VK/24/2835/930/140/3	24V	3000K	427lm/m	CRI>90	3W/m	5m/roll
78001-679126	VK/24/2835/940/140/3	24V	4000K	453lm/m	CRI>90	3W/m	5m/roll

### Details

Led type SMD 2835. Led qty 140pcs/m. CRI>90. Tape on back 3M. Working temperature -40°C → 80°C. Storage temperature -25°C → 60°C.



IP20.




5 years guarantee

24V

8mm

H1.1mm

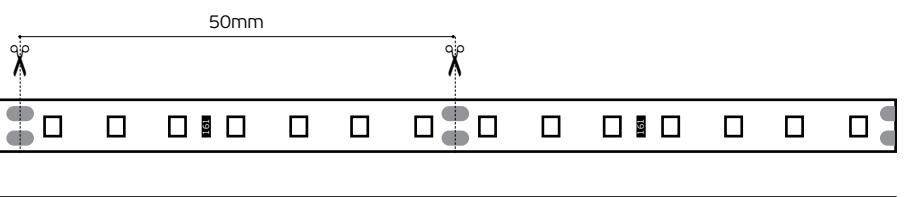

# Ledstrips CRI>90. IP20.

Ledstrips CRI>90 Collection



140Led/m. 6W/m.


## VK/24/2835/140/6 24V


Code	Model	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-674126	VK/24/2835/927/140/6	24V	2700K	750lm/m	CRI>90	6W/m	5m/roll
78001-675126	VK/24/2835/930/140/6	24V	3000K	807lm/m	CRI>90	6W/m	5m/roll
78001-676126	VK/24/2835/940/140/6	24V	4000K	857lm/m	CRI>90	6W/m	5m/roll

### Details

Led type SMD 2835. Led qty 140pcs/m. CRI>90. Tape on back 3M. Working temperature -40°C → 80°C. Storage temperature -25°C → 60°C.

 IP20.

 5 years guarantee

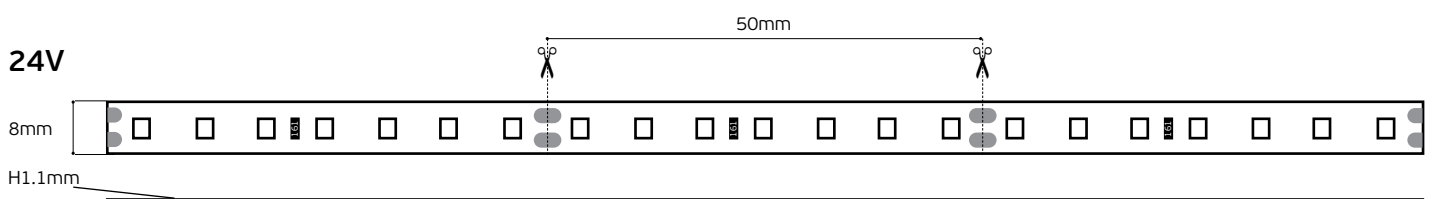

# Ledstrips CCT CRI>90. IP20.

## Dimming to Warm 1800K-3000K

Ledstrips CRI>90, Collection




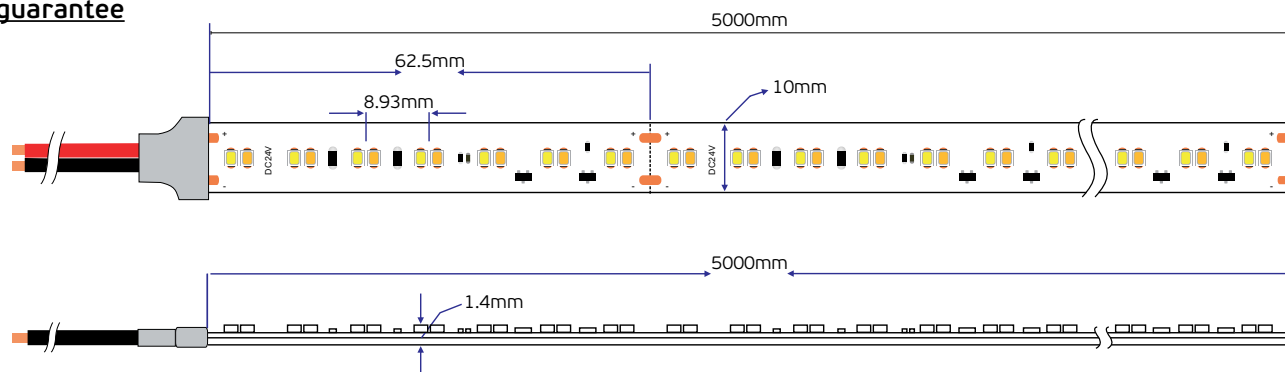
### VK/24/2216/CCT/224/90

Code	Model	IP Rating	Voltage	Kelvin	Lumen/m	CRI	Watt/m	Box
78001-774724	VK/24/2216/CCT/224/90	IP20	24V	1800K-3000K	1520lm/m	CRI>90	16W/m	5m/roll

Details  
Led type SMD 2216. Led qty 224pcs/m. Tape on back 3M. Working temperature -20°C → 45°C. Storage temperature -20°C → 60°C. Lifetime 50.000hrs.

 IP20.

 5 years guarantee





# Ledstrips Profiles IP20

Ledstrips accessories

## Profile

### VK/29 Aluminium Profile Π




Code	Model	Box
75165-319806	VK/29/AL/W/2 ● Anodized Silver. Aluminium profile 2m with 2m white opal pc cover & 2 end cups & buckles.	100pcs
75165-321806	VK/29/W/W/2 ○ Anodized White. Aluminium profile 2m with 2m white opal pc cover & 2 end cups & buckles.	100pcs
75165-320806	VK/29/B/W/2 ● Anodized Black. Aluminium profile 2m with 2m white opal pc cover & 2 end cups & buckles.	100pcs


Details  
Charged per meter. Available 2m. Material Aluminium with pc cover, ABS end cups & buckles.

### Accessories included

End cups, buckles & pc cover

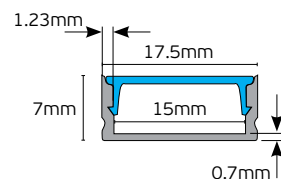


### VK/30 Aluminium Profile T

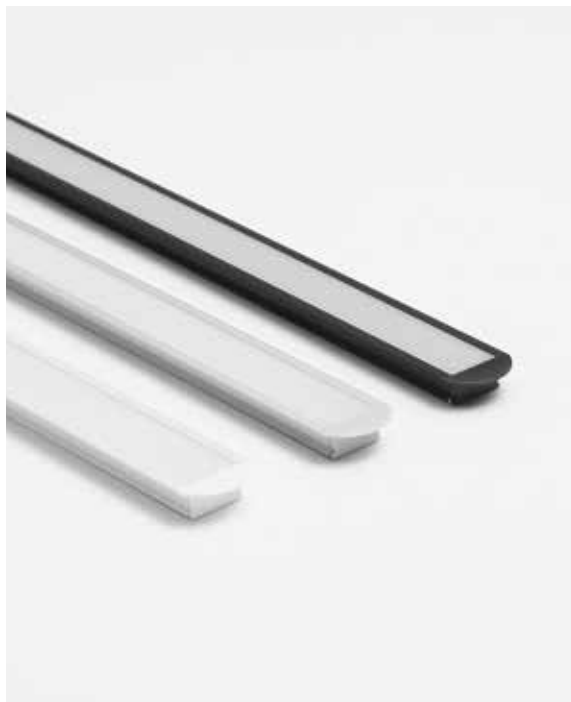

Code	Model	Box
75165-322806	VK/30/AL/W/2 ● Anodized Silver. Aluminium profile 2m with 2m white opal pc cover & 2 end cups.	100pcs
75165-324806	VK/30/W/W/2 ○ Anodized White. Aluminium profile 2m with 2m white opal pc cover & 2 end cups.	100pcs
75165-323806	VK/30/B/W/2 ● Anodized Black. Aluminium profile 2m with 2m white opal pc cover & 2 end cups.	100pcs

Details  
Charged per meter. Available 2m. Material Aluminium with pc cover, & ABS end caps.

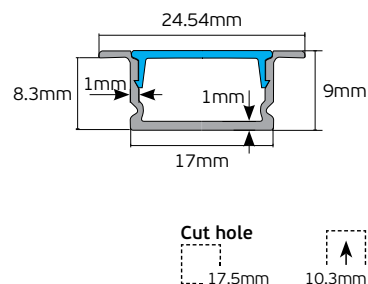

## Covers

### VK/K29-30



Code  
75165-325806

Model  
VK/K29-30/CL  
○ Clear PC cover. Cover 2m for profile VK/29, VK/30


Box  
100pcs

75165-326806

Model  
VK/K29-30/W  
○ Opal PC cover. Cover 2m for profile VK/29, VK/30

100pcs

Details  
Available 2m. Material PC.



### VK/34 Aluminium Profile Π




Code  
75165-335806

Model  
VK/34/AL/W/FLEX  
● Anodized Silver. Aluminium profile 2m with 2m white opal pc cover.

Box  
100pcs

Details  
Charged per meter. Available 2m. Material Aluminium with pc cover.



# Ledstrips Profiles Linear IP20

Ledstrips accessories

## Profile


### VK/18 Aluminium Profile Π deep



Code	Model	Box
75165-024724	VK/18/AL/W/2 ● Silver. Aluminium profile 2m with 2m white cover, end cups & buckles.	100pcs
75165-025724	VK/18/W/W/2 ○ White. Aluminium profile 2m with 2m white cover, end cups & buckles.	100pcs
75165-026724	VK/18/B/W/2 ● Black. Aluminium profile 2m with 2m white cover, end cups & buckles.	100pcs

#### Details

Charged per meter. Available 2m. Material Aluminium with cover, end cups and buckles.

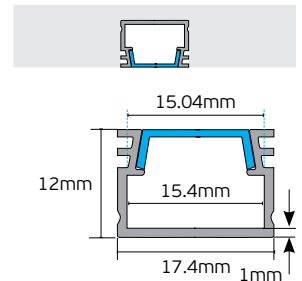


### VK/19 Aluminium Profile recessed T



Code	Model	Box
75165-027724	VK/19/AL/W/2 ● Silver. Aluminium profile 2m with 2m white cover, end cups & buckles.	100pcs
75165-028724	VK/19/W/W/2 ○ White. Aluminium profile 2m with 2m white cover, end cups & buckles.	100pcs
75165-029724	VK/19/B/W/2 ● Black. Aluminium profile 2m with 2m white cover, end cups & buckles.	100pcs

#### Details

Charged per meter. Available 2m. Material Aluminium with cover, end cups and buckles.

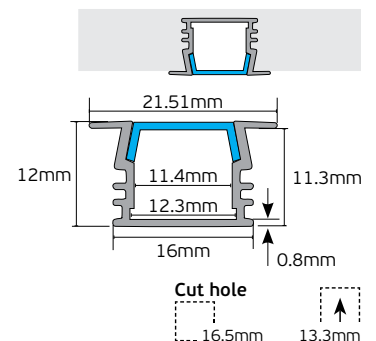

## Covers

### VK/K18-19



Code  
75165-327806

Model  
VK/K18-19/CL  
○ Clear PC cover. Cover 2m for profile VK/18, VK/19


Box  
100pcs

75165-328806

Model  
VK/K18-19/W  
○ Opal PC cover. Cover 2m for profile VK/18, VK/19

100pcs

Details  
Available 2m. Material PC.



# Ledstrips Profiles Corner IP20

Ledstrips accessories

## Profile

### VK/28 Aluminum corner profile




Code	Model	Box
75165-314806	VK/28/AL/W/2 ● Anodized Silver. Aluminium profile 2m with 2m white opal pc cover & 2 ABS end cups & buckles.	100pcs
75165-316806	VK/28/W/W/2 ○ Anodized White. Aluminium profile 2m with 2m white opal pc cover & 2 ABS end cups & buckles.	100pcs
75165-315806	VK/28/B/W/2 ● Anodized Black. Aluminium profile 2m with 2m white opal pc cover & 2 ABS end cups & buckles.	100pcs

#### Details

Charged per meter. Available 2m. Material Aluminium with pc cover, ABS end cups & buckles.

### Accessories included

#### End cups, buckles & pc cover



# Ledstrips Profiles Corner IP20

Ledstrips accessories

## Covers

### VK/K28



Code  
75165-317806

Model  
VK/K28/CL

Box  
100pcs

○ Clear PC cover. Cover 2m for profile VK/28


75165-318806

VK/K28/W

100pcs

○ Opal PC cover. Cover 2m for profile VK/28

Details  
Available 2m. Material PC.

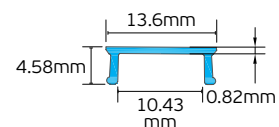

# Ledstrips Profiles Trimless IP20

Ledstrips accessories

## Profile

### VK/09 Aluminium Profile Trimless T



Code  
75165-269264

Model  
VK/09/AL/W  
● Silver. Aluminium profile 2m with 2m white cover.

Box  
80pcs

75165-271264

VK/09/B/B  
● Black. Aluminium profile 2m with 2m black cover.


80pcs

#### Details

Use **Recessed trimless**. Length 2m + 2 end cups. Working temperature -20°C → 40°C.  
Material Aluminium.

### Accessories included

#### End cups & pc cover

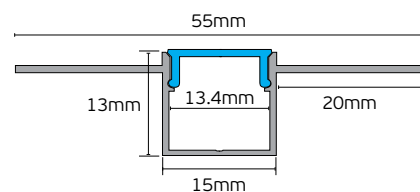

Cut hole  
17mm

12.2mm

### VK/10 Aluminium Profile Trimless T wide



Code  
75165-270264

Model  
VK/10/AL/W  
● Silver. Aluminium profile 2m with 2m white cover.

Box  
60pcs

75165-272264

VK/10/B/B  
● Black. Aluminium profile 2m with 2m black cover.


60pcs

#### Details

Use **Recessed trimless**. Length 2m + 2 end cups. Working temperature -20°C → 40°C.  
Material Aluminium.

### Accessories included

#### End cups & pc cover

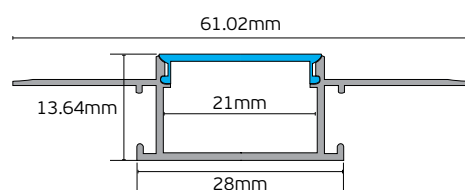

Cut hole  
22mm

12.5mm

## Covers

### VK/K09




Code  
75165-309264

Model  
VK/K09/W

Box  
100pcs

○ Opal PC cover. Cover 2m for profile VK/09.

Details  
Available 2m. Material PC.

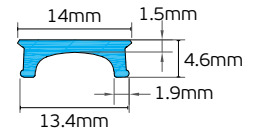

### VK/K10




Code  
75165-310264

Model  
VK/K10/W

Box  
100pcs

○ Opal PC cover. Cover 2m for profile VK/10.

Details  
Available 2m. Material PC.



# Ledstrips Profiles Trimless IP20

Ledstrips accessories

## Profile

### VK/32 Aluminium Profile Trimless T FLEX





Code  
75165-332806

Model  
VK/32/AL/W/FLEX  
● Silver. Aluminium profile 2m with  
2m white silicone cover.

Box  
100pcs

#### Details

Use **Recessed trimless**. Length 2m + 2 end cups. Working temperature -20°C → 40°C.  
Material **Aluminium**.

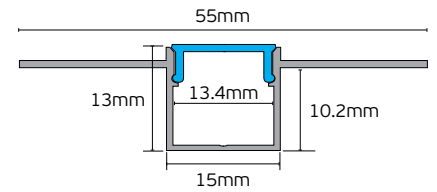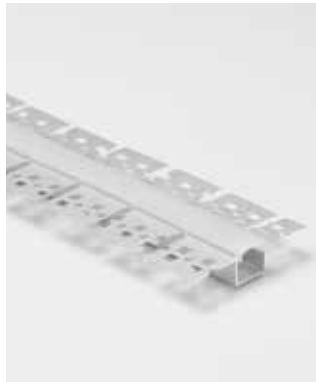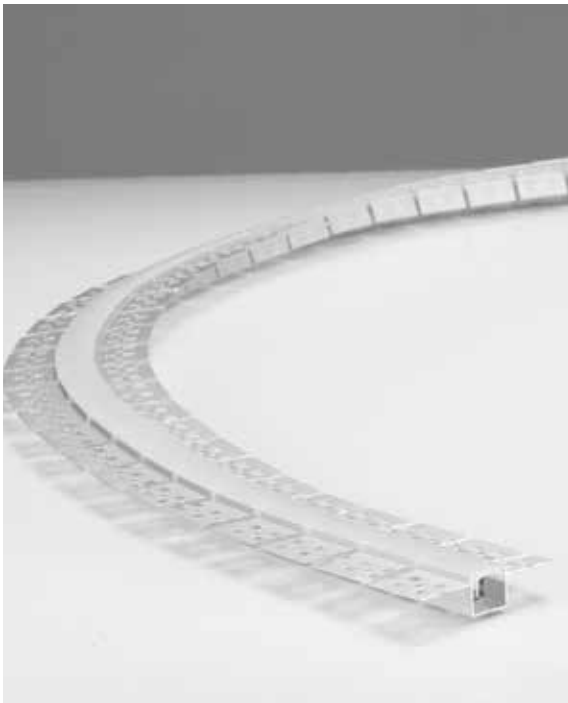

### VK/33 Aluminium Profile Trimless T wide FLEX




Code  
75165-333806

Model  
VK/33/AL/W/FLEX  
● Silver. Aluminium profile 2m with  
2m white silicone cover.

Box  
100pcs

#### Details

Use **Recessed trimless**. Length 2m + 2 end cups. Working temperature -20°C → 40°C.  
Material **Aluminium**.

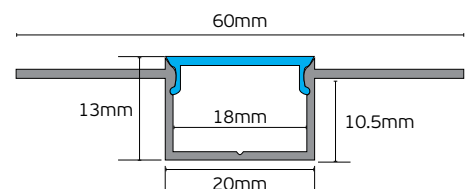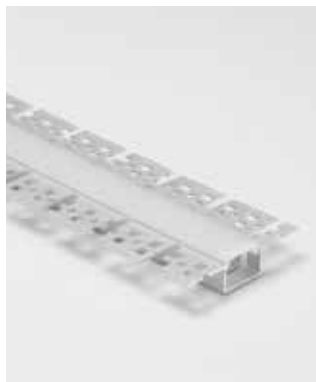



# Ledstrips Profiles Trimless IP20

Ledstrips accessories

## Profile

### VK/25 T-shaped aluminum profile, 3 positions, recessed Trimless

Code  
75165-043724




Model  
VK/25/B/W/2  
● Black. Aluminium profile 2m  
with 2m white cover & end cups.

Box  
20pcs

#### Details


Charged per meter. Available 2m. Material Aluminium with cover & end cups.

**Note:** This T-shaped aluminum profile, recessed in 3 positions, is flexible for plasterboard thicknesses of 0.3cm, 0.8cm and 1.5cm

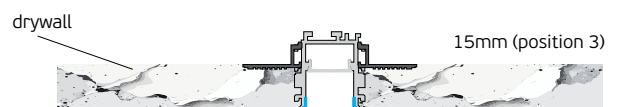

## Accessories included

### End cups & pc cover

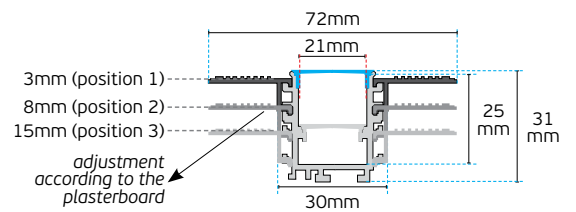



# Ledstrips Profiles Trimless IP20

Ledstrips accessories

## Profile

### VK/22 Aluminium Profile Trimless inner corner



Code  
75165-036724

Model  
VK/22/W/W/2  
○ White. Aluminium profile 2m with 2m white cover & end cups.

Box  
20pcs



75165-037724

VK/22/B/W/2  
● Black. Aluminium profile 2m with 2m white cover & end cups.

20pcs

#### Details

Charged per meter. Available 2m. Material Aluminium with cover & end cups.

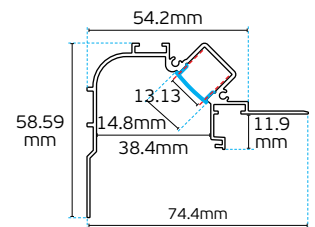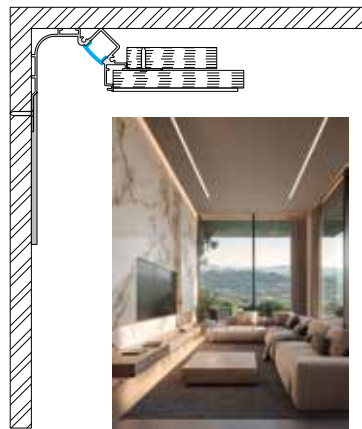

### VK/24 Aluminium Profile Trimless external corner





Code  
75165-042724

Model  
VK/24/W/W/2  
○ White. Aluminium profile 2m with 2m white cover & end cups.

Box  
30pcs

#### Details

Charged per meter. Available 2m. Material Aluminium with cover & end cups.

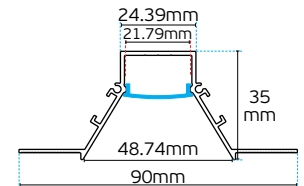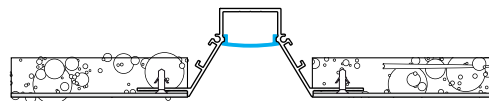



## Accessories

### VK/PROF/CON/I



Code  
75165-051724

Model  
**VK/PROF/CON/I**  
straight connector for aluminum profiles VK/13, VK/14, VK/15, VK/16, VK/20, VK/22, VK/23, VK/24.

Box  
1pc

Details  
Available **1 pc.** Material **Aluminium.** IP20.

### VK/PROF/CON/L



Code  
75165-052724

Model  
**VK/PROF/CON/L**  
horizontal corner joint for aluminum profiles VK/15, VK/16, VK/17, VK/20, VK/22, VK/23.

Box  
1pc

Details  
Available **1 pc.** Material **Aluminium.** IP20.

### VK/PROF/CON/L/3D



Code  
75165-053724

Model  
**VK/PROF/CON/L/3D**  
vertical corner joint for aluminum profiles VK/15, VK/16, VK/17, VK/20, VK/22, VK/23.

Box  
1pc

Details  
Available **1 pc.** Material **Aluminium.** IP20.

# Ledstrips Profiles Trimless IP20

Ledstrips accessories

## Profile

### VK/21 Aluminium Profile Trimless skirting board



Code	Model	Box
75165-033724	VK/21/AL/W/2 ● Silver. Aluminium profile 2m with 2m white cover.	40pcs
75165-034724	VK/21/W/W/2 ○ White. Aluminium profile 2m with 2m white cover.	40pcs
75165-035724	VK/21/B/W/2 ● Black. Aluminium profile 2m with 2m white cover.	40pcs

#### Details

Charged per meter. Available 2m. Material Aluminium with cover.




### VK/20 Aluminium Profile Trimless corner



Code	Model	Box
75165-030724	VK/20/AL/W/2 ● Silver. Aluminium profile 2m with 2m white cover.	50pcs
75165-031724	VK/20/W/W/2 ○ White. Aluminium profile 2m with 2m white cover.	50pcs
75165-032724	VK/20/B/W/2 ● Black. Aluminium profile 2m with 2m white cover.	50pcs

#### Details

Charged per meter. Available 2m. Material Aluminium with cover.

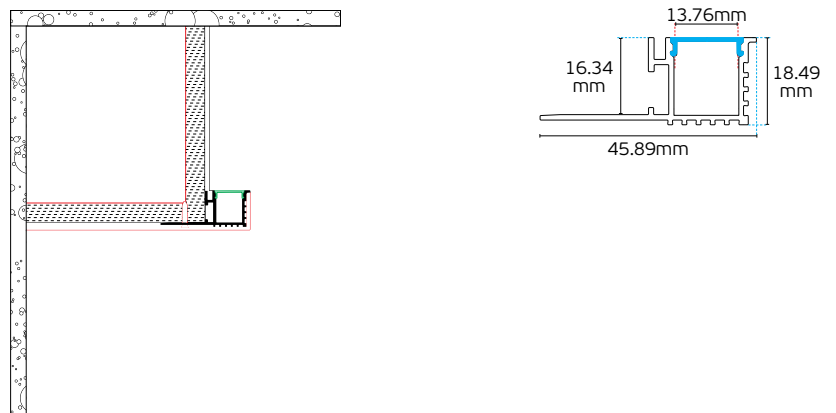



## Accessories

### VK/PROF/CON/I



Code  
75165-051724

Model  
**VK/PROF/CON/I**  
straight connector for aluminum profiles VK/13, VK/14, VK/15, VK/16, VK/20, VK/22, VK/23, VK/24.

Box  
1pc

Details  
Available **1 pc.** Material **Aluminium.** IP20.

### VK/PROF/CON/L



Code  
75165-052724

Model  
**VK/PROF/CON/L**  
horizontal corner joint for aluminum profiles VK/15, VK/16, VK/17, VK/20, VK/22, VK/23.

Box  
1pc

Details  
Available **1 pc.** Material **Aluminium.** IP20.

### VK/PROF/CON/L/3D



Code  
75165-053724

Model  
**VK/PROF/CON/L/3D**  
vertical corner joint for aluminum profiles VK/15, VK/16, VK/17, VK/20, VK/22, VK/23.

Box  
1pc

Details  
Available **1 pc.** Material **Aluminium.** IP20.

# Ledstrips Profiles Up/Down IP20

Ledstrips accessories

## Profile

### VK/31 Aluminum wall Up/Down profile




Code	Model	Box
75165-329806	VK/31/AL/W/2 ● Anodized Silver. Aluminium profile 2m with 2m white opal pc cover & 4pcs end cups & 4pcs fixing clips	100pcs
75165-331806	VK/31/W/W/2 ○ Anodized White. Aluminium profile 2m with 2m white opal pc cover & 4pcs end cups & 4pcs fixing clips.	100pcs
75165-330806	VK/31/B/W/2 ● Anodized Black. Aluminium profile 2m with 2m white opal pc cover & 4pcs end cups & 4pcs fixing clips.	100pcs

#### Details

Charged per meter. Available 2m. Material Aluminium with pc cover, & 4pcs end cups & 4pcs fixing clips.

### Accessories included

#### End cups, fixing clips & pc cover

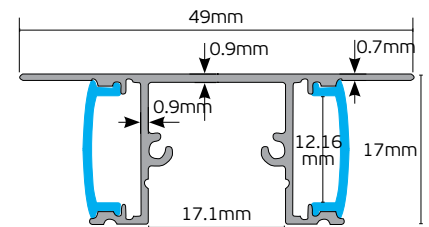



# Ledstrips Profiles Linear IP20

Ledstrips accessories

## Profile

### VK/16 Aluminium Profile Π wide





Code	Model	Box
75165-01724	VK/16/W/W/2 ○ White. Aluminium profile 2m with 2m white cover & end cups.	30pcs
75165-018724	VK/16/W/W/3 ○ White. Aluminium profile 3m with 3m white cover & end cups.	20pcs
75165-017724	VK/16/B/W/2 ● Black. Aluminium profile 2m with 2m white cover & end cups.	30pcs
75165-019724	VK/16/B/W/3 ● Black. Aluminium profile 3m with 3m white cover & end cups.	20pcs

#### Details

Charged per meter. Available 2m & 3m. Material Aluminium with cover & end cups.

### Accessories included

#### End cups & pc cover



### VK/17 Aluminium Profile recessed wide T





Code	Model	Box
75165-020724	VK/17/W/W/2 ○ White. Aluminium profile 2m with 2m white cover & end cups.	30pcs
75165-022724	VK/17/W/W/3 ○ White. Aluminium profile 3m with 3m white cover & end cups.	20pcs
75165-021724	VK/17/B/W/2 ● Black. Aluminium profile 2m with 2m white cover & end cups.	30pcs
75165-023724	VK/17/B/W/3 ● Black. Aluminium profile 3m with 3m white cover & end cups.	20pcs

#### Details

Charged per meter. Available 2m & 3m. Material Aluminium with cover & end cups.

### Accessories included

#### End cups & pc cover





## Accessories

### VK/PROF/SRK



Code  
75165-049724

Model  
**VK/PROF/SRK**  
Pendant suspension for profiles  
VK/11, VK/13, VK/14, VK/15, VK/16, VK/23.

Box  
1pc

Details  
Available **2 pcs.** Material **Aluminium.** IP20.

### VK/PROF/CON/I



Code  
75165-051724

Model  
**VK/PROF/CON/I**  
straight connector for aluminum profiles VK/13, VK/14,  
VK/15, VK/16, VK/20, VK/22, VK/23, VK/24.

Box  
1pc

Details  
Available **1 pc.** Material **Aluminium.** IP20.

### VK/PROF/CON/L



Code  
75165-052724

Model  
**VK/PROF/CON/L**  
horizontal corner joint for aluminum profiles  
VK/15, VK/16, VK/17, VK/20, VK/22, VK/23.

Box  
1pc

Details  
Available **1 pc.** Material **Aluminium.** IP20.

### VK/PROF/CON/L/3D



Code  
75165-053724

Model  
**VK/PROF/CON/L/3D**  
vertical corner joint for aluminum profiles  
VK/15, VK/16, VK/17, VK/20, VK/22, VK/23.

Box  
1pc

Details  
Available **1 pc.** Material **Aluminium.** IP20.

### VK/PROF/RES



Code  
75165-050724

Model  
**VK/PROF/RES**  
Recessed for profiles VK/17.

Box  
1pc

Details  
Available **2 pcs.** Material **Aluminium.**

# Ledstrips Profiles Linear IP20

Ledstrips accessories

## Profile

### VK/15 Aluminium Profile with place for driver, ceiling or pendant




Code	Model	Box
75165-012724	VK/15/W/W/2 ○ White. Aluminium profile 2m with 2m white cover, end cups & buckles.	15pcs
75165-014724	VK/15/W/W/3 ○ White. Aluminium profile 3m with 3m white cover, end cups & buckles.	10pcs
75165-013724	VK/15/B/W/2 ● Black. Aluminium profile 2m with 2m white cover, end cups & buckles.	15pcs
75165-015724	VK/15/B/W/3 ● Black. Aluminium profile 3m with 3m white cover, end cups & buckles.	10pcs

#### Details

Charged per meter. Available 2m & 3m. Material Aluminium with cover, end cups and buckles.

#### Accessories included

End cups, buckles & pc cover

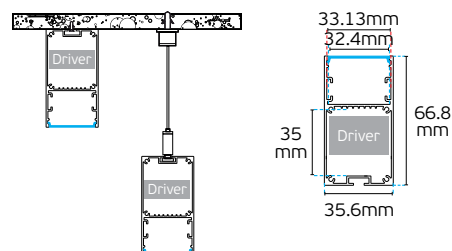

### VK/23 Aluminium Profile with place for driver, ceiling or pendant





Code	Model	Box
75165-038724	VK/23/W/W/2 ○ White. Aluminium profile 2m with 2m white cover, end cups & buckles.	10pcs
75165-040724	VK/23/W/W/3 ○ White. Aluminium profile 3m with 3m white cover, end cups & buckles.	8pcs
75165-039724	VK/23/B/W/2 ● Black. Aluminium profile 2m with 2m white cover, end cups & buckles.	10pcs
75165-041724	VK/23/B/W/3 ● Black. Aluminium profile 3m with 3m white cover, end cups & buckles.	8pcs

#### Details

Charged per meter. Available 2m & 3m. Material Aluminium with cover, end cups and buckles.

#### Accessories included

End cups, buckles & pc cover

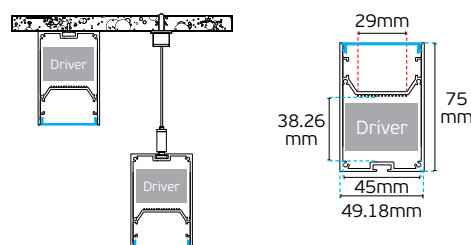



## Accessories

### VK/PROF/SRK



Code  
75165-049724

Model  
**VK/PROF/SRK**  
Pendant suspension for profiles  
VK/11, VK/13, VK/14, VK/15, VK/16, VK/23.

Box  
1pc

Details  
Available **2 pcs.** Material **Aluminium.** IP20.

### VK/PROF/CON/I



Code  
75165-051724

Model  
**VK/PROF/CON/I**  
Straight connector for aluminum profiles VK/13, VK/14,  
VK/15, VK/16, VK/20, VK/22, VK/23, VK/24.

Box  
1pc

Details  
Available **1 pc.** Material **Aluminium.** IP20.

### VK/PROF/CON/L



Code  
75165-052724

Model  
**VK/PROF/CON/L**  
Horizontal corner joint for aluminum profiles  
VK/15, VK/16, VK/17, VK/20, VK/22, VK/23.

Box  
1pc

Details  
Available **1 pc.** Material **Aluminium.** IP20.

### VK/PROF/CON/L/3D



Code  
75165-053724

Model  
**VK/PROF/CON/L/3D**  
Vertical corner joint for aluminum profiles  
VK/15, VK/16, VK/17, VK/20, VK/22, VK/23.

Box  
1pc

Details  
Available **1 pc.** Material **Aluminium.** IP20.

# Ledstrips Profiles Linear IP20

Ledstrips accessories

## Profile

### VK/11 Aluminium Profile with cover П



Code  
75165-008724

Model  
VK/11/AL/W/2  
● Aluminium profile 2m with 2m white cover,  
end cups & buckles.



Box  
50pcs

#### Details

Charged per meter. Available 2m. Material Aluminium with cover, end cups and buckles.

### Accessories included

#### End cups, buckles & pc cover



### VK/13 Aluminium Profile with cover П wide



Code  
75165-009724

Model  
VK/13/AL/W/2  
● Aluminium profile 2m with 2m white cover,  
end cups & buckles.



Box  
30pcs

#### Details

Charged per meter. Available 2m. Material Aluminium with cover, end cups and buckles.

### Accessories included

#### End cups, buckles & pc cover



### VK/14 Aluminium Profile with round cover



Code  
75165-010724

Model  
VK/14/AL/W/2  
● Aluminium profile 2m with 2m white cover & end cups.

Box  
20pcs

75165-011724

Model  
VK/14/AL/W/3  
● Aluminium profile 3m with 3m white cover & end cups.



10pcs

#### Details

Charged per meter. Available 2m & 3m. Material Aluminium with cover, end cups and suspension.

### Accessories included

#### End cups & pc cover





## Accessories

### VK/PROF/SRK



Code  
75165-049724

Model  
**VK/PROF/SRK**  
Pendant suspension for profiles  
VK/11, VK/13, VK/14, VK/15, VK/16, VK/23.

Box  
1pc

Details  
Available **2 pcs**. Material **Aluminium**. IP20.

### VK/PROF/CON/I



Code  
75165-051724

Model  
**VK/PROF/CON/I**  
Straight connector for aluminum profiles VK/13, VK/14,  
VK/15, VK/16, VK/20, VK/22, VK/23, VK/24.

Box  
1pc

Details  
Available **1 pc**. Material **Aluminium**. IP20.

# Ledstrips Profiles for Flooring IP65

Ledstrips accessories

## Profile

### VK/26 Aluminum profile for flooring T recessed




Code	Model	Box
75165-044724	VK/26/AL/W/2 ● Silver. Aluminium profile 2m with 2m white cover & silicon end cups.	50pcs
75165-045724	VK/26/W/W/2 ○ White. Aluminium profile 2m with 2m white cover & silicon end cups.	50pcs
75165-046724	VK/26/B/W/2 ● Black. Aluminium profile 2m with 2m white cover & silicon end cups.	50pcs

#### Details

Charged per meter. Available 2m. Material Aluminium with cover & silicon end cups.

### Accessories included

#### End cups & pc cover



### VK/27 Aluminum profile for flooring Π recessed




Code	Model	Box
75165-047724	VK/27/AL/W/2 ● Silver. Aluminium profile 2m with 2m white cover & silicon end cups.	13pcs
75165-048724	VK/27/B/W/2 ● Black. Aluminium profile 2m with 2m white cover & silicon end cups.	13pcs

#### Details

Charged per meter. Available 2m. Material Aluminium with cover, silicon end cups, waterproof screws.

### Accessories included

#### End cups & pc cover





# Ledstrips Profiles IP20


Ledstrips accessories



Greek production

## Profile

### VK/00 Aluminum profile

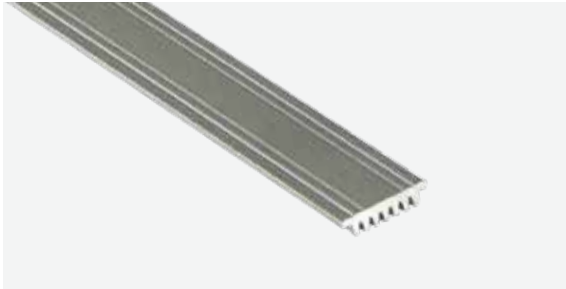

Code  
**75165-137264**


Model  
**VK/00/AL**

Box  
**100pcs**

● Silver. Aluminium profile 2m. 2.000x12x4mm

Details

Charged **per meter**. Available 2m. Material **Aluminium**.



### VK/00/33 Aluminum profile



Code  
**75165-334806**


Model  
**VK/00/33/AL**

Box  
**100pcs**

● Silver. Aluminium profile 2m. 2.000x12x3.3mm

Details

Charged **per meter**. Available 2m. Material **Aluminium**.



### VK/01/SLIM/AL Aluminum profile Π



Code  
**75165-162264**


Model  
**VK/01/SLIM/AL**

Box  
**100pcs**

● Silver. Aluminium profile 2m. 2.000x14x8mm

Details

Charged **per meter**. Available 2m. Material **Aluminium**.



### VK/01/DEEP/SLIM/AL Aluminum profile Π deep



Code  
**75165-215264**


Model  
**VK/01/DEEP/SLIM/AL**

Box  
**100pcs**

● Silver. Aluminium profile 2m. 2.000x13x16mm

Details

Charged **per meter**. Available 2m. Material **Aluminium**.



## Covers

### VK/K01/SLIM



Code  
75165-167264

Model  
VK/K01/SLIM/CL  
○ Clear. 2.000x12x2.5mm


Box  
100pcs

75165-168264

VK/K01/SLIM/W  
○ Frost. 2.000x12x2.5mm

100pcs

Details  
Suitable for: VK/01/SLIM/AL, VK/01/DEEP/SLIM/AL.  
Material Polycarbonate. Charged per meter. Available 2m.



# Ledstrips Profiles IP20

Ledstrips accessories

## Profile

### VK/01/AL Aluminum profile Π



Code  
75165-161264


Model  
VK/01/AL

Box  
100pcs


● Silver. Aluminium profile 2m. 2.000x17.4x9mm

Details

Charged per meter. Available 2m. Material Aluminium.



with VK/K01U  
(prismatic beam lens  
for better light angle)



### VK/02/AL Aluminum profile T recessed



Code  
75165-164264

Model  
VK/02/AL

Box  
100pcs

● Silver. Aluminium profile 2m. 2.000x28x9mm

75165-195264


VK/02/W

100pcs


○ White. Aluminium profile 2m. 2.000x28x9mm

Details

Charged per meter. Available 2m. Material Aluminium.



with VK/K01U  
(prismatic beam lens  
for better light angle)



### VK/12/AL Aluminum profile Π deep



Code  
75165-212264


Model  
VK/12/AL

Box  
100pcs

● Silver. Aluminium profile 2m. 2.000x17.4x12mm

Details

Charged per meter. Available 2m. Material Aluminium.



## Covers


### VK/K01



Code	Model	Box
75165-039264	VK/K01/CL ○ Clear. 2.000x16x4.5mm	100pcs
75165-062264	VK/K01/W ○ Frost. 2.000x16x4.5mm	100pcs
75165-295264	VK/K01/B ● Black. 2.000x16x4.5mm	100pcs

**Details**

Suitable for: VK/01/AL, VK/12/AL, VK/D1/AL, VK/03/SLIM/AL, VK/D2/AL, VK/02/AL.  
Material Polycarbonate. Charged per meter. Available 2m.




### VK/K01/NEON



Code	Model	Box
75165-241264	VK/K01/NEON ○ Frost. 2.000x17x14mm	100pcs

**Details**

Suitable for: VK/01/AL, VK/D1/AL, VK/03/SLIM/AL, VK/D2/AL, VK/02/AL.  
Material Polycarbonate. Charged per meter. Available 2m.




### VK/K01U (prismatic)



Code	Model	Box
75165-216264	VK/K01U/CL ○ Clear. 2.000x14x10mm	100pcs
75165-217264	VK/K01U/W ○ Frost. 2.000x14x10mm	100pcs

**Details**

Suitable for: VK/01/AL, VK/D1/AL, VK/03/SLIM/AL, VK/D2/AL, VK/02/AL.  
Material Polycarbonate. Charged per meter. Available 2m.



# Ledstrips Profiles IP20

Ledstrips accessories

## Profile

### VK/D1/AL Aluminum profile Π




Code  
75165-173264


Model  
VK/D1/AL  
● Silver. Aluminium profile 2m. 2.000x21x16mm

Box  
100pcs

Details  
Charged **per meter**. Available 2m. Material **Aluminium**.



with VK/KO1U  
(prismatic beam lens  
for beter light angle)



### VK/O3/SLIM/AL Aluminum profile corner




Code  
75165-166264


Model  
VK/O3/SLIM/AL  
● Silver. Aluminium profile 2m. 2.000x27.4x15mm

Box  
100pcs

Details  
Charged **per meter**. Available 2m. Material **Aluminium**.



with VK/KO1U  
(prismatic beam lens  
for beter light angle)



### VK/D2/AL Aluminum profile T recessed




Code  
75165-165264


Model  
VK/D2/AL  
● Silver. Aluminium profile 2m. 2.000x30x16mm

Box  
100pcs

Details  
Charged **per meter**. Available 2m. Material **Aluminium**.



with VK/KO1U  
(prismatic beam lens  
for beter light angle)



## Covers


### VK/K01



Code	Model	Box
75165-039264	VK/K01/CL ○ Clear. 2.000x16x4.5mm	100pcs
75165-062264	VK/K01/W ○ Frost. 2.000x16x4.5mm	100pcs
75165-295264	VK/K01/B ● Black. 2.000x16x4.5mm	100pcs

**Details**

Suitable for: VK/01/AL, VK/12/AL, VK/D1/AL, VK/03/SLIM/AL, VK/D2/AL, VK/02/AL, VK/01R/DEEP/TRIMLESS/AL. Material Polycarbonate. Charged per meter. Available 2m.




### VK/K01/NEON



Code	Model	Box
75165-241264	VK/K01/NEON ○ Frost. 2.000x17x14mm	100pcs

**Details**

Suitable for: VK/01/AL, VK/D1/AL, VK/03/SLIM/AL, VK/D2/AL, VK/02/AL. Material Polycarbonate. Charged per meter. Available 2m.





### VK/K01U (prismatic)



Code	Model	Box
75165-216264	VK/K01U/CL ○ Clear. 2.000x14x10mm	100pcs
75165-217264	VK/K01U/W ○ Frost. 2.000x14x10mm	100pcs

**Details**

Suitable for: VK/01/AL, VK/D1/AL, VK/03/SLIM/AL, VK/D2/AL, VK/02/AL. Material Polycarbonate. Charged per meter. Available 2m.

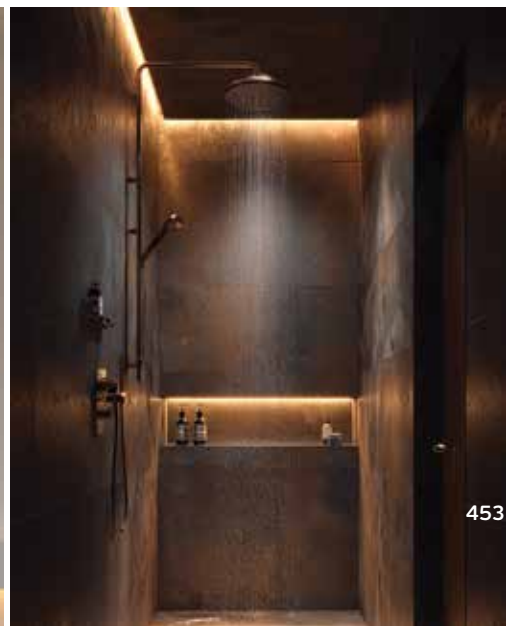

# Ledstrips Profiles IP20

Ledstrips accessories

## Profile



### VK/04R Aluminum profile T recessed wide



Code	Model	Box
75165-225264	VK/04R/AL ● Silver. Aluminium profile 2m. 2.000x45x13mm	100pcs
75165-236264	VK/04R/W ○ White. Aluminium profile 2m. 2.000x45x13mm	100pcs

#### Details

Charged **per meter**. Available 2m. Material **Aluminium**.

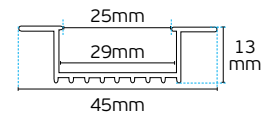


### VK/04 Aluminum profile Π wide



Code	Model	Box
75165-224264	VK/04/AL ● Silver. Aluminium profile 2m. 2.000x29x12mm	100pcs
75165-263264	VK/04/W ○ White. Aluminium profile 2m. 2.000x29x12mm	100pcs

#### Details

Charged **per meter**. Available 2m. Material **Aluminium**.




### VK/06 Aluminum profile corner



Code	Model	Box
75165-233264	VK/06/AL ● Silver. Aluminium profile 2m. 2.000x28x19.5mm	100pcs

#### Details

Charged **per meter**. Available 2m. Material **Aluminium**.



## Covers

### VK/K04



Code  
75165-229264

Model  
VK/K04/CL  
○ Clear. 2.000x25x5mm

Box  
100pcs

75165-223264


VK/K04/W  
○ Frost. 2.000x25x5mm

100pcs

#### Details

Suitable for: VK/04R/AL, VK/04/AL, VK/06/AL.

Material Polycarbonate. Charged per meter. Available 2m.



# Ledstrips Profiles Trimless IP20

Ledstrips accessories

## Profile

**VK/01R/DEEP/TRIMLESS/AL**

**Aluminum profile trimless T deep**



Code  
75165-247264

Model  
VK/01R/DEEP/TRIMLESS/AL  
● Silver. Aluminium profile 2m. 2.000x41.4x27.2mm

Box  
100pcs

Details

Charged **per meter**. Available 2m. Material **Aluminium**.

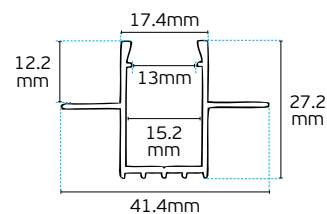

1 σειρά LEDSTRIP



**VK/07R/TRIMLESS/AL**

**Aluminum profile trimless T deep wide**



Code  
75165-246264

Model  
VK/07R/TRIMLESS/AL  
● Silver. Aluminium profile 2m. 2.000x57.8x27.2mm

Box  
100pcs

Details

Charged **per meter**. Available 2m. Material **Aluminium**.

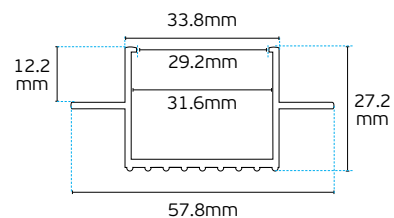

1 πλακέτα LED



2 σειρές LEDSTRIP



## Covers


### VK/K01



Code	Model	Box
75165-039264	VK/K01/CL ○ Clear. 2.000x16x4.5mm	100pcs
75165-062264	VK/K01/W ○ Frost. 2.000x16x4.5mm	100pcs
75165-295264	VK/K01/B ● Black. 2.000x16x4.5mm	100pcs

**Details**

Suitable for: VK/01/AL, VK/12/AL, VK/D1/AL, VK/03/SLIM/AL, VK/D2/AL, VK/02/AL, VK/01R/DEEP/TRIMLESS/AL. Material Polycarbonate. Charged per meter. Available 2m.




### VK/K07



Code	Model	Box
75165-242264	VK/K07/W ○ Frost. 2.000x36x3mm	100pcs

**Details**

Suitable for: VK/07R/TRIMLESS/AL. Material Polycarbonate. Charged per meter. Available 2m.





**Downlights, Darklights & Spotlights Led  
Collection**



Focused light, refined design.

This collection combines precision and style, delivering glare-free, high-performance illumination. Dark interiors and focused optics highlight spaces with clarity, creating subtle, modern elegance.

# Tubes & Squares Lights

## Kara



VK/04718/CE/W



VK/04718/CE/B




VK/04719/CE/W




VK/04719/CE/B

### VK/04718/CE, VK/04719/CE

Code	Model	Box
64174-257721	<b>VK/04718/CE/W/W</b> ○ Sand White. 3000K. 269lm. 5W. CRI>90.	30pcs
64174-258721	<b>VK/04718/CE/B/W</b> ● Sand Black. 3000K. 269lm. 5W. CRI>90.	30pcs
64174-259721	<b>VK/04719/CE/W/W</b> ○ Sand White. 3000K. 788lm. 12W. CRI>90.	20pcs
64174-260721	<b>VK/04719/CE/B/W</b> ● Sand Black. 3000K. 788lm. 12W. CRI>90.	20pcs



VK/04718/CE



VK/04719/CE

#### Details

Voltage **VK/04718/CE**: AC100-240V.  
DC6-10V 500mA  
Voltage **VK/04719/CE**: AC200-240V.  
DC25-42V 300mA.

Working temperature < 45°C.  
Lifetime 50.000hrs.  
Dimmable **NO**  
Material **Aluminium**.  
Adjustable **Yes**.

Type of chip **Bridgelux**.  
Beam angle 35°.

**3 years guarantee**



**IP20**

Kara



# Square Dark downlights Led

## Sero








VK/04618/W



VK/04618/2/B

### VK/04618, VK/04618/2

Code	Model	Box
64174-074776	new VK/04618/W/W/15 ○ White. 3000K. 217lm. 2W. 15° CRI>90	50pcs
64174-075776	new VK/04618/W/W/30 ○ White. 3000K. 217lm. 2W. 30° CRI>90	50pcs
64174-033776	VK/04618/B/W/15 ● Black. 3000K. 217lm. 2W. 15° CRI>90	50pcs
64174-034776	VK/04618/B/W/30 ● Black. 3000K. 217lm. 2W. 30° CRI>90	50pcs
64174-076776	new VK/04618/2/W/W/15 ○ White. 3000K. 434lm. 2x2W. 15° CRI>90	50pcs
64174-077776	new VK/04618/2/W/W/30 ○ White. 3000K. 434lm. 2x2W. 30° CRI>90	50pcs
64174-035776	VK/04618/2/B/W/15 ● Black. 3000K. 434lm. 2x2W. 15° CRI>90	50pcs
64174-036776	VK/04618/2/B/W/30 ● Black. 3000K. 434lm. 2x2W. 30° CRI>90	50pcs



#### Details

Voltage 220-240V.  
Material Aluminium,  
PMMA lens.  
Beam Angle 15°, 30°.

Type of Led Bridgelux SMD 3535.  
Lifetime 50.000 hrs.  
Working temperature < 45°C.  
Dimmable No. Flicker free.

**5 years guarantee**




**IP20.**

Sero



# Square Dark downlights Led

Sero

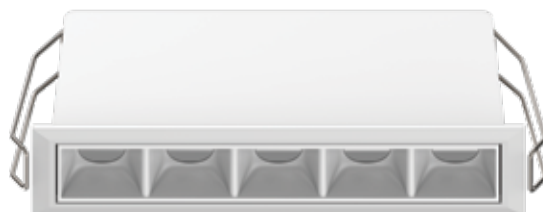




VK/04618/5/W



VK/04618/5/B

## VK/04618/5

Code	Model	Box
64174-078776 new	VK/04618/5/W/W/15 ○ White. 3000K. 1.085lm. 5x2W. 15° CRI>90	42pcs
64174-079776 new	VK/04618/5/W/W/30 ○ White. 3000K. 1.085lm. 5x2W. 30° CRI>90	42pcs
64174-037776	VK/04618/5/B/W/15 ● Black. 3000K. 1.085lm. 5x2W. 15° CRI>90	42pcs
64174-038776	VK/04618/5/B/W/30 ● Black. 3000K. 1.085lm. 5x2W. 30° CRI>90	42pcs



### Details

Voltage 220-240V.  
Material Aluminium,  
PMMA lens.  
Beam Angle 15°, 30°.

Type of Led Bridgelux SMD 3535.  
Lifetime 50.000 hrs.  
Working temperature < 45°C.  
Dimmable No. Flicker free.

**5 years guarantee**



**IP20.**

# Square Dark downlights Led

Sero






VK/04618/10/W



VK/04618/10/B

## VK/04618/10

Code	Model	Box
64174-080776 new	VK/04618/10/W/W/15 ○ White. 3000K. 2.170lm. 10x2W. 15° CRI>90	21pcs
64174-081776 new	VK/04618/10/W/W/30 ○ White. 3000K. 2.170lm. 10x2W. 30° CRI>90	21pcs
64174-039776	VK/04618/10/B/W/15 ● Black. 3000K. 2.170lm. 10x2W. 15° CRI>90	21pcs
64174-040776	VK/04618/10/B/W/30 ● Black. 3000K. 2.170lm. 10x2W. 30° CRI>90	21pcs



### Details

Voltage 220-240V.  
Material Aluminium,  
PMMA lens.  
Beam Angle 15°, 30°.

Type of Led Bridgelux SMD 3535.  
Lifetime 50.000 hrs.  
Working temperature < 45°C.  
Dimmable No. Flicker free.


**5 years guarantee**



**IP20.**

# Square Dark downlights Led

Sero

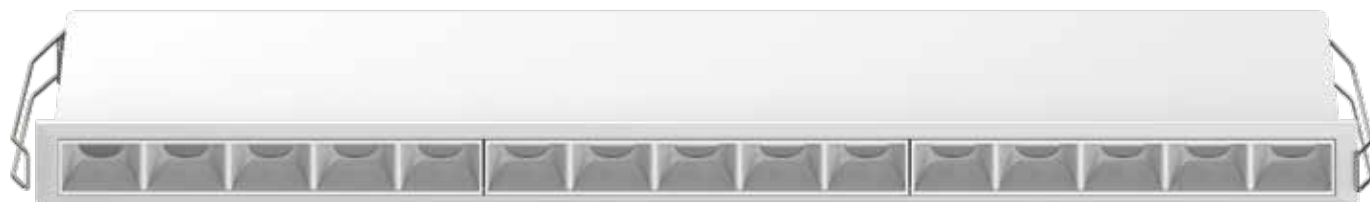



VK/04618/15/W



VK/04618/15/B

## VK/04618/15

Code	Model	Box
64174-082776 new	VK/04618/15/W/W/15 ○ White. 3000K. 3.255lm. 15x2W. 15° CRI>90	15pcs
64174-083776 new	VK/04618/15/W/W/30 ○ White. 3000K. 3.255lm. 15x2W. 30° CRI>90	15pcs
64174-041776	VK/04618/15/B/W/15 ● Black. 3000K. 3.255lm. 15x2W. 15° CRI>90	15pcs
64174-042776	VK/04618/15/B/W/30 ● Black. 3000K. 3.255lm. 15x2W. 30° CRI>90	15pcs



### Details

Voltage 220-240V.  
Material Aluminium,  
PMMA lens.  
Beam Angle 15°, 30°.


Type of Led **Bridgelux SMD 3535**.  
Lifetime **50.000 hrs**.  
Working temperature < 45°C.  
Dimmable **No**. Flicker **free**.

**5 years guarantee**



**IP20.**

Sero

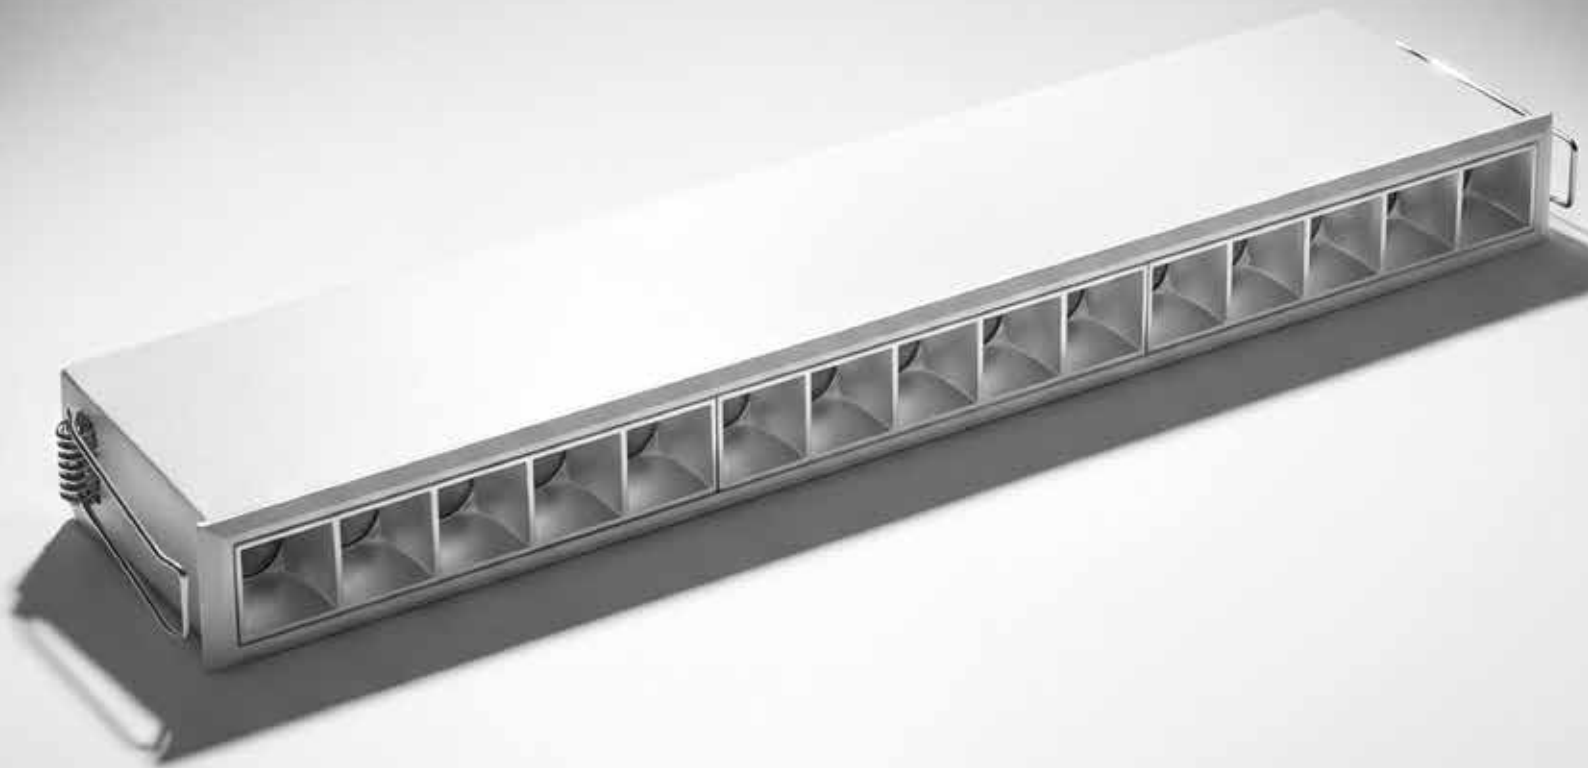

# Recessed Dark downlights Led




Oro



VK/04146/W



VK/04222/B

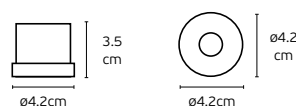

## VK/04146, VK/04222

Code	Model	Box
64171-058738	VK/04146/W/W ○ White. 3000K. 160lm. 3W. 15°. CRI>80	200pcs
64171-057738	VK/04146/B/W ● Black. 3000K. 160lm. 3W. 15°. CRI>80	200pcs
64174-038721	VK/04222/W/W ○ White matt. 3000K. 241lm. 2W. 25°. CRI>90	50pcs
64174-256721 new	VK/04222/B/W ● Black matt. 3000K. 241lm. 2W. 25°. CRI>90	50pcs

### Details

VK/04146: AC 220-240V  
Driver 350mA (Included).  
VK/04222: 100-240V  
driver (included)  
Type of Led CREE.

Lifetime 17.500hrs, 30.000hrs.  
Clicks 15.000, 20.000.  
Working temperature -25°C ~ 40°C.  
Material Aluminium.  
Guarantee 2 years, 3 years (VK/04222/W/W).



Oro



# Recessed Wallwasher downlight Led

Cut










VK/04720/W

VK/04720/B

VK/04721/W

VK/04721/B



## VK/04720, VK/04721

Code	Model	Box
64174-261721	VK/04720/W/W ○ Sand White. 3000K. 520lm. 12W. CRI>90	20pcs
64174-262721	VK/04720/W/C ○ Sand White. 4000K. 552lm. 12W. CRI>90	20pcs
64174-263721	VK/04720/B/W ● Sand Black. 3000K. 520lm. 12W. CRI>90	20pcs
64174-264721	VK/04720/B/C ● Sand Black. 4000K. 552lm. 12W. CRI>90	20pcs
64174-265721	VK/04721/W/W ○ Sand White. 3000K. 666lm. 18W. CRI>90	20pcs
64174-266721	VK/04721/W/C ○ Sand White. 4000K. 761lm. 18W. CRI>90	20pcs
64174-267721	VK/04721/B/W ● Sand Black. 3000K. 666lm. 18W. CRI>90	20pcs
64174-268721	VK/04721/B/C ● Sand Black. 4000K. 761lm. 18W. CRI>90	20pcs

### Details

Voltage VK/04720:  
AC200-240V. DC25-40V  
300mA.  
VK/04721:  
AC200-240V. DC25-40V  
450mA.

Type of chip **Bridgelux**.  
Beam angle 30°x50°.  
Working temperature < 45°C.  
Lifetime 50.000hrs.  
Dimmable **NO**  
Material Aluminium.

**3 years guarantee**



**IP20.**

Cut



# Recessed waterproof downlight Led





Cut



VK/04722/W



VK/04722/B



## VK/04722


Code	Model	Box
75169-205721	VK/04722/W/W ○ Sand White. 3000K. 476lm. 10W. CRI>90	30pcs
75169-206721	VK/04722/W/C ○ Sand White. 4000K. 535lm. 10W. CRI>90	30pcs
75169-207721	VK/04722/B/W ● Sand Black. 3000K. 476lm. 10W. CRI>90	30pcs
75169-208721	VK/04722/B/C ● Sand Black. 4000K. 535lm. 10W. CRI>90	30pcs

### Details

Voltage **AC200-240V**  
**DC25-40V 250mA.**  
 Type of Led **Bridgelux.**  
 Lifetime **50.000hrs.**  
 Beam angle **24°.**

**Dimmable No.**  
 Working temperature **-20°C→45°C.**  
 Material **Aluminum.**  
 Location **Bath ceiling.**  
 Included **Honeycomb.**

**3 years guarantee**




**IP65**

Cut



# Recessed Spots MR16 IP44

Roy


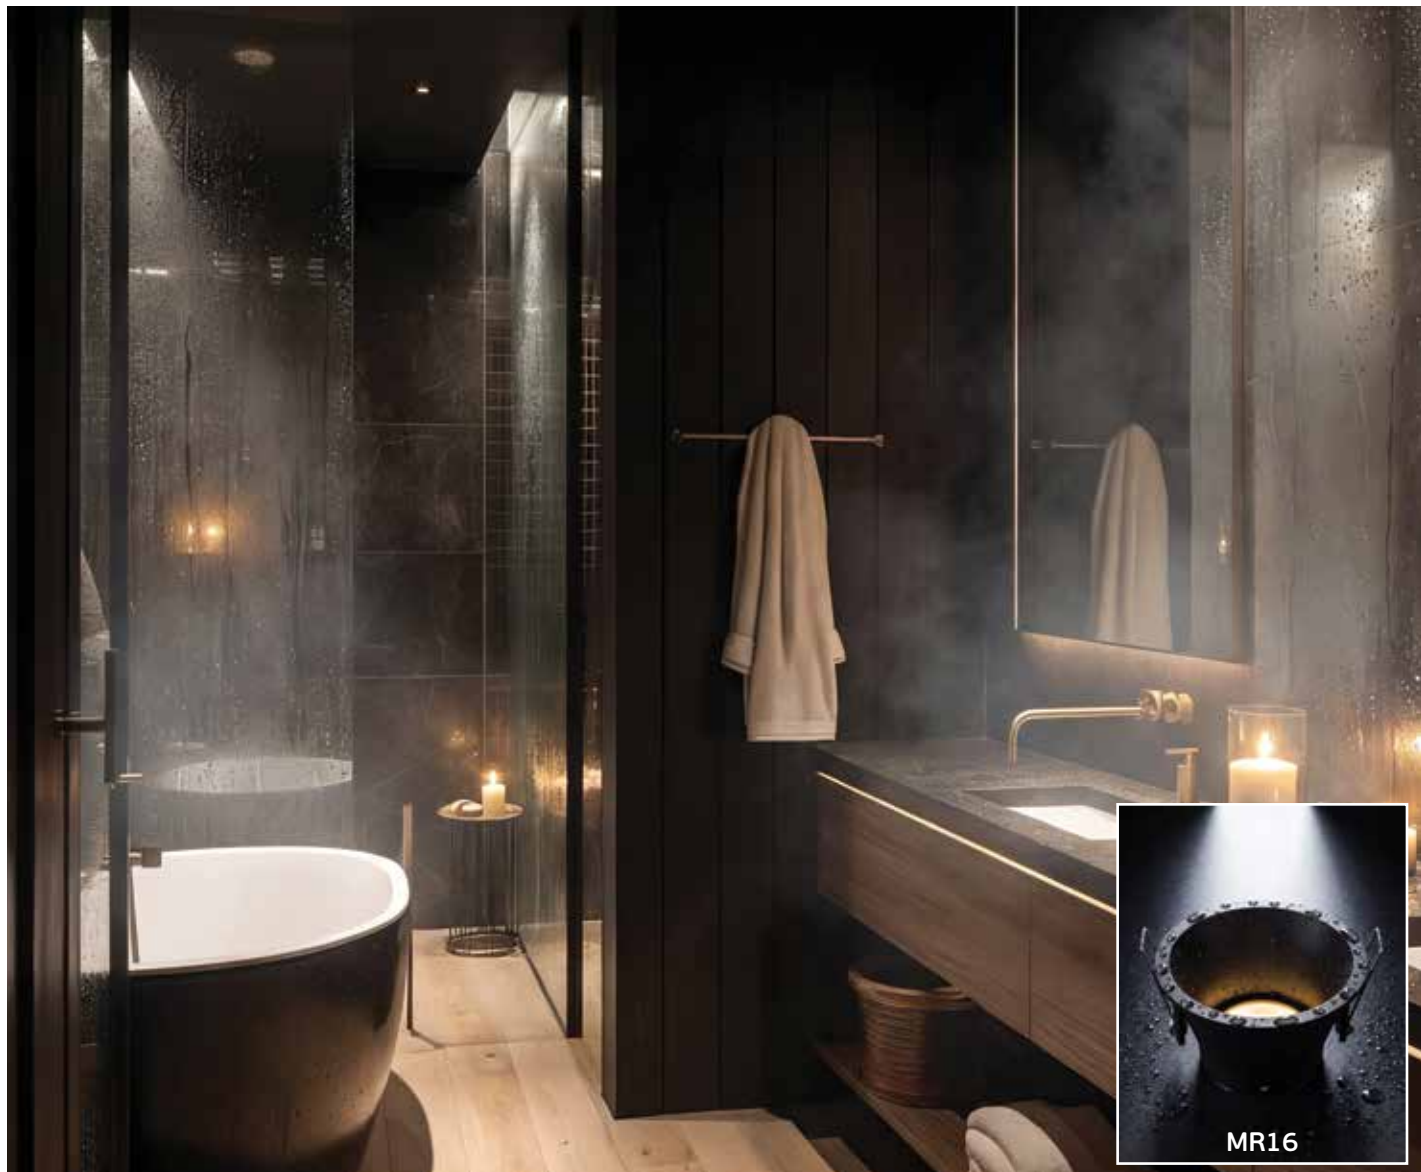


## VK/03341

Code  
64173-135121

Model  
**VK/03341/W**  
○ White. GU5.3. Fixed.


Box  
100pcs



64173-138121

**VK/03341/B**  
● Black. GU5.3. Fixed.

100pcs



### Details

Included lampholder GU5.3.  
Match also with: lamps GU5.3/50,

Par16 (max 12W LED). Modules 50.  
Material Die cast aluminium, clear glass.



# Recessed Spots MR11 IP65

Irma



MR11



**VK/03332**

Code  
64173-132121


Model  
**VK/03332/W**  
○ White. GU5.3/MR11. Fixed.

Box  
100pcs

64173-133121

**VK/03332/B**  
● Black. GU5.3/MR11. Fixed.

100pcs

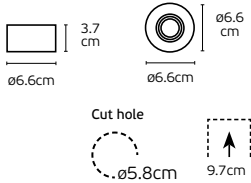

Details

Included lampholder GU5.3.  
Match also with: lamps MR11 (max 6W LED).

Modules 35.  
Material Die cast aluminium.



# Recessed Trimless Spots for GU10/PAR16

## Hudi





VK/03371/B



VK/03371/W

### VK/03371

Code <b>64173-139121</b>	Model <b>VK/03371/W</b> ○ White. GU10. Fixed.	Box <b>100pcs</b>
<b>64173-140121</b>	<b>VK/03371/B</b> ● Black. GU10. Fixed.	<b>100pcs</b>



### Details

Included lampholder GU10.  
Match also with: lamps GU10/50,

Par16 (max 12W LED). Modules 50.  
Material Aluminium.



# Recessed Gypsum Spots for GU10/PAR16



## **VK/09075/R**


Code  
**64174-355131**

Model  
**VK/09075/R**  
○ White. GU10. Fixed.


Box  
**24pcs**

### Details

Included lampholder GU10. Match also with: lamps GU10/50, Par16 (max 12W LED).  
Modules 50. Material Gypsum. Possibility to paint.



**IP20.**




# Recessed Spots for GU10/PAR16

Eve



## VK/03009G

Code	Model	Box
64173-023121	VK/03009G/W ○ White. GU10. Fixed.	100pcs
64173-025121	VK/03009G/C ● Chrome. GU10. Fixed.	100pcs
64173-024121	VK/03009G/MC ● Brushed Chrome. GU10. Fixed.	100pcs
64173-049121	VK/03009G/B ● Black. GU10. Fixed.	100pcs
64173-137121	new VK/03009G/GD ● Gold. GU10. Fixed.	100pcs

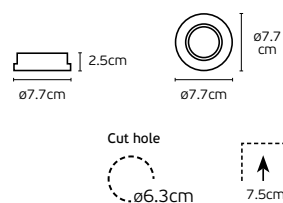

### Details

Included lampholder GU10.  
Match also with: lamps GU10/50,

Par16 (max 12W LED). Modules 50.  
Material Die cast aluminium.



Eve



# Tubes & Squares Lights

Emi



VK/03302G/CE/W




VK/03302G/CE/B



VK/03302G/CE/G

## VK/03302G/CE


Code	Model	Box
64174-970121	VK/03302G/CE/W ○ White. GU10. Adjustable.	1pc
64174-971121	VK/03302G/CE/B ● Black. GU10. Adjustable.	1pc
64174-975121 new	VK/03302G/CE/G ● Grey. GU10. Adjustable.	1pc

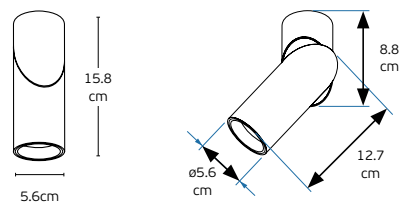

### Details

Included lampholder GU10.  
Match also with: lamps GU10/50, Par16 (max 12W LED).

Material Pure aluminium



Emi



# Tubes & Squares Lights

Keed




VK/03006/G



## VK/03006

Code	Model	Box
75169-192108	<b>VK/03006/W</b> ○ White. GU10. Adjustable.	20pcs
75169-208108	<b>VK/03006/B</b> ● Black. GU10. Adjustable.	20pcs
75169-207108	<b>VK/03006/AL</b> ● Aluminium. GU10. Adjustable.	20pcs
75169-296108	<b>VK/03006/G</b> ● Dark Grey. GU10. Adjustable.	20pcs

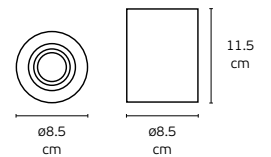

### Details

Included lampholder GU10.  
Match also with: lamps GU10/50, Par16 (max 12W LED).

Working temperature -20°C ~ 40°C.  
Material **Aluminium**.



**IP20**

## Heep



VK/03139CE/G





VK/03139/R/G



### VK/03139/CE, VK/03139/R

Code	Model	Box
75169-381121	<b>VK/03139/CE/W</b> ○ White. GU10. Fixed.	<b>60pcs</b>
75169-382121	<b>VK/03139/CE/B</b> ● Black. GU10. Fixed.	<b>60pcs</b>
75169-391121    new	<b>VK/03139/CE/G</b> ● Light Grey. GU10. Fixed.	<b>60pcs</b>
75169-383121	<b>VK/03139/R/G</b> ● Gold ring. Can be used to VK/03139CE.	<b>200pcs</b>



#### Details

Included lampholder GU10.  
Match also with: lamps GU10/50, Par16 (max 12W LED).

Working temperature -20°C ~ 40°C.  
Material Aluminium.



**IP20**

# Eiva



Review the whole range of Eiva magnetic track in  
TECHNICAL CATALOGUE 2025 page 424

# Eiva

LED Magnetic  
Track Lights  
48V. Slim. Dali.

# Led Magnetic Track Lights 48V CRI>90. Slim. DALI.

## Eiva



VK/04604/TR/DA/TB-B





VK/04605/TR/DA/W-B



VK/04604/TR/DA/B-B/W

### VK/04604/TR/DA, VK/04605/TR/DA

Code	Model	Box
71164-071776	VK/04604/TR/DA/TB-B/W ● Titanium bronze+black. 3000K. 711lm. 7W.  CRI>90	20pcs
71164-072776	VK/04604/TR/DA/W-B/W ○ White+black. 3000K. 711lm. 7W.  CRI>90	20pcs
71164-102776 new	VK/04604/TR/DA/B-B/W ● Black+black. 3000K. 711lm. 7W.  CRI>90	20pcs
71164-073776	VK/04605/TR/DA/TB-B/W ● Titanium bronze+black. 3000K. 1.524lm. 15W.  CRI>90	20pcs
71164-074776	VK/04605/TR/DA/W-B/W ○ White+black. 3000K. 1.524lm. 15W.  CRI>90	20pcs
71164-103776 new	VK/04605/TR/DA/B-B/W ● Black+black. 3000K. 1.524lm. 15W.  CRI>90	20pcs



#### Details

Led magnetic track light DC driver 48V (included).  
Dimmable Dali Driver DT6  
Beam Angle 24°

Type of Led Bridgelux COB V6HD  
Lifetime 50.000 hrs  
Working temperature < 45°C  
Material Aluminium, PC lens.

5 years guarantee



IP20.

# Led Track Light CCT+Multi watt (16-22 watt)

Mob



VK/04682/TR/B/36/CCT




Kelvin Switch

VK/04682/TR/W/36/CCT

## VK/04682/TR/.../36/CCT

Code	Model	Box
64174-299128	<b>VK/04682/TR/W/36/CCT</b> ○ White. 3000K+4000K+5000K. 2.037lm & 2.287lm & 2.480lm. (light source 3.024lm & 3.456lm & 3.348lm) 16W & 18W & 20W & 22W.	30pcs
64174-300128	<b>VK/04682/TR/B/36/CCT</b> ● Black. 3000K+4000K+5000K. 2.037lm & 2.287lm & 2.480lm. (light source 3.024lm & 3.456lm & 3.348lm) 16W & 18W & 20W & 22W.	30pcs



### Details

Voltage **220-240V**.  
Output voltage **DC24-42V**.  
Type of chip **Bridgelux**.  
Beam angle **36°**.  
Clicks **25.000**.  
Working temperature **-20°C → 45°C**.

Lifetime **50.000hrs**.  
Dimmable **NO**.  
CRI **CRI>90**.  
Material **Die-casting aluminium**.  
Adapter **KGP 4-wires**.

**5 years guarantee**




Adjustable

**IP20**

# Led Track Light CCT+Multi watt (30-36 watt)

Mob

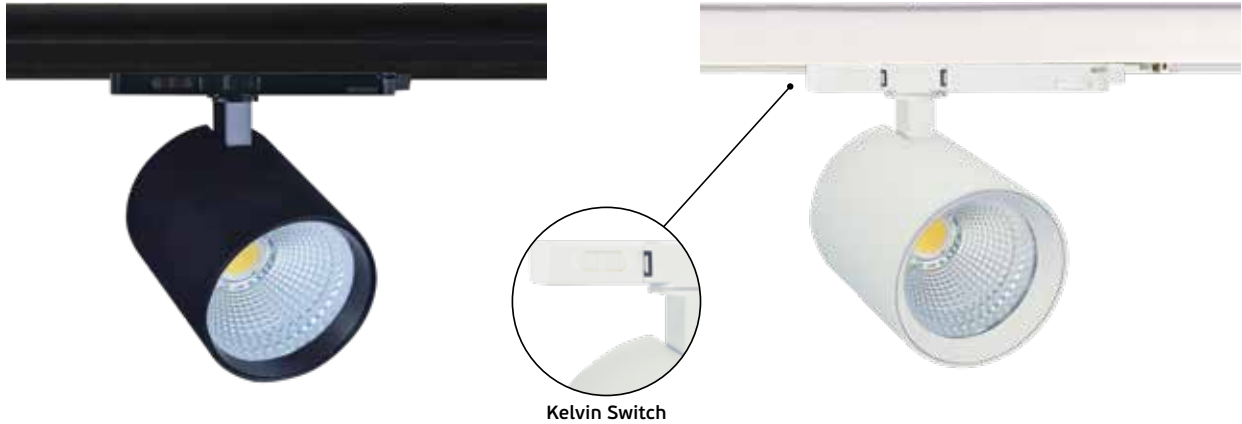


VK/04683/TR/B/36/CCT

VK/04683/TR/W/36/CCT

## VK/04683/TR/.../36/CCT

Code	Model	Box
64174-301128	<b>VK/04683/TR/W/36/CCT</b> ○ White. 3000K+4000K+5000K. 3.556lm & 3.951lm & 3.882lm. (light source 5.040lm & 5.760lm & 5.580lm) 30W & 32W & 34W & 36W.	15pcs
64174-302128	<b>VK/04683/TR/B/36/CCT</b> ● Black. 3000K+4000K+5000K. 3.556lm & 3.951lm & 3.882lm. (light source 5.040lm & 5.760lm & 5.580lm) 30W & 32W & 34W & 36W.	15pcs



### Details

Voltage **220-240V**.  
Output voltage **DC24-42V**.  
Type of chip **Bridgelux**.  
Beam angle **36°**.  
Clicks **25.000**.  
Working temperature **-20°C → 45°C**.

Lifetime **50.000hrs**.  
Dimmable **NO**.  
CRI **CRI>90**.  
Material **Die-casting aluminium**.  
Adapter **KGP 4-wires**.

**5 years guarantee**



**IP20**

# Led Track Light CCT+Multi watt (16-22 watt)

Mob



VK/04680/TR/B/36/CCT




Kelvin Switch

VK/04680/TR/W/36/CCT

## VK/04680/TR/.../36/CCT

Code 64174-287128	Model <b>VK/04680/TR/W/36/CCT</b> ○ White. 3000K+4000K+5000K. 2.037lm & 2.287lm & 2.480lm. (light source 3.024lm & 3.456lm & 3.348lm) 16W & 18W & 20W & 22W.	Box 20pcs
64174-288128	<b>VK/04680/TR/B/36/CCT</b> ● Black. 3000K+4000K+5000K. 2.037lm & 2.287lm & 2.480lm. (light source 3.024lm & 3.456lm & 3.348lm) 16W & 18W & 20W & 22W.	20pcs



### Details

Voltage **220-240V**.  
Output voltage **DC24-42V**.  
Type of chip **Bridgelux**.  
Beam angle **36°**.  
Clicks **25.000**.  
Working temperature **-20°C → 45°C**.

Lifetime **50.000hrs**.  
Dimmable **NO**.  
CRI **CRI>90**.  
Material **Die-casting aluminium**.  
Adapter **KGP 4-wires**.

**5 years guarantee**



**IP20**

## VK/04680/REF


Code 64174-291128	Model <b>VK/04680/REF/24</b> ● Silver. Metal. Reflector 24°.	Box 1pc
64174-292128	<b>VK/04680/REF/60</b> ● Silver. Metal. Reflector 60°.	1pc



VK/04680/REF/24

### Details

Can be used to **VK/04680/TR**. Material **Metal**.



# Led Track Light CCT+Multi watt (30-36 watt)

Mob




VK/04681/TR/B/36/CCT



VK/04681/TR/W/36/CCT

## VK/04681/TR/.../36/CCT

Code	Model	Box
64174-293128	<b>VK/04681/TR/W/36/CCT</b> ○ White. 3000K+4000K+5000K. 3.754lm & 4.223lm & 4.188lm. (light source 5.040lm & 5.760lm & 5.580lm) 30W & 32W & 34W & 36W.	15pcs
64174-294128	<b>VK/04681/TR/B/36/CCT</b> ● Black. 3000K+4000K+5000K. 3.754lm & 4.223lm & 4.188lm. (light source 5.040lm & 5.760lm & 5.580lm) 30W & 32W & 34W & 36W.	15pcs



### Details

Voltage **220-240V**.  
Output voltage **DC24-42V**.  
Type of chip **Bridgelux**.  
Beam angle **36°**.  
Clicks **25.000**.  
Working temperature **-20°C → 45°C**.

Lifetime **50.000hrs**.  
Dimmable **NO**.  
CRI **CRI>90**.  
Material **Die-casting aluminium**.  
Adapter **KGP 4-wires**.

**5 years guarantee**



**IP20**

## VK/04681/REF




VK/04681/REF/60

Code	Model	Box
64174-297128	<b>VK/04681/REF/24</b> ● Silver. Metal. Reflector 24°.	1pc
64174-298128	<b>VK/04681/REF/60</b> ● Silver. Metal. Reflector 60°.	1pc

### Details

Can be used to **VK/04681/TR**. Material **Metal**.

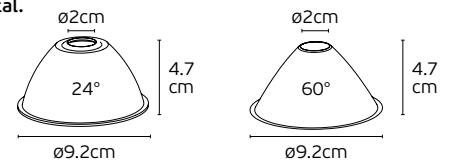


# Led Track Light CCT+Multi watt (30-36 watt)

Mob



VK/04684/TR/B/55/CCT




Kelvin Switch

VK/04684/TR/W/55/CCT

## VK/04684/TR/.../55/CCT


Code	Model	Box
64174-303128	<b>VK/04684/TR/W/55/CCT</b> ○ White. 3000K+4000K+5000K. 3.779lm & 4.285lm & 4.231lm. (light source 5.040lm & 5.760lm & 5.580lm) 30W & 32W & 34W & 36W.	30pcs
64174-304128	<b>VK/04684/TR/B/55/CCT</b> ● Black. 3000K+4000K+5000K. 3.779lm & 4.285lm & 4.231lm. (light source 5.040lm & 5.760lm & 5.580lm) 30W & 32W & 34W & 36W.	30pcs



### Details

Voltage **220-240V**.  
Output voltage **DC24-42V**.  
Type of chip **Bridgelux**.  
Beam angle **75°55°**.  
Clicks **25.000**.  
Working temperature **-20°C → 45°C**.

Lifetime **50.000hrs**.  
Dimmable **NO**.  
CRI **CRI>90**.  
Material **Die-casting aluminium**.  
Adapter **KGP 4-wires**.

 **5 years guarantee**



**IP20**



# 3 phase Track Light (41 watt)

Nori




VK/04674/TR/B/36



VK/04674/TR/W/36

## VK/04674/TR

Code	Model	Box
64174-938739	<b>VK/04674/TR/W/36/930</b> ○ White. 3000K. 5.240lm. (light source 7.600lm) 41W.	10pcs
64174-940739	<b>VK/04674/TR/W/36/940</b> ○ White. 4000K. 5.397lm. (light source 7.800lm) 41W.	10pcs
64174-939739	<b>VK/04674/TR/B/36/930</b> ● Black. 3000K. 5.240lm. (light source 7.600lm) 41W.	10pcs
64174-941739	<b>VK/04674/TR/B/36/940</b> ● Black. 4000K. 5.397lm. (light source 7.800lm) 41W.	10pcs



### Details

Voltage **220-240V**.  
Type of LED **COB Bridgelux high lumen**.  
Beam angle **36°**.  
Clicks **15.000**.  
Working temperature **-30°C → 40°C**.

Lifetime **50.000hrs**.  
Dimmable **NO**.  
CRI **CRI>90**.  
Material **High Pure aluminium**.  
3-phase adapter **Eaglerise 4-wires**.

**5 years guarantee**



**IP20**



## VK/04674/REF/16

Code	Model	Box
64174-946739	<b>VK/04674/REF/16</b> ● Silver. Metal. Reflector 16°.	1pc



### Details

Can be used to **VK/04674/TR**. Material **Metal**.





# Led Track Light Tunable white. 22 watt



Mob




VK/04680/TR/B/36/CCT/DALI



VK/04680/TR/W/36/CCT/DALI

## VK/04680/TR/.../36/CCT/DALI

Code	Model	Box
64174-289128	<b>VK/04680/TR/W/36/CCT/DALI</b> ○ White. 3000K-5000K tunable. 0-2.480lm. (light source 3.024lm-3.456lm). 22W.	15pcs
64174-290128	<b>VK/04680/TR/B/36/CCT/DALI</b> ● Black. 3000K-5000K tunable. 0-2.480lm. (light source 3.024lm-3.456lm). 22W.	15pcs



### Details

Voltage **220-240V**.  
Output voltage **DC10-42V**.  
Type of chip **Bridgelux**.  
Beam angle **36°**.  
Clicks **25.000**.  
Working temperature **-20°C → 45°C**.

Lifetime **50.000hrs**.  
Dimmable **DALI, 300mA-600mA dimming**  
CRI **CRI>90**  
Material **Die-casting aluminium**.  
Adapter **KGP 6-wires**.

**5 years guarantee**



**IP20**

# Led Track Light Tunable white. 37 watt



Mob




VK/04681/TR/B/36/CCT/DALI



VK/04681/TR/W/36/CCT/DALI

## VK/04681/TR/.../36/CCT/DALI

Code	Model	Box
64174-295128	<b>VK/04681/TR/W/36/CCT/DALI</b> ○ White. 3000K-5000K tunable. 0- 4.223lm. (light source 5.040lm-5.760lm). 37W.	15pcs
64174-296128	<b>VK/04681/TR/B/36/CCT/DALI</b> ● Black. 3000K-5000K tunable. 0- 4.223lm. (light source 5.040lm-5.760lm). 37W.	15pcs



### Details

Voltage 220-240V.  
Output voltage DC10-42V.  
Type of chip Bridgelux.  
Beam angle 36°.  
Clicks 25.000.  
Working temperature -20°C → 45°C.

Lifetime 50.000hrs.  
Dimmable DALI, 300mA-1050mA dimming  
CRI CRI>90  
Material Die-casting aluminium.  
Adapter KGP 6-wires.

**5 years guarantee**



**IP20**

# 3 phase Track Light



Nori




VK/04674/TR/DA/B/36



VK/04674/TR/DA/W/36

## VK/04674/TR/DA

Code	Model	Box
64174-942739	<b>VK/04674/TR/DA/W/36/930</b> ○ White. 3000K. 5.120lm. (light source 7.600lm) 40.5W.	10pcs
64174-944739	<b>VK/04674/TR/DA/W/36/940</b> ○ White. 4000K. 5.420lm. (light source 7.800lm) 41.5W.	10pcs
64174-943739	<b>VK/04674/TR/DA/B/36/930</b> ● Black. 3000K. 5.120lm. (light source 7.600lm) 40.5W.	10pcs
64174-945739	<b>VK/04674/TR/DA/B/36/940</b> ● Black. 4000K. 5.420lm. (light source 7.800lm) 41.5W.	10pcs



### Details

Voltage **220-240V**.  
Type of LED **COB Bridgelux high lumen**.  
Beam angle **36°**.  
Clicks **15.000**.  
Working temperature **-30°C → 40°C**.

Lifetime **50.000hrs**.  
Dimmable **Yes** .  
CRI **CRI>90**  
Material **High Pure aluminium**.  
3-phase adapter **Eaglerise 6-wires**.

**5 years guarantee**



**IP20**

## VK/04674/REF/24

Code  
64174-947739


Model  
**VK/04674/REF/24**  
● Silver. Metal. Reflector 24°.

Box  
1pc



### Details

Can be used to **VK/04674/TR**. Material **Metal**.






# Panel Surface CCT LED

## Wabi



VK/04556/W

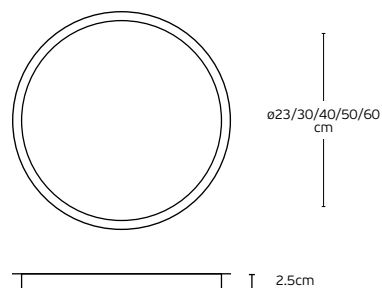

## Superslim 2.5cm

### VK/04556, VK/04557, VK/04558, VK/04559, VK/04560

Code	Model	Box
64175-510727	VK/04556/W/CCT ○ White. 3000K, 4000K or 6000K. 18W. 1800lm. CRI>80. ø23cm	20pcs
64175-511727	VK/04556/B/CCT ● Black. 3000K, 4000K or 6000K. 18W. 1800lm. CRI>80. ø23cm	20pcs
64175-512727	VK/04557/W/CCT ○ White. 3000K, 4000K or 6000K. 24W. 2400lm. CRI>80. ø30cm	10pcs
64175-513727	VK/04557/B/CCT ● Black. 3000K, 4000K or 6000K. 24W. 2400lm. CRI>80. ø30cm	10pcs
64175-514727	VK/04558/W/CCT ○ White. 3000K, 4000K or 6000K. 30W. 3000lm. CRI>80. ø40cm	10pcs
64175-515727	VK/04558/B/CCT ● Black. 3000K, 4000K or 6000K. 30W. 3000lm. CRI>80. ø40cm	10pcs
64175-516727	VK/04559/W/CCT ○ White. 3000K, 4000K or 6000K. 36W. 3600lm. CRI>80. ø50cm	5pcs
64175-517727	VK/04559/B/CCT ● Black. 3000K, 4000K or 6000K. 36W. 3600lm. CRI>80. ø50cm	5pcs
64175-518727	VK/04560/W/CCT ○ White. 3000K, 4000K or 6000K. 42W. 4200lm. CRI>80. ø60cm	5pcs
64175-519727	VK/04560/B/CCT ● Black. 3000K, 4000K or 6000K. 42W. 4200lm. CRI>80. ø60cm	5pcs



3000K      4000K      6000K



### Details

Material **ABS+PS**  
 Type of Led **SMD 2835**  
 Voltage **AC220-240V**  
 Location **Ceiling**  
 Color led choice **3000K, 4000K, 6000K (CCT)**

**Flicker free**  
 Beam angle **120°**  
 Working temperature **-25°C - 45°C**  
 Lifetime **30.000hrs**  
 Dimmable **No**

**3 years guarantee**



**IP40**




### VK/PANEL/.../SRK

Code <b>64173-108123</b>	<b>new</b>	Model <b>VK/PANEL/B/SRK/1.5</b> ● 1.5m <b>black</b> hanging set for ceiling panel lights.	Box <b>1pc</b>
Code <b>64173-109123</b>	<b>new</b>	Model <b>VK/PANEL/W/SRK/1.5</b> ○ 1.5m <b>white</b> hanging set for ceiling panel lights.	Box <b>1pc</b>

#### Details

1.5m hanging set for ceiling panel lights. Material Steel, Aluminium.

**IP20**



# Slim Panel CCT LED

## VK/04072/CCT, VK/04073/CCT, VK/04048/CCT, VK/04074/CCT, VK/04049/CCT, VK/04050/CCT, VK/04017/CCT

Code	Model	Color	Kelvin	Lumen	Watt	Beam angle	CRI	Box
64173-088123	VK/04072/W/CCT	○ White	3000K-4000K-6000K	180lm	3W	100°	CRI>80	100pcs
64173-089123	VK/04073/W/CCT	○ White	3000K-4000K-6000K	360lm	6W	120°	CRI>80	60pcs
64173-090123	VK/04048/W/CCT	○ White	3000K-4000K-6000K	540lm	9W	110°	CRI>80	30pcs
64173-091123	VK/04074/W/CCT	○ White	3000K-4000K-6000K	960lm	12W	120°	CRI>80	30pcs
64173-092123	VK/04049/W/CCT	○ White	3000K-4000K-6000K	1.200lm	15W	120°	CRI>80	20pcs
64173-093123	VK/04050/W/CCT	○ White	3000K-4000K-6000K	1.440lm	18W	120°	CRI>80	20pcs
64173-094123	VK/04050/G/CCT	● Grey	3000K-4000K-6000K	1.440lm	18W	120°	CRI>80	20pcs
64173-095123	VK/04050/B/CCT	● Black	3000K-4000K-6000K	1.440lm	18W	120°	CRI>80	20pcs
64173-096123	VK/04017/W/CCT	○ White	3000K-4000K-6000K	1.920lm	24W	120°	CRI>80	10pcs
64173-097123	VK/04017/G/CCT	● Grey	3000K-4000K-6000K	1.920lm	24W	120°	CRI>80	10pcs
64173-098123	VK/04017/B/CCT	● Black	3000K-4000K-6000K	1.920lm	24W	120°	CRI>80	10pcs

### Details

AC Driver 220-240V (Included).  
Type of Led SMD 2835.  
Lifetime 50.000hrs.

Clicks 50.000.  
Working temperature < 45°C.  
Material Aluminium, plastic.


**3 years guarantee**





**IP20**





# Slim Panel CCT LED

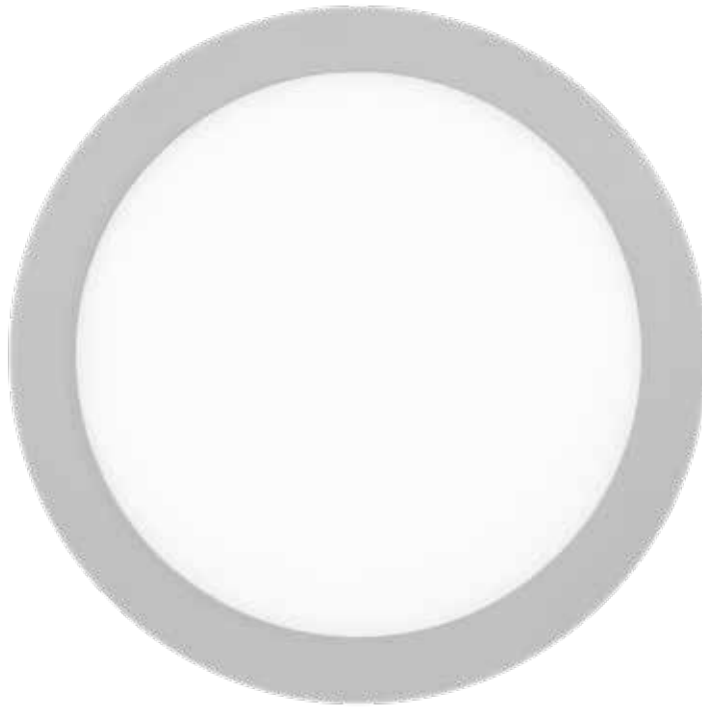






ø9cm





ø12cm




ø15cm




ø17cm







ø20cm



ø22.5cm



ø24cm



# Slim Panel CCT LED

## VK/04075/CCT, VK/04076/CCT, VK/04077/CCT, VK/04078/CCT, VK/04079/CCT, VK/04080/CCT, VK/04018/CCT

Code	Model	Color	Kelvin	Lumen	Watt	Beam angle	CRI	Box
64173-099123	VK/04075/W/CCT	○ White	3000K-4000K-6000K	180lm	3W	100°	CRI>80	100pcs
64173-100123	VK/04076/W/CCT	○ White	3000K-4000K-6000K	360lm	6W	120°	CRI>80	60pcs
64173-101123	VK/04077/W/CCT	○ White	3000K-4000K-6000K	540lm	9W	110°	CRI>80	30pcs
64173-102123	VK/04078/W/CCT	○ White	3000K-4000K-6000K	960lm	12W	120°	CRI>80	20pcs
64173-103123	VK/04079/W/CCT	○ White	3000K-4000K-6000K	1.200lm	15W	120°	CRI>80	20pcs
64173-104123	VK/04080/W/CCT	○ White	3000K-4000K-6000K	1.440lm	18W	120°	CRI>80	20pcs
64173-105123	VK/04080/G/CCT	● Grey	3000K-4000K-6000K	1.440lm	18W	120°	CRI>80	20pcs
64173-106123	VK/04018/W/CCT	○ White	3000K-4000K-6000K	1.920lm	24W	120°	CRI>80	10pcs
64173-107123	VK/04018/G/CCT	● Grey	3000K-4000K-6000K	1.920lm	24W	120°	CRI>80	10pcs

### Details

AC Driver 220-240V (Included).  
Type of Led SMD 2835.  
Lifetime 50.000hrs.

Clicks 50.000.  
Working temperature < 45°C.  
Material Aluminium, plastic.





















**3** years guarantee



IP20



# Slim Panel CCT LED

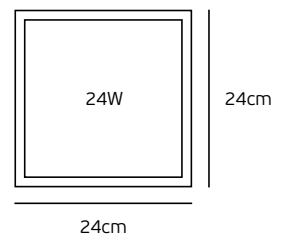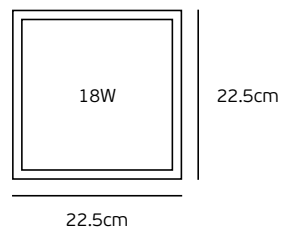



# Miro



VK/02279/W/W/60

VK/02279/B/W/60

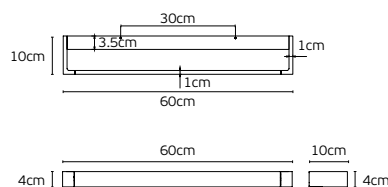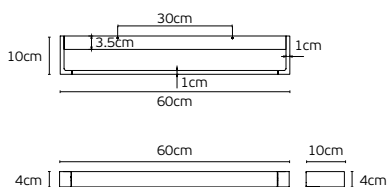

## VK/02279/60

Code  
75169-407695  
75169-408695

Model  
VK/02279/W/W/60  
VK/02279/B/W/60

○ Sand White. 3000K. 1700lm. 18W. 120°. CRI>90  
● Sand Black. 3000K. 1700lm. 18W. 120°. CRI>90

Box  
10pcs  
10pcs

### Details

Voltage 220-240V.  
Type of LED Philips.  
Working temperature -20°C → 60°C.

Lifetime 50.000hrs.  
Clicks 10.000.  
Material Aluminium, acrylic.

**3** years guarantee



IP44

Miro




Miro



VK/02279/W/W/90




VK/02279/B/W/90

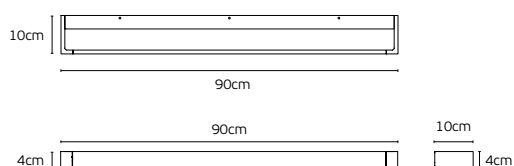

VK/02279/W/W/120



VK/02279/B/W/120

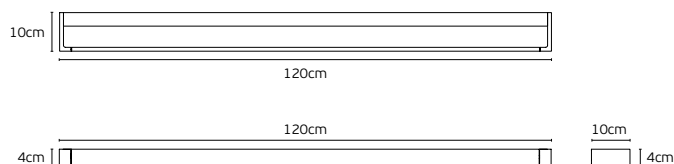

**VK/02279/90, VK/02279/120**


Code	Model		Box
75169-409695	VK/02279/W/W/90	○ Sand White. 3000K. 2151lm. 24W. 120°. CRI>90	10pcs
75169-410695	VK/02279/B/W/90	● Sand Black. 3000K. 2151lm. 24W. 120°. CRI>90	10pcs
75169-411695	VK/02279/W/W/120	○ Sand White. 3000K. 3220lm. 36W. 120°. CRI>90	10pcs
75169-412695	VK/02279/B/W/120	● Sand Black. 3000K. 3220lm. 36W. 120°. CRI>90	10pcs

Details

Voltage 220-240V.  
Type of LED Philips.  
Working temperature -20°C → 60°C.

Lifetime 50.000hrs.  
Clicks 10.000.  
Material Aluminium, acrylic.

**3 years guarantee**




**IP44**

Miro



# Slim Tube CCT LED Light

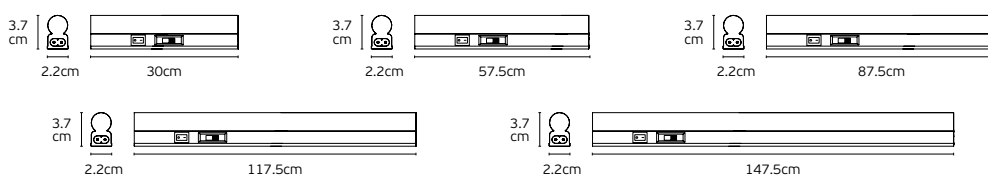

## VK/04668/30/CCT, VK/04669/60/CCT, VK/04670/90/CCT VK/04671/120/CCT, VK/04672/150/CCT

Code	Model	Color	Kelvin	Lumen	Watt	Length	CRI	Box
64174-530664	VK/04668/30/CCT	○ White	3000K/4000K/6000K	400lm	4W	30cm	CRI>80	50pcs
64174-531664	VK/04669/60/CCT	○ White	3000K/4000K/6000K	800lm	8W	57.5cm	CRI>80	50pcs
64174-532664	VK/04670/90/CCT	○ White	3000K/4000K/6000K	1400lm	14W	87.5cm	CRI>80	50pcs
64174-533664	VK/04671/120/CCT	○ White	3000K/4000K/6000K	1800lm	18W	117.5cm	CRI>80	50pcs
64174-534664	VK/04672/150/CCT	○ White	3000K/4000K/6000K	2400lm	24W	147.5cm	CRI>80	50pcs

### Details

Voltage 180-150V. CRI>80. IP Rating IP44. No Dimmable. Lifetime 30.000 hrs. Working temperature -35 ~ 35°C. Beam angle 120°. Material Aluminum + PC. Guarantee 2 years.



IP44





**Modules, Drivers & Lamps**  
Collection




Power and precision in every component. This collection delivers reliable, high-performance lighting solutions, combining advanced modules, efficient drivers, and versatile lamps. Designed for seamless integration, it ensures consistent, controlled illumination with modern, technical elegance.

# Led lamps Modules 50

## PL-CN50-COB 1.400 G3 CRI>90 **OSRAM**



Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-490019 6937186150998	PL-CN50-COB-1400-927-15D-G3	12.7W		2700K	991lm	15°	20
03045-491019 6937186151056	PL-CN50-COB-1400-927-24D-G3	11.7W		2700K	1170lm	24°	20
03045-489019 6937186151193	PL-CN50-COB-1400-927-40D-G3	11.7W		2700K	1226lm	40°	20
03045-492019 6937186151339	PL-CN50-COB-1400-927-60D-G3	11.7W		2700K	1147lm	60°	20
03045-493019 6937186151018	PL-CN50-COB-1400-930-15D-G3	12.7W		3000K	1059lm	15°	20
03045-494019 6937186151070	PL-CN50-COB-1400-930-24D-G3	11.7W		3000K	1204lm	24°	20
03045-495019 6937186151216	PL-CN50-COB-1400-930-40D-G3	11.7W		3000K	1289lm	40°	20
03045-496019 6937186151353	PL-CN50-COB-1400-930-60D-G3	11.7W		3000K	1205lm	60°	20
03045-488019 6937186151032	PL-CN50-COB-1400-940-15D-G3	12.7W		4000K	1063lm	15°	20
03045-485019 6937186151117	PL-CN50-COB-1400-940-24D-G3	11.7W		4000K	1204lm	24°	20
03045-486019 6937186151254	PL-CN50-COB-1400-940-40D-G3	11.7W		4000K	1306lm	40°	20
03045-487019 6937186151391	PL-CN50-COB-1400-940-60D-G3	11.7W		4000K	1256lm	60°	20
03045-497019 6937186151131	PL-CN50-COB-1400-965-24D-G3	11.7W		6500K	1204lm	24°	20
03045-498019 6937186151278	PL-CN50-COB-1400-965-40D-G3	11.7W		6500K	1306lm	40°	20
03045-499019 6937186151414	PL-CN50-COB-1400-965-60D-G3	11.7W		6500K	1259lm	60°	20

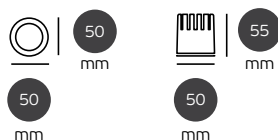

<b>Voltage</b> 36/38V DC/50Hz	<b>COB</b> <b>OSRAM</b>	24°, 40°, 60°	<b>CRI</b> Ra>90	50k hrs	15kciks	-20°C 40°C	Alu	12.5W >50W	IP20	5
-------------------------------------	----------------------------	------------------	---------------------	------------	---------	---------------	-----	------------	------	---


PL-CN111DC-COB-4300-G3 CRI>90

OSRAM

Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-500019 6937186151711	PL-CN111-COB-4300-927-24D-G3	36.2W		2700K	3377lm	24°	12
03045-501019 6937186151858	PL-CN111-COB-4300-927-40D-G3	36.2W		2700K	3423lm	40°	12
03045-502019 6937186151995	PL-CN111-COB-4300-927-60D-G3	36.2W		2700K	3402lm	60°	12
03045-484019 6937186151735	PL-CN111-COB-4300-930-24D-G3	36.2W		3000K	3490lm	24°	12
03045-503019 6937186151872	PL-CN111-COB-4300-930-40D-G3	36.2W		3000K	3425lm	40°	12
03045-504019 6937186152015	PL-CN111-COB-4300-930-60D-G3	36.2W		3000K	3403lm	60°	12
03045-505019 6937186151773	PL-CN111-COB-4300-940-24D-G3	36.2W		4000K	3490lm	24°	12
03045-506019 6937186151919	PL-CN111-COB-4300-940-40D-G3	36.2W		4000K	3425lm	40°	12
03045-507019 6937186152053	PL-CN111-COB-4300-940-60D-G3	36.2W		4000K	3405lm	60°	12
03045-508019 6937186151797	PL-CN111-COB-4300-965-24D-G3	36.2W		6500K	3490lm	24°	12
03045-509019 6937186151933	PL-CN111-COB-4300-965-40D-G3	36.2W		6500K	3425lm	40°	12
03045-510019 6937186152077	PL-CN111-COB-4300-965-60D-G3	36.2W		6500K	3405lm	60°	12



Voltage 36V DC/50Hz	COB OSRAM	24°, 40°, 60°	CRI Ra>90	5k hrs	15kclks	-25°C 40°C	Alu	IP20	5
---------------------------	--------------	------------------	--------------	-----------	---------	---------------	-----	------	---

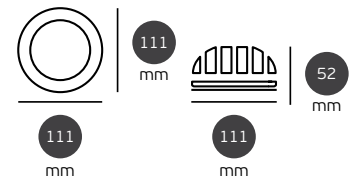

# Led lamps Modules 35

## VK/PL-CN35-COB 600 G3

**OSRAM**



Code	Model	Watt	Dimm	Kelvin	Lumen	Beam Angle	Box
03045-482019 6937186150875	PL-CN35-COB-600-927-24D-G3	6.1W		2700K	531lm	24°	20
03045-511019 6937186150899	PL-CN35-COB-600-930-24D-G3	6.1W		3000K	549lm	24°	20
03045-512019 6937186150912	PL-CN35-COB-600-940-24D-G3	6.1W		4000K	549lm	24°	20
03045-513019 6937186150936	PL-CN35-COB-600-927-36D-G3	6.1W		2700K	580lm	36°	20
03045-483019 6937186150950	PL-CN35-COB-600-930-36D-G3	6.1W		3000K	592lm	36°	20
03045-514019 6937186150974	PL-CN35-COB-600-940-36D-G3	6.1W		4000K	592lm	36°	20



<b>Voltage</b> 38V DC/50Hz	<b>COB</b> <b>OSRAM</b>	24° & 36° 	<b>CRI</b> Ra>90	 50k hrs	 15kclks	 -25°C 40°C	 Alu	5.9W >60W	 IP20	 5
----------------------------------	----------------------------	---------------	---------------------	----------------	-------------	-------------------	---------	-----------	----------	-------



# Led Drivers Dali dim

## CC15W/100-700/DALI/NFC

Code  
78000-819741

Model  
CC15W/100-700/DALI/NFC  
100-700mA. 17.2W. 220-240V.

Box  
300pcs




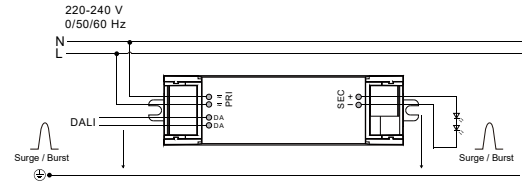
### Details

Voltage 220-240V.  
Output 100-700mA.  
Vout 46Vmax.  
Pout 15W max.  
PF >0.93.  
Material Plastic.  
Dimmable Dali NFC.

**KGP**  NFC )))

 **IP20.**

 **5 years guarantee**



## CC23W/100-700/DALI/NFC

Code  
78000-821741

Model  
CC23W/100-700/DALI/NFC  
100-700mA. 26.3W. 220-240V.

Box  
1pc





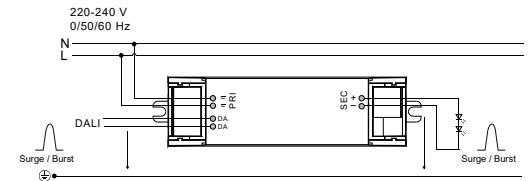
### Details

Voltage 220-240V.  
Output 100-700mA.  
Vout 46Vmax.  
Pout 23.10W max.  
PF >0.95.  
Material Plastic.  
Dimmable Dali NFC.

**KGP**  NFC )))

 **IP20.**

 **5 years guarantee**



## CC44W/300-1050/DALI/NFC

Code  
78000-820741

Model  
CC44W/300-1050/DALI/NFC  
300-1050mA. 50.1W. 220-240V.

Box  
1pc




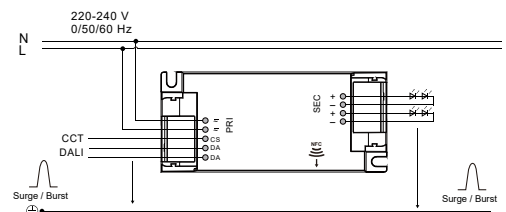
### Details

Voltage 220-240V.  
Output 300-1050mA.  
Vout 45Vmax.  
Pout 44.10W max.  
PF >0.97.  
Material Plastic.  
Dimmable Dali NFC.

**KGP**  NFC )))

 **IP20.**

 **5 years guarantee**



## VK/10093

Code  
78000-757720


Model  
**VK/10093**  
4 ch. 1.2A/ch (max). 100W. 100-240V.

Box  
1pc




### Details

Voltage 24VDC.  
Output Max. 4.1A,  
ch1+ch2+ch3+ch4=4.1A.  
Vout 24V.  
Pout 100W max.  
PF >0.95.  
Material Plastic.  
Built-in Dali interface.

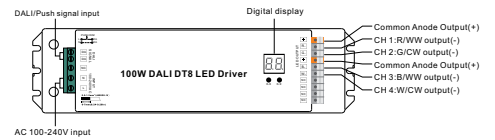

**IP20.**

**5 years guarantee**



## VK/10087/DALI

DALI + Push AC phase cut dimmer

Code  
78000-751720

Model  
**VK/10087/DALI**  
100-240VAC. 1 ch. Up 400W

Box  
200pcs




### Details

Input Voltage 100-240V~ 50/60Hz.  
Output Voltage 100-240V~. Output current Max 1.8A.  
Dimmable LED lamps & Drivers Max 200W@230V. Max 100W@120V  
Incandescent lighting, HV Halogen lamps Max 400W@230V. Max 200W@120V  
Low voltage halogen lighting with electronic transformers Max 200W@230V. Max 100W@120V  
Output power 150W@110V, 300W@220V.  
Material PC & PCB.  
Dimmable DALI/ Push.  
Working temperature -10~40°C.

**IP20.**

**5 years guarantee**



## XLN-60-24DA2

Code  
78000-690734


Model  
**XLN-60-24DA2**  
2.5A. 60W. 24V.

Box  
1pc




### Details

Voltage 110-305V.  
Output 2.5A  
Vout 24V.  
Pout 60W max.  
PF >0.97.  
Material Plastic.  
Dimming Dali.



**IP67.**

**5 years guarantee**

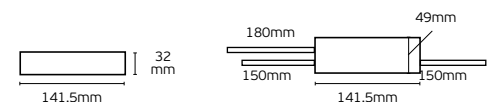

# Led Drivers Dimmable

## VK/10092

Code  
78000-756720

Model  
VK/10092  
1 ch. 100-700mA. 15W. 200-240V.

Box  
1pc


### Details



Voltage 200-240V.  
Output 100-700mA.  
Vout 59Vmax.  
Pout 15W max.  
PF >0.95.  
Material Plastic.  
Dimmable Hybrid method, smooth & deep dimming.  
Built-in 0/1-10V interface, compatible with universal 0/1-10V signal



 IP20.

 **5 years guarantee**



## VK/10091

Code  
78000-755720


Model  
VK/10091  
1 ch. 250-1000mA. 30W. 200-240V.

Box  
1pc


### Details




Voltage 200-240V.  
Output 250-1000mA.  
Vout 60Vmax.  
Pout 30W max.  
PF >0.97.  
Material Plastic.  
Control tunable white LED lighting  
Built-in 0/1-10V interface, switch and dimming function integrated.

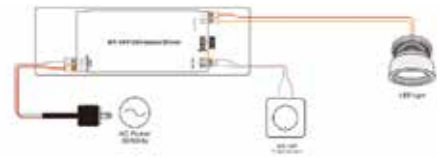

 IP20.

 **5 years guarantee**





# Led lamps E14-G45. Mini globe Filament.



## VK/05105 VK/05121 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-175664	VK/05105/EI/CL/W	E14	4.3W		2700K	470lm	200
03045-176664	VK/05105/EI/CL/D	E14	4.3W		6500K	470lm	200
03045-203664	VK/05121/D/EI/CL/W	E14	5W		2700K	470lm	200

Voltage	COB	360°	CRI	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4.3W > 40W 5W > 40W	IP20	2
---------	-----	------	-----	---------	---------	---------------	-------	-----	------------------------	------	---

## VK/05188 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-239664	VK/05188/EI/CL/W	E14	6W		2700K	720lm	200

Voltage	COB	360°	CRI	15k hrs	30kclks	-20°C 40°C	Glass	Alu	6W > 60W	IP20	2
---------	-----	------	-----	---------	---------	---------------	-------	-----	----------	------	---



## VK/05105 VK/05121 Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-177664	VK/05105/EI/MK/W	E14	4W		2700K	470lm	200
03045-178664	VK/05105/EI/MK/D	E14	3.5W		6500K	350lm	200
03045-192664	VK/05121/EI/MK/W	E14	4W		2700K	400lm	200
03045-193664	VK/05121/EI/MK/D	E14	4W		6500K	470lm	200

Voltage	COB	360°	CRI	15k hrs	30kclks	-20°C 40°C	Glass	Alu	3.5W > 39W 4W > 39W	IP20	2
---------	-----	------	-----	---------	---------	---------------	-------	-----	------------------------	------	---

## VK/05187 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-237664	VK/05187/EI/CL/W	E14	6W		2700K	720lm	50
03045-238664	VK/05187/D/EI/CL/W	E14	6W		2700K	720lm	50

Voltage	COB	360°	CRI	15k hrs	30kclks	-20°C 40°C	Glass	Alu	6W > 60W	IP20	2
---------	-----	------	-----	---------	---------	---------------	-------	-----	----------	------	---



## Led lamps E27-G45. Mini globe Filament.

VK/05106 VK/05121 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-179664	VK/05106/E/CL/W	E27	4.3W		2700K	470lm	200
03045-180664	VK/05106/E/CL/D	E27	4.3W		6500K	470lm	200
03045-206664	VK/05121/D/E/CL/W	E27	4.5W		2700K	450lm	200

Voltage 220-240	COB 1016/ 1018	360° 	CRI Ra>80	15k hrs	30k clicks	-20°C 40°C	Glass	Alu	4W > 40W 4.5W > 40W 5W > 40W	IP20	
--------------------	----------------------	----------	--------------	------------	---------------	---------------	-------	-----	------------------------------------	------	--

VK/05189 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-240664	VK/05189/E/CL/W	E27	6W		2700K	720lm	200


Voltage 220-240	COB 1018	360° 	CRI Ra>80	15k hrs	30k clicks	-20°C 40°C	Glass	Alu	6W > 60W	IP20	
--------------------	-------------	----------	--------------	------------	---------------	---------------	-------	-----	----------	------	--



VK/05106 VK/05121 Milky

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-181664	VK/05106/E/MK/W	E27	4W		2700K	470lm	200
03045-182664	VK/05106/E/MK/D	E27	4W		6500K	490lm	200
03045-194664	VK/05121/E/MK/W	E27	4W		2700K	470lm	200
03045-195664	VK/05121/E/MK/D	E27	4W		6500K	420lm	200


Voltage 220-240	COB 1016/ 1030	360° 	CRI Ra>80	15k hrs	30k clicks	-20°C 40°C	Glass	Alu	4W > 40W	IP20	
--------------------	----------------------	----------	--------------	------------	---------------	---------------	-------	-----	----------	------	--



VK/05185 VK/05186 Clear

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-234664	VK/05185/E/CL/W	E27	8.5W		2700K	1.055lm	120
03045-235664	VK/05186/E/CL/W	E27	10W		2700K	1.250lm	120
03045-236664	VK/05186/D/E/CL/W	E27	10W		2700K	1.250lm	120

Voltage 220-240	COB 1016	360° 	CRI Ra>80	15k hrs	30k clicks	-20°C 40°C	Glass	Alu	8.5W > 75W 10W > 85W	IP20	
--------------------	-------------	----------	--------------	------------	---------------	---------------	-------	-----	-------------------------	------	--



# Led lamps E14-G45. Mini globe Filament.



## VK/05121 Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-204664	VK/05121/D/EI/ST/W	E14	4.5W		2700K	330lm	200

<b>Voltage</b> 220-240	<b>COB</b> 1018	360° 	<b>CRI</b> Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4W > 32W	IP20	
---------------------------	--------------------	----------	---------------------	---------	---------	---------------	-------	-----	----------	------	--



## VK/05121 Pink Copper

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-222664	VK/05121/D/EI/PCT/W	E14	4.5W		2700K	330lm	200

<b>Voltage</b> 220-240	<b>COB</b> 1018	360° 	<b>CRI</b> Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4W > 32W	IP20	
---------------------------	--------------------	----------	---------------------	---------	---------	---------------	-------	-----	----------	------	--



## VK/05121 Gold

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-189742	VK/05121/D/EI/GD/W	E14	4.5W		2700K	330lm	200

<b>Voltage</b> 220-240	<b>COB</b> 1018	360° 	<b>CRI</b> Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	4W > 32W	IP20	
---------------------------	--------------------	----------	---------------------	---------	---------	---------------	-------	-----	----------	------	--

## Led lamps E27-G45. Mini globe Filament.

### VK/05121 Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-205664	VK/05121/D/E/ST/W	E27	4.5W		2700K	330lm	200

<b>Voltage</b> 220-240	<b>COB</b> 1018	360° 	<b>CRI</b> Ra>80	 15k hrs	 30kclks	 -20°C 40°C	 Glass	 Alu	4W > 32W	 IP20	 2
---------------------------	--------------------	----------	---------------------	-------------	-------------	-------------------	-----------	---------	----------	----------	-------



### VK/05121 Pink Copper

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-223664	VK/05121/D/E/PCT/W	E27	4.5W		2700K	330lm	200

<b>Voltage</b> 220-240	<b>COB</b> 1018	360° 	<b>CRI</b> Ra>80	 15k hrs	 30kclks	 -20°C 40°C	 Glass	 Alu	4W > 32W	 IP20	 2
---------------------------	--------------------	----------	---------------------	-------------	-------------	-------------------	-----------	---------	----------	----------	-------



### VK/05121 Gold

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-190742	VK/05121/D/E/GD/W	E27	4.5W		2700K	330lm	200

<b>Voltage</b> 220-240	<b>COB</b> 1018	360° 	<b>CRI</b> Ra>80	 15k hrs	 30kclks	 -20°C 40°C	 Glass	 Alu	4W > 32W	 IP20	 2
---------------------------	--------------------	----------	---------------------	-------------	-------------	-------------------	-----------	---------	----------	----------	-------



## Led lamps E27-A60. Classic Filament.



### VK/05122 Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-207664	VK/05122/D/E/ST/W	E27	7W		2700K	650lm	120

<b>Voltage</b> 220-240	<b>COB</b> 1030	360° 	<b>CRI</b> Ra>80	15k hrs	30k clicks	-20°C 40°C	Glass	Alu	7W > 51W	IP20	2
---------------------------	--------------------	----------	---------------------	---------	------------	---------------	-------	-----	----------	------	---



### VK/05122 Pink Copper

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-224664	VK/05122/D/E/PCT/W	E27	7W		2700K	650lm	120

<b>Voltage</b> 220-240	<b>COB</b> 1030	360° 	<b>CRI</b> Ra>80	15k hrs	30k clicks	-20°C 40°C	Glass	Alu	7W > 51W	IP20	2
---------------------------	--------------------	----------	---------------------	---------	------------	---------------	-------	-----	----------	------	---





### VK/05122 Gold









Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-188742	VK/05122/D/E/GD/W	E27	7W		2700K	650lm	120

<b>Voltage</b> 220-240	<b>COB</b> 1030	360° 	<b>CRI</b> Ra>80	15k hrs	30k clicks	-20°C 40°C	Glass	Alu	7W > 51W	IP20	2
---------------------------	--------------------	----------	---------------------	---------	------------	---------------	-------	-----	----------	------	---

## Led lamps E27-G80 Globo Filament.

VK/05109 VK/05110 Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-189664	VK/05109/E/ST/W	E27	4W		2700K	350lm	50
03045-210664	VK/05110/D/E/ST/W	E27	7W		2700K	650lm	50

<b>Voltage</b> 220-240	<b>COB</b> 1016/ 1030	360° 	<b>CRI</b> Ra>80	 15k hrs	 30klks	 -20°C 40°C	 Glass	 Alu	4W > 32W 7W > 51W	 IP20	 2
---------------------------	-----------------------------	---	---------------------	---	--	---	---	---	----------------------	--	---



## Led lamps E27-G95 Globo Filament.



**VK/05123** Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-212664	VK/05123/D/E/ST/W	E27	7W		2700K	650lm	50

<b>Voltage</b> 220-240	<b>COB</b> 1030	360° 	<b>CRI</b> Ra>80	15k hrs	30k clicks	-20°C 40°C	Glass	Alu	7W > 51W	IP20	
---------------------------	--------------------	----------	---------------------	---------	------------	---------------	-------	-----	----------	------	--



**VK/05123** Pink Copper

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-216664	VK/05123/D/E/PCT/W	E27	7W		2700K	650lm	50

<b>Voltage</b> 220-240	<b>COB</b> 1030	360° 	<b>CRI</b> Ra>80	15k hrs	30k clicks	-20°C 40°C	Glass	Alu	7W > 51W	IP20	
---------------------------	--------------------	----------	---------------------	---------	------------	---------------	-------	-----	----------	------	--



**VK/05123** Gold

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-191742	VK/05123/D/E/GD/W	E27	7W		2700K	650lm	50

<b>Voltage</b> 220-240	<b>COB</b> 1030	360° 	<b>CRI</b> Ra>80	15k hrs	30k clicks	-20°C 40°C	Glass	Alu	7W > 51W	IP20	
---------------------------	--------------------	----------	---------------------	---------	------------	---------------	-------	-----	----------	------	--

## Led lamps E27-G125 Globo Filament.

### VK/05108 Silver

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-214664	VK/05108/D/E/ST/W	E27	7W		2700K	650lm	32

<b>Voltage</b> 220-240	<b>COB</b> 1030	360° 	<b>CRI</b> Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	7W > 51W	IP20	2
---------------------------	--------------------	----------	---------------------	---------	---------	---------------	-------	-----	----------	------	---



### VK/05108 Pink Copper

Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-219664	VK/05108/D/E/PCT/W	E27	7W		2700K	650lm	32

<b>Voltage</b> 220-240	<b>COB</b> 1030	360° 	<b>CRI</b> Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	7W > 51W	IP20	2
---------------------------	--------------------	----------	---------------------	---------	---------	---------------	-------	-----	----------	------	---



### VK/05108 Gold


Code	Model	Base	Watt	Dimm	Kelvin	Lumen	Box
03045-192742	VK/05108/D/E/GD/W	E27	7W		2700K	650lm	32

<b>Voltage</b> 220-240	<b>COB</b> 1030	360° 	<b>CRI</b> Ra>80	15k hrs	30kclks	-20°C 40°C	Glass	Alu	7W > 51W	IP20	2
---------------------------	--------------------	----------	---------------------	---------	---------	---------------	-------	-----	----------	------	---



# Led lamps Linestra

## VK/05059/1, VK/05060/1

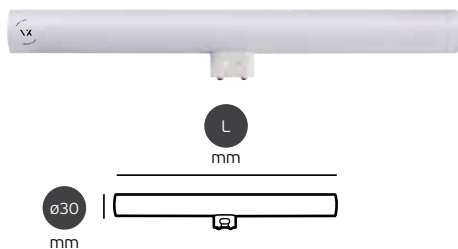


Code	Model	Base	Watt	Dimm	Kelvin	Length (L)	Lumen
03045-269127	VK/05059/30/1/W	S14d	6W		2700K	300mm	600lm

03045-271127	VK/05060/50/1/W	S14d	8W		2700K	500mm	800lm
--------------	-----------------	------	----	--	-------	-------	-------

Voltage 230V	SMD	270° 	CRI Ra>80	40k hrs	100kclks	-25°C 45°C	Polycarbonate	IP20	2	Box 10
-----------------	-----	----------	--------------	---------	----------	---------------	---------------	------	---	-----------

## VK/05059/2, VK/05060/2, VK/05061/2

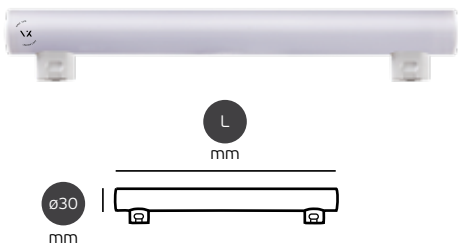

Code	Model	Base	Watt	Dimm	Kelvin	Length (L)	Lumen
03045-270127	VK/05059/30/2/W	S14s	6W		2700K	300mm	600lm

03045-272127	VK/05060/50/2/W	S14s	8W		2700K	500mm	800lm
--------------	-----------------	------	----	--	-------	-------	-------

03045-273127	VK/05061/100/2/W	S14s	16W		2700K	1.000mm	1.600lm
--------------	------------------	------	-----	--	-------	---------	---------

Voltage 230V	SMD	270° 	CRI Ra>80	40k hrs	100kclks	-25°C 45°C	Polycarbonate	IP20	2	Box 10
-----------------	-----	----------	--------------	---------	----------	---------------	---------------	------	---	-----------

## VK/S14D




VK/s14d/BS




VK/s14d/COP

<b>Code</b>	22101-004639	22101-005639	22101-006639
<b>Model</b>	VK/S14D/W	VK/S14D/ABS	VK/S14D/BS
<b>AC Voltage</b>	250/500V~50Hz	250/500V~50Hz	250/500V~50Hz
<b>Base</b>	S14d Single N°6	S14d Single N°6	S14d Single N°6
<b>Material</b>	PC	PC	PC
<b>Color</b>	WHITE	ANTIQUÉ BRASS	BRASS


<b>Code</b>	22101-007639	22101-008639	22101-009639
<b>Model</b>	VK/S14D/COP	VK/S14D/MC	VK/S14D/CR
<b>AC Voltage</b>	250/500V~50Hz	250/500V~50Hz	250/500V~50Hz
<b>Base</b>	S14d Single N°6	S14d Single N°6	S14d Single N°6
<b>Material</b>	PC	PC	PC
<b>Color</b>	COPPER	BRUSHED CHROME	CHROME



VK/s14d/w



VK/s14d/all colors



## VK/S14D/2





VK/S14S/2/B



VK/S14S/2/MC

<b>Code</b>	22101-012639	22101-013639	22101-014639
<b>Model</b>	VK/S14S/2/ABS	VK/S14S/2/B	VK/S14S/2/W
<b>AC Voltage</b>	250V~50Hz	250V~50Hz	250V~50Hz
<b>Base</b>	S14S Double N°6	S14S Double N°6	S14S Double N°6
<b>Material</b>	PC	PC	PC
<b>Color</b>	ANTIQUÉ BRASS	BLACK	WHITE



<b>Code</b>	22101-015639	22101-016639
<b>Model</b>	VK/S14S/2/MC	VK/S14S/2/C
<b>AC Voltage</b>	250V~50Hz	250V~50Hz
<b>Base</b>	S14S Double N°6	S14S Double N°6
<b>Material</b>	PC	PC
<b>Color</b>	BRUSHED CHROME	CHROME




## VK/S14S



<b>Code</b>	22101-010639	22101-011639
<b>Model</b>	VK/S14S/W	VK/S14S/G
<b>AC Voltage</b>	250/500V~50Hz	250/500V~50Hz
<b>Base</b>	S14s	S14s
<b>Material</b>	PC	PC
<b>Color</b>	WHITE	GREY
<b>Description</b>	Double no7	Double no7





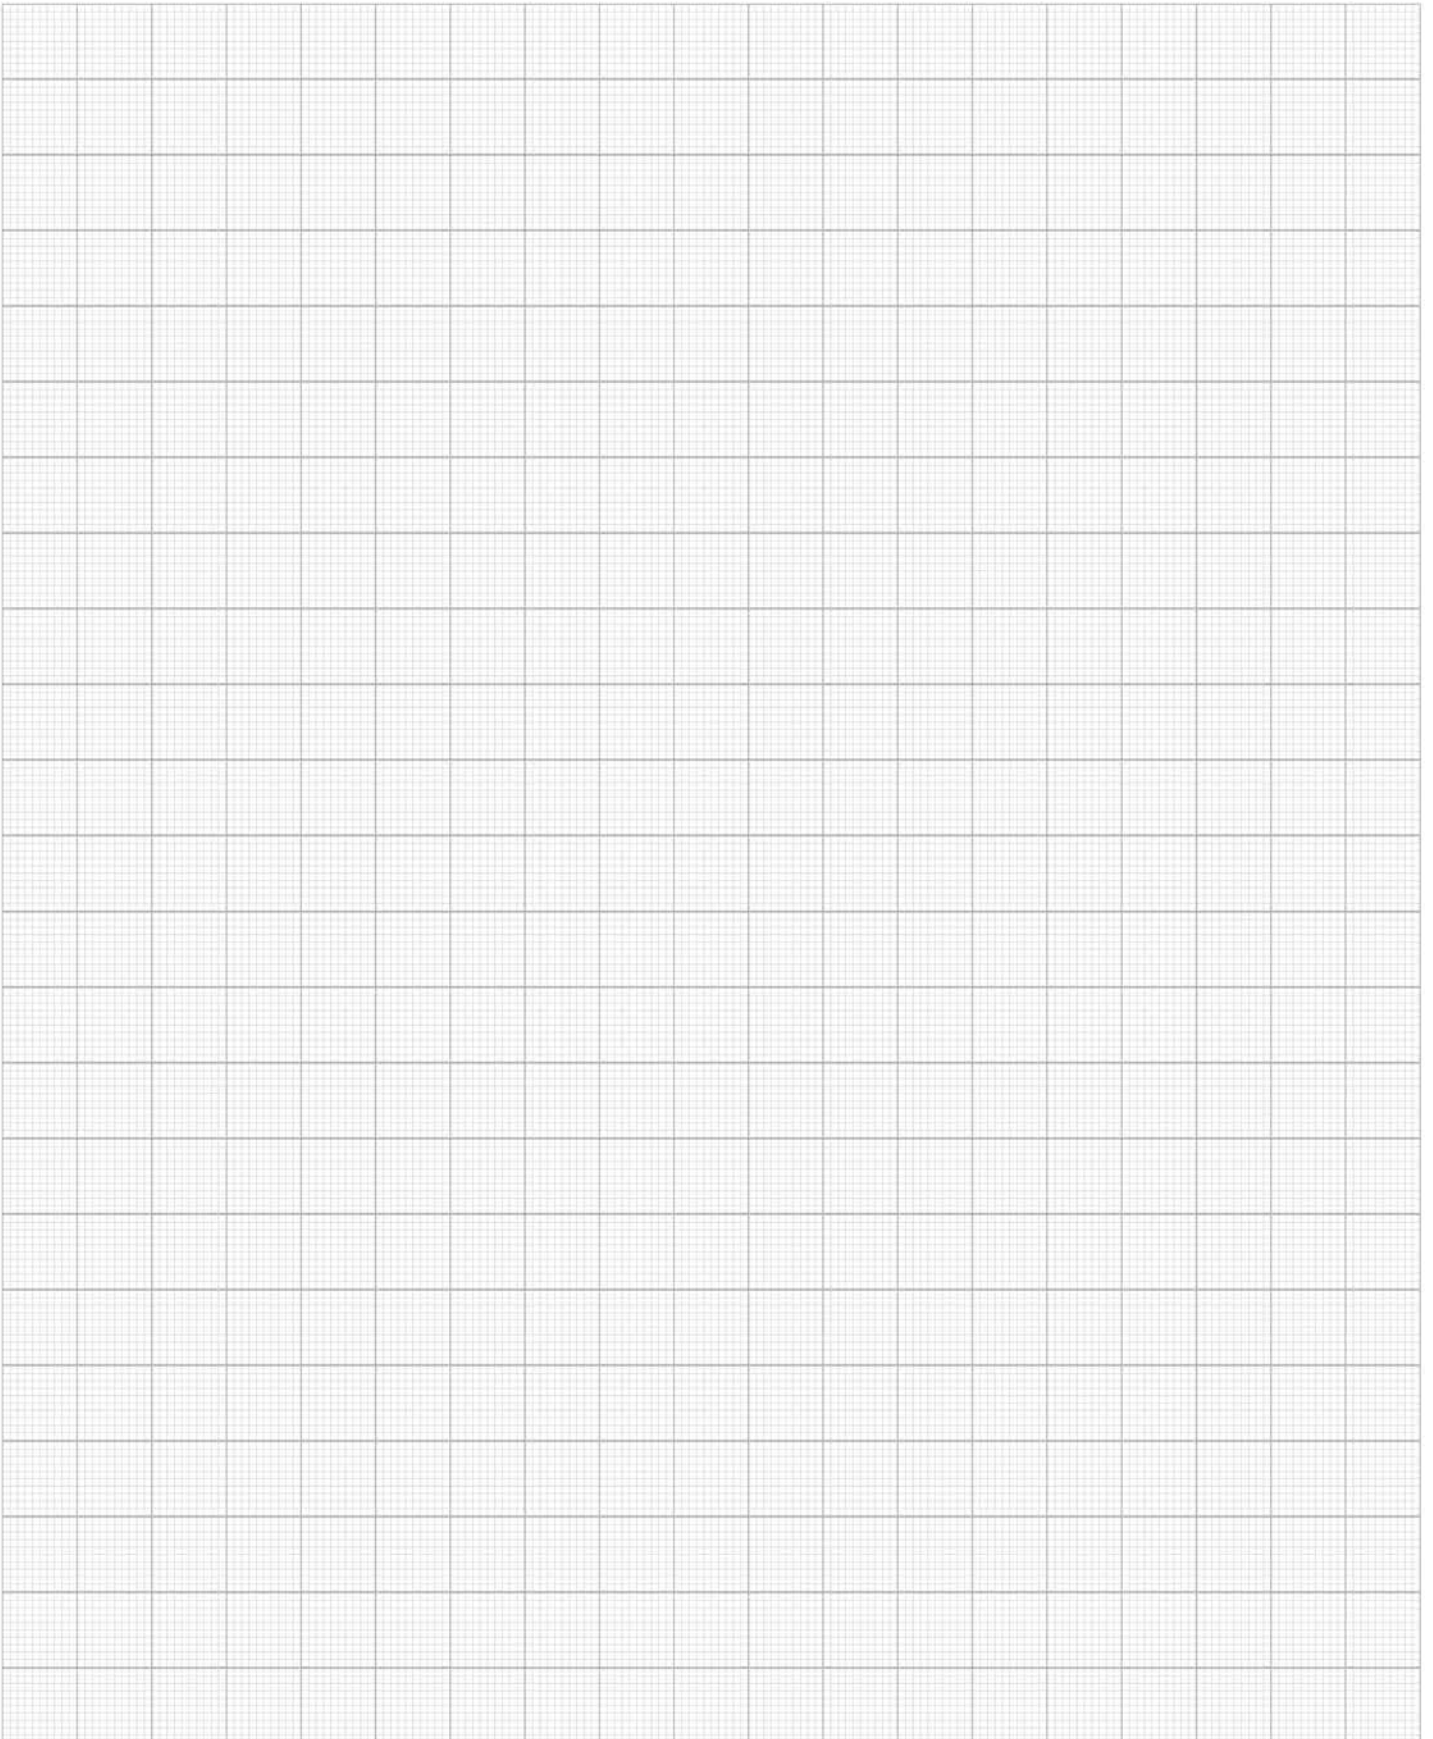

# Q-CERT

## ΠΙΣΤΟΠΟΙΗΤΙΚΟ/CERTIFICATE

QMSCERT, an accredited provider of third-party system certification organization for ISO 9001 quality management systems and acting in accordance with the requirements of ISO 17021 for registrars attests that:

**VK Hellas Electric S.A. - Vaios Karakostas S.A.**  
**8, ARISTOTELOUS STR., GR-17778,**  
**TAVROS, ATHENS, GREECE**

with a scope of:

*Elaboration of Illumination Studies. Wholesale & Retail Sale of  
Illumination & Electrical Equipment.*

has established a quality management system that is in conformance with the  
International Standard

**EN ISO 9001:2015**

June 20<sup>th</sup>, 2019

Certification Period Ending

June 21<sup>st</sup>, 2016

Initial Certification Date

June 21<sup>st</sup>, 2016

Certification Date

IAF/EA Subsector: 29.3, 34.1

For the QMSCERT Board

This certification is subject to Annual Surveillance Audits. The certification is valid (for three years) only if it is followed by the annual surveillance audits approval.

For information concerning the validity of the certificate, you can visit the site [www.qmscert.com](http://www.qmscert.com)



Inspection - Certification



QMSCERT® N. 210616-1 Rev.1

MS Certification  
Cert. No. 110-6

QMSCERT 26<sup>th</sup> OCTOBER Str. 90 - GR 546 27 - THESSALONIKI - HELLAS

# Q-CERT

## ΠΙΣΤΟΠΟΙΗΤΙΚΟ/CERTIFICATE

QMSCERT, an accredited provider of third-party system certification organization for ISO 14001 environmental management systems and acting in accordance with the requirements of ISO 17021 for registrars attests that:

**VK Hellas Electric S.A. - Vaios Karakostas S.A.**  
8, ARISTOTELOUS STR., GR-17778,  
TAVROS, ATHENS, GREECE

with a scope of:

*Elaboration of Illumination Studies. Wholesale & Retail Sale of  
Illumination & Electrical Equipment.*

has established an environmental management system that is in conformance with the  
International Standard

**EN ISO 14001:2015**

September 11<sup>th</sup>, 2020

Certification Period Ending

September 12<sup>th</sup>, 2017

Initial Certification Date

September 12<sup>th</sup>, 2017

Certification Date

NACE code: 46.69, 71.12

For the QMSCERT Board

This certification is subject to Annual Surveillance Audits. The certification is valid (for three years) only if it is followed by the annual surveillance audits approval.

For information concerning the validity of the certificate, you can visit the site [www.qmscert.com](http://www.qmscert.com)



Inspection - Certification



QMSCERT® N. 120917-6 Rev.1

MS Certification  
Cert. No. 110-6

QMSCERT 26<sup>th</sup> OCTOBER Str. 90 - GR 546 27 - THESSALONIKI - HELLAS



# CERTIFICATE

## Q-CERT

Q-CERT, an accredited provider of third-party system certification  
attests that:

**VK LEADING LIGHT - VAIOS I. KARAKOSTAS S.A.**  
8, ARISTOTELOUS STR., GR-17778, TAVROS, ATHENS, GREECE

with a scope of:

***Elaboration of Illumination Studies. Wholesale & Retail Sale  
of Illumination & Electrical Equipment***

has established an  
**OCCUPATIONAL HEALTH & SAFETY MANAGEMENT SYSTEM**  
that is in conformance with the requirements of the International Standard

**ISO 45001:2018**

August 31, 2023  
Certification Period Ending

September 01, 2020  
Initial Certification Date

September 01, 2020  
Certification Date

IAF/EA Sector: 29, 34

For Q-CERT's Board

This certification is subject to Annual Surveillance Audits. The certification is valid (for three years) only if it is followed by the annual surveillance audits approval.

For information concerning the validity of the certificate, you can visit the site [www.qmscert.com](http://www.qmscert.com)

Certificate No: 010920-3



MS Certification  
Cert. No. 110-6







Being absorbent rather than reflective - an offer without bias or contradiction. When the clarity of vision becomes direct, a novel experience merges with the universal being.  
Everything is clearer now.