

WIRING DEVICES

CATALOGUE ENGLISH



WIRING DEVICES

CATALOGUE ENGLISH

Index

Eikon	48
Linea	178
Arké	224
Plana	296
Neve Up	364
Smart Home&Building	404
Customisation	440
Enclosures and boxes	462

MADE OF ITALY

Passion, design, innovation. Since 1945.



Vimar acknowledged as a Historic Brand of National Interest. On the strength of its leading role in the market for over 50 years, Vimar was awarded the prestigious designation of Historic Brand of national interest by the Italian Ministry for Economic Development in 2021, bearing witness to the company's long tradition and Italian pedigree.

An all-Italian business powered by extraordinary positive energy, with passion and a desire to innovate. "Good-looking and well made" are the words that best describe our vision of Italian manufacturing, which - for us - means creativity, expertise, innovation, tradition, attention and the utmost dedication. A productive vision involving the company's entire value chain, aimed at offering customers a product and service that fully meets their expectations of style and quality.



About us

9

branch offices
worldwide

Present on the international stage with 9 sites worldwide, supplying over 100 countries with versatile, practical products that meet the most varied installation requirements and comply with the major international standards.



4

production plants
at Marostica, Italy



Vimar Headquarters



Logistics and production pole

1.300

employees, of whom 1,000
work in Italy

15.000

articles distributed
in more than 100
countries

Positive energy Made in Italy.

Our company's home, where we **create, design and manufacture** our products, is still located in the North East of Italy because we are committed to the **Made in Italy** concept in all its aspects. Our production is inspired by a unique blend of aesthetic quality and technological reliability. From materials to aesthetic lines, colour combinations and electronics, Vimar stands out for a blend of style that speaks Italian the world over. **All this is called Positive Energy.** The same energy that ensures that today Vimar is one of the key players in the market with a range able to cover all needs in the residential, commercial and naval sectors.

Logistics and production pole.

The logistics and production pole at Marostica is based on the utmost harmony established with the local area: a project where **forms and materials blend in naturally with the environment** and the surrounding landscape, bringing together the three souls of the company in a single space: offices, production and warehouse.

We design to be sustainable



Delve into our
Sustainability
Report

Our commitment to the future.

We have chosen Positive Energy. We implement a circular economy model that drives our design concepts: with the work we do, with our research and our designs, we invest in the urgent challenges to regenerate the environment. In our production plants, too, we have made design choices in which sustainability, architectural value and occupational comfort are expressed to the full.

-1,115_{tCO₂}

of emissions avoided over the last three years thanks to our company's energy efficiency actions

>1,700,000_{kWh/year}

of energy generated by the photovoltaic systems

-400,000_{kWh/year}

of energy saved with the geothermal system

94%

the portion of waste directed to reclaiming and recycling

Products assessed according to the LCA approach. We assess the environmental performance of Vimar's high-turnover products according to the LCA (Life Cycle Assessment) approach, with respect to the international reference standards ISO 14040 and 14044. The process is part of the Environmental Product Declaration (EPD).

EPD-PEP Ecopassport certifications are available for all high-turnover products in the Linea, Eikon, Arké and Plana series and junction boxes; these are flagged with the relevant mark on every product sheet on www.vimar.com

We design to be integrated with the other players. We manufacture products capable of contributing to the rating of the most renowned building sustainability protocols, such as LEED®, BREEAM® and WELL®.



Production process with a low environmental impact



-80% 
CO₂ eq. emissions

We certify our commitment to environmental, social and economic sustainability. The Linea series is a virtuous example: it replaces 70% of conventional fossil-fuel based plastics with plastics from recycled and renewable sources and thanks also to the optimised production processes, the efficient management of product volumes and the use of FSC certified eco-sustainable packaging, it reduces CO₂ equivalent produced by over 80%, saving more than 500 tonnes of CO₂ equivalent each year.



> 500

saving more than 500 tonnes of CO₂ equivalent each year

97%

of Linea production contains plastic from renewable and recycled sources originating from an ISCC PLUS certified supply chain (mass balance, the certified portion varies for different products), contributing to the significantly lower environmental impact.



100%





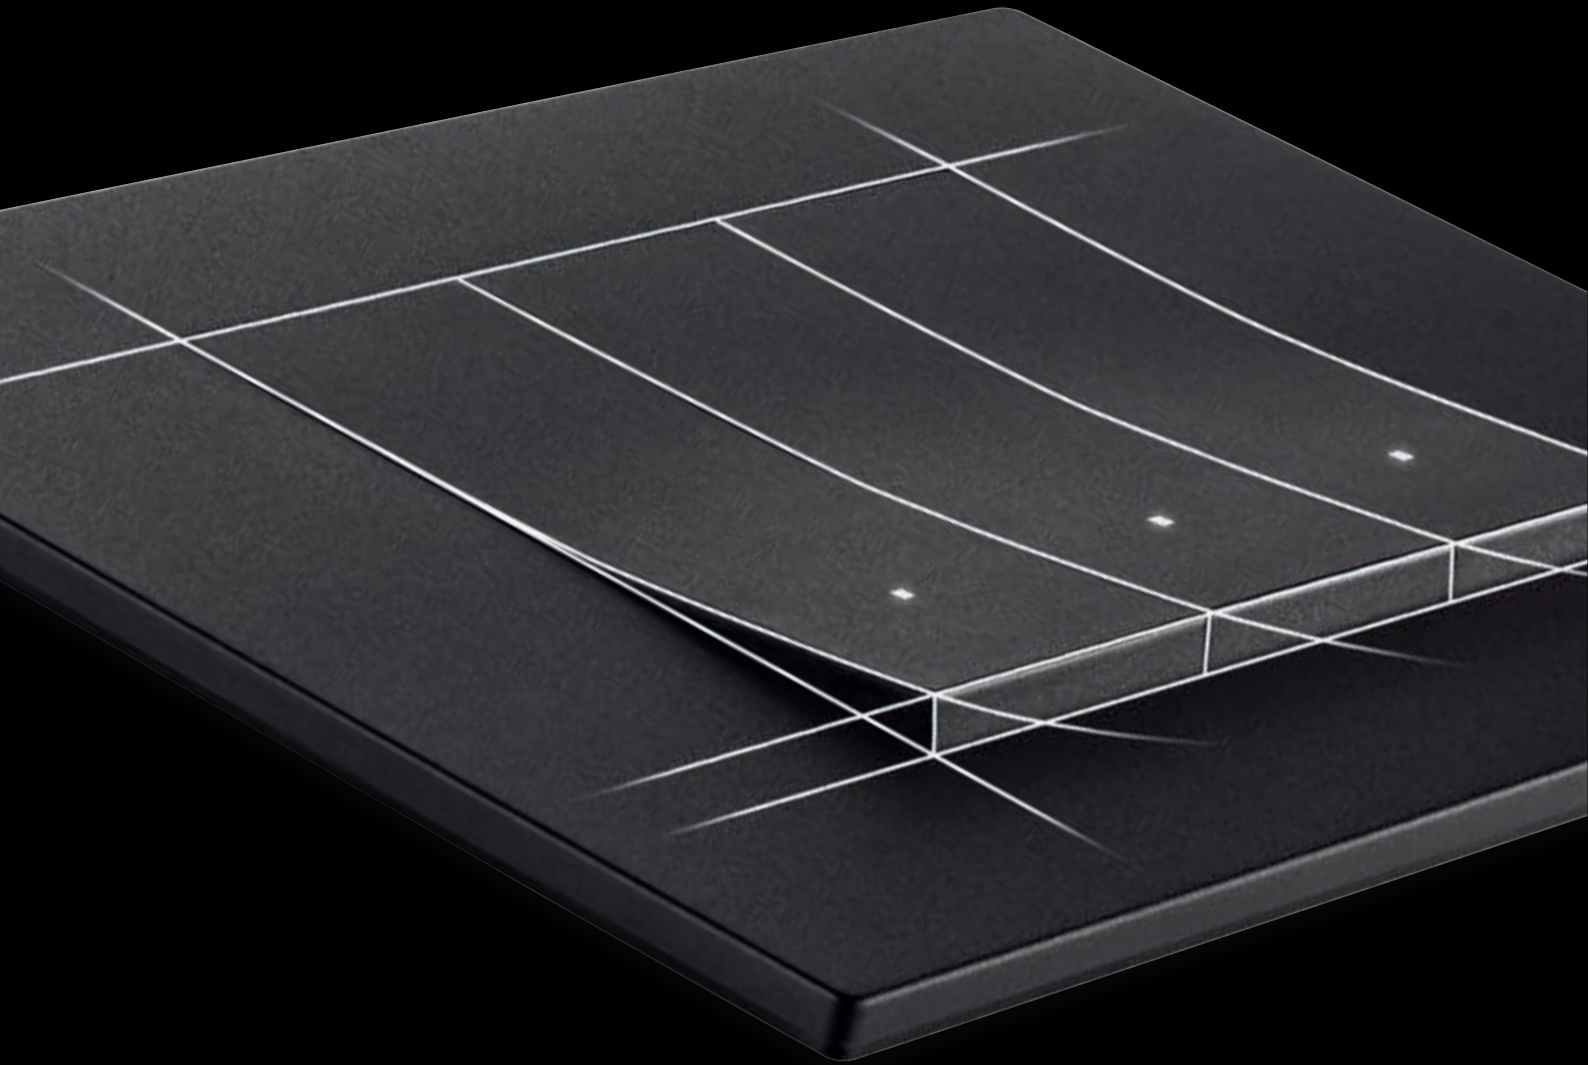
of packaging is fully recyclable. Product cases, enclosures and boxes are made of recycled cardboard or card, printed with water-based ink and make exclusive use of eco-sustainable glues. The paper used is FSC certified, which guarantees it is sourced from responsibly managed forests.



PATENTED
VIMAR

Finishing process for PVD (Physical Vapour Deposition) metal cover plates. Painsstaking care taken with the choice of materials, including zinc-titanium alloy cover plates that allow a process of cold forging and PVD finishes with prestigious, eco-sustainable metallic effects.

Quality guarantee



Research and Development

To offer the best in **technology** and **design** we invest a portion of each year's turnover: we have registered over **200 patents worldwide**, of which 24 for the new Linea series, undisputed evidence of our attention to both great innovations and to small details that ensure safety and simplicity in everyday actions.



We believe in a job well done for the common good. The aim is to provide support in **creating protected, comfortable environments** through **high quality products**, with intuitive functions and a sophisticated, truly Italian design. Our patents are the fruit of a research aimed at the common good: like the **SICURY** shutter. An idea that revolutionised the safety of electrical installations and the socket outlet protection system in 1968. We decided to make it freely available to all operators in the sector. From that day on, the life of children was a little safer and that of parents a little more serene.

High quality

Before leaving the factory, all **our products are rigorously tested** in observance of the product requirements expressed both by the Quality Management System and by the national and international product Marks, in the belief that product quality is the best business card. Not by chance we have obtained the most important Quality certifications, including **ISO 9001:2015**. Vimar, moreover, uses an environmental management system certified to **ISO 14001:2015** and a work environment health and safety management system to **ISO 45001:2018**.

>200 patents registered in over 78 years of business

Design and innovation



The prestigious prizes and awards of the wiring series

We contribute to the culture of the home.

Outstanding quality combines valuable expertise with a profound appreciation for innovation and design, and a willingness to embrace the new along with the needs of your projects. Each lighting device or socket outlet fully integrates in interior design projects as a **true item of décor**. We take care of all the details.

Iconic design.

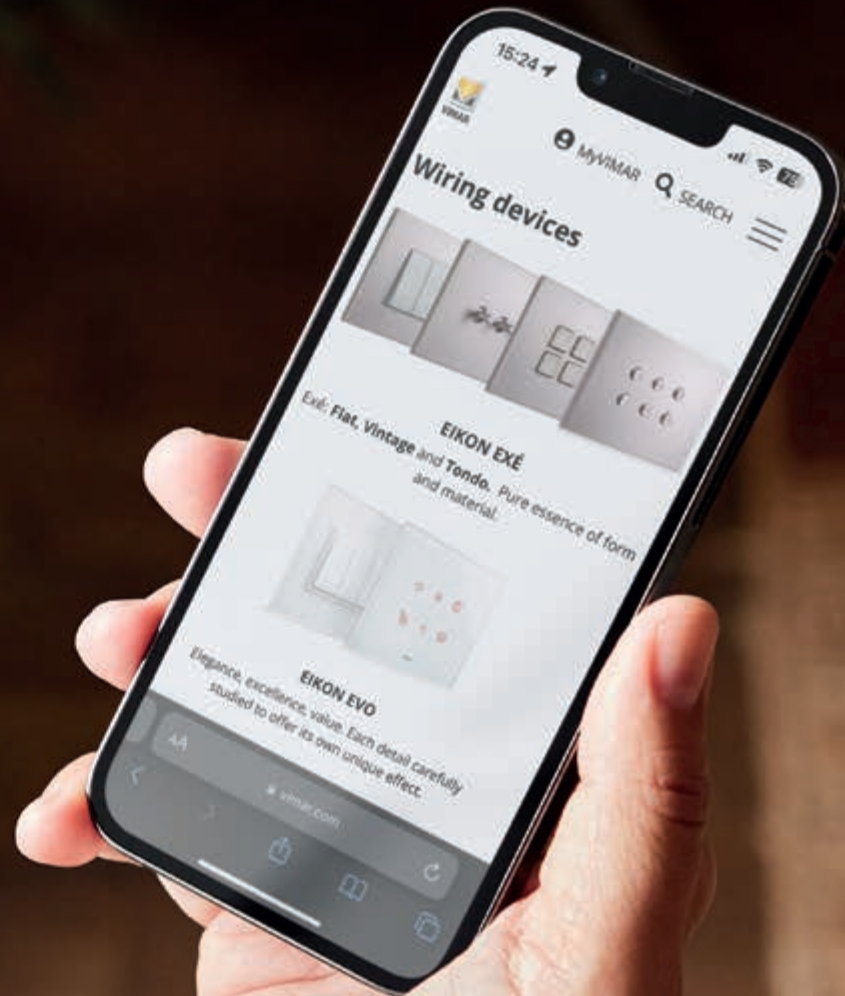
We have the **most expert designers available to us to develop housing styles together**: stylish and harmonious lines are combined in numerous variations of colours and materials to improve the look of every environment. We commit time and energy to developing new projects in the electro-technical, electronic and electronic materials fields daily. Because form and innovation can live alongside each other in harmony. This is shown by the many awards won in the most prestigious international competitions.

Safe and easy technology for integrated building management.

Our technology provides a practical response to the needs of people who design, build and use living space, while ensuring that buildings can be smart and welcoming at the same time. It is a set of solutions for control, comfort, energy efficiency and security, in which home automation, burglar alarm system, video door entry system, CCTV and automation are in constant communication with each other, within **a single, integrated system** that's fully connected to the Internet of Things: the **View** app is the application for smartphones and tablets for managing Vimar's professional systems and connected devices.



Always by your side



The benefits of on-line services

A web area constantly updated and rich in useful content for professionals: documentation, on-line product catalogue, tutorial videos, software downloads and helpful applications for your professional activity, sales network and technical support contacts, training courses, interesting news, and events.



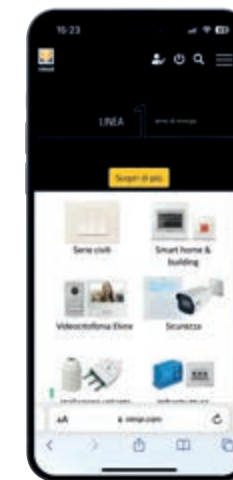
Tutorial videos

conceived to help installers during the installation and configuration of the various Vimar systems.




Home Tour

To discover how to develop the electrical system with new functions to make life easier.



MyVimar

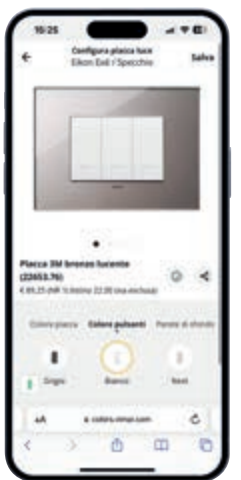to receive constant information and services, a platform designated for customers and professionals.



Colour configurator

to choose colours, shapes and materials of the cover plates and devices most suited for the style of your home.

360° training

We offer courses on the systems in the catalogue, thanks to which professionals can develop the knowledge allowing them to work on smart home and building automation projects. The training courses can be followed in a classroom, at our Training Centre, in our local offices and at selected training facilities nationwide, or conveniently from home or the workplace, **via the dedicated web platform.**



Intelligent products and interconnected systems

Vimar is a one-stop shop offering connected systems and products for new builds, refurbishments or to modernise existing systems. A combination of solutions designed to enhance comfort, energy efficiency, safety and security, with matching styling.



Vimar View

Full integration, also with third-party systems (KNX, Google, Alexa by Amazon, SmartThings by Samsung, HomeKit by Apple, IFTTT)

Matching style and total **customisation** for the wiring series

Solutions for comfort, security and energy efficiency



Comfort



Securezza



Efficienza Energetica



Connected systems and products, to ensure **maximum control**


Integrated systems for a unique user experience

A quality service to support every customer every day

A unique experience to manage, control and create scenarios, even remotely. You are always connected to your living spaces, wherever you are, and are always up-to-date on what is going on inside and outside the building.



Vimar View




Versatile solutions

From small to large
buildings

Residential
Hospitality
Nautical
Office
Service industry
Healthcare

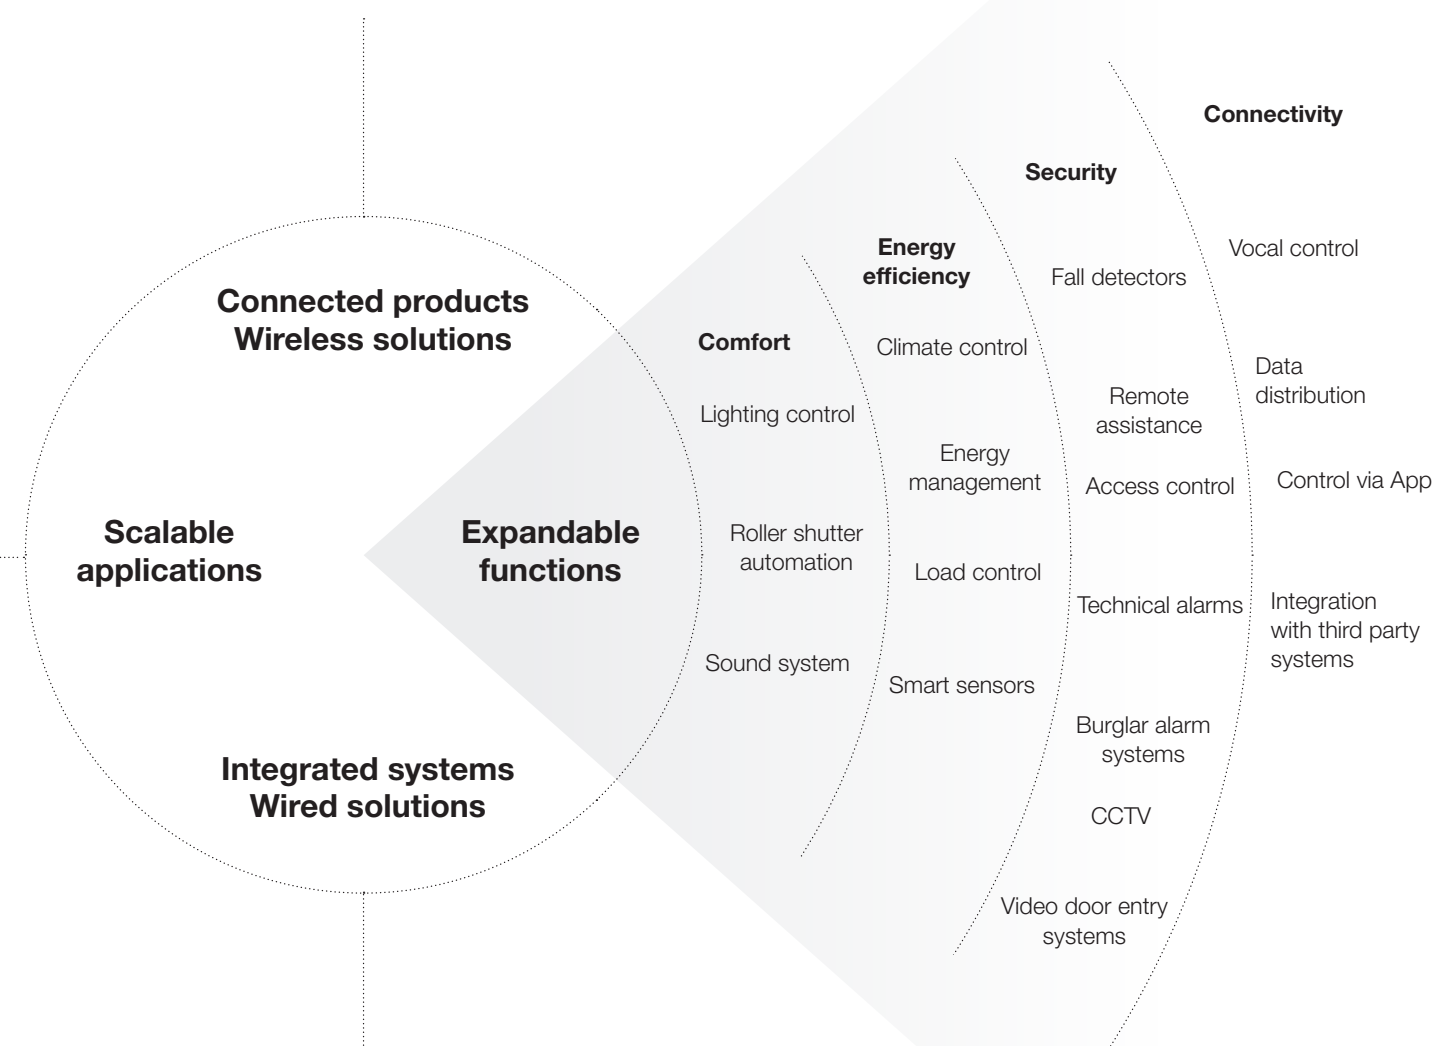Customised products that liaise with one another continuously and in a perfectly integrated way to provide a concrete solution to the needs of those who build and enjoy spaces. **Our solutions respect the identity of every setting**, for total control of your home and of the building.



A complete range

Design solutions, unique combinations.

Each lighting device socket outlet fully integrates in the interior design project as a true item of décor. Simple, elegant and impeccable shapes.

Eikon Exé

The essence of form and material



Eikon Evo

Luxury is unveiled



Linea

Energy takes shape



Arké

A contemporary soul, a strong personality



Plana

Essential and universal



Neve Up

A smart choice



Customisation.

Choose the style you prefer for the various technologies

An aesthetic choice.

Cover plates with different shapes and a wide range of **materials/finishes and colours**, also in shades of RAL K7. You only need to choose the cover plate you prefer.

Identity and immediate visibility.

To boost the identity of an accommodation facility all the cover plates can show the facility's logo. Indeed, our laser technology is used to reproduce any symbol clearly and precisely, guaranteeing a long-lasting result.

A symbolic choice.

Buttons and controls can be customised according to the chosen function. Laser technology makes it possible to engrave any symbol accurately, choosing from **an extensive gallery of pictograms** that identify the most widespread functions or reproducing a symbol you have provided. Thanks to RGB technology, customers can also choose the colour of the backlighting.

Unique and distinctive details.

Cover plate customised with your logo



Laser engraved customised buttons



Thanks to the RGB LED technology, you can also choose the colour of the backlighting to create totally coordinated interfaces.

Customisable symbols from a large library



Dynamic LED icons that can be customised using the app

The Linea range with XT platform allows customising the controls in two ways: using dynamic LED icons which can be customised using the app or, for the black version, by applying a label of a symbol chosen from the library onto the back of the button.

Scalable solutions


Wireless or wired.

The opportunity to design a complete, expandable and modular system

Versatile technological solutions, from the traditional system to advanced home automation systems, for the utmost integration and interoperability of all functions. Full synergy with international standards and protocols.




VIEW 
IoT smart life



Standard functions for lights, roller shutters and temperature control



Centralised functions for lights and roller shutters



Individual connected functions, can be managed with smart systems and products, controllable via app and voice-operated



Complete and connected functions, integrated and expandable for all buildings, controllable via app and voice-operated

quid+

WiFi
CERTIFIED

by-me
smart automation


4G
LTE

 **Bluetooth**

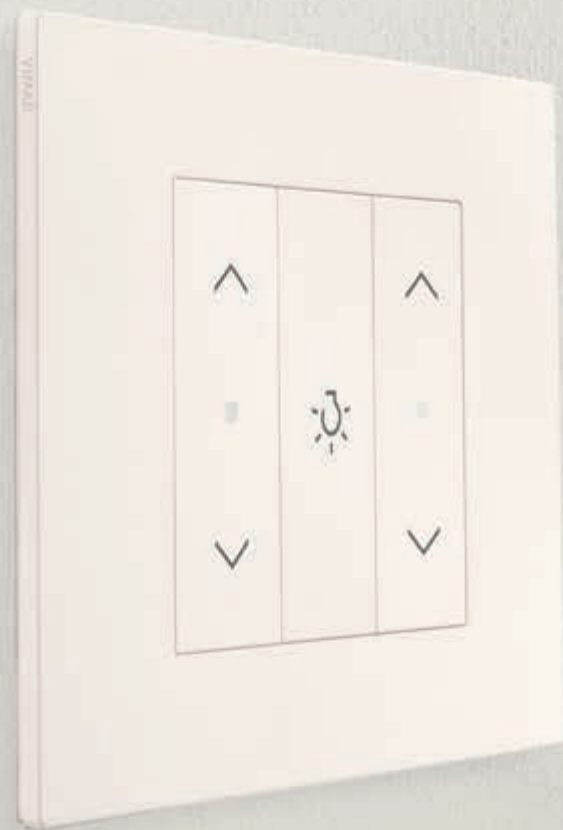KNX

 **zigbee**

ADVANCED
TRADITIONAL
SYSTEM



QUID. The simplicity of centralised control


It is sufficient to equip a traditional system with a simple Quid magnetic relay that allows you to centralise shutting off lights and automating roller shutters and also saving your favourite position.



quid+




LIGHT



CENTRALISED
POWER-OFF
CONTROL



ROLLER
SHUTTERS



COORDINATED
CENTRALISING

QUID FOR LIGHTING CONTROL Innovative and more silent relay.

Centralised power-off control.

QUID is used to turn off all the lights with a single gesture. The presence of a pilot light reveals whether the lighting is active at any connected point.

More silent

Differently to standard electromechanical relays, the change of state proves more silent, thanks to Vimar's patented magnetic relay.

Safe

If the push button remains active, the relay does not overheat: the current is not present after the change of state.

Energy saving

It is not powered when the lights are off.

QUID FOR ROLLER SHUTTERS Innovative electronic device.

Central control

The device automates the curtains and roller shutters, enabling control in groups, load cut-off at the limit stop and saves the favourite position.

Safe and reliable

Cuts off the voltage at the limit stop to avoid the motor remaining under voltage and being damaged.

SMART
SYSTEM



View Wireless. System with Bluetooth® wireless technology mesh system

View Wireless is the ideal solution to turn a traditional system into a connected one and is perfect when **renovating** an area of the home or an entire dwelling, store, restaurant, office and in those situations where **masonry work** and **repainting** tasks need to be kept to a minimum. A connected system gives you full control of your home.

Bluetooth®

Wi-Fi


zigbee



View Wireless



Vimar View



Control
with app



Voice
operated



Climate
control




Energy



Lighting




Roller
Shutters
Blinds




Access control



Presence
detection



Scenarios



Integration

HOME
AUTOMATION
SYSTEM



By-me Plus.

System with built-in home automation system



The **By-me Plus home automation system BUS system** consists of a range of intercommunicating devices designed to improve the comfort, energy efficiency and security of everyday life, using automatic devices involving all the installed functions, for medium high level systems, complete, integrated, highly customisable and programmable simply with the View Pro app.

The **modular design** and **depth of the range** and the **segmentation** of the wiring series can: accommodate the functional requirements of residential customers and those of small service and hospitality industries, for both new builds and refurbishments; be used for updating and expanding systems even later on; meet the aesthetic needs of the end user.



View Pro
Vimar View

- Control with app
- Voice operated
- Advanced climate control
- Energy
- Lighting
- Roller shutters Blinds
- Sound system
- Sprinkler system
- Scenarios and logics
- Integration



HOME
AUTOMATION
SYSTEM

Well-contact Plus. KNX®

Automation system on KNX standard

Automation for the whole building, with integrated functions and centralised monitoring.

Flexible, interoperable, safe and modular, Well-contact Plus is the system developed on the KNX standard, for complete building management. Specifically, in the hotel, service and residential sectors, the system is used to create centralised management systems that permit the integration, supervision and constant management of lights, temperature, security, energy and accesses, guaranteeing ease of use.




Comfort



Energy
efficiency



Security



Integration



Total supervision.

The great advantage of the Well-contact Plus system is that it allows supervision of all the functions and the centralised management of the whole building.

Local supervision is performed via devices installed in each room, used to locally manage the different functions (touch controls, thermostats, touch screens, etc.) or with touch screen supervisors.

Remote supervision in the service sector using the Well-contact Suite software on a PC. Remote control is assured via a local LAN or Wi-Fi network to supervise and control all the devices in the system; view the system status, events log, etc. at any time.

Universal language

Our products speak a universal language. International standards and several modular designs

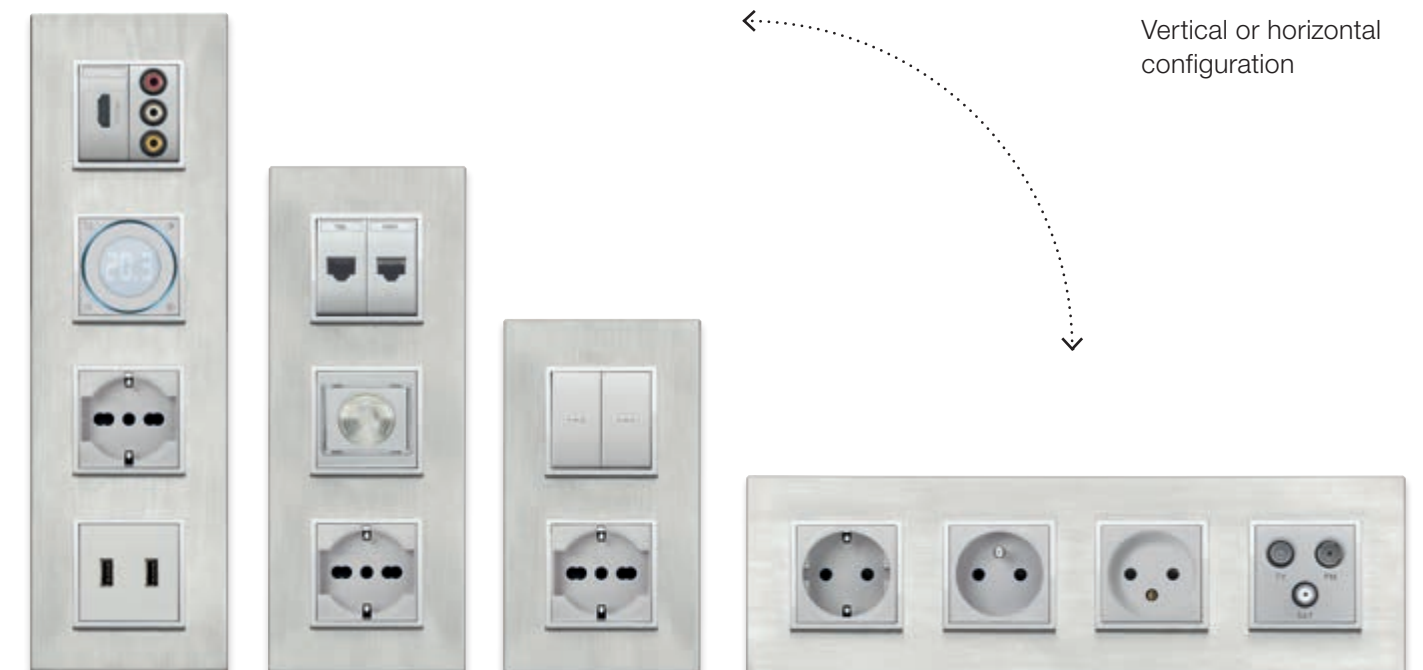
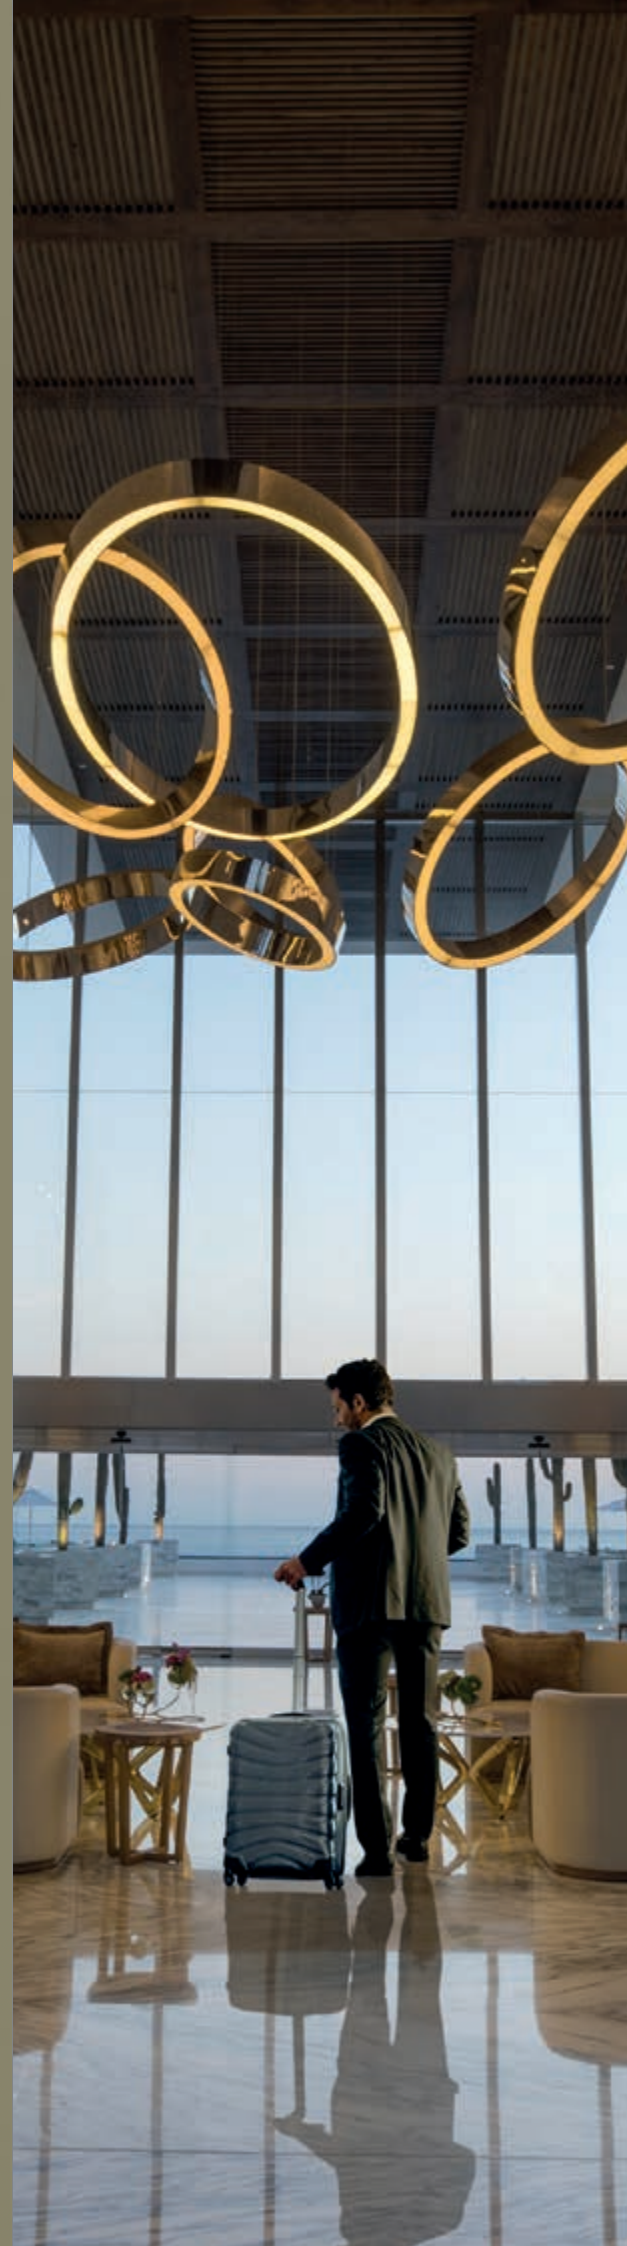

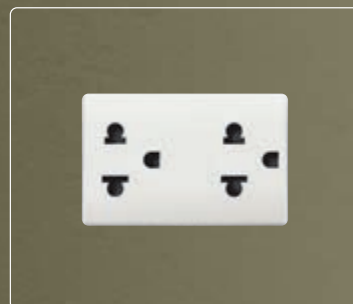
Thanks to the wide range of cover plates you can choose the modular design that best meets the most varied installation requirements. Two-, three- and four modules, through to seven modules to optimise several devices within a single cover plate offering superior styling value. Add and change functions over time, depending on your specific domestic needs.

Power management solutions compatible with more than 100 countries worldwide.

To meet different energy usage requirements in different countries, our range includes a broad array of devices that comply with the most widespread international standards and are highly versatile from the perspectives of modular design and installation potential.

A versatile system. Choose the modular design to suit your needs.

Socket outlets and controls with Italian, British, French, German, American standard, to design and manage energy in complete safety according to individual international specifications. Extremely modular design, from 1 to 21 modules, including multi-module and monobloc; both vertical and horizontal, to create bespoke systems.



Easy solutions to live better



Comfort

An extensive range of functions to make a proper electrical system that guarantees greater comfort, increasing the value of the property and improving the lives of those who live there.




Discover the functions of an intelligent building and the benefits of a digital platform for everyone: system installers, programmers, maintenance people, those who manage and supervise the building, and the people who live there. A single app to manage Vimar's connected devices and built-in solutions.



EASY TO CHARGE SMARTPHONES AND PCS

Thanks to the range of USB socket outlets, available with power supply units of up to 30 W, it is very easy and handy to charge devices quickly, at any point in the home, thereby combining functionality and design.




ALWAYS THE RIGHT ATMOSPHERE

Thanks to the connected dimmer switches you can control the lights in the house even more smartly and obtain the appropriate degree of lighting depending on the situation.



MOVE ABOUT SAFETY, WITHOUT DISTURBING OTHERS

Courtesy lights with a delicate warm beam directed downwards, step marker and auxiliary emergency (with battery) function. Combined with the IR bedside motion sensor, to be installed at the level of the socket outlets, they allow switching on the step marker lamp only when a movement is detected at that height. No one is disturbed when you get out of bed.





DEDICATED FUNCTIONS FOR EVERY ACTIVITY AND OCCASION

Easy to set the day and night light control, switch on background music or recall the relaxation scenario when you want to read. Just one tap: thanks to the buttons that, with the customised icon, make your gestures immediate or remotely with your smartphone.



REMOVABLE HAND LAMP AND RINGTONE/BUZZER

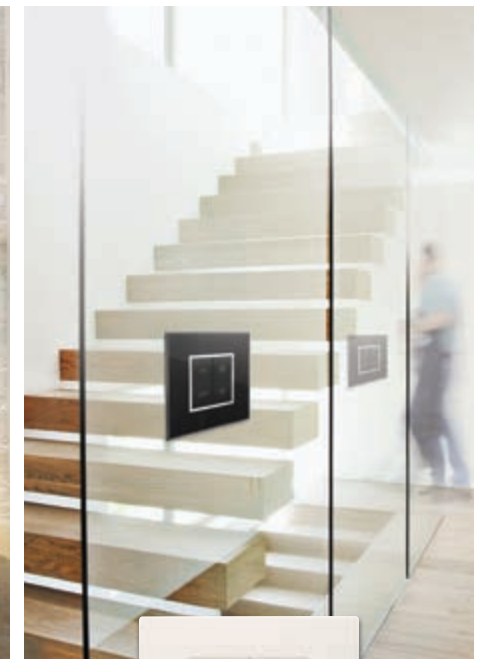The removable hand lamp lights up immediately in the event of a power cut and it can be pulled out of the socket outlet. Whereas with the ringtone/buzzer, by turning the device cover, the function changes from ringtone to buzzer and vice versa.



RADIO FREQUENCY CONTROLS. VERSATILE INSTALLATION WITHOUT ANY MASONRY WORK

The radio frequency control can be placed on any surface, such as glass, wood or on the wall, and it is installed with the utmost simplicity. It can be quickly applied to the wall, since it does not require flush mounting boxes.

Energy efficiency

Devices and technologies capable of transforming the home into a place where sustainability is the foundation for planning living in the future. Thanks to our solutions, the building becomes intelligent and allows living with awareness, eliminating energy waste, optimising consumption and taking advantage of all the opportunities offered by renewable sources, such as, for example, solar power.



Discover the functions of an intelligent building and the benefits of a digital platform for everyone: system installers, programmers, maintenance people, those who manage and supervise the building, and the people who live there. A single app to manage Vimar's connected devices and built-in solutions.



CLIMATE CONTROL, OPTIMISE ENERGY CONSUMPTION REDUCING WASTE

Vimar's intelligent thermostats allow programming the ideal temperature in every room, even remotely. Rooms are heated and cooled only when necessary, for waste reduction and energy savings of up to 30%.

WELL-BEING ASSURED AT HOME

Thanks to the Linea with XT platform multisensor and the Vimar View app, you can check room air quality: calculate the dew point, manage automation to prevent condensation and have the right level of relative humidity by activating automatic air recycling.

NO MORE POWER OUTAGES CAUSED BY OVERLOADS

If the contractual draw threshold is exceeded, the system automatically cuts off certain loads according to pre-set priorities in order to prevent a blackout due to overloading.



LEVERAGING SOLAR POWER FOR SELF-CONSUMPTION

The system offers smart management of the energy produced by a photovoltaic system, transferring it to previously selected appliances to reduce the amount of power drawn from the mains and support the greatest self-consumption.

EVERYTHING UNDER CONTROL, NO WASTE

Thanks to Vimar's integrated smart solutions, hotels for example become an ecosystem in perfect harmony with the lifestyles of their guests and employees. You have central control of lights and curtains, you heat and cool rooms only when necessary.

LIGHTING - ONLY WHEN NEEDED

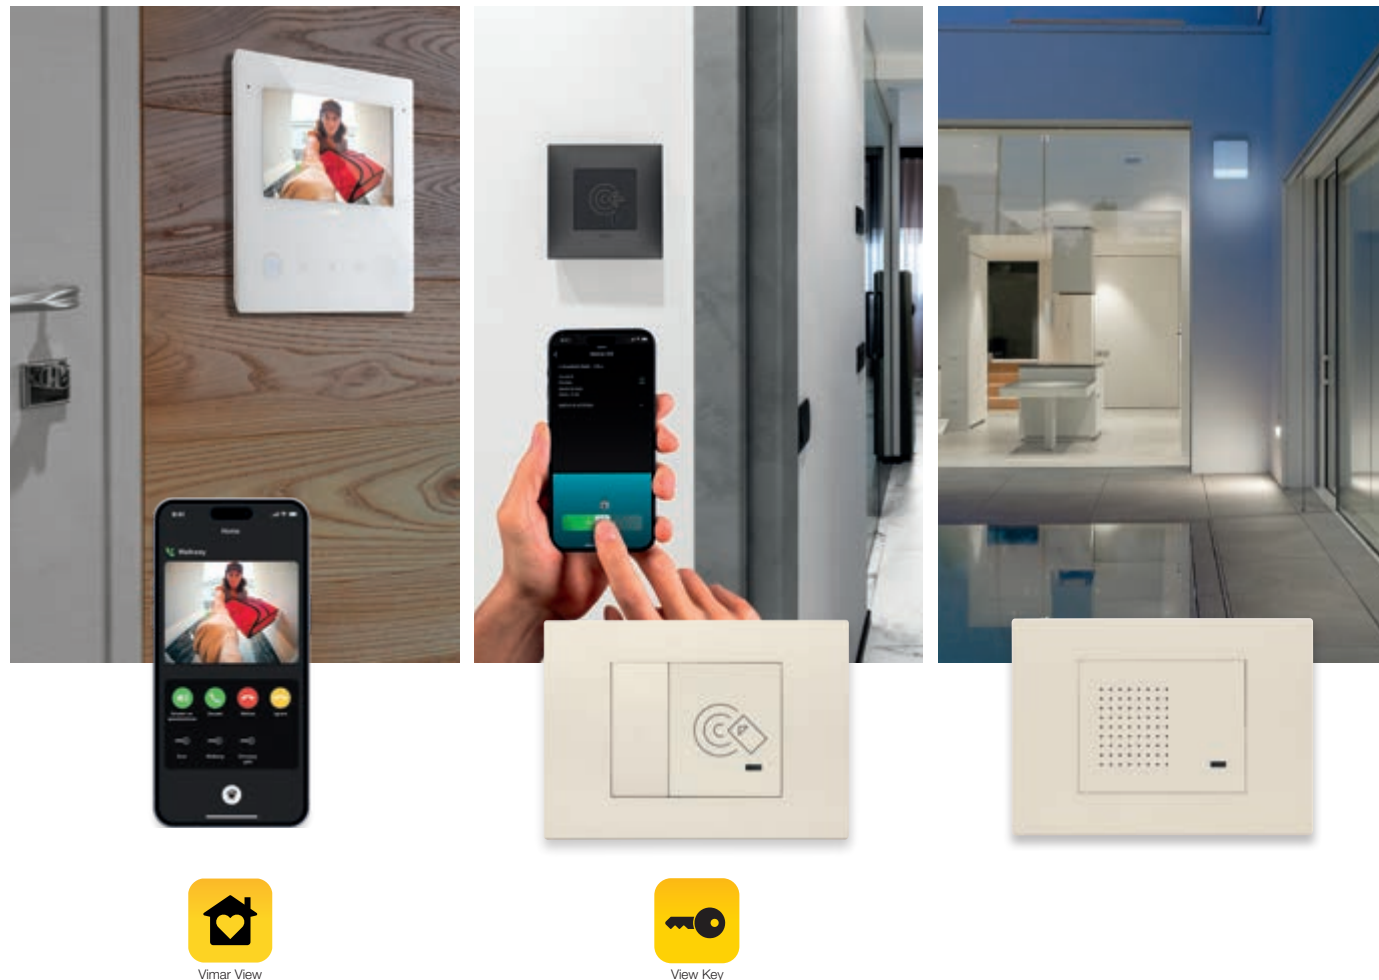
In corridors, stairwells or other communal areas of for example a hotel facility, sensors strategically positioned in the communal areas prevent energy wastage by turning the lights on only when someone approaches, forming a path of lights that illuminate in sequence.

Security

Integration of the video door entry functions and of the burglar alarm system for peace of mind at home or away, depending on the project. Technology also at the service of people with the Assisted Living devices and smart solutions that improve the quality of life and are easy to integrate with the View Wireless and By-me Plus systems.



Discover the functions of an intelligent building and the benefits of a digital platform for everyone: system installers, programmers, maintenance people, those who manage and supervise the building, and the people who live there. A single app to manage Vimar's connected devices and built-in solutions.



ANSWER, WHEREVER YOU ARE. MOVE ABOUT WITH PEACE OF MIND!

With the Vimar smart system you can see who's ringing the doorbell at any time. The call will be forwarded directly to your smartphone and you can open the gate. If you're away from home, in the office, relaxing in the garden or on the patio, just one tap on your smartphone to always have access to your home under control and open the door or the gate according to need.

SMART SYSTEM FOR ACCESS CONTROL

Access to an opening/room is granted by a veritable digital key ring, activated in the App, after receiving an invitation e-mail with the validity dates. Simply approach the reader and the opening will be opened with a simple gesture.

INTEGRATED BY-ALARM

With Vimar's burglar alarm system, smart cameras and sensors, your home is always safe. Your smartphone gives you round-the-clock control over all your spaces, and you can keep an eye on things inside and outside your home at all times.

Perfect synergy for peace of mind.



REMOTE ASSISTANCE

You have at your disposal a range of remote assistance devices to be connected to the devices for View Wireless and By-me Plus home automation and KNX connected systems, to increase the chances of making emergency calls or sending alerts by smartphone for accidental falls.

PRESENCE DETECTOR AND RADAR SENSORS

IoT sensors with Ultra Wide Band UWB radar technology are available, which make it possible, by measuring micro-movements of the body with the utmost precision (even the breathing of an immobile person), to detect the presence of a person in a room.

ACCESS CONTROL

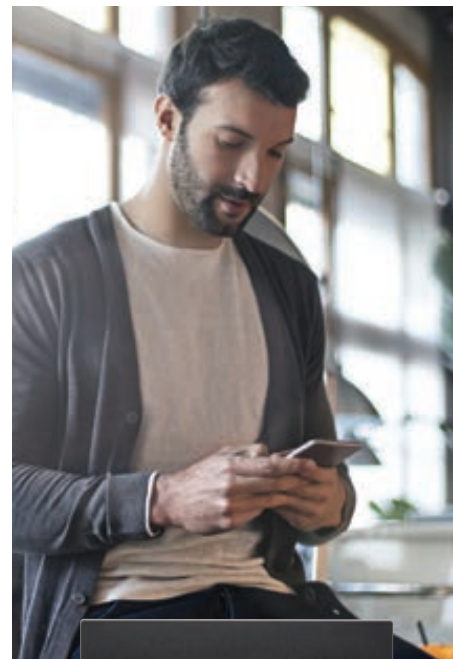

Simply place the card near the reader to open the electrical lock and turn on the courtesy lights. The reader permits entry into the various rooms only for authorised persons, signalling whether the room has to be made up or whether it is occupied.

Connectivity

Straightforward and user-friendly function management to turn a wiring system into a connected one. It all becomes easy and at your fingertips, also thanks to the Vimar View app. User-friendly and easy to use technologies supporting everyday activities.



Discover the functions of an intelligent building and the benefits of a digital platform for everyone: system installers, programmers, maintenance people, those who manage and supervise the building, and the people who live there. A single app to manage Vimar's connected devices and built-in solutions.



A WIRED BUILDING

Solutions that make domestic spaces more functional for working from home, as an alternative work mode. The Netsafe offer dedicated to fibre optics meets the requirements of standard CEI 306-22 and Italian Law 164/14 on structured residential wiring for FTTH (Fiber To The Home), allowing fibre connections to be made all the way to individual homes. Data and HDMI socket outlets complete the product offering.

AN INTERNET SIGNAL EVERYWHERE

To take connectivity even to where it usually doesn't reach or where the signal is weaker, Vimar offers its WI-FI Access Point, which extends the WLAN network to various rooms, also covering areas which the Internet router doesn't reach. This two-module flush mounting device is powered at 230 V and is designed to blend in seamlessly with any interior design style.

A CONNECTED WORLD

High-performing solutions to make the building smart. From the simple View Wireless system, which makes it possible to make a traditional wiring system connected, through to the most comprehensive home automation systems. As well as video door entry and video surveillance systems. All with superior performance levels guaranteed.




SOUND SYSTEM

Thanks to this innovative technology, wired connections are no longer necessary, simply activate the Bluetooth on your smartphone, the connection is made automatically and the music plays throughout the room. In addition, the Bluetooth receiver with built-in amplifier is designed to add local sound sources.



MANAGEMENT IN COMPLETE SAFETY

The manager of the accommodation facility or of a residential complex can, through the View Vimar portal, activate/deactivate user access permissions, set entry times and send invitation emails to enable new users with the dates of validity.



ALL THE FUNCTIONS INTEGRATED IN A SINGLE SYSTEM

Viewing alarms with a video inspection, opening the pedestrian gate with home automation system control, switching on the lights automatically via the alarm sensors, controlling Philips HUE lights and creating recipes with IFTTT.

Control devices	86
Power and signal socket outlets	111
Signalling, protection and detection	123
Comfort and climate	127
Stand alone and hotel solutions	128
Smart home View Wireless	132
Cover plates range	138
Installation types	160

Eikon. Two identities.
An expression of elegance, prestige and sustainability

Eikon is the image of luxury in all its facets, providing an impeccable solution for every style choice. Designed to be sustainable, with the most sophisticated functions for superlative energy management.

Eikon Exé



Traditional controls **Vintage** controls **Flat** controls **Tondo** controls

The exclusive flair of Eikon Exé and its available control versions, traditional, Vintage, Flat and the new Tondo control, give the electrical system an unmistakable style.

Eikon Evo

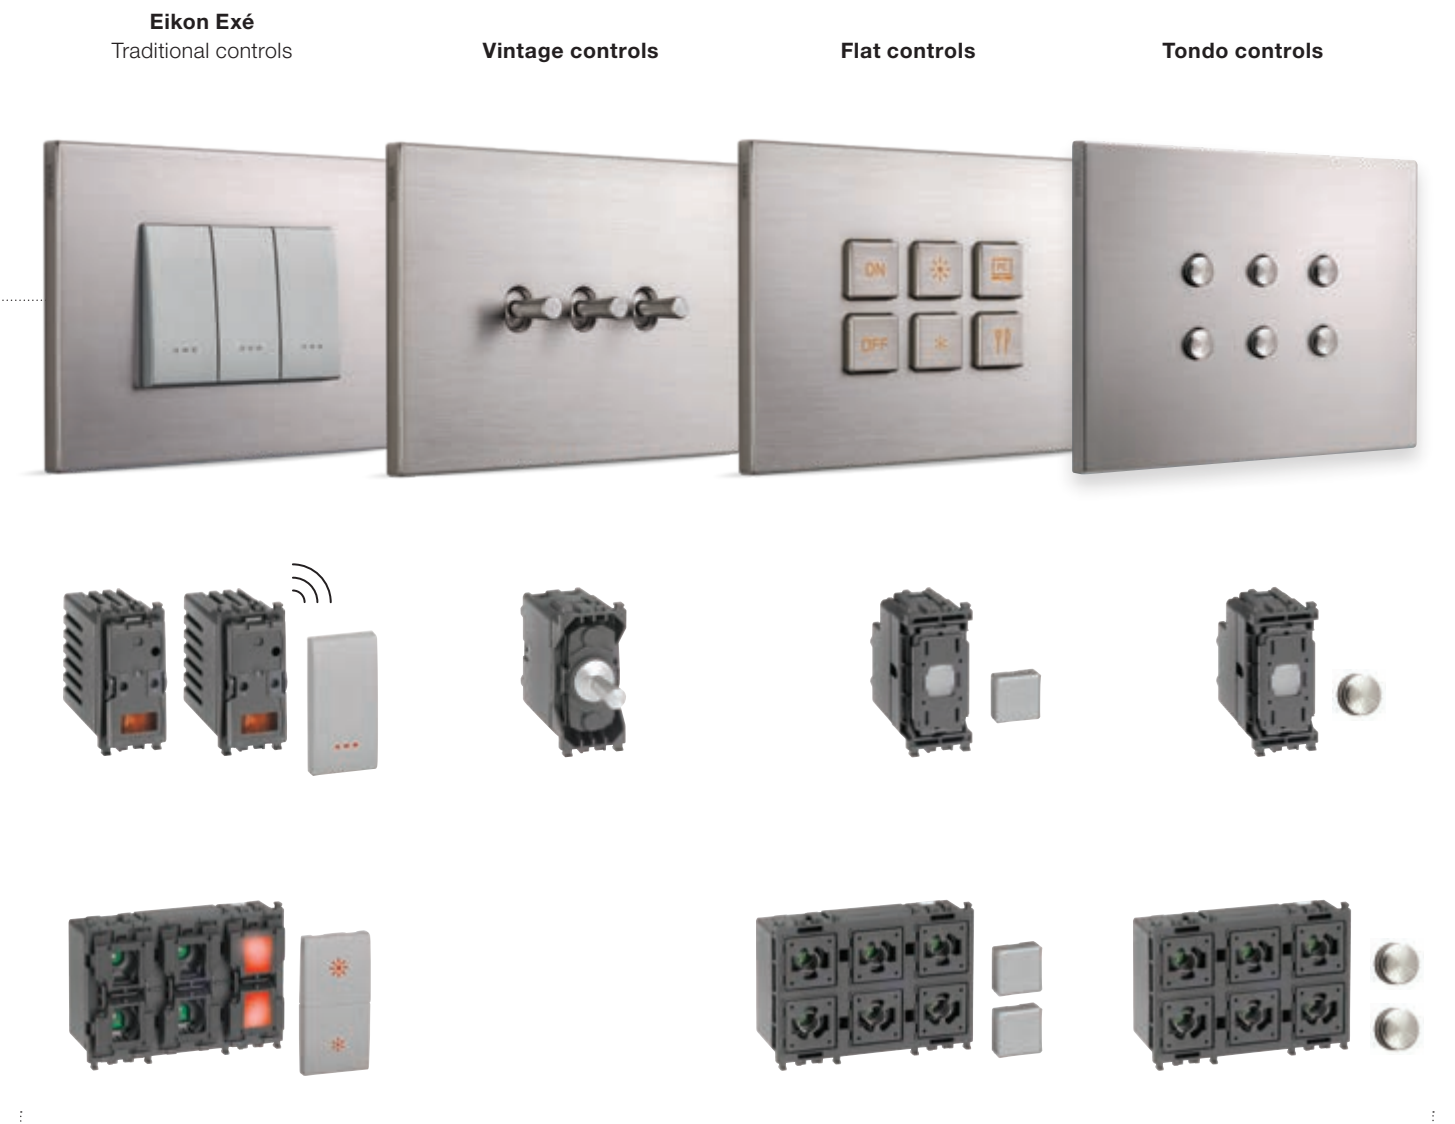
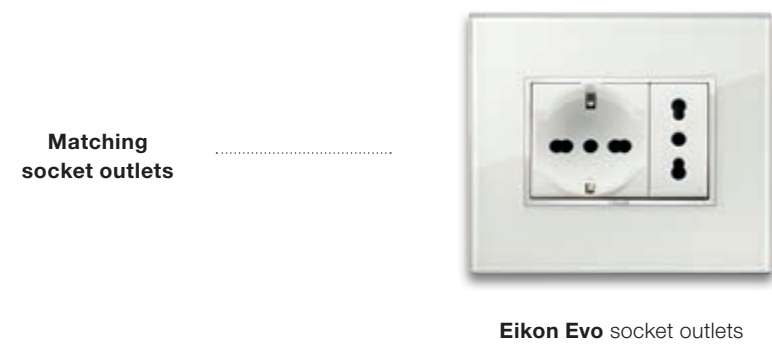
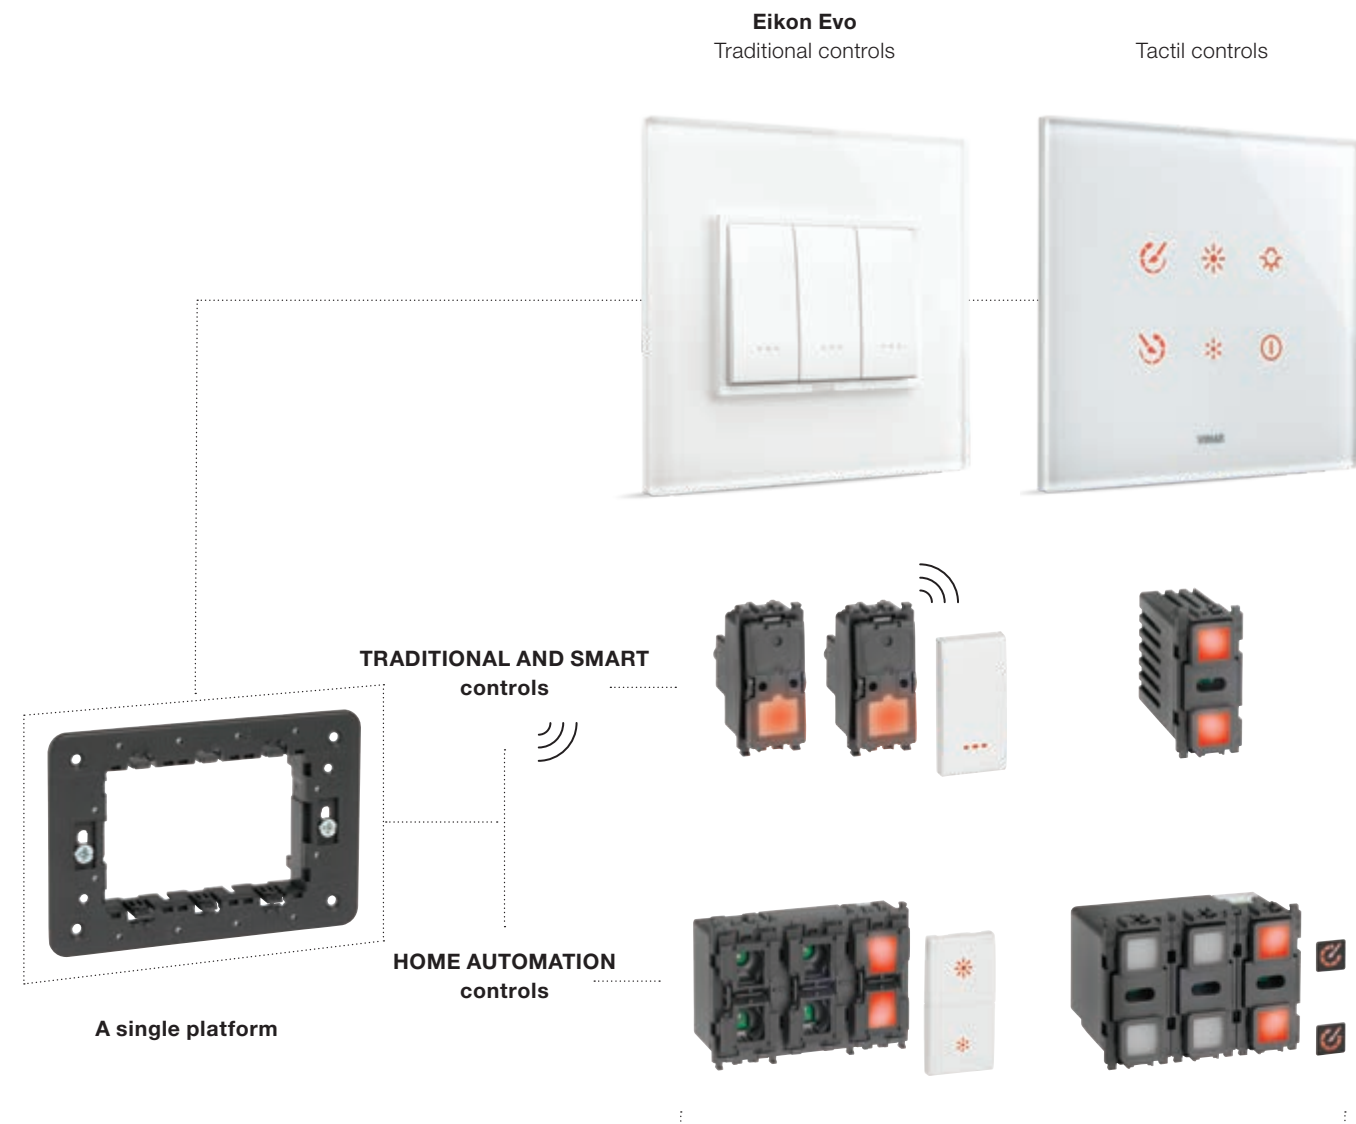


Traditional controls **Tactil** controls

The design of Eikon Evo responds to the latest interior design trends and brings out the best of Italian style, offering a perfect match with the Eikon Tactil cover plates, which are distinguished by refined touch technology.

Eikon.

A single platform, different styles



Eikon Exé





Eikon Exé

Material and form, prestige and refinement: an impeccable look and advanced features merge to produce simply astounding results.



reddot winner 2022



archiproducts
DESIGN AWARDS
WINNER 2019



Traditional control



Vintage control

Vintage controls embrace the mesmerising silhouettes of the past restyling them with a modern twist to give settings a retro touch.



Flat control

The squared, flat shape affords a pleasant effect flush with the surface, emphasising the textured appeal of the cover plate.



Tondo control

Delivers an enveloping and playful effect on the eye. Elegant and discreet, inspired by the classic round-shaped controls





Eikon Exé. Materials and finishes



Metal total look
Styling continuity, discreet tones for total immersion.



Brushed metals
Enhanced textured appeal of the surfaces thanks to delicate processing delivering a unique effect.



Polished metals
Brightening up the modern allure with polished finishings that enhance the sophisticated design.



Exclusive metals
Stylish refined finishings that make the rooms even more precious.



Glass
Enveloping hues and delicate reflections to create unique details in the rooms.



Mirrors
Elegant reflections interacting with the interiors brighten up the rooms.



Marbled stoneware
Textured strength, the ultimate quality and elegance for a material that recalls the most exclusive stones.



Wood
Natural wood taking on different shades, from light and warm hues to darker woods.



Leather
Classic shades featuring fine and refined textures.



More colour for your living spaces

More than 200 shades of cover plates and buttons.

For high-profile projects we can consider the colour of the lighting device together. In addition to the existing range of colours in the catalogue, with the Eikon Evo and Eikon Exé series in metal, you can choose to paint the cover plate in a special RAL K7 specification. For large projects, we can together consider painting the buttons also with the same colour as the cover plates, to create the effect which best suits the style of the facility and to add further value to the architectural project.



A versatile system

A modular design to accommodate the needs of your projects.

Our range stands out for its complete versatility in terms of both modular design and installation; for example, it combines the round socket outlets with the functions and style of the Eikon Exé range for a distinctive effect and to simplify everyday actions. From two, three and four modules, through to seven modules to optimise several devices within a single cover plate offering superior styling value.



Eikon Evo





Eikon Evo

Chromed stylish shapes for the frame, perfectly matching Eikon Tactil, a technological gem with high-tech appeal.



Traditional control

The refined technological flair of Eikon Evo and its version with Tactil controls. Prized materials enhancing the shapes with marked elegance. An impeccable, light and minimal silhouette.



Tactil control

Seductive at first glance, owing to the sophisticated touch technology, detecting your presence, anticipating your moves, lighting the controls. Décor item for exclusive interiors.





Eikon Evo. Materials and finishes



Metal Total Look
Enhanced textured appeal of the surfaces thanks to delicate processing delivering a unique effect.



Brushed metals
Enhanced textured appeal of the surfaces thanks to delicate processing delivering a unique effect.



Exclusive metals
Stylish refined finishings that make the rooms even more precious.



Glass
Enveloping hues and delicate reflections to create unique details in the rooms.



Mirrors
Elegant reflections interacting with the interiors brighten up the rooms.



Marbled stoneware
Textured strength, the ultimate quality and elegance for a material that recalls the most exclusive stones.



Wood
Natural wood taking on different shades, from light and warm hues to darker woods.



Leather
Classic shades featuring fine and refined textures.



Eikon Evo with Tactil control. Materials and finishes



Glass
Enveloping hues and delicate reflections to create unique details in the rooms.



Marbled stoneware
Textured strength, the ultimate quality and elegance for a material that recalls the most exclusive stones.



Wood
Natural wood taking on different shades, from light and warm hues to darker woods.



Leather
Classic shades featuring fine and refined textures.



Quality and versatility of products,
from its design concept.

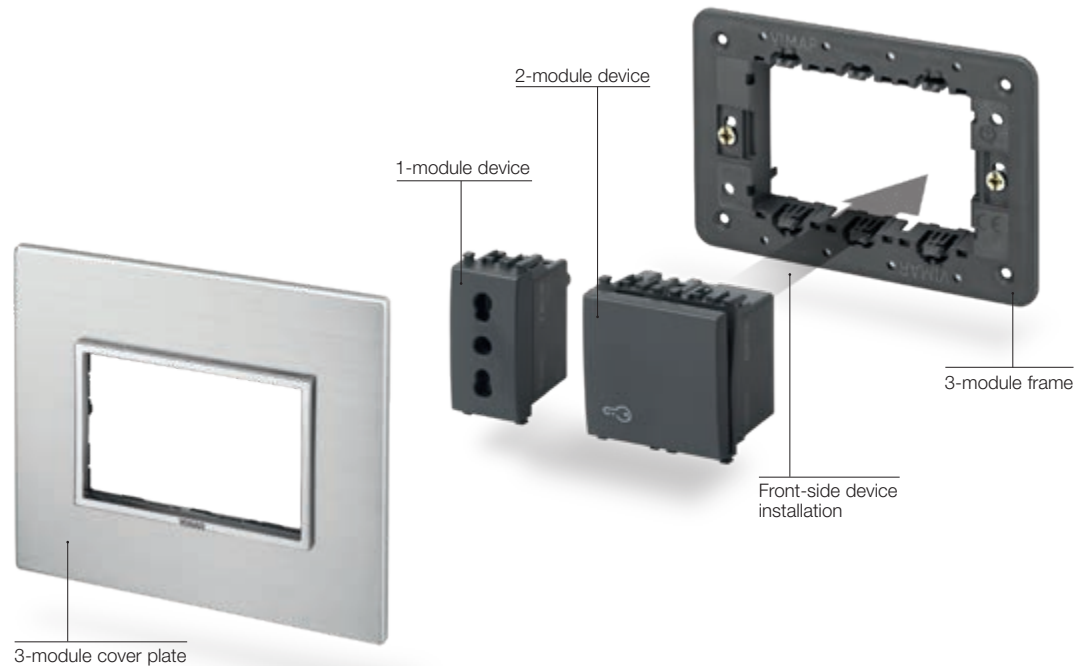
Plack-clack hooking system

A Vimar patent that makes it quick and easy to fit the lighting components (devices and mounting frames) to the cover plate. The plack-clack is a hooking system with an extra-strong mounting frame (thanks to its metal core) and exceptional rigidity, simplifying the front-on fitting and removal of devices.




Modular devices and cover plates

The modular device with from 1 to 3 modules lets you install multiple devices of different modularity in a single mounting frame, up to a composition of 21 modules for cover plates size 7+7+7. The mounting frame that installs the devices is equipped with interlocking teeth that provide strong and reliable fixing for each single device and allows perfect alignment between devices such as to create an orderly and visually pleasing stylistic effect. The device can also be fixed front-on to the mounting frame, allowing work on the installation at any time without having to remove the mounting frame from the box.





Controls

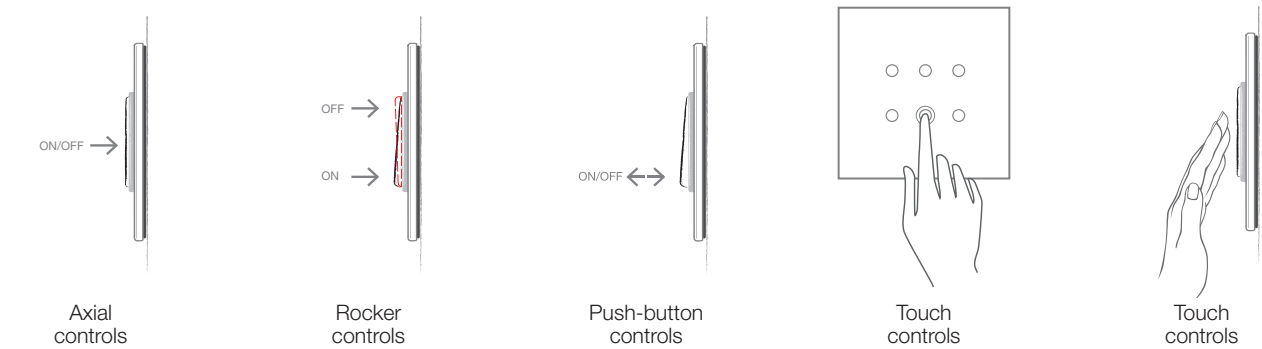Controlling the light, activating a scenario or managing loads are just some of the many uses of energy. The combination of mechanics and technology enables simplifying these daily gestures in operating a simple device, as a axial or rocker switches or push button, with precision and an intuitive understanding of the associated functions.







Backlighting and customization

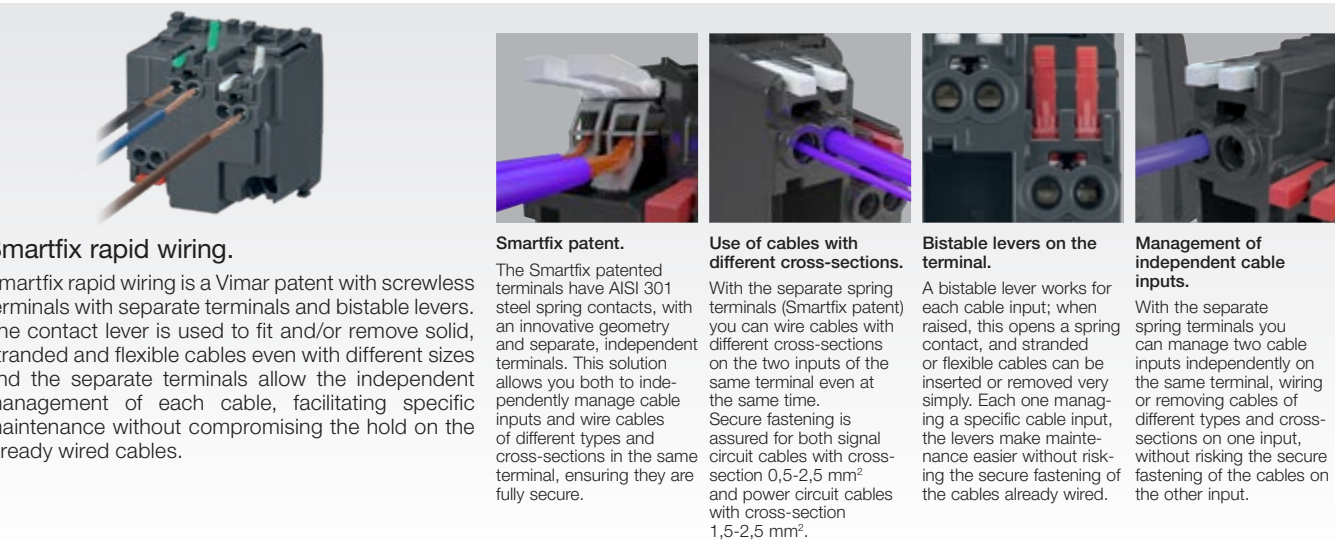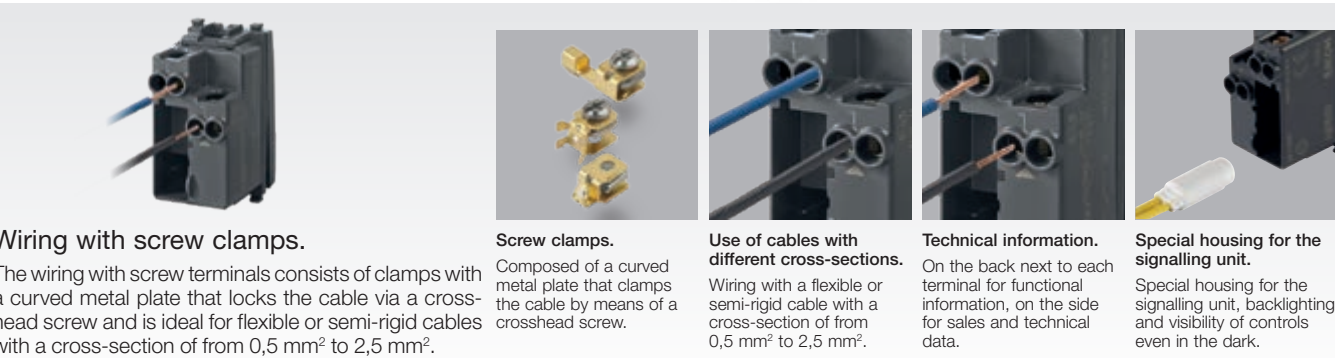The backlighting with different colours makes the controls visible even in the dark, while the symbols, either laser-engraved or customized on site, always give a clear indication of the various functions.



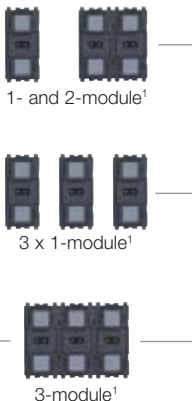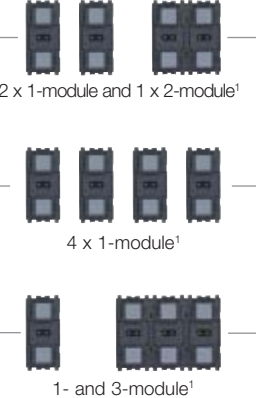Mounting features for Eikon Tactil
3-module installation



Composition	Box	Frame	Device	Cover plate
 2 modules	 Flush mounting	 2-module with/without screws or with claws	 2 x 1-module ¹ 1 x 2-module ¹	 2 modules
 3 modules	 Flush mounting	 With screws	 1- and 2-module ¹ 3 x 1-module ¹ 3-module ¹	 3 modules
 4 modules	 Flush mounting	 With screws	 2 x 1-module and 1 x 2-module ¹ 4 x 1-module ¹ 1- and 3-module ¹	 4 modules

* For other combinations, see the installation types from page 160

¹ To customise with Mylar adhesive labels (21847...)

Mounting features for Eikon Evo
3-module installation

Technical information.
On the back next to each terminal for functional information, on the side for sales and technical data.

Rocker controls and interchangeable buttons.
1-, 2- and 3-module, with backlighting symbols and customizables.

Ultra-slim support.
Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.

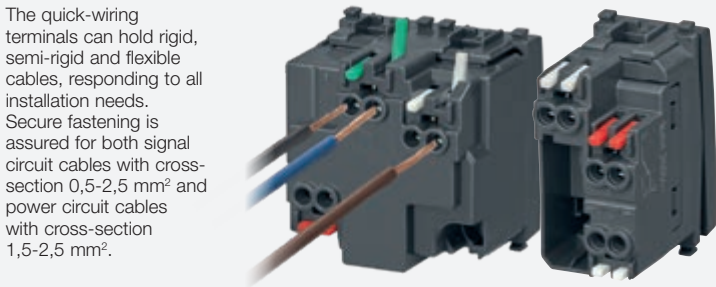
Plack-clack system.
The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

Night&day symbols.
Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.

Cover plates.
Large, square size, from 2 to 7 and 4+4 modules. In 6 precious materials and a wide range of colours with flat frame with no shaping, symmetrical and elegant to make the most of the lighting device.


SCREWLESS TERMINALS



For solid, stranded and flexible cables. Quick, easy and safe.



SCREW TERMINALS

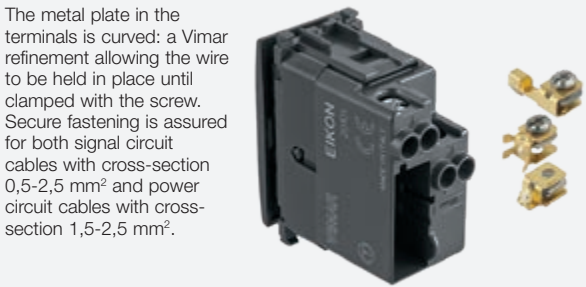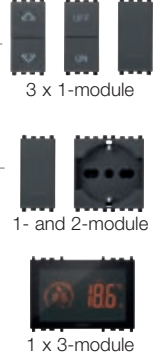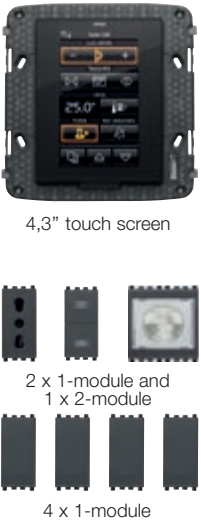Ergonomic contacts.



Composition	Box	Frame	Device	Cover plate
 2 modules	 Flush mounting ø 60 mm or 56x56 mm	 2-module with/without screws or with claws	 2 x 1-module 1 x 2-module	 2 modules
 From 3 to 7 modules	 Flush mounting from 3 to 7 modules	 With screws	 3 x 1-module 1- and 2-module 1 x 3-module	 From 3 to 7 modules*
 10" IP touch screen	 Semi-flush mounting			 Cover plate for 10" IP touch screen
 4,3" touch screen	 Flush mounting	 With screws	 4,3" touch screen 2 x 1-module and 1 x 2-module 4 x 1-module	 8 modules cover plate*
 4,3" IP touch screen			 4,3" IP touch screen	 8 modules cover plate*, rotated at 90° angle

* For other combinations, see the installation types from page 160

Mounting features for Eikon Evo

Installation with 71 mm distance between centres
(German and French standard)

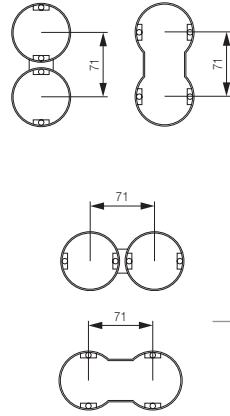


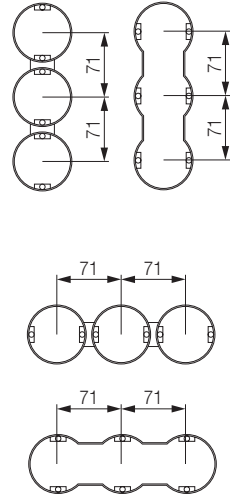
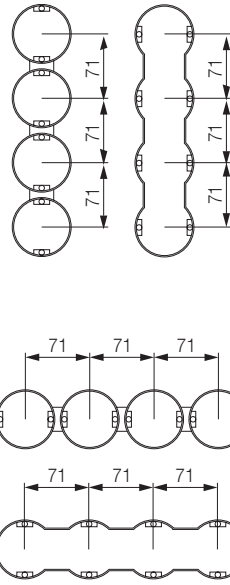

Ultra-flat mounting frame with metal core.
Just 2 mm thick, it guarantees strength, flexibility and electric insulation. The metal core has a galvanised, anti-oxidant coating and attaches devices quickly and easily. Wide range of installation possibilities because of the 71 mm between centres.

Plack-clack system.
The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

Interchangeable buttons
1- and 2-module, with backlighting symbols and customizables.

Technical information
On the back next to each terminal for functional information, on the side for sales and technical data.

Multi-module cover plates
Wide range of cover plates, from 2+2 to 2+2+2+2 modules, for safe and functional vertical and horizontal installation for any country.

Composition	Box	Frame	Device	Cover plate
 2+2 modules		 With/without screws with 71 mm between centres	 2 x 2 modules	 2+2 modules, vertical installation 2+2 modules, horizontal installation
 2+2+2 modules		 With/without screws with 71 mm between centres	 3 x 2 modules	 2+2+2 modules, vertical installation 2+2+2 modules, horizontal installation
 2+2+2+2 modules		 With/without screws with 71 mm between centres	 4 x 2 modules	 2+2+2+2 modules, vertical installation 2+2+2+2 modules, horizontal installation

* For other combinations, see the installation types from page 162

Mounting features for Eikon Exé
Eikon Exé Tondo



Cover plates.
The essence of minimalism, from 2 to 4 modules and from 1 to 8 gangs. Metal in 5 different colours.

Controls.
Electromechanical and home automation controls, to complete with interchangeable buttons.

Ultra-slim support.
Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.

Plack-clack system.
The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

Interchangeable buttons.
With backlightable symbols in 5 different colours for a perfect coordination between buttons and cover plates.

Composition	Box	Frame	Device	Cover plate
Eikon Exé Tondo				
 2 modules for 1 conventional switch	 Flush mounting ø 60 mm or 56x56 mm	 1-module without screws/with claws	 1 x 1-module	 2 modules for 1 conventional switch*
 2 modules for 4 home/KNX automation devices	 Flush mounting ø 60 mm or 56x56 mm	 2-module without screws/with claws	 1 x 2-module	 2 modules for 4 home/KNX automation devices
 3 modules for 3 conventional switches	 Flush mounting	 With screws	 3 x 1-module	 3 modules for 3 conventional switches*
 from 3 to 4 modules for 6 or 8 home/KNX automation devices	 Flush mounting from 3 to 4 modules	 With screws	 1 x 3-module	 from 3 to 4 modules for 6 or 8 home/KNX automation devices*

Mounting features for Eikon Exé

Eikon Exé Flat

Cover plates.
The essence of minimalism, from 2 to 4 modules and from 1 to 8 gangs.
Metal in 5 different colours.

Controls.
Electromechanical and home automation controls, to complete with interchangeable buttons.

Ultra-slim support.
Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.

Plack-clack system.
The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

Interchangeable buttons.
With backlightable symbols in 5 different colours for a perfect coordination between buttons and cover plates.

Eikon Exé Vintage

Cover plates.
The modern essence of the retrò, fascinating lines of the past, from 2 to 3 modules and from 1 to 3 gangs, in special metal finishes

Controls.
Electromechanical controls, highly performing and aesthetically coordinated.

Ultra-slim support.
Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.

Plack-clack system.
The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

Composition	Box	Frame	Device	Cover plate
Eikon Exé Flat				
 2 modules for 1 conventional switch	 Flush mounting ø 60 mm or 56x56 mm	 1-module without screws/with claws	 1 x 1-module	 2 modules for 1 conventional switch*
 2 modules for 4 home/KNX automation devices	 Flush mounting ø 60 mm or 56x56 mm	 2-module without screws/with claws	 1 x 2-module	 2 modules for 4 home/KNX automation devices
 3 modules for 3 conventional switches	 Flush mounting	 With screws	 3 x 1-module	 3 modules for 3 conventional switches*
 from 3 to 4 modules for 6 or 8 home/KNX automation devices	 Flush mounting from 3 to 4 modules	 With screws	 1 x 3-module	 from 3 to 4 modules for 6 or 8 home/KNX automation devices*
Eikon Exé Vintage				
 2-gang, 2 modules	 Flush mounting ø 60 mm or 56x56 mm	 2-module without screws/with claws	 2 x 1-module	 2-gang, 2 modules*
 3-gang, 3 modules	 Flush mounting	 With screws	 3 x 1-module	 3-gang, 3 modules*

* For other combinations, see the installation types from page 168

Mounting features for Eikon Exé

3-module installation

Technical information.
On the back next to each terminal for functional information, on the side for sales and technical data.

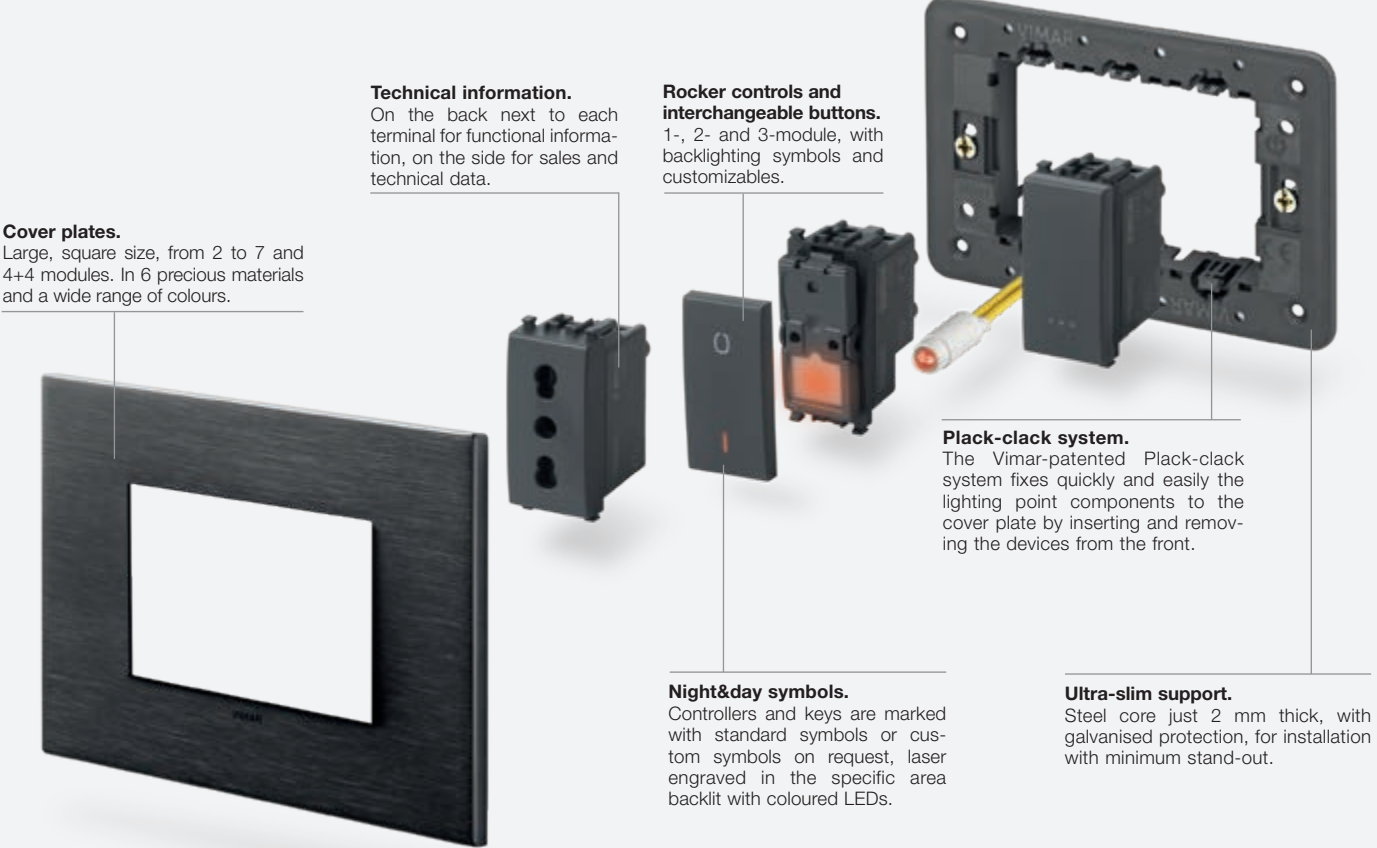
Rocker controls and interchangeable buttons.
1-, 2- and 3-module, with backlighting symbols and customizables.

Plack-clack system.
The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

Ultra-slim support.
Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.

Night&day symbols.
Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.

Cover plates.
Large, square size, from 2 to 7 and 4+4 modules. In 6 precious materials and a wide range of colours.



Flush mounting in plasterboard walls - flat design

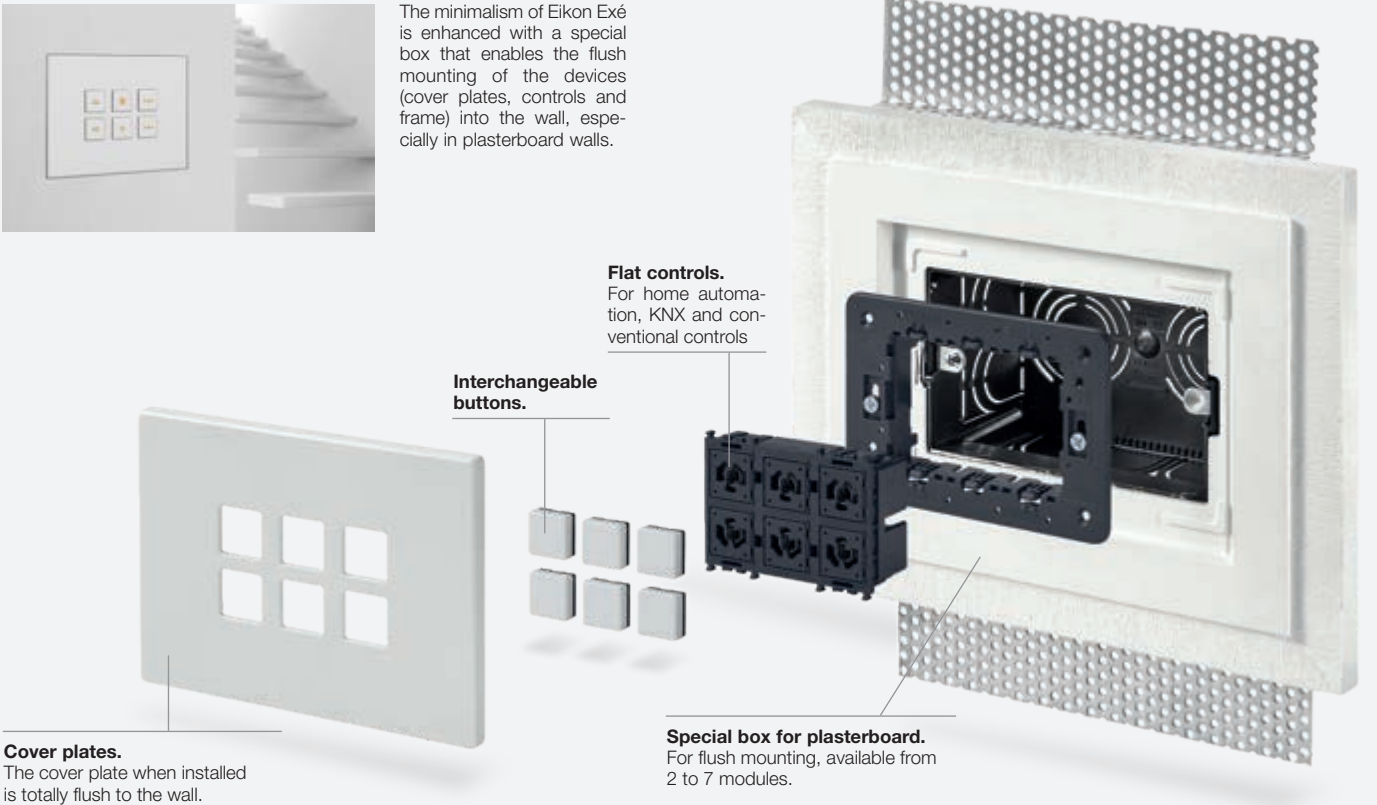
The minimalism of Eikon Exé is enhanced with a special box that enables the flush mounting of the devices (cover plates, controls and frame) into the wall, especially in plasterboard walls.


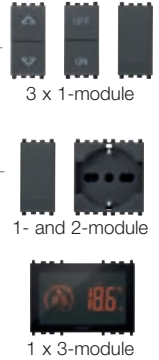
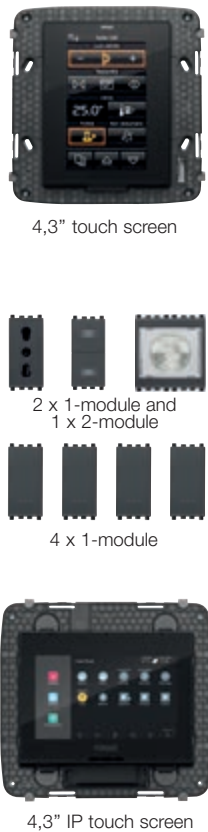
Flat controls.
For home automation, KNX and conventional controls

Interchangeable buttons.

Special box for plasterboard.
For flush mounting, available from 2 to 7 modules.

Cover plates.
The cover plate when installed is totally flush to the wall.



Composition	Box	Frame	Device	Cover plate
 2 modules	 Flush mounting ø 60 mm or 56x56 mm	 2-module with/without screws or with claws	 2 x 1-module 1 x 2-module	 2 modules
 From 3 to 7 modules	 Flush mounting from 3 to 7 modules	 With screws	 3 x 1-module 1- and 2-module 1 x 3-module	 From 3 to 7 modules*
 4,3" touch screen  4,3" IP touch screen	 Flush mounting	 With screws	 4,3" touch screen 2 x 1-module and 1 x 2-module 4 x 1-module 4,3" IP touch screen	 8 modules cover plate* 8 modules cover plate*, rotated at 90° angle

Mounting features for Eikon British standard

Modular devices mounting



Cover plates
Wide range of colours and combinations:
EIKON EVO
EIKON EXÉ

Technical information
On the back next to each terminal for functional information, on the side for sales and technical data.



Interchangeable buttons
One or two modules, with backlit symbols and customizable.



Customisation
Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.





Lowered frame.
Stainless steel mounting frame with earth terminal, with lugs for an easy and fast installation of the devices from the front.
Available also for 1 module with built-in blank module.

Monobloc device (with built-in mounting frame)



Cover plates
For vertical and horizontal mounting

Socket outlet
With SICURY patented system to prevent accidental contacts.



Monobloc device
Built-in mounting frame.

Fixing lugs
Possibility of horizontal and vertical mounting of device.









Signalling LED
Signalling of power supply, with integrated signalling unit, perfectly visible by day and night.



Matching possibility



Joining possibility with minimum 25 mm of distance between boxes

Composition	Box	Frame	Device	Cover plate
 1 module, modular mounting (1-gang)	 1-gang mounting box Fixing centres: 60,3 mm	 1-module with screws M 3,5	 1-gang switch, 1 module	 From 1 to 2 modules*
 2 modules, modular mounting (1-, 2-, 3-gang switch)	 1-gang mounting box Fixing centres: 60,3 mm	 2-module with screws M 3,5	 3-gang switch, 2 modules  2 x 1-gang switches, 1 module  1-gang switch, 2 modules	 From 1 to 2 modules*
 monobloc device or 3 modules modular mounting	 1-gang mounting box Fixing centres: 60,3 mm	 3-module with screws M 3,5	 Socket outlet monobloc device  ON/OFF unit monobloc device  1 x 2-module + 1 x 1-module	 monobloc horizontal mounting*  monobloc vertical mounting*  3 modules*
 monobloc device or 5 modules modular mounting	 2-gang mounting box Fixing centres: 120,6 mm	 5-module with screws M 3,5	 2-gang switched socket outlets monobloc device  2 x 2-module + 1 x 1-module (blank module)	 5 modules*

* For other combinations, see the installation types from page 173



EIKON TACTIL

Blank modules



21041
Blank module.
Depth: 11 mm

Electronic devices



21119
NO 6 A 230 V~ relay output, supply voltage 230 V~ 50/60 Hz.
Depth: 42,5 mm



21126
6 independent push buttons, 8 non-polarised inputs, 7 solid state outputs for non-polarised contacts, 9-32 VDC power supply - 3 modules. Depth: 22,8 mm



21174
For cosφ 0,6 2 A 230 V~ roller shutters laths adjustment.
Depth: 42,5 mm



21122
2 push buttons for the remote control of a single or centralized control.
Depth: 42,5 mm



21125
8 non-polarised inputs, 7 solid state outputs for non-polarised contacts, 9-32 VDC power supply, for external/internal hotel room or cabin applications - 3 modules. Depth: 22,8 mm

230 V~ 50 Hz dimmers



21134
MASTER, 40-500 W, 40-300 VA, CFL 10-200 W, LED 3-200 W.
Depth: 42,5 mm

By-me Plus - Electronic devices



21520.1
4 independent push buttons or 2 rocker buttons, 4 independent RGB LEDs - 2 modules. Depth: 38 mm



21540.1
6 independent push buttons or 3 rocker buttons, 6 independent RGB LEDs - 3 modules. Depth: 38 mm

By-me Plus - Thermostats



21514.F.70
Touch screen thermostat (heating and air conditioning), 3-speed and proportional FAN COIL control, class I (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator 01466.1 to make a class V modulating room thermostat (contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, white diamond - 2 modules. Depth: 30,2 mm



21514.F.76
Touch screen thermostat (heating and air conditioning), 3-speed and proportional FAN COIL control, class I (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator 01466.1 to make a class V modulating room thermostat (contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, black diamond - 2 modules. Depth: 30,2 mm



EIKON TACTIL

By-me Plus - Thermostats



21514.S.70
Touch screen thermostat (heating and air conditioning), configurable STAR control, class I (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator 01466.1 to make a class V modulating room thermostat (contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, white diamond - 2 modules. Depth: 30,2 mm



21514.S.76
Touch screen thermostat (heating and air conditioning), configurable STAR control, class I (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator 01466.1 to make a class V modulating room thermostat (contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, black diamond - 2 modules. Depth: 30,2 mm



21514.H.70
Touch screen thermostat (heating and air conditioning), MAKE UP ROOM and DO NOT DISTURB control, class I (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator 01466.1 to make a class V modulating room thermostat (contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, white diamond - 2 modules. Depth: 30,2 mm



21514.H.76
Touch screen thermostat (heating and air conditioning), MAKE UP ROOM and DO NOT DISTURB control, class I (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator 01466.1 to make a class V modulating room thermostat (contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, black diamond - 2 modules. Depth: 30,2 mm

Well-contact Plus - Electronic devices




21840
4 independently programmable buttons for single controls or scenes, KNX standard - 2 modules. Depth: 38 mm



21860
6 independently programmable buttons for single controls or scenes, KNX standard - 3 modules. Depth: 38 mm

Well-contact Plus - Access control system



21457
Eikon Tactil touch transponder card reader, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 36,5 mm



21666.70
Electronic plate for 21457, white diamond - 3 modules



21666.71
Electronic plate for 21457, aqua - 3 modules




21666.73
Electronic plate for 21457, pearl grey - 3 modules



21666.76
Electronic plate for 21457, black diamond - 3 modules

EIKON TACTIL

Well-contact Plus - Access control system



21666.53
Electronic plate for 21457, grey quartzite - 3 modules



21666.31
Electronic plate for 21457, italian walnut - 3 modules



21666.32
Electronic plate for 21457, white oak - 3 modules



21666.33
Electronic plate for 21457, wengé - 3 modules



21666.21
Electronic plate for 21457, cream - 3 modules



21666.22
Electronic plate for 21457, tobacco - 3 modules



21666.41
Electronic plate for 21457, glacier ice - 3 modules



OK21666.70.02
Electronic plate for 21457, IP55, white diamond - 3 modules




OK21666.71.02
Electronic plate for 21457, IP55, aqua - 3 modules



OK21666.73.02
Electronic plate for 21457, IP55, pearl grey - 3 modules



OK21666.76.02
Electronic plate for 21457, IP55, black diamond - 3 modules



21457.1
Eikon Tactil touch transponder card reader, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 36,5 mm



21666.70.01
Electronic plate for 21457.1, white diamond - 3 modules



21666.71.01
Electronic plate for 21457.1, aqua - 3 modules



21666.76.01
Electronic plate for 21457.1, black diamond - 3 modules



OK21666.70.03
Electronic plate for 21457.1, IP55, white diamond - 3 modules



OK21666.71.03
Electronic plate for 21457.1, IP55, aqua - 3 modules



OK21666.76.03
Electronic plate for 21457.1, IP55, black diamond - 3 modules

EIKON TACTIL

Well-contact Plus - Thermostats



21814.F.70
Touch screen thermostat (heating and air conditioning), 3-speed and proportional FAN COIL control, class I (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator 01466.1 to make a class V modulating room thermostat (contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, white diamond - 2 modules. Depth: 30,2 mm



21814.S.70
Touch screen thermostat (heating and air conditioning), configurable STAR control, class I (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator 01466.1 to make a class V modulating room thermostat (contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, white diamond - 2 modules. Depth: 30,2 mm



21814.H.70
Touch screen thermostat (heating and air conditioning), MAKE UP ROOM and DO NOT DISTURB control, class I (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator 01466.1 to make a class V modulating room thermostat (contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, white diamond - 2 modules. Depth: 30,2 mm



21814.F.76
Touch screen thermostat (heating and air conditioning), 3-speed and proportional FAN COIL control, class I (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator 01466.1 to make a class V modulating room thermostat (contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, black diamond - 2 modules. Depth: 30,2 mm



21814.S.76
Touch screen thermostat (heating and air conditioning), configurable STAR control, class I (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator 01466.1 to make a class V modulating room thermostat (contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, black diamond - 2 modules. Depth: 30,2 mm



21814.H.76
Touch screen thermostat (heating and air conditioning), MAKE UP ROOM and DO NOT DISTURB control, class I (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator 01466.1 to make a class V modulating room thermostat (contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, black diamond - 2 modules. Depth: 30,2 mm

EIKON TACTIL

Labels



▲21847.5
8 stickers sheets with symbols and words for customization of standard function for Eikon Tactil controls



▲21847.6
4 sheets with labels featuring symbols and wording for external/ internal hotel room or cabin functions for Eikon Tactil controls



▲21847.7
4 stickers sheets with symbols and words for customization of standard function for Eikon Tactil controls



1847.P
Sheet with stickers with symbols and words for customization of function for Eikon Tactil controls



21846
8 sheets with adhesive labels with numbers for room numbering to customise Eikon Tactil cover plates

Examples of Eikon Tactil custom controls

For the symbols to be applied, see the standard library on page 452



Eikon Tactil



Eikon Tactil control with adhesive labels 21847...



EIKON EXÉ VINTAGE

Devices

 22004.01 1P 10 AX 2-way switch, white. Depth: 32 mm	 22004.03 As on the side, grey. Depth: 32 mm	 22004.11 As on the side, nickel. Depth: 32 mm	 22004.12 As on the side, bronze. Depth: 32 mm	 22004.82 As on the side, gold. Depth: 32 mm	 22004.88 As on the side, satin gold. Depth: 32 mm
 22008.01 1P NO 10 A push button, white. Depth: 32 mm	 22008.03 As on the side, grey. Depth: 32 mm	 22008.11 As on the side, nickel. Depth: 32 mm	 22008.12 As on the side, bronze. Depth: 32 mm	 22008.82 As on the side, gold. Depth: 32 mm	 22008.88 As on the side, satin gold. Depth: 32 mm
 22061.01 2P 10 A 2-way push button, central OFF, white. Depth: 40,5 mm	 22061.03 As on the side, grey. Depth: 40,5 mm	 22061.11 As on the side, nickel. Depth: 40,5 mm	 22061.12 As on the side, bronze. Depth: 40,5 mm	 22061.82 As on the side, gold. Depth: 40,5 mm	 22061.88 As on the side, satin gold. Depth: 40,5 mm

Cover plates

Cover plates modularity

 22672.1.01 1-gang, 2 modules, matt white	 22672.2.01 2-gang, 2 modules, matt white	 22673.1.01 1-gang, 3 modules, matt white	 22673.2.01 2-gang, 3 modules, matt white	 22673.3.01 3-gang, 3 modules, matt white
 22674.4.01 4-gang, 4 modules, matt white	 22675.3.01 3-gang, 3 modules, British standard, matt white	 22679.5.01 5-gang, 5 modules, British standard, matt white		

Cover plate finishes

 .03 Anthracite grey	 .11 Brushed nickel	 .12 Brushed dark bronze	 .82 Gold	 .88 Satin gold
---	--	---	--	--

EIKON EXÉ FLAT

Electromechanical devices



22104
Axial 1P 10 AX 250 V~
2-way switch mechanism.
Depth: 39,5 mm



22108
Axial 1P NO 10 A 250 V~
push button mechanism.
Depth: 39,5 mm



02686.AX
4-button 1P NO 24 Vdc 50 mA
max., lightable - 2 modules.
Depth: 21,5 mm



02687.AX
Six push buttons 1P NO 24
VDC 50 mA max., lightable - 3
modules
Depth: 16.5 mm

By-me Plus - Home automation system devices



01480.AX
4-button, visible in darkness
with RGB LED brightness
adjustment - 2 modules.
Depth: 21,5 mm



01485.AX
6-button, visible in darkness
with RGB LED brightness
adjustment - 3 modules.
Depth: 21,5 mm

Well-contact Plus - Home automation system devices



01580.AX
4-button, KNX standard, visible in
darkness with RGB LED brightness
adjustment - 2 modules.
Depth: 21,5 mm



▲01583.AX
4 push buttons, KNX Secure
standard, RGB LED visible in
darkness with brightness con-
trol - 2 modules.
Depth: 21,5 mm



01585.AX
6-button, KNX standard, visible in
darkness with RGB LED brightness
adjustment - 3 modules.
Depth: 21,5 mm



▲01588.AX
6 push buttons, KNX Secure stand-
ard, RGB LED visible in darkness
with brightness control - 3 modules.
Depth: 21.5 mm

Interchangeable half buttons Eikon Exé Flat devices - 1-module



22751.01
Without
symbol,
white



22751.03
Without
symbol,
grey



22751.11
Without
symbol,
nickel



22751.12
Without
symbol,
bronze



22751.82
Without
symbol,
gold



22751.88
Without
symbol,
satin gold



22751.0.01
Without symbol,
customizable*,
white



22751.0.03
Without symbol,
customizable*,
grey



22751.0.11
Without symbol,
customizable*,
nickel



22751.0.12
Without symbol,
customizable*,
bronze



22751.0.82
Without symbol,
customizable*,
gold



22751.0.88
Without symbol,
customizable*,
satin gold



22751.1.01
ON/OFF
symbols,
white



22751.1.03
ON/OFF
symbols,
grey



22751.1.11
ON/OFF
symbols,
nickel



22751.1.12
ON/OFF
symbols,
bronze



22751.1.82
ON/OFF
symbols,
gold



22751.1.88
ON/OFF
symbols,
satin gold

EIKON EXÉ FLAT

Interchangeable half buttons Eikon Exé Flat devices - 1-module



22751.2.01
Arrows
symbols,
white



22751.2.03
Arrows
symbols,
grey



22751.2.11
Arrows
symbols,
nickel



22751.2.12
Arrows
symbols,
bronze



22751.2.82
Arrows
symbols,
gold



22751.2.88
Arrows
symbols,
satin gold



22751.3.01
Regulation
symbols,
white



22751.3.03
Regulation
symbols,
grey



22751.3.11
Regulation
symbols,
nickel



22751.3.12
Regulation
symbols,
bronze



22751.3.82
Regulation
symbols,
gold



22751.3.88
Regulation
symbols,
satin gold

Cover plates

Cover plates modularity for conventional devices



22682.1.01
1-gang, 2 modules,
matt white



22682.2.01
2-gang, 2 modules,
matt white



22683.1.01
1-gang, 3 modules,
matt white



22683.2.01
2-gang, 3 modules,
matt white



22683.3.01
3-gang, 3 modules,
matt white



22684.4.01
4-gang, 4 modules,
matt white



22685.3.01
3-gang, 3 modules,
British standard,
matt white



22689.5.01
5-gang, 5 modules,
British standard,
matt white

Cover plates modularity for home automation devices



22692.01
4-gang, 2 modules,
matt white



22693.01
6-gang, 3 modules,
matt white



22694.01
8-gang, 4 modules,
matt white



22695.01
6-gang, 3 modules,
British standard,
matt white



22699.01
10-gang, 5 modules,
British standard,
matt white

Cover plates finishes



.03
Anthracite grey



.11
Brushed nickel



.12
Brushed dark bronze



.82
Gold



.88
Satin gold

EIKON EXÉ TONDO

Electromechanical devices



22104
Axial 1P 10 AX, 250 V~
2-way switch mechanism.
Depth: 39,5 mm



22108
Axial 1P NO 10 A 250 V~
push button mechanism.
Depth: 39,5 mm

Two interchangeable half-button caps for Eikon Exé Tondo cover plates and electro-mechanical devices



22761.RN.01
Lighttable, white



22761.RN.03
Lighttable, grey



22761.RN.11
Lighttable, nickel



22761.RN.12
Lighttable, bronze



22761.RN.82
Lighttable, gold




22761.RN.88
Lighttable, satin gold

Electromechanical devices

By-me Plus - Home automation system devices



02686.AX
4-button 1P NO 24 Vdc 50 mA max.,
lighttable - 2 modules.
Depth: 16,5 mm
To be completed with buttons 22751.RN...



02687.AX
6-button 1P NO 24 Vdc 50 mA max.,
lighttable - 3 modules.
Depth: 16,5 mm
To be completed with buttons 22751.RN...



01480.AX
4-button, visible in darkness
with RGB LED brightness
adjustment - 2 modules.
Depth: 21,5 mm



01485.AX
6-button, visible in darkness
with RGB LED brightness
adjustment - 3 modules.
Depth: 21,5 mm

Well-contact Plus - Home automation system devices



01580.AX
4-button, KNX standard, visible in
darkness with RGB LED brightness
adjustment - 2 modules.
Depth: 21,5 mm



▲01583.AX
4 push buttons, KNX Secure
standard, RGB LED visible in
darkness with brightness con-
trol - 2 modules.
Depth: 21,5 mm



01585.AX
6-button, KNX standard, visible in
darkness with RGB LED brightness
adjustment - 3 modules.
Depth: 21,5 mm



▲01588.AX
6 push buttons, KNX Secure stand-
ard, RGB LED visible in darkness
with brightness control - 3 modules.
Depth: 21,5 mm

Two interchangeable half-button caps for Eikon Exé Tondo cover plates and home automation system devices



22751.RN.01
Lighttable, white



22751.RN.03
Lighttable, grey



22751.RN.11
Lighttable, nickel



22751.RN.12
Lighttable, bronze



22751.RN.82
Lighttable, gold



22751.RN.88
Lighttable, satin gold

EIKON EXÉ TONDO

Cover plates

Cover plates modularity for conventional devices



22682.RN.1.01
1-gang, 2 modules,
matt white



22682.RN.2.01
2-gang, 2 modules,
matt white



22683.RN.1.01
1-gang, 3 modules,
matt white



22683.RN.2.01
2-gang, 3 modules,
matt white



22683.RN.3.01
3-gang, 3 modules,
matt white



22684.RN.4.01
4-gang, 4 modules,
matt white



22685.RN.3.01
3-gang, 3 modules,
British standard,
matt white



22689.RN.5.01
5-gang, 5 modules,
British standard,
matt white

Cover plates modularity for home automation devices



22692.RN.01
4-gang, 2 modules,
matt white



22693.RN.01
6-gang, 3 modules,
matt white



22694.RN.01
8-gang, 4 modules,
matt white



22695.RN.01
6-gang, 3 modules,
British standard,
matt white



22699.RN.01
10-gang, 5 modules,
British standard,
matt white

Cover plates finishes



.03
Anthracite grey



.11
Brushed nickel



.12
Brushed dark bronze



.82
Gold



.88
Satin gold

EIKON EXÉ VINTAGE - EIKON EXÉ FLAT

Frames and boxes

Frames



21600.0
1-module,
without screws



21601.0
1-module,
with claws



21602
2-module,
with claws



21603
2-module,
without screws



21613
3-module, with screws



21614
4-module, with screws

Frames for British Standard



20606.0
1-module



20607
2-module



20608
3-module



20609
5-module

Flat mounting boxes for hollow walls and accessories



V71791
2-module



V71793
3-module



V71794
4-module



V71796
7-module



V71580
Accessory for removing flush
mounted Exé cover plate

Grey White Next

Blank modules and cable outlets

 20041 Blank module. Depth: 11 mm	 20044 Cable outlet. Depth: 16,6 mm	 20041.B Blank module. Depth: 11 mm	 20044.B Cable outlet. Depth: 16,6 mm	 20041.N Blank module. Depth: 11 mm	 20044.N Cable outlet. Depth: 16,6 mm
 20042 Blank module - 2 modules. Depth: 11 mm		 20042.B Blank module - 2 modules. Depth: 11 mm		 20042.N Blank module - 2 modules. Depth: 11 mm	
 20046² Cable outlet + terminalbar 20 A. Depth: 22,1 mm	 20047² 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm	 20046.B² Cable outlet + terminalbar 20 A. Depth: 22,1 mm	 20047.B² 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm	 20046.N² Cable outlet + terminalbar 20 A. Depth: 22,1 mm	 20047.N² 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm
 20049.L³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm		 20049.L.B³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm		 20049.L.N³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm	

1P 1-way switches 250 V~ (lightable°)

 20001 16 AX. Depth: 25 mm	 20001.2 16 AX. - 2 modules. Depth: 25 mm	 20001.B 16 AX. Depth: 25 mm	 20001.2.B 16 AX. - 2 modules. Depth: 25 mm	 20001.N 16 AX. Depth: 25 mm	 20001.2.N 16 AX. - 2 modules. Depth: 25 mm			
 20002 20 AX. Depth: 25 mm	 20002.2 20 AX. - 2 modules. Depth: 25 mm	 20003 20 AX, 3-gang. - 2 modules. Depth: 25 mm	 20002.B 20 AX. Depth: 25 mm	 20002.2.B 20 AX. - 2 modules. Depth: 25 mm	 20003.B 20 AX, 3-gang. - 2 modules. Depth: 25 mm	 20002.N 20 AX. Depth: 25 mm	 20002.2.N 20 AX. - 2 modules. Depth: 25 mm	 20003.N 20 AX, 3-gang. - 2 modules. Depth: 25 mm

Grey		White		Next	
1P 1-way switches 250 V~, screwless terminals (lightable°)					
					
20000.FX 10 AX Depth: 26,7 mm	20000.FX.2 10 AX - 2 modules. Depth: 26,7 mm	20000.FX.B 10 AX. Depth: 26,7 mm	20000.FX.2.B 10 AX - 2 modules. Depth: 26,7 mm	20000.FX.N 10 AX. Depth: 26,7 mm	20000.FX.2.N 10 AX - 2 modules. Depth: 26,7 mm
Axial 1P 1-way switches 250 V~ (lightable°)					
					
20101 16 AX. Depth: 34,5 mm	20101.2 16 AX - 2 modules. Depth: 34,5 mm	20101.B 16 AX. Depth: 34,5 mm	20101.2.B 16 AX - 2 modules. Depth: 34,5 mm	20101.N 16 AX. Depth: 34,5 mm	20101.2.N 16 AX - 2 modules. Depth: 34,5 mm
2P 1-way switches 250 V~ (lightable°)					
					
20015 16 AX. Depth: 25 mm	20015.2 16 AX - 2 modules. Depth: 25 mm	20015.B 16 AX. Depth: 25 mm	20015.2.B 16 AX - 2 modules. Depth: 25 mm	20015.N 16 AX. Depth: 25 mm	20015.2.N 16 AX - 2 modules. Depth: 25 mm

Grey		White		Next	
2P 1-way switches 250 V~ (lightable°)					
					
20016 20 AX. Depth: 26 mm	20016.2 20 AX, ON/OFF - 2 modules. Depth: 26 mm	20016.B 20 AX. Depth: 26 mm	20016.2.B 20 AX, ON/OFF - 2 modules. Depth: 26 mm	20016.N 20 AX. Depth: 26 mm	20016.2.N 20 AX, ON/OFF - 2 modules. Depth: 26 mm
2P 1-way switches 250 V~ (lightable°)					
					
20016.WH 20 AX, Water/Heater. Depth: 26 mm	20016.2.WH 20 AX, Water/Heater - 2 modules. Depth: 26 mm	20016.WH.B 20 AX, Water/Heater. Depth: 26 mm	20016.2.WH.B 20 AX, Water/Heater - 2 modules. Depth: 26 mm	20016.WH.N 20 AX, Water/Heater. Depth: 26 mm	20016.2.WH.N 20 AX, Water/Heater - 2 modules. Depth: 26 mm
2P 1-way switches 250 V~ (lightable°)					
					
20017 32 A, 1-gang, ON/OFF. Depth: 22,5 mm	20017.WH 32 A, 1-gang, Water/Heater. Depth: 22,5 mm	20017.B 32 A, 1-gang, ON/OFF. Depth: 22,5 mm	20017.WH.B 32 A, 1-gang, Water/Heater. Depth: 22,5 mm	20017.N 32 A, 1-gang, ON/OFF. Depth: 22,5 mm	20017.WH.N 32 A, 1-gang, Water/Heater. Depth: 22,5 mm

Grey	White	Next
2P 1-way switches 250 V~ (lightable°)		
 20018 45 A, 1-gang, ON/OFF. Depth: 22,5 mm	 20018.CK 45 A, 1-gang, cooker unit. Depth: 22,5 mm	
 20018.B 45 A, 1-gang, ON/OFF. Depth: 22,5 mm	 20018.CK.B 45 A, 1-gang, cooker unit. Depth: 22,5 mm	
 20018.N 45 A, 1-gang, ON/OFF. Depth: 22,5 mm	 20018.CK.N 45 A, 1-gang, cooker unit. Depth: 22,5 mm	
 20019 45 A, 1-gang, ON/OFF for 2-gang boxes. Depth: 22,5 mm	 20019.CK 45 A, 1-gang, cooker unit for 2-gang boxes. Depth: 22,5 mm	
 20019.B 45 A, 1-gang, ON/OFF for 2-gang boxes. Depth: 22,5 mm	 20019.CK.B 45 A, 1-gang, cooker unit for 2-gang boxes. Depth: 22,5 mm	
 20019.N 45 A, 1-gang, ON/OFF for 2-gang boxes. Depth: 22,5 mm	 20019.CK.N 45 A, 1-gang, cooker unit for 2-gang boxes. Depth: 22,5 mm	
Badge switch (lightable°)		
 20466 Badge switch. Depth: 22,1 mm	 20466.B Badge switch. Depth: 22,1 mm	 20466.N Badge switch. Depth: 22,1 mm
1P 2-way switches 250 V~ (lightable°)		
 20005 16 AX. Depth: 25 mm	 20005.2 16 AX - 2 modules. Depth: 25 mm	
 20005.B 16 AX. Depth: 25 mm	 20005.2.B 16 AX - 2 modules. Depth: 25 mm	
 20005.N 16 AX. Depth: 25 mm	 20005.2.N 16 AX - 2 modules. Depth: 25 mm	
 20006 20 AX. Depth: 25 mm	 20006.2 20 AX, - 2 modules. Depth: 25 mm	
 20006.B 20 AX. Depth: 25 mm	 20006.2.B 20 AX, - 2 modules. Depth: 25 mm	
 20006.N 20 AX. Depth: 25 mm	 20006.2.N 20 AX, - 2 modules. Depth: 25 mm	

Grey	White	Next
1P 2-way switches 250 V~, screwless terminals (lightable°)		
 20004.FX 10 AX. Depth: 26,7 mm	 20004.FX.2 10 AX - 2 modules. Depth: 26,7 mm	
 20004.FX.B 10 AX. Depth: 26,7 mm	 20004.FX.2.B 10 AX - 2 modules. Depth: 26,7 mm	
 20004.FX.N 10 AX. Depth: 26,7 mm	 20004.FX.2.N 10 AX - 2 modules. Depth: 26,7 mm	
1P 2-way switches 250 V~		
 20007 20 AX, 3-gang - 2 modules. Depth: 32,6 mm	 20007.B 20 AX, 3-gang - 2 modules. Depth: 32,6 mm	 20007.N 20 AX, 3-gang - 2 modules. Depth: 32,6 mm
Axial 1P 2-way switches 250 V~ (lightable°)		
 20105 16 AX. Depth: 34,5 mm	 20105.2 16 AX - 2 modules. Depth: 34,5 mm	
 20105.B 16 AX. Depth: 34,5 mm	 20105.2.B 16 AX - 2 modules. Depth: 34,5 mm	
 20105.N 16 AX. Depth: 34,5 mm	 20105.2.N 16 AX - 2 modules. Depth: 34,5 mm	
View Wireless connected 2-way switches		
 20592.0 Mechanism, 100-240 V 50/60 Hz output relay for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 60 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for actuator push button or recall a scenario. To complete with 1-, 2- or 3-module buttons. Depth: 37,5 mm	 	

Grey		White		Next	
1P reversing switches 250 V~ (lightable°)					
					
20013 16 AX. Depth: 25 mm	20013.2 16 AX - 2 modules. Depth: 25 mm	20013.B 16 AX. Depth: 25 mm	20013.2.B 16 AX - 2 modules. Depth: 25 mm	20013.N 16 AX. Depth: 25 mm	20013.2.N 16 AX - 2 modules. Depth: 25 mm
1P reversing switches 250 V~, screwless terminals (lightable°)					
					
20009.FX 10 AX. Depth: 27,7 mm	20009.FX.2 10 AX - 2 modules. Depth: 26,7 mm	20009.FX.B 10 AX. Depth: 27,7 mm	20009.FX.2.B 10 AX - 2 modules. Depth: 26,7 mm	20009.FX.N 10 AX. Depth: 27,7 mm	20009.FX.2.N 10 AX - 2 modules. Depth: 26,7 mm
Axial 1P reversing switches 250 V~ (lightable°)					
					
20113 16 AX. Depth: 34,5 mm	20113.2 16 AX - 2 modules. Depth: 34,5 mm	20113.B 16 AX. Depth: 34,5 mm	20113.2.B 16 AX - 2 modules. Depth: 34,5 mm	20113.N 16 AX. Depth: 34,5 mm	20113.2.N 16 AX - 2 modules. Depth: 34,5 mm
1P NO 10 A push buttons 250 V~ (lightable°)					
					
20008 10 A. Depth: 25 mm	20008.2 10 A - 2 modules. Depth: 25 mm	20008.B 10 A. Depth: 25 mm	20008.2.B 10 A - 2 modules. Depth: 25 mm	20008.N 10 A. Depth: 25 mm	20008.2.N 10 A - 2 modules. Depth: 25 mm
					
20008.2.C Bell symbol - 2 modules. Depth: 25 mm	20008.2.L Light symbol - 2 modules. Depth: 25 mm	20008.2.C.B Bell symbol - 2 modules. Depth: 25 mm	20008.2.L.B Light symbol - 2 modules. Depth: 25 mm	20008.2.C.N Bell symbol - 2 modules. Depth: 25 mm	20008.2.L.N Light symbol - 2 modules. Depth: 25 mm

Grey		White		Next	
1P NO 10 A push buttons 250 V~, screwless terminals (lightable°)					
					
20008.FX 10 A. Depth: 26,7 mm	20008.FX.2 10 A - 2 modules. Depth: 26,7 mm	20008.FX.B 10 A. Depth: 26,7 mm	20008.FX.2.B 10 A - 2 modules. Depth: 26,7 mm	20008.FX.N 10 A. Depth: 26,7 mm	20008.FX.2.N 10 A - 2 modules. Depth: 26,7 mm
Axial 1P NO 10 A push buttons 250 V~ (lightable°)					
					
20108 10 A. Depth: 34,5 mm	20108.2 10 A - 2 modules. Depth: 34,5 mm	20108.B 10 A. Depth: 34,5 mm	20108.2.B 10 A - 2 modules. Depth: 34,5 mm	20108.N 10 A. Depth: 34,5 mm	20108.2.N 10 A - 2 modules. Depth: 34,5 mm
1P NC 10 A push button 250 V~ (lightable°)					
					
20010 10 A. Depth: 25 mm	20010.B 10 A. Depth: 25 mm	20010.N 10 A. Depth: 25 mm			
Quid - Magnetic relay module for lighting (backfit)					
	03991 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, for backfit		03992 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 input for reset push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, luminous signalling of load status, for backfit		03993 ON/OFF sequence pulse relay module, 1 input for NO push button, 2 NO 10 A 220-240 V~ 50/60 Hz sequence relay outputs, for backfit
	▲ 03994 Quid magnetic relay module with sequential ON/OFF pulses, 1 input for NO push-button on phase (L) or on neutral (N), 1 NO relay output 10 AX 220-240 V~ 50/60		00932 Pre-wired LED unit for signalling the load status, for 03992, supply voltage 220-240 V~ 50/60 Hz, 0,5 W, green		

Grey	White	Next
------	-------	------

Lightable° mechanisms 250 V~ (common devices for the three versions)

 20001.0 1P 16 AX 1-way switch. Depth: 25 mm	 20015.0 2P 16 AX 1-way switch. Depth: 25 mm	 20005.0 1P 16 AX 2-way switch. Depth: 25 mm	 20013.0 1P 16 AX reversing switch. Depth: 25 mm	 20008.0 1P NO 10 A push button. Depth: 25 mm	 20010.0 1P NC 10 A push button. Depth: 25 mm	 20002.0 1P 20 AX 1-way switch. Depth: 25 mm	 20016.0 2P 20 AX 1-way switch. Depth: 25 mm	 20006.0 1P 20 AX 2-way switch. Depth: 25 mm
---	--	--	--	---	---	---	--	--



Lightable° mechanisms 250 V~, screwless terminals (common devices for the three versions)

 20000.FX.0 1P 10 AX 1-way switch. Depth: 26,7 mm	 20004.FX.0 1P 10 AX 2-way switch. Depth: 26,7 mm	 20009.FX.0 1P 10 AX reversing switch. Depth: 26,7 mm	 20008.FX.0 1P NO 10 A push button. Depth: 26,7 mm
--	---	---	--

1-module interchangeable buttons (lightable°)

 20021 No symbol	 20026 With diffuser	 20026.DND Do Not Disturb with diffuser	 20026.PLS Please Clean with diffuser	 20021.B No symbol	 20026.B With diffuser	 20026.DND.B Do Not Disturb with diffuser	 20026.PLS.B Please Clean with diffuser	 20021.N No symbol	 20026.N With diffuser	 20026.DND.N Do Not Disturb with diffuser	 20026.PLS.N Please Clean with diffuser
 20021.C Bell symbol	 20021.L Light symbol	 20021.P Key symbol		 20021.C.B Bell symbol	 20021.L.B Light symbol	 20021.P.B Key symbol		 20021.C.N Bell symbol	 20021.L.N Light symbol	 20021.P.N Key symbol	
 20021.99 O I symbols for 2P switches	 20031.PS 'Press' marked			 20021.99.B O I symbols for 2P switches	 20031.PS.B 'Press' marked			 20021.99.N O I symbols for 2P switches	 20031.PS.N 'Press' marked		

1-module interchangeable buttons for axial controls (lightable°)

 20131 No symbol	 20131.C Bell symbol	 20131.L Light symbol	 20131.P Key symbol	 20131.B No symbol	 20131.C.B Bell symbol	 20131.L.B Light symbol	 20131.P.B Key symbol	 20131.N No symbol	 20131.C.N Bell symbol	 20131.L.N Light symbol	 20131.P.N Key symbol
---	--	---	---	--	--	---	---	---	--	---	---

Grey	White	Next
------	-------	------

2-module interchangeable buttons (lightable°)

 20022 No symbol	 20027 With diffuser	 20032 Customizable	 20022.B No symbol	 20027.B With diffuser	 20032.B Customizable	 20022.N No symbol	 20027.N With diffuser	 20032.N Customizable
 20022.C Bell symbol	 20022.L Light symbol	 20022.P Key symbol	 20022.C.B Bell symbol	 20022.L.B Light symbol	 20022.P.B Key symbol	 20022.C.N Bell symbol	 20022.L.N Light symbol	 20022.P.N Key symbol
 20022.99 O I symbols for 2P switches	 20032.PS 'Press' marked		 20022.99.B O I symbols for 2P switches	 20032.PS.B 'Press' marked		 20022.99.N O I symbols for 2P switches	 20032.PS.N 'Press' marked	




2-module interchangeable buttons for axial controls (lightable°)

 20132 No symbol	 20132.C Bell symbol	 20132.L Light symbol	 20132.B No symbol	 20132.C.B Bell symbol	 20132.L.B Light symbol	 20132.N No symbol	 20132.C.N Bell symbol	 20132.L.N Light symbol
 20132.P Key symbol			 20132.P.B Key symbol			 20132.P.N Key symbol		

3-module interchangeable buttons (lightable°)

 20023 No symbol	 20028 With diffuser	 20023.B No symbol	 20028.B With diffuser	 20023.N No symbol	 20028.N With diffuser
 20023.C Bell symbol		 20023.C.B Bell symbol		 20023.C.N Bell symbol	

Grey	White			Next				
1P special switches 250 V~								
								
20050 NO 10 A, with lightable name- plate - 2 modules. Depth: 26,5 mm	20052 NO 10 A cord- operated. Depth: 25,5 mm	20053 NC 10 A cord- operated. Depth: 25,5 mm	20050.B NO 10 A, with lightable name- plate - 2 modules. Depth: 26,5 mm	20052.B NO 10 A cord- operated. Depth: 25,5 mm	20053.B NC 10 A cord- operated. Depth: 25,5 mm	20050.N NO 10 A, with lightable name- plate - 2 modules. Depth: 26,5 mm	20052.N NO 10 A cord- operated. Depth: 25,5 mm	20053.N NC 10 A cord- operated. Depth: 25,5 mm
Additional 1P switches 250 V~								
								
20056.33 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	20056.34 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	20058 Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm	20056.33.B 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	20056.34.B 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	20058.B Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm	20056.33.N 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	20056.34.N 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	20058.N Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm
1P NO 10 A push buttons 250 V~								
								
20066 Two NO 10 A, independents. Depth: 29,5 mm	20068.B With white diffuser (for signalling unit). Depth: 29 mm		20066.B Two NO 10 A, independents. Depth: 29,5 mm	20068.B.B With white diffuser (for signalling unit). Depth: 29 mm		20066.N Two NO 10 A, independents. Depth: 29,5 mm	20068.B.N With white diffuser (for signalling unit). Depth: 29 mm	
Switches 250 V~								
								
20060 2P 10 AX 2-way switch, OFF-central. Depth: 34 mm	20061 2P 10 A 2-way push button, OFF-central. Depth: 35 mm	20062 2 1P NO 10 A push buttons, interlocked. Depth: 29,5 mm	20060.B 2P 10 AX 2-way switch, OFF-central. Depth: 34 mm	20061.B 2P 10 A 2-way push button, OFF-central. Depth: 35 mm	20062.B 2 1P NO 10 A push buttons, interlocked. Depth: 29,5 mm	20060.N 2P 10 AX 2-way switch, OFF-central. Depth: 34 mm	20061.N 2P 10 A 2-way push button, OFF-central. Depth: 35 mm	20062.N 2 1P NO 10 A push buttons, interlocked. Depth: 29,5 mm
Quid - Electronic 2-way switch for roller shutter								
								
20196 Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 41,5 mm			20196.B Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 41,5 mm			20196.N Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 41,5 mm		

Grey	White	Next			
Quid - Electronic relay module and control unit module for roller shutters (backfit)					
 03996 Centralizable relay module, slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving, for backfit or junction boxes installation	 03997 Control unit module, 2 inputs for NO push button, 6 outputs for Quid roller shutter relay module (03996), 220-240 V~ 50/60 Hz power supply, for backfit or junction boxes installation				
View Wireless connected control device for roller shutter					
 20594.0 Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario, favourite position recall function. To complete with 2 1-module half-button. Depth: 37,5 mm	 Bluetooth®  zigbee certified product				
 20755.2 2 1-module interchangeable half-button, arrows symbol	 20755.2.B 2 1-module interchangeable half-button, arrows symbol	 20755.2.N 2 1-module interchangeable half-button, arrows symbol			
2P key-operated switches 250 V~ (add .CU to the basic code for switches with 000 unified key)					
 20083 16 AX 1-way switch, key removable in both positions. Depth: 33,5 mm	 20086 NO 16 A push button, key removable in "O" position. Depth: 33,5 mm	 20083.B 16 AX 1-way switch, key removable in both positions. Depth: 33,5 mm	 20086.B NO 16 A push button, key removable in "O" position. Depth: 33,5 mm	 20083.N 16 AX 1-way switch, key removable in both positions. Depth: 33,5 mm	 20086.N NO 16 A push button, key removable in "O" position. Depth: 33,5 mm
Dimmers**					
 20135.1 MASTER, universal. Depth: 41,5 mm	 20136.1 MASTER, universal, with potentiometer. Depth: 41,5 mm	 20135.1.B MASTER, universal. Depth: 41,5 mm	 20136.1.B MASTER, universal, with potentiometer. Depth: 41,5 mm	 20135.1.N MASTER, universal. Depth: 41,5 mm	 20136.1.N MASTER, universal, with potentiometer. Depth: 41,5 mm
 20135.1.120 As above, 120 V~. Depth: 40,5 mm		 20135.1.120.B As above, 120 V~. Depth: 40,5 mm		 20135.1.120.N As above, 120 V~. Depth: 40,5 mm	

Grey	White	Next
------	-------	------

Dimmer - controllable loads

Type	UNIVERSAL							
LOADS	20135.1				20136.1			
	2-wire connection		3-wire connection		2-wire connection		3-wire connection	
	LE	TE	LE	TE	LE	TE	LE	TE
Incandescence	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W
LED	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps
Electronic transformers for halogen	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 

Type	STANDARD
LOADS	20148 MASTER
	40 - 500 W 120 V~ 50/60 Hz 40 - 800 W 230 V~ 50/60 Hz
	40 - 300 VA 120 V~ 50/60 Hz 40 - 500 VA 230 V~ 50/60 Hz

Electronic supply unit



01876
230 V~ 50 Hz, for controllable LED RGB lamps, 12-24 Vdc

Infrared switches



20181
Lighting switch,
NO 6 A 230 V~
relay output,
50/60 Hz
20181.120
As above, 120 V~.
Depth: 37 mm



20181.B
Lighting switch,
NO 6 A 230 V~
relay output, 50/60 Hz
20181.120.B
As above, 120 V~.
Depth: 37 mm



20181.N
Lighting switch,
NO 6 A 230 V~
relay output,
50/60 Hz
20181.120.N
As above, 120 V~.
Depth: 37 mm

Grey	White	Next
------	-------	------

Infrared switches



00800.14
Frame for orien-
table support
surface mounting



00805.14
Adaptor for
orientable support
flush mounting
- 2 modules.
Depth: 36,5 mm



00801.14
Orientable
support
- 1 module



00800
Frame for orien-
table support
surface mounting



00805
Adaptor for
orientable support
flush mounting
- 2 modules.
Depth: 36,5 mm



00801
Orientable
support
- 1 module



00800.20
Frame for orien-
table support
surface mounting



00805.20
Adaptor for
orientable support
flush mounting
- 2 modules.
Depth: 36,5 mm



00801.20
Orientable
support
- 1 module



02690
Lighting switch, 2000 W incandescent lamps,
CFL 10-1000 W, LED 100 W, 220-240 V~
50/60 Hz, ceiling mounting

Set/Reset push buttons



20183
For emergency call, 2 NO 5 A 250 V~,
12 V~/12-24 Vdc (SELV) - 2 modules.
Depth: 38,5 mm



20183.B
For emergency call, 2 NO 5 A 250 V~,
12 V~/12-24 Vdc (SELV) - 2 modules.
Depth: 38,5 mm



20183.N
For emergency call, 2 NO 5 A 250 V~,
12 V~/12-24 Vdc (SELV) - 2 modules.
Depth: 38,5 mm

Radiofrequency kits



0K03906.03
Kit Friends of Hue Eikon Evo. Contains:
• 1 4-button RF device 03906
• 1 mounting frame 21507.B, white
• 2 buttons 20506.B, white
• 2-module cover plate 21642.17, total white

Grey	White	Next
Radiofrequency smart devices		
 03955 4-button flat device with RF transmission, 868 MHz, EnOcean® standard, to be completed with buttons 20506+20506.2 - 2 modules	 01796.2 Multi-function actuator with relay output NO 10 A 230 V~, 2 programmable inputs with switch function for local control, transferable local input as ON/OFF control for other EnOcean® actuators, 230 V~ 50/60 Hz power supply	 01798 EnOcean® actuator with 2 NO relay outputs 5 A 230 V~, 2 programmable inputs with switch function for local control, power supply 230 V~ 50/60 Hz
 03925 4-button flat device with RF transmission, 2.4 GHz, Bluetooth® Low Energy <i>wireless technology</i>, to be completed with buttons 20506+20506.2 - 2 modules	Compatible with CASAMBI  03905 4-button flat device with RF transmission, 2.4 GHz, ZigBee Green Power standard, to be completed with buttons 20506+20506.2 - 2 modules	Compatible with View Wireless system  03906 4-button flat device with RF transmission, 2.4 GHz, ZigBee Green Power and Friends of Hue standard, to be completed with buttons 20506 - 2 modules
 20507 Frame for RF devices surface mounting, only for Eikon Chrome cover plate, grey	 20507.B Frame for RF devices surface mounting, only for Eikon Chrome cover plate, white	
 21507.1 Frame for RF devices surface mounting, only for Eikon Evo cover plate, grey	 21507.1.B Frame for RF devices surface mounting, only for Eikon Evo cover plate, white	 22507 Frame for RF devices surface mounting, only for Eikon Exé cover plate, grey
		 22507.B Frame for RF devices surface mounting, only for Eikon Exé cover plate, white
 20506 Pair of 1-module buttons for RF devices, customizable	 20506.2 2-module button for RF devices, customizable	 20506.B Pair of 1-module buttons for RF devices, customizable
	 20506.2.B 2-module button for RF devices, customizable	 20506.N Pair of 1-module buttons for RF devices, customizable
		 20506.2.N 2-module button for RF devices, customizable

Grey	White	Next
SICURY 2P+E Italian standard socket outlets 250 V~		
 20201 10 A, P11. Depth: 25 mm	 20203 Bpresa 16 A, P17/11. Depth: 25 mm	 20201.B 10 A, P11. Depth: 25 mm
 20209 16 A, P30 - 2 modules. Depth: 29,4 mm	 20210 16 A, universal - 2 modules. Depth: 26 mm	 20203.B Bpresa 16 A, P17/11. Depth: 25 mm
		 20209.B 16 A, P30 - 2 modules. Depth: 29,4 mm
		 20210.B 16 A, universal - 2 modules. Depth: 26 mm
		 20201.N 10 A, P11. Depth: 25 mm
		 20203.N Bpresa 16 A, P17/11. Depth: 25 mm
		 20209.N 16 A, P30 - 2 modules. Depth: 29,4 mm
		 20210.N 16 A, universal - 2 modules. Depth: 26 mm
View Wireless connected control device for socket outlet		
 20593 Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39,5 mm	 20593.B Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39,5 mm	 20593.N Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39,5 mm
SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)		
 20203.R Bpresa 16 A, P17/11, red. Depth: 25 mm	 20209.A 16 A, P30, orange - 2 modules. Depth: 29,4 mm	 20209.R 16 A, P30, red - 2 modules. Depth: 29,4 mm
		 20209.V 16 A, P30, green - 2 modules. Depth: 29,4 mm
		 20210.R 16 A, universal, red - 2 modules. Depth: 29,4 mm
Socket outlets 250 V~ - German standard		
 20208 SICURY 2P+E 16 A, German - 2 modules. Depth: 29,4 mm	 20208.C SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 31,2 mm	 22208"" SICURY 2P+T 16 A, round German - 2 modules. Depth: 31,2 mm
		 20208.B SICURY 2P+E 16 A, German - 2 modules. Depth: 29,4 mm
		 20208.C.B SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 31,2 mm
		 22208.B"" SICURY 2P+T 16 A, round German - 2 modules. Depth: 31,2 mm
		 20208.N SICURY 2P+E 16 A, German - 2 modules. Depth: 29,4 mm
		 20208.C.N SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 31,2 mm
		 22208.N"" SICURY 2P+T 16 A, round German - 2 modules. Depth: 31,2 mm
 ▲ 20208.USB SICURY 2P+T 16 A 250 V~ German standard, 1 USB-C output 18 W - 2 modules. Depth: 29,4 mm	 ▲ 20208.USB.B SICURY 2P+T 16 A 250 V~ German standard, 1 USB-C output 18 W - 2 modules. Depth: 29,4 mm	 ▲ 20208.USB.N SICURY 2P+T 16 A 250 V~ German standard, 1 USB-C output 18 W - 2 modules. Depth: 29,4 mm

Socket outlets

Grey			White			Next		
Socket outlets 250 V~, screwless terminals - German standard								
 20208.FX SICURY 2P+E 16 A, German - 2 modules. Depth: 33,5 mm	 20208.FX.C SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 34,4 mm		 20208.FX.B SICURY 2P+E 16 A, German - 2 modules. Depth: 33,5 mm	 20208.FX.C.B SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 34,4 mm		 20208.FX.N SICURY 2P+E 16 A, German - 2 modules. Depth: 33,5 mm	 20208.FX.C.N SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 34,4 mm	
Socket outlets 250 V~ - French standard								
 20212 SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	 20212.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm	 22212.FL SICURY 2P+T 16 A, round French - 2 modules. Depth: 29,2 mm	 20212.B SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	 20212.C.B SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm	 22212.FL.B SICURY 2P+T 16 A, round French - 2 modules. Depth: 29,2 mm	 20212.N SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	 20212.C.N SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm	 22212.FL.N SICURY 2P+T 16 A, round French - 2 modules. Depth: 29,2 mm
Socket outlets 250 V~, screwless terminals - French standard								
 20212.FX SICURY 2P+E 16 A, French - 2 modules. Depth: 30,5 mm	 20212.FX.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,5 mm	 20212.FL.FX SICURY 2P+T 16 A, round French - 2 modules. Depth: 32,1 mm	 20212.FX.B SICURY 2P+E 16 A, French - 2 modules. Depth: 30,5 mm	 20212.FX.C.B SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,5 mm	 20212.FL.FX.B SICURY 2P+T 16 A, round French - 2 modules. Depth: 32,1 mm	 20212.FX.N SICURY 2P+E 16 A, French - 2 modules. Depth: 30,5 mm	 20212.FX.C.N SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,5 mm	 20212.FL.FX.N SICURY 2P+T 16 A, round French - 2 modules. Depth: 32,1 mm
Socket outlets 250 V~ - English standard								
 20214 SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	 20219 2P+E 13 A, English - 2 modules. Depth: 17 mm		 20214.B SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	 20219.B 2P+E 13 A, English - 2 modules. Depth: 17 mm		 20214.N SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	 20219.N 2P+E 13 A, English - 2 modules. Depth: 17 mm	
Socket outlets 250 V~ - Swiss standard								
 20226 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm	 20226.B 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm		 20226.N 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm					

Socket outlets

Grey			White			Next		
SICURY socket outlets 250 V~ - Euro-American standard								
								
20234 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	20248 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	20249 Two 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm	20234.B 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	20248.B 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	20249.B Two 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm	20234.N 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	20248.N 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	20249.N Two 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm
Socket outlets 127 V~ - USA and Saudi Arabian standards								
								
20242 SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm	20243 Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm		20242.B SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm	20243.B Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm		20242.N SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm	20243.N Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm	
Socket outlets 250 V~ - Israeli standard								
								
20240 SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm			20240.B SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm			20240.N SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm		
Socket outlets 250 V~ - Argentinian standard								
								
20250 SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm			20250.B SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm			20250.N SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm		
Socket outlets 250 V~ - Chinese standard								
								
20251 SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm	20252 SICURY 2P+E 10 A, Chinese - 2 modules. Depth: 27,3 mm	20254 SICURY 2P+E 16 A, Chinese - 2 modules. Depth: 30 mm	20251.B SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm	20252.B SICURY 2P+E 10 A, Chinese - 2 modules. Depth: 27,3 mm	20254.B SICURY 2P+E 16 A, Chinese. - 2 modules. Depth: 30 mm	20251.N SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm	20252.N SICURY 2P+E 10 A, Chinese - 2 modules. Depth: 27,3 mm	20254.N SICURY 2P+E 16 A, Chinese - 2 modules. Depth: 30 mm

Socket outlets

Grey		White	Next
Socket outlets 250 V~ - Australian standard			
 20262 SICURY 2P+E 15 A, Australian - 2 modules. Depth: 30,4 mm		 20262.B SICURY 2P+E 15 A, Australian - 2 modules. Depth: 30,4 mm	 20262.N SICURY 2P+E 15 A, Australian - 2 modules. Depth: 30,4 mm
Socket outlets 250 V~ - Brazilian standard			
 20264 SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm		 20265 SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm	
 20264.B SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm		 20265.B SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm	
 20264.N SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm		 20265.N SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm	
Socket outlets 250 V~ - Multistandard			
 20255 SICURY 2P+E 13 A, with 1P 1-way switch, lightable - 3 modules. Depth: 19,5 mm		 *20257 SICURY 2P+E 13 A, - 2 modules. Depth: 18,7 mm	
 20255.B SICURY 2P+E 13 A, with 1P 1-way switch, lightable - 3 modules. Depth: 19,5 mm		 *20257.B SICURY 2P+E 13 A, - 2 modules. Depth: 18,7 mm	
 20255.N SICURY 2P+E 13 A, with 1P 1-way switch, lightable - 3 modules. Depth: 19,5 mm		 *20257.N SICURY 2P+E 13 A, - 2 modules. Depth: 18,7 mm	
British standard socket outlets 250 V~ (with signalling unit 00930 included)			
 20221.L⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm		 20222.L⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm	
 20221.L.B⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm		 20222.L.B⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm	
 20221.L.N⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm		 20222.L.N⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm	
British standard socket outlets 250 V~ (with signalling unit 00930 included)			
 20215.L⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm		 20217.L⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm	
 20215.L.B⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm		 20217.L.B⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm	
 20215.L.N⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm		 20217.L.N⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm	

Socket outlets

Grey		White	Next
Socket outlets 125 V~ - 2P+E 15 A 60 Hz American standard			
 21296 Double American standard with GFCI - 3 modules. Depth: 33,4 mm		 21296.B Double American standard with GFCI - 3 modules. Depth: 33,4 mm	 21296.N Double American standard with GFCI - 3 modules. Depth: 33,4 mm
British Standard 250 V~ - socket outlets and USB supply units			
 ■ 20223.A SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-A. Depth: 21 mm		 20223.C SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-C. Depth: 22,8 mm	
 ■ 20223.A.B SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-A. Depth: 21 mm		 20223.C.B SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-C. Depth: 22,8 mm	
 ■ 20223.A.N SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-A. Depth: 21 mm		 20223.C.N SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-C. Depth: 22,8 mm	
 ■ 20224.AC SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches, 1 USB-A and 1 USB-C. Depth: 21 mm		 ■ 20224.AC.B SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches, 1 USB-A and 1 USB-C. Depth: 21 mm	
 ■ 20224.AC.N SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches, 1 USB-A and 1 USB-C. Depth: 21 mm			
 20224.CC SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches and 2 USB-C. Depth: 22,8 mm		 20224.CC.B SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches and 2 USB-C. Depth: 22,8 mm	 20224.CC.N SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches and 2 USB-C. Depth: 22,8 mm
 ■ 20266.A SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-A. Depth: 21 mm		 20266.C SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-C. Depth: 22,8 mm	
 ■ 20266.A.B SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-A. Depth: 22,8 mm		 20266.C.B SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-C. Depth: 22,8 mm	
 ■ 20266.A.N SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-A. Depth: 21 mm		 20266.C.N SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-C. Depth: 22,8 mm	

Socket outlets

Grey	White	Next
------	-------	------

Possibles matches - Foreign standard plugs and socket outlets

PLUG \ SOCKET OUTLET	German	French	English			Swiss	Israeli	Argentinian	Brazilian		British standard			
	20208	20212	20214	20219	20220	20226	20240	20250	20264	20265	20221.L	20222.L	20215.L	20217.L
S10 Italian standard	●	●					●							
2P 2,5 A Europlug	●	●				●	●		●	●				
2P+E 16 A 250 V~ German standard	●						○							
2P+E 16 A 250 V~ German and French standards	●	●					○							
2P 16 A 250 V~ German and French standards	●	●					●							
2P+E 16 A 250 V~ French standard		●					○							
2P+E 10 A 250 V~ Swiss standard						●								
2P+E 16 A 250 V~ Israeli standard							●							
2P+E 10 A 250 V~ Argentinian standard								●						
2P+E 10 A 250 V~ Brazilian standard									●	●				
2P+E 20 A 250 V~ Brazilian standard										●				
2P+E 5 A 250 V~ English standard			●										●	
2P+E 13 A 250 V~ English standard				●	●						●	●		
2P+E 15 A 250 V~ English standard														●
2P 13 A 220 V~ Saudi Arabian standard											●	●		

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

Possibles matches - Foreign standard plugs and socket outlets

PLUG \ SOCKET OUTLET	Multistandard		American	Euroamerican			American Saudi Arabian		Chinese			Australian
	20255	20257	20296	20234	20248	20249	20242	20243	20251	20252	20254	20262
S10 Italian standard	●	●		●	●	●						
2P 2,5 A Europlug	●	●		●	●	●						
2P+E 16 A 250 V~ German standard	○	○		○	○	○						
2P+E 16 A 250 V~ German and French standards				○	○	○						
2P 16 A 250 V~ German and French standards				●	●	●						
2P+E 16 A 250 V~ French standard				○	○	○						
2P+E 15 A 125 V~ American standard					●	●						
2P+E 10 A 250 V~ Swiss standard	●	●										
2P+E 5 A 250 V~ English standard	●	●										
2P+E 13 A 250 V~ English standard	●	●										
2P+E 15 A 125 V~ American standard			●				●	●				
2P 15 A 127 V~ American and Saudi Arabian standards							●	●				
2P+E 10 A 250 V~ Brazilian standard	●	●										
2P+E 10 A 250 V~ Chinese standard	●	●										
2P+E 16 A 250 V~ Chinese standard									●	●		
2P+E 10 A 250 V~ Australian standard	●	●									●	
2P+E 15 A 250 V~ Australian standard												●

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

Socket outlets

Grey	White	Next
------	-------	------

SICURY 2P+E interlocked socket outlets with CB and RCBO I_{Δn} 10 mA,  (120-230 V~ 50/60 Hz)



20276
16 A P30 250 V~,
1P+N C 16
- 3 modules.
Depth: 39,8 mm



20276.B
16 A P30 250 V~,
1P+N C 16
- 3 modules.
Depth: 39,8 mm



20276.N
16 A P30 250 V~,
1P+N C 16
- 3 modules.
Depth: 39,8 mm



20286
16 A P30 250 V~,
1P+N C 16
- 4 modules.
Depth: 39,8 mm



20286.B
16 A P30 250 V~,
1P+N C 16
- 4 modules.
Depth: 39,8 mm



20286.N
16 A P30 250 V~,
1P+N C 16
- 4 modules.
Depth: 39,8 mm

Shaver supply units



20290
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs
- 3 modules.
Depth: 42 mm



20291⁶
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm



20290.B
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs
- 3 modules.
Depth: 42 mm



20291.B⁶
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm



20290.N
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs
- 3 modules.
Depth: 42 mm



20291.N⁶
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm

250 V~ Italian standard socket outlets with USB power supply units



20210.USB
SICURY 2P+T 16 A
universal, 1 USB C
5 V 3 A - 2 modules.
Depth: 46,7 mm



20210.USB.B
SICURY 2P+T 16 A
universal, 1 USB C
5 V 3 A - 2 modules.
Depth: 46,7 mm



20210.USB.N
SICURY 2P+T 16 A
universal, 1 USB C
5 V 3 A - 2 modules.
Depth: 46,7 mm

USB supply unit



20292
5 V 1,5 A,
1 USB-A,
120-230 V~
50/60 Hz.
Depth:
37 mm



Δ20292.AC
12 W,
USB-A+C,
120-240 V~
50/60 Hz.
Depth:
36 mm



▲20292.AC.15
15 W,
USB-A+C,
120-240 V~
50/60 Hz.
Depth:
37 mm



20292.B
5 V 1,5 A,
1 USB-A,
120-230 V~
50/60 Hz.
Depth:
37 mm



Δ20292.AC.B
12 W,
USB-A+C,
120-240 V~
50/60 Hz.
Depth:
36 mm



▲20292.AC.15.B
15 W,
USB-A+C,
120-240 V~
50/60 Hz.
Depth:
37 mm



20292.N
5 V 1,5 A,
1 USB-A,
120-230 V~
50/60 Hz.
Depth:
37 mm



Δ20292.AC.N
12 W,
USB-A+C,
120-240 V~
50/60 Hz.
Depth:
36 mm



▲20292.AC.15.N
15 W,
USB-A+C,
120-240 V~
50/60 Hz.
Depth:
37 mm



Socket outlets

Grey	White	Next
USB supply unit		
 Δ20292.C 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm	 ▲20292.C.25 25 W, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 37 mm	 20292.CC 12 W, 2 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm
 Δ20292.C.B 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm	 ▲20292.C.25.B 25 W, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 37 mm	 20292.CC.B 12 W, 2 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm
 Δ20292.C.N 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm	 ▲20292.C.25.N 25 W, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 37 mm	 20292.CC.N 12 W, 2 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm
 20298 30W, USB C, 120-140 V~ 50/60 Hz - 2 modules. Depth: 33.35 mm	 20298.B 30W, USB C, 120-140 V~ 50/60 Hz - 2 modules. Depth: 33.35 mm	 20298.N 30W, USB C, 120-140 V~ 50/60 Hz - 2 modules. Depth: 33.35 mm
 20298.60 60W, USB C, 120-140 V~ 50/60 Hz - 2 modules. Depth: 32.9 mm	 20298.60.B 60W, USB C, 120-140 V~ 50/60 Hz - 2 modules. Depth: 32.9 mm	 20298.60.N 60W, USB C, 120-140 V~ 50/60 Hz - 2 modules. Depth: 32.9 mm
USB supply unit		
 Δ 20295 5 V 2,1 A, 2 USB-A for total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm	 20295.AC 5 V 3 A, USB-A+C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm	 Δ 20295.B 5 V 2,1 A, 2 USB-A for total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm
 20295.AC.B 5 V 3 A, USB-A+C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm	 Δ 20295.N 5 V 2,1 A, 2 USB-A for total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm	 20295.AC.N 5 V 3 A, USB-A+C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm
 20295.CC 5 V 3 A, 2 USB-C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm	 20295.CC.B 5 V 3 A, 2 USB-C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm	 20295.CC.N 5 V 3 A, 2 USB-C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm

Socket outlets • Signal reception socket outlets

Grey	White	Next
Bluetooth® wireless technology smart sound		
 21588 Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm	 21588.B Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm	 21588.N Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm
 20587 Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm	 20099 Volume control, 8 Ω 15 W - 2 modules. Depth: 30,9 mm	 20587.N Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm
 20590¹ 4+4 W stereo amplifier, 2 ouputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36 mm	 20590.B¹ 4+4 W stereo amplifier, 2 ouputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36 mm	 20590.N¹ 4+4 W stereo amplifier, 2 ouputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36 mm
Special socket outlets		
 20331 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 25 mm	 20331.B 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 25 mm	 20331.N 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 25 mm
 20345 USB outlet, screw terminals. Depth: 31,9 mm	 20335 3 RCA outlets, screw terminals. Depth: 23,4 mm	 20583 Spring connector for speaker. Depth: 19,4 mm
 20345.B USB outlet, screw terminals. Depth: 31,9 mm	 20335.B 3 RCA outlets, screw terminals. Depth: 23,4 mm	 20583.B Spring connector for speaker. Depth: 19,4 mm
 20345.N USB outlet, screw terminals. Depth: 31,9 mm	 20335.N 3 RCA outlets, screw terminals. Depth: 23,4 mm	 20583.N Spring connector for speaker. Depth: 19,4 mm

Signal reception socket outlets

Grey	White	Next
Special socket outlets		
 20346 HDMI, Keystone connection. Depth: 37,4 mm	 20346.B HDMI, Keystone connection. Depth: 37,4 mm	 20346.N HDMI, Keystone connection. Depth: 37,4 mm
 20346.H HDMI, Keystone connection, 90° cable. Depth: 30,5 mm	 20346.H.B HDMI, Keystone connection, 90° cable. Depth: 30,5 mm	 20346.H.N HDMI, Keystone connection, 90° cable. Depth: 30,5 mm
Phone jack		
 20320 RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm	 20320.B RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm	 20320.N RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm
 20324 Israeli standard, screw terminals. Depth: 33,4 mm	 20324.B Israeli standard, screw terminals. Depth: 33,4 mm	 20324.N Israeli standard, screw terminals. Depth: 33,4 mm
 20327 8-contact, French standard - 2 modules. Depth: 22 mm	 20327.B 8-contact, French standard - 2 modules. Depth: 22 mm	 20327.N 8-contact, French standard - 2 modules. Depth: 22 mm
 20322 RJ11, 6-position 4-contact (6/4) + cover. Depth: 33,4 mm	 20322.B RJ11, 6-position 4-contact (6/4) + cover. Depth: 33,4 mm	 20322.N RJ11, 6-position 4-contact (6/4) + cover. Depth: 33,4 mm

Signal reception socket outlets




Grey	White	Next
Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output male and female)		
 20300.01 Single connection, 1 dB. Depth: 26,8 mm	 20300.10 Through-line, 10 dB. Depth: 26,8 mm	 20300.01.N Single connection, 1 dB. Depth: 26,8 mm
 20300.01.B Single connection, 1 dB. Depth: 26,8 mm	 20300.10.B Through-line, 10 dB. Depth: 26,8 mm	 20300.10.N Through-line, 10 dB. Depth: 26,8 mm
Coaxial TV-RD-SAT 5-2400 MHz socket outlets, demix (male and F-type outputs)		
 20302.01 Single connection 1 dB - 2 modules. Depth: 22,4 mm	 20302.10 Through-line 10 dB - 2 modules. Depth: 22,4 mm	 20302.01.N Single connection 1 dB - 2 modules. Depth: 22,4 mm
 20302.01.B Single connection 1 dB - 2 modules. Depth: 22,4 mm	 20302.10.B Through-line 10 dB - 2 modules. Depth: 22,4 mm	 20302.10.N Through-line 10 dB - 2 modules. Depth: 22,4 mm
Coaxial TV-FM-SAT 5-2400 MHz socket outlets (male, female and F-type outputs)		
 20303 Single connection 1 dB - 2 modules. Depth: 20,5 mm	 20303.B Single connection 1 dB - 2 modules. Depth: 20,5 mm	 20303.N Single connection 1 dB - 2 modules. Depth: 20,5 mm
F-type socket outlets		
 20318 With F type female connector. Depth: 11 mm	 20318.B With F type female connector. Depth: 11 mm	 20318.N With F type female connector. Depth: 11 mm
Coaxial TV 40-862 MHz socket outlets (1 output: female)		
 *20313 Single connection. Depth: 29,2 mm	 *20313.B Single connection. Depth: 29,2 mm	 *20313.N Single connection. Depth: 29,2 mm

Signal reception socket outlets

Grey	White	Next									
Adaptors for coaxial TV-RD-SAT socket outlets											
 20319 For 2 or 3 outputs - 2 modules	 20319.B For 2 or 3 outputs - 2 modules	 20319.N For 2 or 3 outputs - 2 modules									
Terminal resistor and coaxial TV-RD-SAT 2400 MHz connectors											
 16330 Z 75 Ω, for frequencies up to 2400 MHz	 01644 Male, axial cable entry	 01645 Female, axial cable entry	 01634 Male, 90°-cable entry	 01635 Female, 90°-cable entry	 01654 Male F-type, for RG59 cable						
RJ45 data ports											
 20337.6 Cat. 6, UTP, shuttered. Depth: 26,1 mm	 20338.8 Netsafe, Cat. 5e, UTP. Depth: 23,6 mm	 20339.4 Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm	 20339.5 Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm	 20337.6.B Cat. 6, UTP, shuttered. Depth: 26,1 mm	 20338.8.B Netsafe, Cat. 5e, UTP. Depth: 23,6 mm	 20339.4.B Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm	 20339.5.B Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm	 20337.6.N Cat. 6, UTP, shuttered. Depth: 26,1 mm	 20338.8.N Netsafe, Cat. 5e, UTP. Depth: 23,6 mm	 20339.4.N Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm	 20339.5.N Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm
 20339.6 Netsafe, Cat. 6, UTP 110. Depth: 22,3 mm	 20339.11 Netsafe, Cat. 5e, UTP. Depth: 30,3 mm	 20339.13 Netsafe, Cat. 6, UTP. Depth: 30,3 mm	 20339.14 Netsafe, Cat. 6, FTP. Depth: 30,3 mm	 20339.6.B Netsafe, Cat. 6, UTP 110. Depth: 22,3 mm	 20339.11.B Netsafe, Cat. 5e, UTP. Depth: 30,3 mm	 20339.13.B Netsafe, Cat. 6, UTP. Depth: 30,3 mm	 20339.14.B Netsafe, Cat. 6, FTP. Depth: 30,3 mm	 20339.6.N Netsafe, Cat. 6, UTP 110. Depth: 22,3 mm	 20339.11.N Netsafe, Cat. 5e, UTP. Depth: 30,3 mm	 20339.13.N Netsafe, Cat. 6, UTP. Depth: 30,3 mm	 20339.14.N Netsafe, Cat. 6, FTP. Depth: 30,3 mm
 20339.15 Netsafe, Cat. 6a, UTP. Depth: 30,3 mm	 20339.16 Netsafe, Cat. 6a, FTP. Depth: 30,3 mm	 20340.1 Panduit, Cat. 5e, UTP. Depth: 28,55 mm	 20339.15.B Netsafe, Cat. 6a, UTP. Depth: 30,3 mm	 20339.16.B Netsafe, Cat. 6a, FTP. Depth: 30,3 mm	 20340.1.B Panduit, Cat. 5e, UTP. Depth: 28,55 mm	 20339.15.N Netsafe, Cat. 6a, UTP. Depth: 30,3 mm	 20339.16.N Netsafe, Cat. 6a, FTP. Depth: 30,3 mm	 20340.1.N Panduit, Cat. 5e, UTP. Depth: 28,55 mm			

Signal reception socket outlets • Signalling

Grey	White	Next									
Wi-Fi access point											
 20195 72,2 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 230 V~ 50/60 Hz - 2 modules. Depth: 41 mm	 20195.B 72,2 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 230 V~ 50/60 Hz - 2 modules. Depth: 41 mm	 20195.N 72,2 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 230 V~ 50/60 Hz - 2 modules. Depth: 41 mm									
Adapters for data ports											
 20337.C RJ45 Keystone + cover. Depth: 10 mm	 20338.C RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm	 20340.C For MINI-COM Panduit. Depth: 11 mm	 20343.K Slanting adaptor for RJ45 Keystone. Depth: 11 mm	 20337.C.B RJ45 Keystone + cover. Depth: 10 mm	 20338.C.B RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm	 20340.C.B For MINI-COM Panduit. Depth: 11 mm	 20343.K.B Slanting adaptor for RJ45 Keystone. Depth: 11 mm	 20337.C.N RJ45 Keystone + cover. Depth: 10 mm	 20338.C.N RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm	 20340.C.N For MINI-COM Panduit. Depth: 11 mm	 20343.K.N Slanting adaptor for RJ45 Keystone. Depth: 11 mm
Sockets for fibre optic cable											
 20350.SC Monomode 9/125 µm, with SC/ APC simplex adaptor. Depth: 19,4 mm	 20350.LC Monomode 9/125 µm, with LC duplex adaptor. Depth: 19,7 mm	 20351.SC Multimode 50/125 µm, with SC simplex adaptor. Depth: 19,4 mm	 20351.LC Multimode 50/125 µm, with LC duplex adaptor. Depth: 17,9 mm	 20350.SC.B Monomode 9/125 µm, with SC/ APC simplex adaptor. Depth: 19,4 mm	 20350.LC.B Monomode 9/125 µm, with LC duplex adaptor. Depth: 19,7 mm	 20351.SC.B Multimode 50/125 µm, with SC simplex adaptor. Depth: 19,4 mm	 20351.LC.B Multimode 50/125 µm, with LC duplex adaptor. Depth: 17,9 mm	 20350.SC.N Monomode 9/125 µm, with SC/ APC simplex adaptor. Depth: 19,4 mm	 20350.LC.N Monomode 9/125 µm, with LC duplex adaptor. Depth: 19,7 mm	 20351.SC.N Multimode 50/125 µm, with SC simplex adaptor. Depth: 19,4 mm	 20351.LC.N Multimode 50/125 µm, with LC duplex adaptor. Depth: 17,9 mm
Electromechanical bells											
 20380 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm	 20380.B 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm	 20380.N 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm									

Grey			White			Next		
Ringtone/buzzer								
								
▲20370.SR 12 V~ (SELV) 50/60 Hz. Depth: 32 mm 20377 120 V~ 50/60 Hz. Depth: 37 mm ▲20373.SR 230 V~ 50/60 Hz. Depth: 32 mm			▲20370.SR.B 12 V~ (SELV) 50/60 Hz. Depth: 32 mm 20377.B 120 V~ 50/60 Hz. Depth: 37 mm ▲20373.SR.B 230 V~ 50/60 Hz. Depth: 32 mm			▲20370.SR.N 12 V~ (SELV) 50/60 Hz. Depth: 32 mm 20377.N 120 V~ 50/60 Hz. Depth: 37 mm ▲20373.SR.N 230 V~ 50/60 Hz. Depth: 32 mm		
Luminous indicator units (for 1 or 2 signalling units*)								
								
20386.B White diffuser. Depth: 23 mm 20388 Neutral diffusers. Depth: 23 mm			20386.B.B White diffuser. Depth: 23 mm 20388.B Neutral diffusers. Depth: 23 mm			20386.B.N White diffuser. Depth: 23 mm 20388.N Neutral diffusers. Depth: 23 mm		
Prismatic indicator units - 2 modules (for 14771 and 14777 lamps - supplied without lamp)								
								
20387.B White diffuser - 2 modules. Depth: 25 mm			20387.R Red diffuser - 2 modules. Depth: 25 mm			20387.V Green diffuser - 2 modules. Depth: 25 mm		
Step marker lamps (with high-efficiency LED)								
								
20381 230 V~ 50/60 Hz Depth: 37 mm 20389 230 V~ 50/60 Hz - 2 modules. Depth: 37 mm			20381.B 230 V~ 50/60 Hz Depth: 37 mm 20389.B 230 V~ 50/60 Hz - 2 modules. Depth: 37 mm			20381.N 230 V~ 50/60 Hz Depth: 37 mm 20389.N 230 V~ 50/60 Hz - 2 modules. Depth: 37 mm		

Grey		White		Next	
Emergency lighting devices (with automatic emergency device)					
					
20384 With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules. Depth: 37 mm	20384.B With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules. Depth: 37 mm	20384.N With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules. Depth: 37 mm			
Emergency lighting devices					
					
02661 With high-efficiency LED, 230 V~ 50/60 Hz, rechargeable Ni-Cd battery and built-in 7-module frame. Depth: 44,7 mm					
Hand lamp and step marker lamp					
					
20397 Auxiliary emergency removable hand lampand controllable step marker lamp, high-efficiency LED 100-240 V~ 50/60 Hz - 2 modules. Depth: 36.4 mm	20398 Auxiliary emergency and controllable step marker lamp, high-efficiency LED 100-240 V~ 50/60 Hz - 2 modules. Depth: 36.2 mm				
Rechargeable batteries					
					
00908 3 x Ni-MH 1,2 V 800 mAh, HR03 (AAA)	00910 Ni-MH 4,8 V 80 mAh battery, spare part for TORCIA	00911.1 Ni-Cd 2,4 V 1,3 Ah battery, spare part for emergency lighting devices (20394)	00913 Ni-Cd 4,8 V 800 mAh spare rechargeable battery for 02661	00914 Li-ion 3.7 V 250 mAh spare for removable hand lamps LED 20397	




Grey	White	Next
Protection devices		
 20416 1P 16 A 250 V~ fuse carrier. Depth: 29 mm	 20416.B 1P 16 A 250 V~ fuse carrier. Depth: 29 mm	 20416.N 1P 16 A 250 V~ fuse carrier. Depth: 29 mm
1P+N circuit breakers (120-230 V~ 50/60 Hz)		
 20405.06 C 6, breaking capacity 1500 A. Depth: 39 mm	 20405.10 C 10, breaking capacity 3000 A. Depth: 39 mm	 20405.16 C 16, breaking capacity 3000 A. Depth: 39 mm
 20405.06.B C 6, breaking capacity 1500 A. Depth: 39 mm	 20405.10.B C 10, breaking capacity 3000 A. Depth: 39 mm	 20405.16.B C 16, breaking capacity 3000 A. Depth: 39 mm
 20405.06.N C 6, breaking capacity 1500 A. Depth: 39 mm	 20405.10.N C 10, breaking capacity 3000 A. Depth: 39 mm	 20405.16.N C 16, breaking capacity 3000 A. Depth: 39 mm
1P+N residual current breakers with overcurrent protection (RCBO) (120-230 V~ 50/60 Hz )		
 20411.06 C 6, I_{Δn} 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm	 20411.10 C 10, I_{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.06.B C 6, I_{Δn} 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm
 20411.10.B C 10, I_{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.06.N C 6, I_{Δn} 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm	 20411.10.N C 10, I_{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm
 20411.16 C 16, I_{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.16.6 C 16, I_{Δn} 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.16.B C 16, I_{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm
 20411.16.6.B C 16, I_{Δn} 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.16.N C 16, I_{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.16.6.N C 16, I_{Δn} 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm





Grey	White	Next
Thermostats		
 02970 Dial thermostat with relay output 5(2) A 240 V~, heating and air conditioning in ON/OFF mode, class I temperature control device (contribution 1%), white LED backlighting with brightness control, supply voltage 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm	 02970.B Dial thermostat with relay output 5(2) A 240 V~, heating and air conditioning in ON/OFF mode, class I temperature control device (contribution 1%), white LED backlighting with brightness control, supply voltage 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm	 02970.N Dial thermostat with relay output 5(2) A 240 V~, heating and air conditioning in ON/OFF mode, class I temperature control device (contribution 1%), white LED backlighting with brightness control, supply voltage 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm
Connected thermostats		
 02973 Dial thermostat with relay output 5(2) A 240 V~, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm	 02973.B Dial thermostat with relay output 5(2) A 240 V~, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm	 02973.N Dial thermostat with relay output 5(2) A 240 V~, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm
Connected magnetic contact		
 03980 Connected magnetic contact for windows and doors, View Wireless, <i>Bluetooth® wireless technology</i> 5.0 standard technology for mesh system realization, 1 clean-contact input, powered with AA LR6 1,5 V batteries (not supplied), white. To use as accessory of connected thermostat or with gateway as sensor for notification of magnetic contact open/close		

Climate • Stand alone solutions

Grey		White		Next	
Electronic sensors					
 20432 Electronic temperature sensor. Depth: 24,4 mm	 20433 Electronic humidity sensor, 1 0-10 V or 4-20 mA output- 2 modules. Depth: 37 mm	 20432.B Electronic temperature sensor. Depth: 24,4 mm	 20433.B Electronic humidity sensor, 1 0-10 V or 4-20 mA output- 2 modules. Depth: 37 mm	 20432.N Electronic temperature sensor. Depth: 24,4 mm	 20433.N Electronic humidity sensor, 1 0-10 V or 4-20 mA output- 2 modules. Depth: 37 mm
Switches for fan-coil regulation					
 20095 Slide, 1P 6(2) A 250 V~, 4-position. Depth: 40 mm	 20096 Rotary, 1P 6(3) A 250 V~, 4-position - 2 modules. Depth: 37 mm	 20095.B Slide, 1P 6(2) A 250 V~, 4-position. Depth: 40 mm	 20096.B Rotary, 1P 6(3) A 250 V~, 4-position - 2 modules. Depth: 37 mm	 20095.N Slide, 1P 6(2) A 250 V~, 4-position. Depth: 40 mm	 20096.N Rotary, 1P 6(3) A 250 V~, 4-position - 2 modules. Depth: 37 mm
 20063 2P 10 AX 250 V~. Depth: 34 mm		 20063.B 2P 10 AX 250 V~. Depth: 34 mm		 20063.N 2P 10 AX 250 V~. Depth: 34 mm	
Power meter		Wired temperature sensor			
 02960 3 inputs for sensor 01457, 50 W-10 kW detectable power, for DIN (60715 TH35) rail installation 1x17,5 mm. Supplied with 01457		 02965.1 Wired temperature sensor, NTC 10 kΩ, cable length 3 m			
Video door entry system					
 20570 Inner light, with LED. Depth: 37 mm	 20570.B Inner light, with LED. Depth: 37 mm	 20570.N Inner light, with LED. Depth: 37 mm			

Hotel solutions

Grey		White		Next	
Hotel solutions					
	02686.1 Control device with four push buttons 1P NO 24 vdc 50 mA max., to be completed with 2-module back-lightable interchangeable button caps - 2 modules. Depth: 15 mm		21125 8 non-polarised inputs, 7 solid state outputs for non-polarised contacts, 9-32 VDC power supply, for external/internal hotel room or cabin applications - 3 modules. Depth: 22,8 mm		02687 Six push buttons 1P NO 24 VDC 50 mA max., to be completed with interchangeable half-button caps, lightable - 3 modules. Depth: 15 mm
	20026.DND Do Not Disturb with diffuser		20026.PLS Please Clean with diffuser		20026.DND.N Do Not Disturb with diffuser
	20026.DND.B Do Not Disturb with diffuser		20026.PLS.B Please Clean with diffuser		20026.PLS.N Please Clean with diffuser
	20099 Volume control, 8 Ω 15 W - 2 modules. Depth: 30,9 mm		20099.B Volume control, 8 Ω 15 W - 2 modules. Depth: 30,9 mm		20099.N Volume control, 8 Ω 15 W - 2 modules. Depth: 30,9 mm
	20097 1P NO 10 A 250 V~, for hotel "Do Not Disturb" and "Please Clean" lightable - 2 modules. Depth: 29 mm		00975 Card to customise for 20097 button		02685 4 signalling indicator: IN, Do Not Disturb, OUT, waitress symbol, white - 2 modules. Depth: 22 mm
Hotel solutions					
	20290 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm		20290.B 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm		20290.N 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm
	20291° 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41 mm		20291.B° 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41 mm		20291.N° 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41 mm

Hotel solutions

Grey	White	Next
------	-------	------

Hotel solutions



02690
Lighting switch, 2000 W incandescent lamps, CFL 10-1000 W, LED 100 W, 220-240 V~ 50/60 Hz, ceiling mounting

Access control system



20463
Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 20,5 mm



20465
Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm



20463.B
Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 20,5 mm



20465.B
Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm



20463.N
Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 20,5 mm



20465.N
Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm



20468
NFC/RFID electronic reader, suitable for **AGB Electronic Solutions** for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm



20468.1
NFC/RFID electronic reader, suitable for **CISA Electronic Solutions** for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm



20468.B
NFC/RFID electronic reader, suitable for **AGB Electronic Solutions** for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm



20468.1.N
NFC/RFID electronic reader, suitable for **CISA Electronic Solutions** for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm



20468.N
NFC/RFID electronic reader, suitable for **AGB Electronic Solutions** for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm



20468.1.N
NFC/RFID electronic reader, suitable for **CISA Electronic Solutions** for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm

Access control system



20469
NFC/RFID electronic reader, suitable for **Mifare Electronic Solutions** for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm



20469.B
NFC/RFID electronic reader, suitable for **Mifare Electronic Solutions** for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm



20469.N
NFC/RFID electronic reader, suitable for **Mifare Electronic Solutions** for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm



16452.S
ISO-card (badge)

Hotel solutions

Grey	White	Next
------	-------	------

Hotel solutions

Connected access control system



20462
NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on *Bluetooth® wireless technology* 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 32 mm



20462.B
NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on *Bluetooth® wireless technology* 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 32 mm



20462.N
NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on *Bluetooth® wireless technology* 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 32 mm



20467
NFC/RFID energy saver card switch for installation inside the room, IoT technology on *Bluetooth® wireless technology* 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm



20467.B
NFC/RFID energy saver card switch for installation inside the room, IoT technology on *Bluetooth® wireless technology* 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm



20467.N
NFC/RFID energy saver card switch for installation inside the room, IoT technology on *Bluetooth® wireless technology* 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm

Connected access control system



20467.C
Card holder cover for NFC/RFID reader pocket and badge switch - 2 modules.



20467.C.B
Card holder cover for NFC/RFID reader pocket and badge switch - 2 modules.



20467.C.N
Card holder cover for NFC/RFID reader pocket and badge switch - 2 modules.



01817
Mifare transponder card

Grey	White	Next
View Wireless gateway		
 20597 View Wireless gateway, Bluetooth® wireless technology 4.2 Wi-Fi, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 37 mm	 20597.B View Wireless gateway, Bluetooth® wireless technology 4.2 Wi-Fi, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 37 mm	 20597.N View Wireless gateway, Bluetooth® wireless technology 4.2 Wi-Fi, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 37 mm

Mounting frames for iPads		
 01430 Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied with type C USB cable and no power supply unit, black	 01430.B Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied with type C USB cable and no power supply unit, white	 01430.N Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied with type C USB cable and no power supply unit, Next

View Wireless connected 2-way switches		
 20592.0 Mechanism, 100-240 V 50/60 Hz output relay for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 60 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for actuator push button or recall a scenario. To complete with 1-, 2- or 3-module buttons. Depth: 37,5 mm		

1-module interchangeable buttons for connected switch mechanism (lightable°)								
 20021 No symbol	 20026 With diffuser	 20021.L Light symbol	 20021.B No symbol	 20026.B With diffuser	 20021.L.B Light symbol	 20021.N No symbol	 20026.N With diffuser	 20021.L.N Light symbol

Grey	White	Next						
1-module interchangeable buttons for connected switch mechanism (lightable°)								
 20021.P Key symbol	 20026.PLS Please Clean with diffuser	 20026.DND Do Not Disturb with diffuser	 20021.PB Key symbol	 20026.PLS.B Please Clean with diffuser	 20026.DND.B Do Not Disturb with diffuser	 20021.PN Key symbol	 20026.PLS.N Please Clean with diffuser	 20026.DND.N Do Not Disturb with diffuser
2-module interchangeable buttons for connected switch mechanism (lightable°)								
 20022 No symbol	 20027 With diffuser	 20032 Customizable	 20022.B No symbol	 20027.B With diffuser	 20032.B Customizable	 20022.N No symbol	 20027.N With diffuser	 20032.N Customizable
 20022.L Light symbol	 20022.P Key symbol		 20022.L.B Light symbol	 20022.PB Key symbol		 20022.L.N Light symbol	 20022.PN Key symbol	
3-module interchangeable buttons for connected switch mechanism (lightable°)								
 20023 No symbol	 20028 With diffuser		 20023.B No symbol	 20028.B With diffuser		 20023.N No symbol	 20028.N With diffuser	

View Wireless connected control device for roller shutter		
 20594.0 Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario, favourite position recall function. To complete with 2 1-module half-button. Depth: 37,5 mm		
 20755.2 2 1-module interchangeable half-button, arrows symbol	 20755.2.B 2 1-module interchangeable half-button, arrows symbol	 20755.2.N 2 1-module interchangeable half-button, arrows symbol

Grey	White	Next
------	-------	------

View Wireless connected actuator for 1 roller shutter - backside installation



03982

Actuator for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)





Connected dimmer







20595.0
Electronic dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, double IoT technology on Bluetooth 5.0 standard for the creation of View Wireless mesh system and on Zigbee 3.0 standard, 1 input for external push button for dimmer control or to recall a scenario, RGB LED visible in darkness with brightness control, 220-240 V 50/60 Hz power supply. To be completed with two 1-module half-button caps.
Depth: 37.5 mm

20595.0.120
As above, power supply 120 V 50/60 Hz.

1-module interchangeable buttons and half-button caps for connected dimmer controls

		
20755.3 Dimmer symbols	20755.3.B Dimmer symbols	20755.3.N Dimmer symbols

Connected electronic controls





20591.0

View Wireless electronic control mechanism, local control with push button or remote control, IoT technology on Bluetooth technology 5.0 standard to make View Wireless mesh system, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply, to be completed. To be completed with two 1-module half-button caps. Depth: 37.5 mm

1-module interchangeable buttons and half-button caps for connected electronic controls

		
20755.2 Arrows symbols	20755.2.B Arrows symbols	20755.2.N Arrows symbols
		
20755.3 Dimmer symbols	20755.3.B Dimmer symbols	20755.3.N Dimmer symbols

Grey	White	Next
------	-------	------

1-module interchangeable buttons and half-button caps for connected electronic controls

		
20755.6 Scenarios symbols	20755.6.B Scenarios symbols	20755.6.N Scenarios symbols
		
20755 Neutral customisable	20755.B Neutral customisable	20755.N Neutral customisable

Radiofrequency smart devices






Compatible with 

03925

4-button flat device with RF transmission, 2.4 GHz, **Bluetooth®** Low Energy *wireless technology*, to be completed with buttons 20506+20506.2 - 2 modules

View Wireless connected control device for socket outlet

		
 	 	 
20593 Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39,5 mm	20593.B Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39,5 mm	20593.N Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39,5 mm

View Wireless connected actuator - backside installation







03981

Control device with NO 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)

View Wireless connected energy meter





02963

Energy meter for measuring of consumption/production of instant and historical electric energy (hourly, daily, monthly and in the year mode), 1 input for supplied toroidal current sensor, detectable power 25 W-100 kW, single-phase power supply 100-240 V 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, occupies 1 17,5 mm module

Grey	White	Next
------	-------	------

View Wireless connected thermostats

 Bluetooth® 02973 Dial thermostat with relay output 5(2) A 240 V~, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm	 Bluetooth® 02973.B Dial thermostat with relay output 5(2) A 240 V~, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm	 Bluetooth® 02973.N Dial thermostat with relay output 5(2) A 240 V~, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm
--	---	--

View Wireless connected magnetic contact

 Bluetooth® 03980 Connected magnetic contact for windows and doors, View Wireless, <i>Bluetooth® wireless technology</i> 5.0 standard technology for mesh system realization, 1 clean-contact input, powered with AA LR6 1,5 V batteries (not supplied), white. To use as accessory of connected thermostat or with gateway as sensor for notification of magnetic contact open/close
--

Radar sensors

 Bluetooth® 20179 UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply. Depth: 40 mm	 Bluetooth® 20179.B UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply. Depth: 40 mm	 Bluetooth® 20179.N UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply. Depth: 40 mm
--	---	--

 Bluetooth® 02692 UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, false ceiling installation.	 02692.S.1 Round section adaptor for ceiling installation of the IoT connected radar sensor 02692.
--	---

Grey	White	Next
------	-------	------

View Wireless connected access control system

 Bluetooth® 20462 NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 32 mm	 Bluetooth® 20462.B NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 32 mm	 Bluetooth® 20462.N NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 32 mm
 Bluetooth® 20467 NFC/RFID energy saver card switch for installation inside the room, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm	 Bluetooth® 20467.B NFC/RFID energy saver card switch for installation inside the room, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm	 Bluetooth® 20467.N NFC/RFID energy saver card switch for installation inside the room, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm
 20467.C Card holder cover for NFC/RFID reader pocket and badge switch - 2 modules.	 20467.C.B Card holder cover for NFC/RFID reader pocket and badge switch - 2 modules.	 20467.C.N Card holder cover for NFC/RFID reader pocket and badge switch - 2 modules.

 01817 Mifare transponder card

Luminosi
(Bevelled crystal)



70 White diamond



71 Aqua



76 Black Diamond




73 Pearl grey



Eikon Tactil:
power simulation



Scolpiti
(Carved stone)



■ 53 Grey quartzite

Naturali
(Solid wood)



■ 31 Italian walnut



■ 32 White Oak



■ 33 Wengé

Raffinati
(Natural leather)



■ 21 Cream



■ 22 Tobacco

Speciali
(Corian®)



■ 41 Glacier ice



Primari
(Anodized aluminium)



01 Brilliant Aluminium



03 Lava Grey



04 Neutral Bronze



05 Dark Bronze

Esclusivi
(Refined aluminium)



06 Black Sapphire



07.01 Silver



08 Titanium



G09 Total polished gold



G10 Total satin gold

Scolpiti
(Carved stone)



51 Carrara white



52 Natural split slate



53 Grey quartzite

Naturali
(Solid wood)



31 Italian walnut



32 White Oak



33 Wengé



Luminosi
(Bevelled crystal)



70 White diamond



71 Aqua



72 Silver ice



73 Pearl grey



74 Opal brown



75 Bronze mirror



76 Black diamond

Raffinati
(Natural leather)



21 Cream



22 Tobacco

Speciali
(Corian®)



41 Glacier ice

Essenziali
(Total aluminium and crystal)



17 Total white



18 Total black



87 Total white diamond

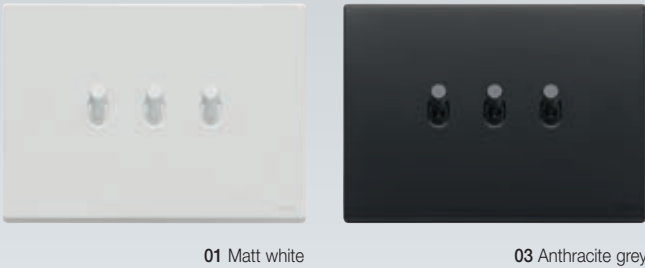


88 Total black diamond




02 Next Grey

Total look metals






Brushed metals

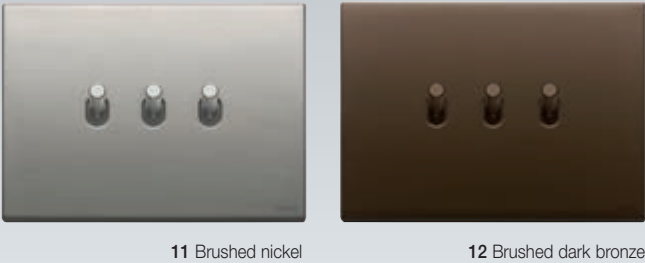

Polished metals



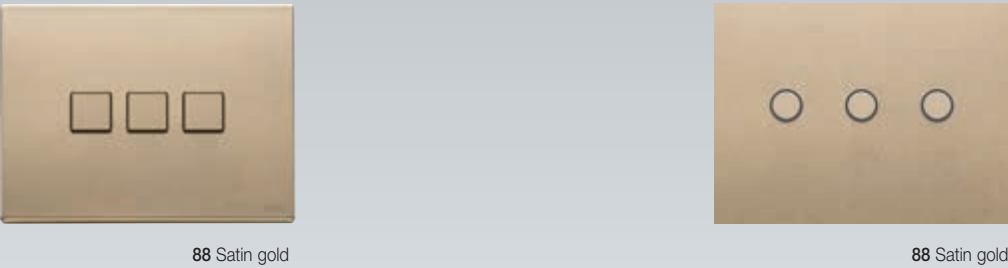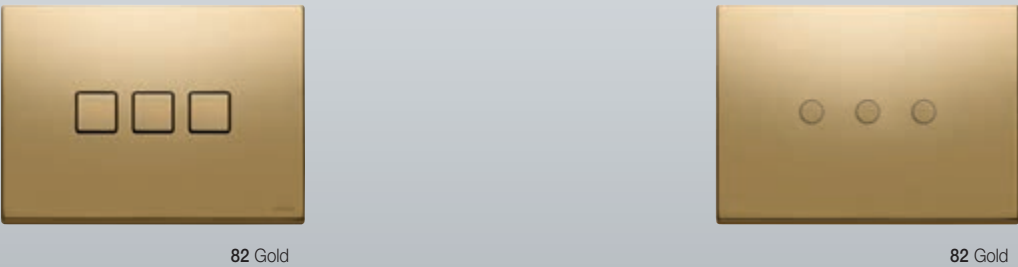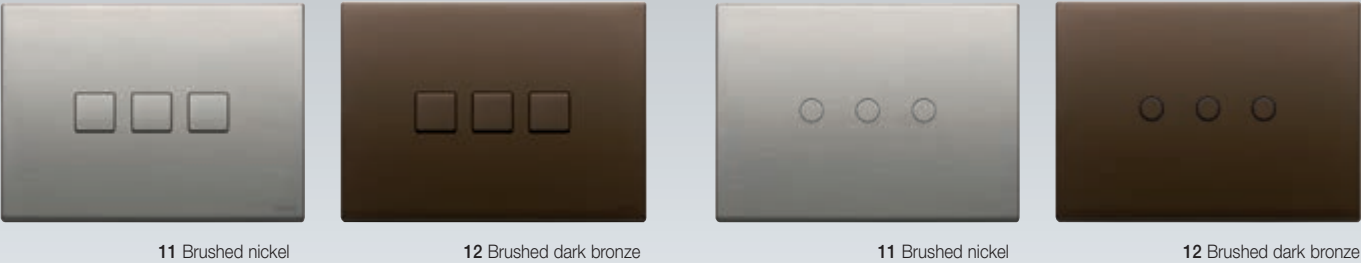Exclusive metals



EIKON

EIKON EXÉ - Cover plates



Total look metals



01 Matt white



02 Next



03 Anthracite grey

Brushed metals



11 Brushed nickel



12 Brushed dark bronze



13 Brushed black

Polished metals



81 Nickel



82 Gold



83 Black chrome

Exclusive metals



86 Brushed copper



87 Antique brushed bronze



88 Satin gold

EIKON

EIKON EXÉ - Cover plates



Glass



71 Milky white



72 Canvas white



73 Satin black

Mirrors



75 Ice silver



76 Shiny bronze



77 Opal brown

Leather



21 Savannah



22 Steppe



23 Black forest

Marbled stoneware



51 White Calacatta



52 Coffee brown



53 Black Marquina

Wood



31 Oak



32 American walnut



33 Eucalyptus

Eikon Tactil and Eikon Evo cover plates: guideline

2-module			3-module		4-module		7-module	
Eikon Tactil	Eikon Evo	Eikon Tactil	Eikon Evo	Eikon Tactil	Eikon Evo	Eikon Evo		
								
Primari (Anodized aluminium)								
	Brilliant Aluminium	-	21642.01	-	21653.01	-	21654.01	21657.01
	Next Grey	-	21642.02	-	21653.02	-	21654.02	21657.02
	Lava Grey	-	21642.03	-	21653.03	-	21654.03	21657.03
	Neutral Bronze	-	21642.04	-	21653.04	-	21654.04	21657.04
	Dark Bronze	-	21642.05	-	21653.05	-	21654.05	21657.05
Esclusivi (Refined aluminium)								
	Black Sapphire	-	21642.06	-	21653.06	-	21654.06	21657.06
	Silver	-	21642.07.01	-	21653.07.01	-	21654.07.01	21657.07.01
	Titanium	-	21642.08	-	21653.08	-	21654.08	21657.08
	Total polished gold (with gold frame)	-	21642.G09	-	21653.G09	-	21654.G09	21657.G09
	Total satin gold (with gold frame)	-	21642.G10	-	21653.G10	-	21654.G10	21657.G10
Scolpiti (Carved stone)								
	Carrara white	-	21642.51	-	21653.51	-	21654.51	21657.51
	Natural split slate	-	21642.52	-	21653.52	-	21654.52	21657.52
	Grey quartzite	■ 21662.53	21642.53	■ 21663.53	21653.53	■ 21664.53	21654.53	21657.53
Naturali (Solid wood)								
	Italian walnut	■ 21662.31	21642.31	■ 21663.31	21653.31	■ 21664.31	21654.31	21657.31
	White Oak	■ 21662.32	21642.32	■ 21663.32	21653.32	■ 21664.32	21654.32	21657.32
	Wengé	■ 21662.33	21642.33	■ 21663.33	21653.33	■ 21664.33	21654.33	21657.33
Luminosi (Bevelled crystal)								
	White diamond	21662.70	21642.70	21663.70	21653.70	21664.70	21654.70	21657.70
	Aqua	21662.71	21642.71	21663.71	21653.71	21664.71	21654.71	21657.71
	Silver ice	-	21642.72	-	21653.72	-	21654.72	21657.72
	Pearl grey	21662.73	21642.73	21663.73	21653.73	21664.73	21654.73	21657.73
	Opal brown	-	21642.74	-	21653.74	-	21654.74	21657.74
	Bronze mirror	-	21642.75	-	21653.75	-	21654.75	21657.75
	Black Diamond	21662.76	21642.76	21663.76	21653.76	21664.76	21654.76	21657.76
Raffinati (Natural leather)								
	Cream	■ 21662.21	21642.21	■ 21663.21	21653.21	■ 21664.21	21654.21	21657.21
	Tobacco	■ 21662.22	21642.22	■ 21663.22	21653.22	■ 21664.22	21654.22	21657.22
Speciali (Corian®)								
	Glacier ice	■ 21662.41	21642.41	■ 21663.41	21653.41	■ 21664.41	21654.41	21657.41
Essenziali (Total aluminium and crystal)								
	Total White	-	21642.17	-	21653.17	-	21654.17	21657.17
	Total Black	-	21642.18	-	21653.18	-	21654.18	21657.18
	Total White Diamond	-	21642.87	-	21653.87	-	21654.87	21657.87
	Total Black Diamond	-	21642.88	-	21653.88	-	21654.88	21657.88

Eikon Tactil and Eikon Evo cover plates: guideline

8-module	2+2-module (between centres 71 mm)	2+2+2-module (between centres 71 mm)	2+2+2+2-module (between centres 71 mm)
Eikon Evo	Eikon Evo	Eikon Evo	Eikon Evo
			
21668.01	21643.01	21644.01	21669.01
21668.02	21643.02	21644.02	21669.02
21668.03	21643.03	21644.03	21669.03
21668.04	21643.04	21644.04	21669.04
21668.05	21643.05	21644.05	21669.05
21668.06	21643.06	21644.06	21669.06
21668.07.01	21643.07.01	21644.07.01	21669.07.01
21668.08	21643.08	21644.08	21669.08
21668.G09	21643.G09	21644.G09	21669.G09
21668.G10	21643.G10	21644.G10	21669.G10
21668.51	-	-	-
21668.52	-	-	-
21657.53	-	-	-
21668.31	-	-	-
21657.32	-	-	-
21668.33	-	-	-
21668.70	21643.70	21644.70	21669.70
21668.71	21643.71	21644.71	21669.71
21668.72	21643.72	21644.72	21669.72
21668.73	21643.73	21644.73	21669.73
21668.74	21643.74	21644.74	21669.74
21668.75	21643.75	21644.75	21669.75
21668.76	21643.76	21644.76	21669.76
21668.21	-	-	-
21668.22	-	-	-
21668.41	-	-	-
21668.17	21643.17	21644.17	21669.17
21668.18	21643.18	21644.18	21669.18
21668.87	21643.87	21644.87	21669.87
21668.88	21643.88	21644.88	21669.88

Eikon Exé - The collections cover plates: guideline

Vintage cover plates	1 module	2-module	
	1-gang	1-gang	2-gang
			
Total look metals			
 Matt white	22671.1.01	22672.1.01	22672.2.01
 Anthracite grey	22671.1.03	22672.1.03	22672.2.03
Brushed metals			
 Brushed nickel		22672.1.11	22672.2.11
 Brushed dark bronze		22672.1.12	22672.2.12
Polished metals			
 Gold		22672.1.82	22672.2.82
Exclusive metals			
 Satin gold		22672.1.88	22672.2.88

Flat cover plates		1 module	2-module			4-module	
		1-gang	1-gang	2-gang	4-gang	4-gang	8-gang
							
Total look metals							
	Matt white	22681.1.01	22682.1.01	22682.2.01	22692.01	22684.4.01	22694.01
	Anthracite grey	22681.1.03	22682.1.03	22682.2.03	22692.03	22684.4.03	22694.03
Brushed metals							
	Brushed nickel		22682.1.11	22682.2.11	22692.11	22684.4.11	22694.11
	Brushed dark bronze		22682.1.12	22682.2.12	22692.12	22684.4.12	22694.12
Polished metals							
	Gold		22682.1.82	22682.2.82	22692.82	22684.4.82	22694.82
Exclusive metals							
	Satin gold		22682.1.88	22682.2.88	22692.88	22684.4.88	22694.88

Tondo Cover Plates	2-module		3-module	
	1-gang	2-gang	4-gang	1-gang¹
				
Total look metals				
 Matt white	22682.RN.1.01	22682.RN.2.01	22692.RN.01	22683.RN.1.01
 Anthracite grey	22682.RN.1.03	22682.RN.2.03	22692.RN.03	22683.RN.1.03
Brushed metals				
 Nickel brushed	22682.RN.1.11	22682.RN.2.11	22692.RN.11	22683.RN.1.11
 Dark bronze brushed	22682.RN.1.12	22682.RN.2.12	22692.RN.12	22683.RN.1.12
Polished metals				
 Gold	22682.RN.1.82	22682.RN.2.82	22692.RN.82	22683.RN.1.82
Exclusive metals				
 Satin gold	22682.RN.1.88	22682.RN.2.88	22692.RN.88	22683.1.88

¹ Con supporto 21613 è necessario utilizzare il supporto 21041 quando installato con placche 22683.RN.1 e 22683.RN.2.

Eikon Exé - The collections cover plates: guideline


3-module		4-module	
1-gang	2-gang	3-gang	4-gang
			
22673.1.01	22673.2.01	22673.3.01	22674.4.01
22673.1.03	22673.2.03	22673.3.03	22674.4.03
22673.1.11	22673.2.11	22673.3.11	22674.4.11
22673.1.12	22673.2.12	22673.3.12	22674.4.12
22673.1.82	22673.2.82	22673.3.82	22674.4.82
22673.1.88	22673.2.88	22673.3.88	22674.4.88

Flat cover plates	3-module		6-gang	
	1-gang¹	2-gang¹	3-gang	6-gang
				
Total look metals				
 Matt white	22683.1.01	22683.2.01	22683.3.01	22693.01
 Anthracite grey	22683.1.03	22683.2.03	22683.3.03	22693.03
Brushed metals				
 Brushed nickel	22683.1.11	22683.2.11	22683.3.11	22693.11
 Brushed dark bronze	22683.1.12	22683.2.12	22683.3.12	22693.12
Polished metals				
 Gold	22683.1.82	22683.2.82	22683.3.82	22693.82
Exclusive metals				
 Satin gold	22683.1.88	22683.2.88	22683.3.88	22693.88

¹ it is necessary to use 21041 blank module when 21613 mounting frame is installed with 22683.1 and 22683.2 cover plates.

3-module		4-module	
2-gang¹	3-gang	6-gang	8-gang
			
22683.RN.2.01	22683.RN.3.01	22693.RN.01	22684.RN.4.01
22683.RN.2.03	22683.RN.3.03	22693.RN.03	22684.RN.4.03
22683.RN.2.11	22683.RN.3.11	22693.RN.11	22684.RN.4.11
22683.RN.2.12	22683.RN.3.12	22693.RN.12	22684.RN.4.12
22683.RN.2.82	22683.RN.3.82	22693.RN.82	22684.RN.4.82
22683.RN.2.88	22683.RN.3.88	22693.RN.88	22684.RN.4.88

Eikon Exé cover plates: guideline

	1-module	2-module	3-module	4-module	7-module
					
Total look metals					
 Matt white	22666.01	22642.01	22653.01	22654.01	22657.01
 Next	22666.02	22642.02	22653.02	22654.02	22657.02
 Anthracite grey	22666.03	22642.03	22653.03	22654.03	22657.03
Brushed metals					
 Brushed nickel	-	22642.11	22653.11	22654.11	22657.11
 Brushed dark bronze	-	22642.12	22653.12	22654.12	22657.12
 Brushed black	-	22642.13	22653.13	22654.13	22657.13
Polished metals					
 Nickel	-	22642.81	22653.81	22654.81	22657.81
 Gold	-	22642.82	22653.82	22654.82	22657.82
 Black chrome	-	22642.83	22653.83	22654.83	22657.83
Exclusive metals					
 Brushed copper	-	22642.86	22653.86	22654.86	22657.86
 Antique brushed bronze	-	22642.87	22653.87	22654.87	22657.87
 Satin gold	-	22642.88	22653.88	22654.88	22657.88
Glass					
 Milky white	-	22642.71	22653.71	22654.71	22657.71
 Canvas white	-	22642.72	22653.72	22654.72	22657.72
 Satin black	-	22642.73	22653.73	22654.73	22657.73
Mirrors					
 Ice silver	-	22642.75	22653.75	22654.75	22657.75
 Opal brown	-	22642.77	22653.77	22654.77	22657.77
Leather					
 Savannah	-	22642.21	22653.21	22654.21	22657.21
 Steppe	-	22642.22	22653.22	22654.22	22657.22
 Black forest	-	22642.23	22653.23	22654.23	22657.23
Marbled stoneware					
 White Calacatta	-	22642.51	22653.51	22654.51	22657.51
 Coffee brown	-	22642.52	22653.52	22654.52	22657.52
 Black Marquiña	-	22642.53	22653.53	22654.53	22657.53
Wood					
 Oak	-	22642.31	22653.31	22654.31	22657.31
 American walnut	-	22642.32	22653.32	22654.32	22657.32
 Eucalyptus	-	22642.33	22653.33	22654.33	22657.33

Eikon Exé cover plates: guideline

	8-module	2+2-module (between centres 71 mm)	2+2+2-module (between centres 71 mm)	2+2+2+2-module (between centres 71 mm)
				
22668.01	22643.01	22644.01	22669.01	
22668.02	22643.02	22644.02	22669.02	
22668.03	22643.03	22644.03	22669.03	
22668.11	22643.11	22644.11	22669.11	
22668.12	22643.12	22644.12	22669.12	
22668.13	22643.13	22644.13	22669.13	
22668.81	22643.81	22644.81	22669.81	
22668.82	22643.82	22644.82	22669.82	
22668.83	22653.83	22644.83	22669.83	
22668.86	22643.86	22644.86	22669.86	
22668.87	22643.87	22644.87	22669.87	
22668.88	22643.88	22644.88	22669.88	
22668.71	22643.71	22644.71	22669.71	
22668.72	22643.72	22644.72	22669.72	
22668.73	22643.73	22644.73	22669.73	
22668.75	22643.75	22644.75	22669.75	
22668.77	22643.77	22644.77	22669.77	
22668.21	-	-	-	
22668.22	-	-	-	
22668.23	-	-	-	
22668.51	-	-	-	
22668.52	-	-	-	
22668.53	-	-	-	
22668.31	-	-	-	
22668.32	-	-	-	
22668.33	-	-	-	

Eikon Tactil and Eikon Evo cover plates for British standard: guideline

		2-module		3-module/monobloc	5-module/monobloc	
		Eikon Tactil	Eikon Evo	Eikon Evo	Eikon Tactil	Eikon Evo
						
Primari (Anodized aluminium)						
	Brilliant Aluminium	-	21642.01	21648.01	-	21649.01
	Next Grey	-	21642.02	21648.02	-	21649.02
	Lava Grey	-	21642.03	21648.03	-	21649.03
	Neutral Bronze	-	21642.04	21648.04	-	21649.04
	Dark Bronze	-	21642.05	21648.05	-	21649.05
Esclusivi (Refined aluminium)						
	Black Sapphire	-	21642.06	21648.06	-	21649.06
	Silver	-	21642.07.01	21648.07.01	-	21649.07.01
	Titanium	-	21642.08	21648.08	-	21649.08
	Total polished gold (with gold frame)	-	21642.G09	21648.G09	-	21649.G09
	Total satin gold (with gold frame)	-	21642.G10	21648.G10	-	21649.G10
Scolpiti (Carved stone)						
	Carrara white	-	21642.51	21648.51	-	21649.51
	Natural split slate	-	21642.52	21648.52	-	21649.52
	Grey quartzite	■ 21662.53	21642.53	21648.53	■ 21667.53	21649.53
Naturali (Solid wood)						
	Italian walnut	■ 21662.31	21642.31	21648.31	■ 21667.31	21649.31
	White Oak	■ 21662.32	21642.32	21648.32	■ 21667.32	21649.32
	Wengé	■ 21662.33	21642.33	21648.33	■ 21667.33	21649.33

Eikon Tactil and Eikon Evo cover plates for British standard: guideline

		2-module		3-module/monobloc	5-module/monobloc	
		Eikon Tactil	Eikon Evo	Eikon Evo	Eikon Tactil	Eikon Evo
						
Luminosi (Bevelled crystal)						
	White diamond	21662.70	21642.70	21648.70	21667.70	21649.70
	Aqua	21662.71	21642.71	21648.71	21667.71	21649.71
	Silver ice	-	21642.72	21648.72	-	21649.72
	Pearl grey	21662.73	21642.73	21648.73	21667.73	21649.73
	Opal brown	-	21642.74	21648.74	-	21649.74
	Bronze mirror	-	21642.75	21648.75	-	21649.75
	Black Diamond	21662.76	21642.76	21648.76	21667.76	21649.76
Raffinati (Natural leather)						
	Cream	■ 21662.21	21642.21	21648.21	■ 21667.21	21649.21
	Tobacco	■ 21662.22	21642.22	21648.22	■ 21667.22	21649.22
Speciali (Corian®)						
	Glacier ice	■ 21662.41	21642.41	21648.41	■ 21667.41	21649.41
Essenziali (total aluminium and crystal)						
	Total White	-	21642.17	21648.17	-	21649.17
	Total Black	-	21642.18	21648.18	-	21649.18
	Total White Diamond	-	21642.87	21648.87	-	21649.87
	Total Black Diamond	-	21642.88	21648.88	-	21649.88

Eikon Exé - The collections cover plates for British standard: guideline

Vintage cover plates			2-module
		1-gang	2-gang
			
Total look metals			
	Matt white	22672.1.01	22672.2.01
	Anthracite grey	22672.1.03	22672.2.03
Brushed metals			
	Brushed nickel	22672.1.11	22672.2.11
	Brushed dark bronze	22672.1.12	22672.2.12
Polished metals			
	Gold	22672.1.82	22672.2.82
Exclusive metals			
	Satin gold	22672.1.88	22672.2.88

Flat cover plates				2-module
		1-gang	2-gang	4-gang
				
Total look metals				
	Matt white	22682.1.01	22682.2.01	22692.01
	Anthracite grey	22682.1.03	22682.2.03	22692.03
Brushed metals				
	Brushed nickel	22682.1.11	22682.2.11	22692.11
	Brushed dark bronze	22682.1.12	22682.2.12	22692.12
Polished metals				
	Gold	22682.1.82	22682.2.82	22692.82
Exclusive metals				
	Satin gold	22682.1.88	22682.2.88	22692.88

Tondo Cover Plates			3-module
		3-gang	6-gang
			
Total look metals			
	Matt white	22685.RN.3.01	22695.RN.01
	Anthracite grey	22685.RN.3.03	22695.RN.03
Brushed metals			
	Brushed nickel	22685.RN.3.11	22695.RN.11
	Brushed dark bronze	22685.RN.3.12	22695.RN.12
Polished metals			
	Gold	22685.RN.3.82	22695.RN.82
Exclusive metals			
	Satin gold	22685.RN.3.88	22695.RN.88

Eikon Exé - The collections cover plates for British standard: guideline

Vintage cover plates		3-module 3-gang	5-module 5-gang
			
Total look metals			
	Matt white	22675.3.01	22679.5.01
	Anthracite grey	22675.3.03	22679.5.03
Brushed metals			
	Brushed nickel	22675.3.11	22679.5.11
	Brushed dark bronze	22675.3.12	22679.5.12
Polished metals			
	Gold	22675.3.82	22679.5.82
Exclusive metals			
	Satin gold	22675.3.88	22679.5.88

Flat cover plates		3-module		5-module	
		3-gang	6-gang	5-gang	10-gang
					
Total look metals					
	Matt white	22685.3.01	22695.01	22689.5.01	22699.01
	Anthracite grey	22685.3.03	22695.03	22689.5.03	22699.03
Brushed metals					
	Brushed nickel	22685.3.11	22695.11	22689.5.11	22699.11
	Brushed dark bronze	22685.3.12	22695.12	22689.5.12	22699.12
Polished metals					
	Gold	22685.3.82	22695.82	22689.5.82	22699.82
Exclusive metals					
	Satin gold	22685.3.88	22695.88	22689.5.88	22699.88

			5-module
		5-gang	10-gang
			
		22689.RN.5.01	22699.RN.01
		22689.RN.5.03	22699.RN.03
		22689.RN.5.11	22699.RN.11
		22689.RN.5.12	22699.RN.12
		22689.RN.5.82	22699.RN.82
		22689.RN.5.88	22699.RN.88

Eikon Exé cover plates for British standard: guideline

	2-module	3-module/monobloc	5-module/monobloc
			
Total look metals			
 Matt white	22642.01	22648.01	22649.01
 Next	22642.02	22648.02	22649.02
 Anthracite grey	22642.03	22648.03	22649.03
Brushed metals			
 Brushed nickel	22642.11	22648.11	22649.11
 Brushed dark bronze	22642.12	22648.12	22649.12
 Brushed black	22642.13	22648.13	22649.13
Polished metals			
 Nickel	22642.81	22648.81	22649.81
 Gold	22642.82	22648.82	22649.82
 Black chrome	22642.83	22648.83	22649.83
Exclusive metals			
 Brushed copper	22642.86	22648.86	22649.86
 Antique brushed bronze	22642.87	22648.87	22649.87
 Satin gold	22642.88	22648.88	22649.88
Glass			
 Milky white	22642.71	22648.71	22649.71
 Canvas white	22642.72	22648.72	22649.72
 Satin black	22642.73	22648.73	22649.73
Mirrors			
 Ice silver	22642.75	22648.75	22649.75
 Opal brown	22642.77	22648.77	22649.77
Leather			
 Savannah	22642.21	22648.21	22649.21
 Steppe	22642.22	22648.22	22649.22
 Black forest	22642.23	22648.23	22649.23
Marbled stoneware			
 White Calacatta	22642.51	22648.51	22649.51
 Coffee brown	22642.52	22648.52	22649.52
 Black Marquina	22642.53	22648.53	22649.53
Wood			
 Oak	22642.31	22648.31	22649.31
 American walnut	22642.32	22648.32	22649.32
 Eucalyptus	22642.33	22648.33	22649.33

Eikon Exé cover plates: guideline

Cover plates for socket outlets	2-module 1-gang
	
Total look metals	
 Matt white	22642.RN.01
 Anthracite grey	22642.RN.03
Brushed metals	
 Brushed nickel	22642.RN.11
 Brushed dark bronze	22642.RN.12
Polished metals	
 Gold	22642.RN.82
Exclusive metals	
 Satin gold	22642.RN.88

Da abbinare alle prese 22208... e 22212.FL...
















Eikon Tactil and Eikon Evo: standard types of mounting




Module	Box	Frame	Cover plate*
2 for ø 60 mm or 56x56 mm mounting box	Flush mounting  V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black	 21602 2-module, with claws  21603 2-module, without screws	 21662... 2-module Dimensions: 95,4x95,4 mm  21642... 2-module Dimensions: 95,4x95,4 mm
	Flush mounting  V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black		 21663... 3-module Dimensions: 118x106 mm  21653... 3-module Dimensions: 118x106 mm
	Flush mounting  V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black		 21664... 4-module Dimensions: 140,5x106 mm  21654... 4-module Dimensions: 140,5x106 mm
	Flush mounting  V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black		 21657... 7-module Dimensions: 208x106 mm

Eikon Evo: standard types of mounting







Module	Box	Touch screen/frame	Cover plate*
8 (4+4)	Flush mounting  V71318 For masonry GW 650 °C, light blue	 01420 4,3" IP touch screen, grey 01420.B: white 01420.BN: neutral  21848.1... Colour touch screen, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame  21618 4+4-module, with screws	 21668... 8-module (4+4) Dimensions: 155,2x155,2 mm  Cover plate rotated at a 90° angle
	Flush mounting  V71718 For hollow walls GW 850 °C, light blue		
	Semi-flush mounting  V71318 For masonry GW 650 °C, light blue	 01425 10" IP touch screen	 21665... For 10" IP touch screen Dimensions: 345x250 mm Material and finishing availability: 21665.11: Aluminium 21665.70: White diamond 21665.76: Black Diamond
	Semi-flush mounting  V71718 For hollow walls GW 850 °C, light blue		

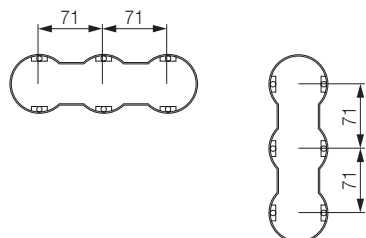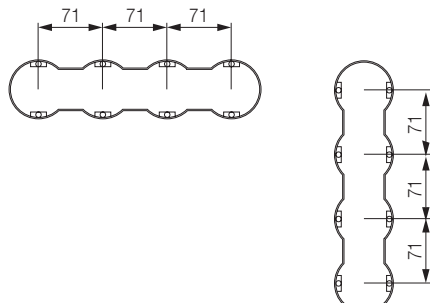* Cover plates range, page 148

Module	Box	Frame
2+2 71 mm between centres		 2 x 21602 2-module, with claws  71  2 x 21603 2-module, without screws  71
2+2+2 71 mm between centres		 3 x 21602 2-module, with claws  71 71  3 x 21603 2-module, without screws  71 71
2+2+2+2 71 mm between centres		 4 x 21602 2-module, with claws  71 71 71  4 x 21603 2-module, without screws  71 71 71

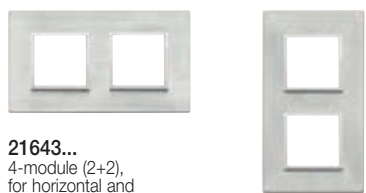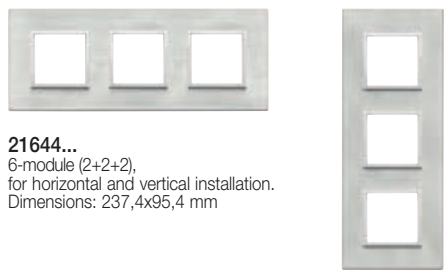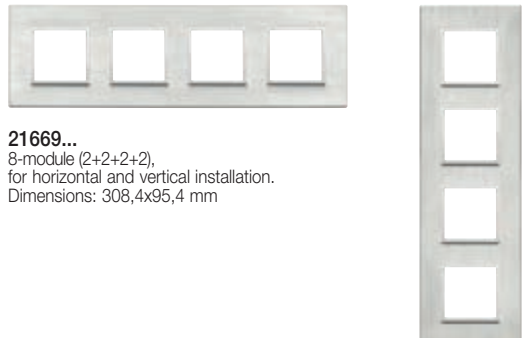Cover plate*
 21643... 4-module (2+2), for horizontal and vertical installation. Dimensions: 166,4x95,4 mm
 21644... 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 237,4x95,4 mm
 21669... 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 308,4x95,4 mm















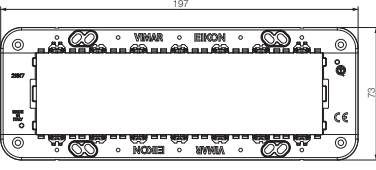
Eikon Exé: standard types of mounting


Module	Box	Frame	Cover plate*
2 for ø 60 mm or 56x56 mm mounting box	Flush mounting   V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black V71001 For hollow walls, for frame without claws, GW 850 °C, light blue	  21602 2-module, with claws   21603 2-module, without screws	 22642... 2-module Dimensions: 90x90 mm
3	Flush mounting   V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black V71703 For hollow walls GW 850 °C, light blue	 21613 3-module, with screws 	 22653... 3-module Dimensions: 122x90 mm
4	Flush mounting   V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black V71704 For hollow walls GW 850 °C, light blue	 21614 4-module, with screws 	 22654... 4-module Dimensions: 144,5x90 mm
7	Flush mounting   V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black V71706 For hollow walls GW 850 °C, light blue	 21617 7-module, with screws 	 22657... 7-module Dimensions: 212x90 mm

Eikon Exé: standard types of mounting




Module	Box	Touch screen/frame	Cover plate*
8 (4+4)	Flush mounting   V71318 For masonry GW 650 °C, light blue V71718 For hollow walls GW 850 °C, light blue	 01420 4,3" IP touch screen, grey 01420.B: white 01420.BN: neutral  21848.1... Colour touch screen, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame  21618 4+4-module, with screws	 22668... 8-module (4+4) Dimensions:156,1x156,1 mm  Cover plate rotated at a 90° angle
1	Panel mounting  16776.AU GW 960 °C	 21626 1-module, with screws	 22666... 1-module, Dimensions: 82x42 mm

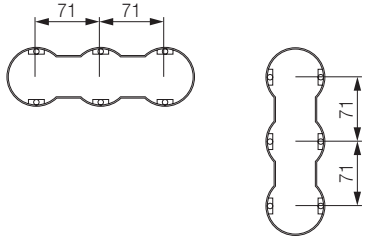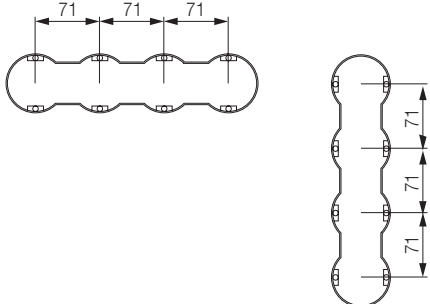* Cover plates range, page 152



Module	Box	Frame
2+2 71 mm between centres		 2 x 21602 2-module, with claws   2 x 21603 2-module, without screws 
2+2+2 71 mm between centres		 3 x 21602 2-module, with claws   3 x 21603 2-module, without screws 
2+2+2+2 71 mm between centres		 4 x 21602 2-module, with claws   4 x 21603 2-module, without screws 

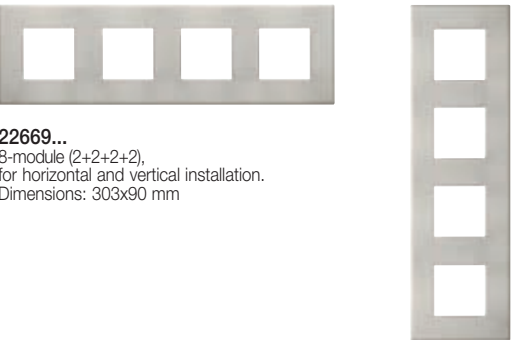Cover plate*
 22643... 4-module (2+2), for horizontal and vertical installation. Dimensions: 161x90 mm
 22644... 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 232x90 mm
 22669... 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 303x90 mm







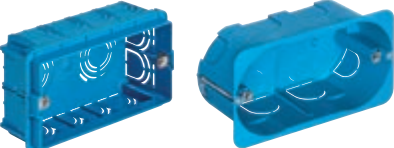

Eikon Exé - Vintage: standard types of mounting

Module	Box	Frame	Cover plate*
2 for ø 60 mm or 56x56 mm mounting box	Flush mounting  V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	 21600.0 1-module, without screws  21601.0 1-module, with claws  21602 2-module, with claws  21603 2-module, without screws	 22672.1... 2 modules, 1-gang. Dimensions: 90x90 mm  22672.2... 2 modules, 2-gang. Dimensions: 90x90 mm  22642.RN... 2 modules, with round hole. Dimensions: 90x90 mm
	Flush mounting  V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black V71703 For hollow walls GW 850 °C, light blue	 21613 3-module, with screws 	 22673.1... 3 modules, 1-gang. Dimensions: 122x90 mm  22673.2... 3 modules, 2-gang. Dimensions: 122x90 mm  22673.3... 3 modules, 3-gang. Dimensions: 122x90 mm
3	Flush mounting  V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black V71704 For hollow walls GW 850 °C, light blue	 21614 4-module, with screws 	 22674.4... 4 modules, 4-gang. Dimensions: 144,5x90 mm

Eikon Exé - Flat: standard types of mounting




Module	Box	Frame	Cover plate*
2 for ø 60 mm or 56x56 mm mounting box	Flush mounting  V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	 21600.0 1-module, without screws  21601.0 1-module, with claws  21602 2-module, with claws  21603 2-module, without screws	 22682.1... 2 modules for 1 switch. Dimensions: 90x90 mm  22682.2... 2 modules for 2 switches. Dimensions: 90x90 mm  22692... 2 modules for 4 home auto- mation/KNX devices. Dimensions: 90x90 mm  22642.RN... 2 modules, with round hole. Dimensions: 90x90 mm
	Flush mounting  V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black V71703 For hollow walls GW 850 °C, light blue	 21613 3-module, with screws 	 22683.1... ¹ 3 modules for 1 switch. Dimensions: 122x90 mm  22683.2... ¹ 3 modules for 2 switches. Dimensions: 122x90 mm  22683.3... 3 modules for 3 switches. Dimensions: 122x90 mm  22693... 3 modules for 6 home automation/KNX devices. Dimensions: 122x90 mm
4	Flush mounting  V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black V71704 For hollow walls GW 850 °C, light blue	 21614 4-module, with screws 	 22684.4... 4 modules for 4 switches. Dimensions: 144,5x90 mm  22694... 4 modules for 8 home automation/KNX devices. Dimensions: 144,5x90 mm

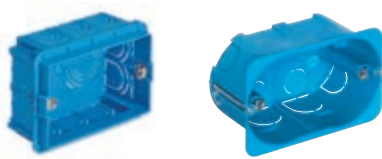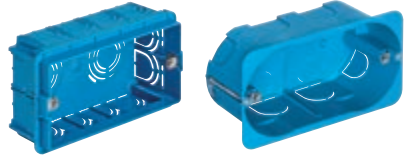Eikon Exé - Tondo: standard types of mounting

Module	Box	Frame	Cover plate*
2 for ø 60 mm or 56x56 mm mounting box	Flush mounting  V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	 21600.0 1-module, without screws  21601.0 1-module, with claws  21602 2-module, with claws  21603 2-module, without screws	 22682.RN.1... 2 modules for 1 switch. Dimensions: 90x90 mm  22682.RN.2... 2 modules for 2 switches. Dimensions: 90x90 mm  22692.RN... 2 modules for 4 home auto- mation/KNX devices. Dimensions: 90x90 mm  22642.RN... 2 modules, with round hole. Dimensions: 90x90 mm
	Flush mounting  V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black V71703 For hollow walls GW 850 °C, light blue	 21613 3-module, with screws 	 22683.RN.1...¹ 3 modules for 1 switch. Dimensions: 122x90 mm  22683.RN.2...¹ 3 modules for 2 switches. Dimensions: 122x90 mm  22683.RN.3... 3 modules for 3 switches. Dimensions: 122x90 mm  22693.RN... 3 modules for 6 home automation/KNX devices. Dimensions: 122x90 mm
3	Flush mounting  V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black V71704 For hollow walls GW 850 °C, light blue	 21614 4-module, with screws 	 22684.RN.4... 4 modules for 4 switches. Dimensions: 144,5x90 mm  22694.RN... 4 modules for 8 home automation/KNX devices. Dimensions: 144,5x90 mm



* Cover plates range, page 156

Eikon Exé: flush mounting for plasterboard





Module	Box	Frame	Cover plate*
1 and 2	 V71791 ø 60 mm mounting box (GW 960 °C) with plaster frame for plasterboard and hollow walls	 21600.0 1-module, without screws  21601.0 1-module, with claws	 Eikon Exé Flat 22682.1... 2 modules for 1 switch. Dimensions: 90x90 mm  Eikon Exé Flat 22682.2... 2 modules for 2 switches. Dimensions: 90x90 mm  22692... 2 modules for 4 home automation/KNX devices. Dimensions: 90x90 mm
		 21602 2-module, with claws  21603 2-module, without screws	 Eikon Exé 22642... 2-module. Dimensions: 90x90 mm  22642.RN... 2 modules, with round hole. Dimensions: 90x90 mm
3	 V71793 3-module mounting box (GW 960 °C) with plaster frame for plasterboard and hollow walls	 21613 3-module, with screws 	 Eikon Exé Flat 22683.1...¹ 3 modules for 1 switch. Dimensions: 122x90 mm  22683.2...¹ 3 modules for 2 switches. Dimensions: 122x90 mm  22683.3... 3 modules for 3 switches. Dimensions: 122x90 mm  22693... 3 modules for 6 home automation/KNX devices. Dimensions: 122x90 mm  Eikon Exé 22653... 3-module. Dimensions: 122x90 mm

¹ It is necessary to use 21041 blank module when 21613 mounting frame is installed with 22683.1 and 22683.2 cover plates.




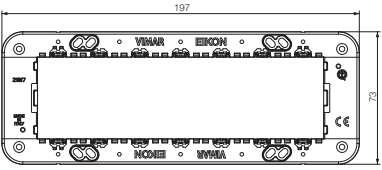
Eikon Exé: flush mounting for plasterboard

Module	Box	Frame	Cover plate*
4	 V71794 4-module mounting box (GW 960 °C) with plaster frame for plasterboard and hollow walls	 21614 4-module, with screws 	Eikon Exé Flat  22684.4... 4 modules for 4 switches. Dimensions: 144,5x90 mm  22694... 4 modules for 4 home automation/KNX devices. Dimensions: 144,5x90 mm Eikon Exé  22654... 4-module. Dimensions: 144,5x90 mm
7	 V71796 7-module mounting box (GW 960 °C) with plaster frame for plasterboard and hollow walls	 21617 7-module, with screws 	Eikon Exé  22657... 7-module. Dimensions: 212x90 mm








Eikon Tactil and Eikon Evo: British standard mounting

Module	Box	Frame	Cover plate*
1 and 2	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20606' 1-module, with screws M 3,5, grey  20606.B' 1-module, with screws M 3,5, white  20606.N' 1-module, with screws M 3,5, Next	Eikon Evo  21642... 2-module Dimensions: 95,4x95,4 mm
3 and mono-bloc	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20607' 2-module, with screws M 3,5  20608' 3-module, with screws M 3,5  20017 Example of monobloc device  20215.L Example of monobloc device	Eikon Tactil  21662... 2-module Dimensions: 95,4x95,4 mm Eikon Evo  21642... 2-module Dimensions: 95,4x95,4 mm
5 and mono-bloc	Flush mounting  2-gang mounting box Fixing centres: 120,6 mm	 20609' 5-module, with screws M 3,5  20222.L Example of monobloc device in horizontal mounting  20291 Example of monobloc device in vertical mounting	Eikon Tactil  21667... 5-module Dimensions: 163x95,4 mm Eikon Evo  21649... 5-module Dimensions: 163x95,4 mm

Eikon Exé - Vintage: British standard mounting

Module	Box	Frame	Cover plate*
1 and 2	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20606.0¹ 1-module, with screws M 3,5  20607¹ 2-module, with screws M 3,5	 22672.1... 2 modules for 1 switch. Dimensions: 90x90 mm  22672.2... 2 modules for 2 switches. Dimensions: 90x90 mm
		 20608¹ 3-module, with screws M 3,5	 22675.3... 3 modules for 3 switches. Dimensions: 90x90 mm
5	 2-gang mounting box Fixing centres: 120,6 mm	 20609¹ 5-module, with screws M 3,5  20609¹ 5-module, with screws M 3,5	 22679.5... 5 modules for 5 switches. Dimensions: 159,3x90 mm









Eikon Exé - Flat: British standard mounting

Module	Box	Frame	Cover plate*
1 and 2	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20606.0¹ 1-module, with screws M 3,5  20607¹ 2-module, with screws M 3,5	 22682.1... 2 modules for 1 switch. Dimensions: 90x90 mm
		 20607¹ 2-module, with screws M 3,5  20607¹ 2-module, with screws M 3,5	 22682.2... 2 modules for 2 switches. Dimensions: 90x90 mm  22692... 2 modules for 4 home automation/KNX devices. Dimensions: 90x90 mm
3	 1-gang mounting box Fixing centres: 60,3 mm	 20608¹ 3-module, with screws M 3,5  20608¹ 3-module, with screws M 3,5	 22695... 3 modules for 6 home automation/KNX devices. Dimensions: 90x90 mm
5	 2-gang mounting box Fixing centres: 120,6 mm	 20609¹ 5-module, with screws M 3,5  20609¹ 5-module, with screws M 3,5	 22689.5... 5 modules for 5 switches. Dimensions: 159,3x90 mm  22699... 5 modules for 10 switches. Dimensions: 159,3x90 mm








* Cover plates range, page 156

¹ Items conform to BS 5733

Eikon Exé - Tondo: British standard mounting

Module	Box	Frame	Cover plate*
1 and 2	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20606.0' 1-module, with screws M 3,5 	 22682.RN.1... 2 modules for 1 switches. Dimensions: 90x90 mm
		 20607' 2-module, with screws M 3,5 	 22682.RN.2... 2 modules for 2 switches. Dimensions: 90x90 mm  22692.RN... 2 modules for 4 home automation/KNX devices. Dimensions: 90x90 mm
3	 1-gang mounting box Fixing centres: 60,3 mm	 20608' 3-module, with screws M 3,5 	 22685.RN.3... 3 modules for 3 switches. Dimensions: 90x90 mm  22695.RN... 3 modules for 6 switches. Dimensions: 90x90 mm
5	 2-gang mounting box Fixing centres: 120,6 mm	 20609' 5-module, with screws M 3,5 	 22689.RN.5... 5 modules for 5 home automation/KNX devices. Dimensions: 159,3x90 mm  22699.RN... 5 modules for 10 switches. Dimensions: 159,3x90 mm

Eikon Exé: British standard mounting

Module	Box	Frame	Cover plate*
1 and 2	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20606' 1-module, with screws M 3,5, grey  20606.B' 1-module, with screws M 3,5, white  20606.N' 1-module, with screws M 3,5, Next  20607' 2-module, with screws M 3,5 	 22642... 2-module Dimensions: 90x90 mm
3 and mono-bloc	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20608' 3-module, with screws M 3,5   20017 Example of monobloc device  20215.L Example of monobloc device	 22648... 3-module Dimensions: 90x90 mm
5 and mono-bloc	Flush mounting  2-gang mounting box Fixing centres: 120,6 mm	 20609' 5-module, with screws M 3,5   20222.L Example of monobloc device in horizontal mounting  20291 Example of monobloc device in vertical mounting	 22649... 5-module Dimensions: 159,3x90 mm

Control devices	196
Power and signal socket outlets	203
Signalling, protection and detection	208
Comfort and climate	210
Stand alone and hotel solutions	211
Smart home View Wireless	212
Cover plates range	218
Installation types	221

Linea



-80% 
CO₂ eq. emissions

The Linea series reduces CO₂ equivalent emissions by over 80%, saving more than 500 tonnes of CO₂ equivalent each year.





Linea

User-friendly, connected, essential and sustainable. An unprecedented and elegant design, which brings together the understated allure of sophisticated styling with state-of-the-art technology. Designed to be sustainable, with 24 patents registered to make it truly one of a kind.



Aligned control
Once activated, the button resumes its original position, guaranteeing perfect alignment at all times thanks to our patented In-line technology.



Axial control
The axial control remains perfectly aligned with the surface of the cover plate, even after each use.



Home automation control
Linea controls are also available in the home automation system version for the By-me Plus system and the KNX standard.



Total Look
Impeccable coordination for an identity that stands out every time. White, canvas and black for settings with a bold personality.



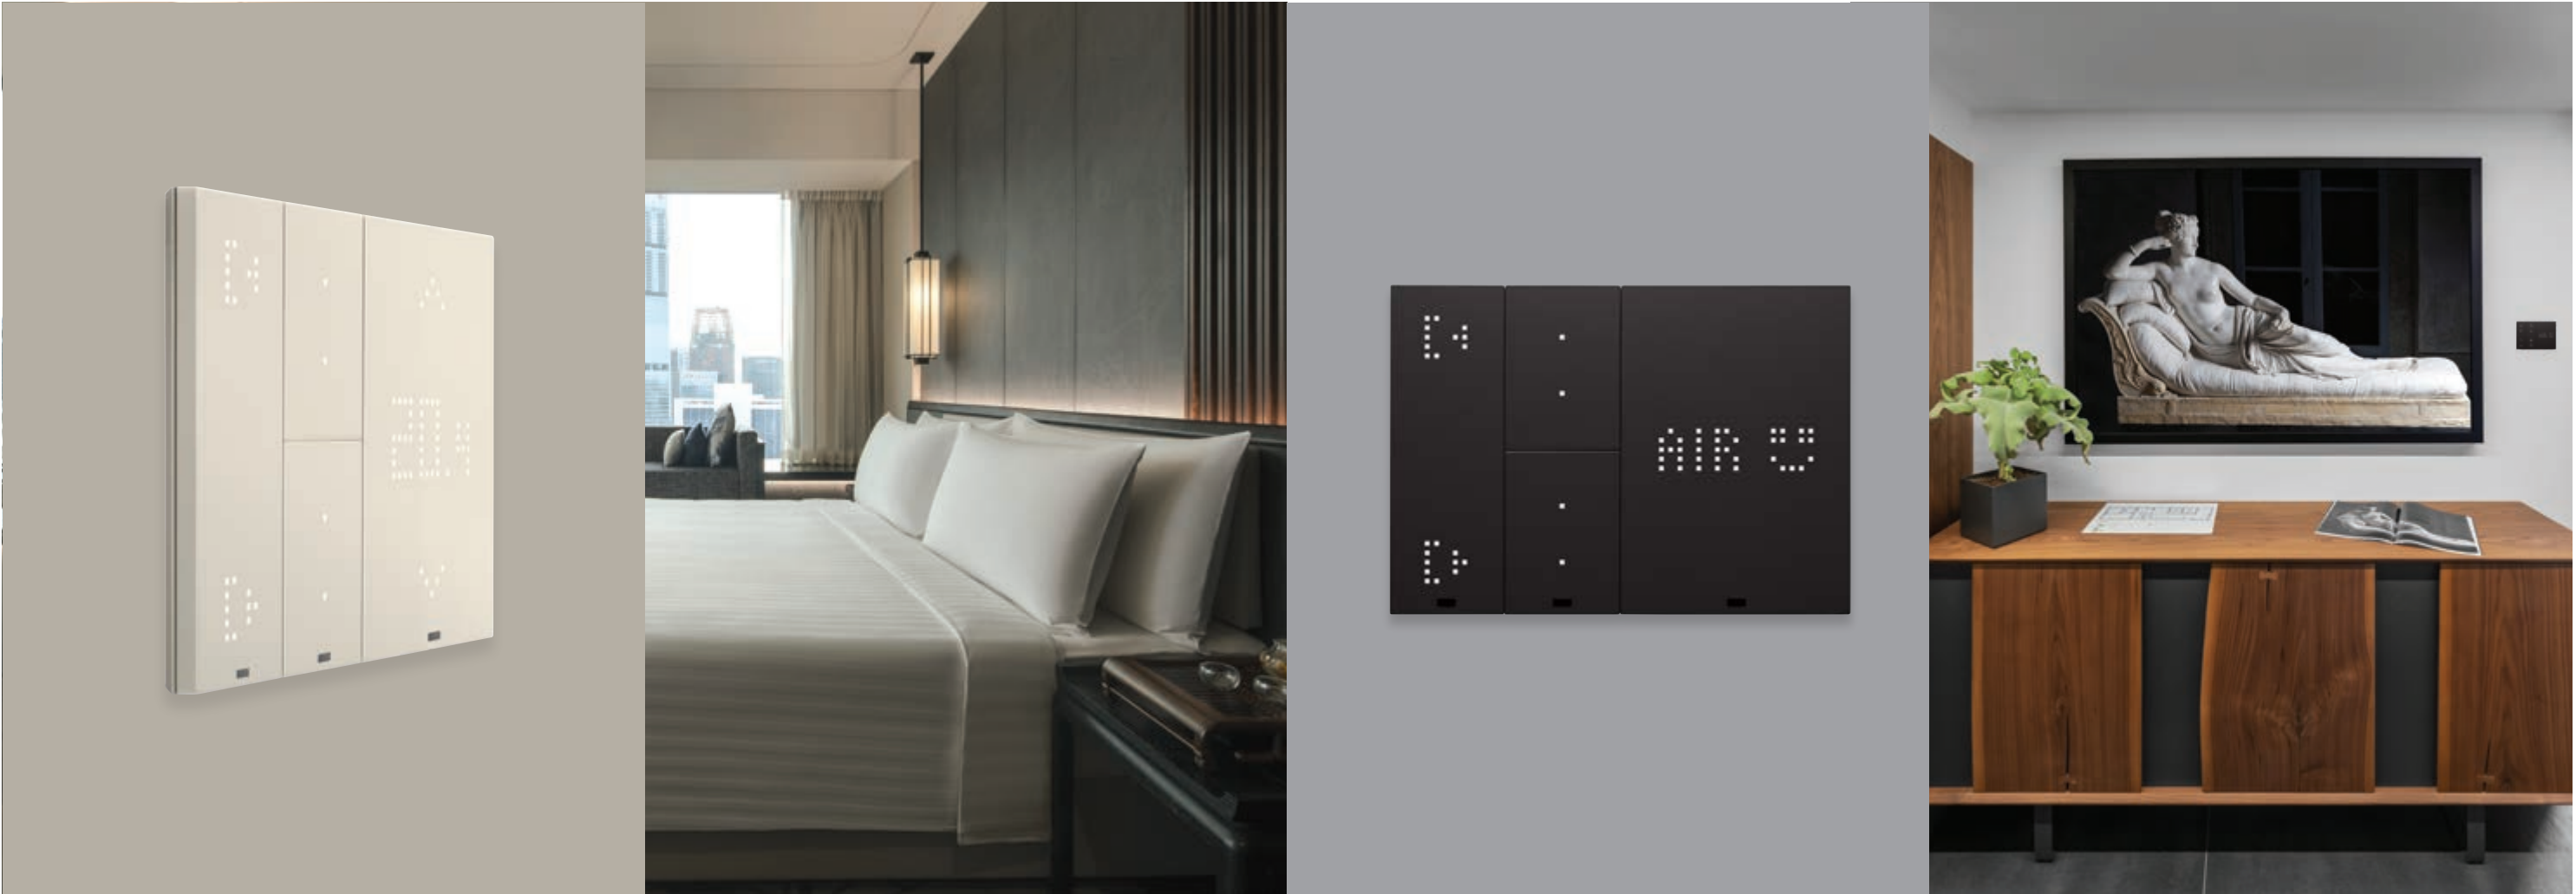
Reflex
Versatility and appeal thanks to the extremely realistic glass effect.



Painted technopolymers
The energy of simple and gleaming modernity.



PVD metals
Cover plates made in zinc-titanium alloy for high environmental performance PVD finishes that emphasise the metallic reflections of the material.



Linea with XT platform

Dynamic for an enhanced user experience. Linea is also digital, thanks to the innovative XT platform, a high-tech experience for home automation systems. Innovative styling with controls across the entire surface and activation with micro-switch with flawless feedback. Understated, flat design.



White



Canvas



Black

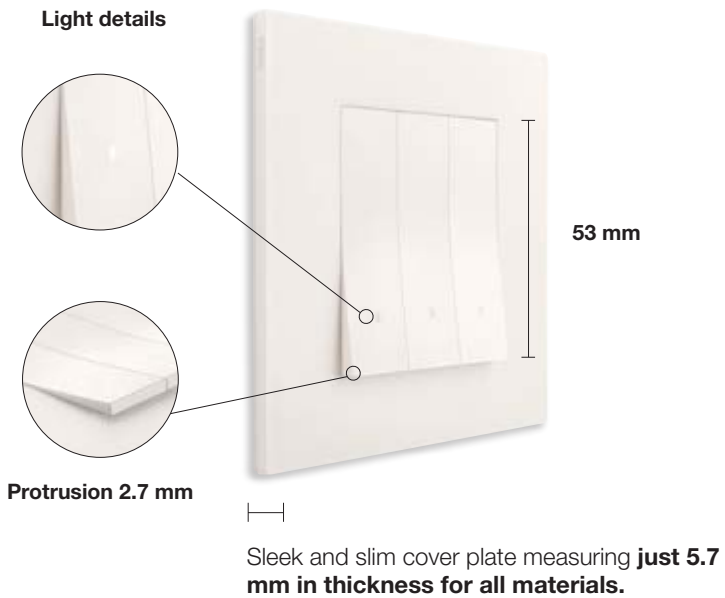


Modular and scalable to suit any need

The devices in the XT platform are scalable in time and extremely easy to use: from a simple control for lights and roller shutters, to temperature management and even the activation of scenarios to a home automation system that is always up-to-date and functional.



Aligned controls



> **Distinctive, generously-proportioned button profile featuring a gentle curve to make use even more intuitive.** A soft protrusion that elegantly interrupts the flat continuity of the surface of the cover plate.

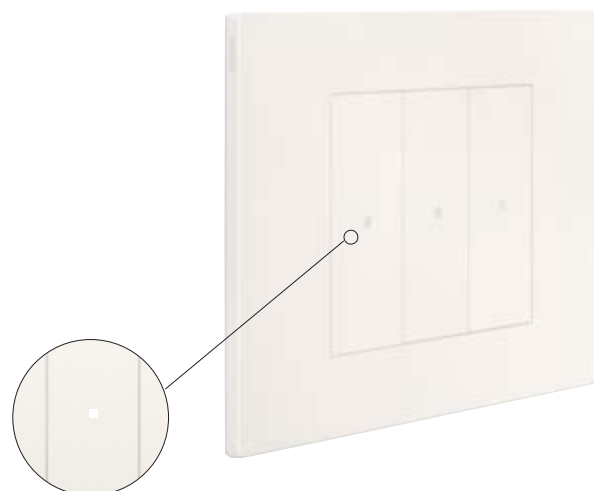
PATENTED
VIMAR

- **In-line technology** that keeps the controls perfectly aligned, even after repeated use.
- **New control mechanism with kinematic precision and silent operation at just a touch of your fingertips, with reduced control protrusion.**



> **Vertical light beam.**
For the aligned control, there is also the possibility of ordering a dedicated button to create a **vertical downward light beam**, choosing between a **LED lighting unit with standard brightness** or a **softer one that creates a soft glow on the surface of the cover plate**. The result is a discrete yet distinctive effect on the wall.

Axial controls



> **Absolutely flat effect.**
The axial control remains perfectly aligned with the surface of the cover plate, even after each use.

PATENTED
VIMAR

- **New control mechanism with kinematic precision and silent operation at just a touch of your fingertips and across the entire surface of the control.**
- **More compact mechanism with reduced depth to ensure there is more space inside the mounting box.**

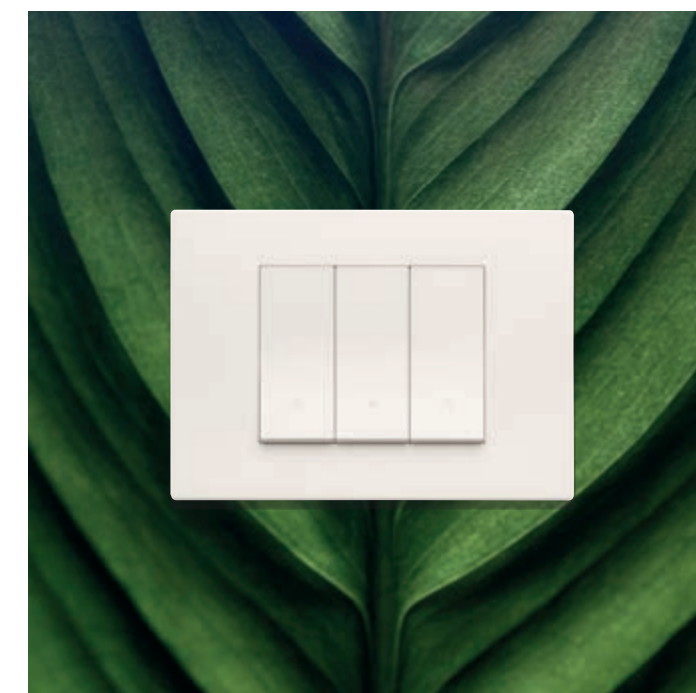
Universal flush-fitting socket outlets



PATENTED
VIMAR

- **Universal flush-fitting socket outlets** with a patented recessed anti-jamming mechanism which guarantees functionality at every use and for every type of plug.
- **Device terminals** have been specifically designed (in different shapes) for guided wiring. Earth terminal in socket outlets or significant terminal in controls (e.g. common on the 2-way switch) with square holes and relief dot for easier identification.

Production processes with a low environmental impact



> 500

a reduction of more than 500 tonnes of CO₂ equivalents per year.

97%



of production contains plastic from renewable and recycled sources originating from an ISCC PLUS certified supply chain (mass balance, the certified portion varies for different products), contributing to a significantly lower environmental impact.

70%

of traditional plastic from fossil sources is replaced by plastic derived from renewable sources.

Installation methods
Controls

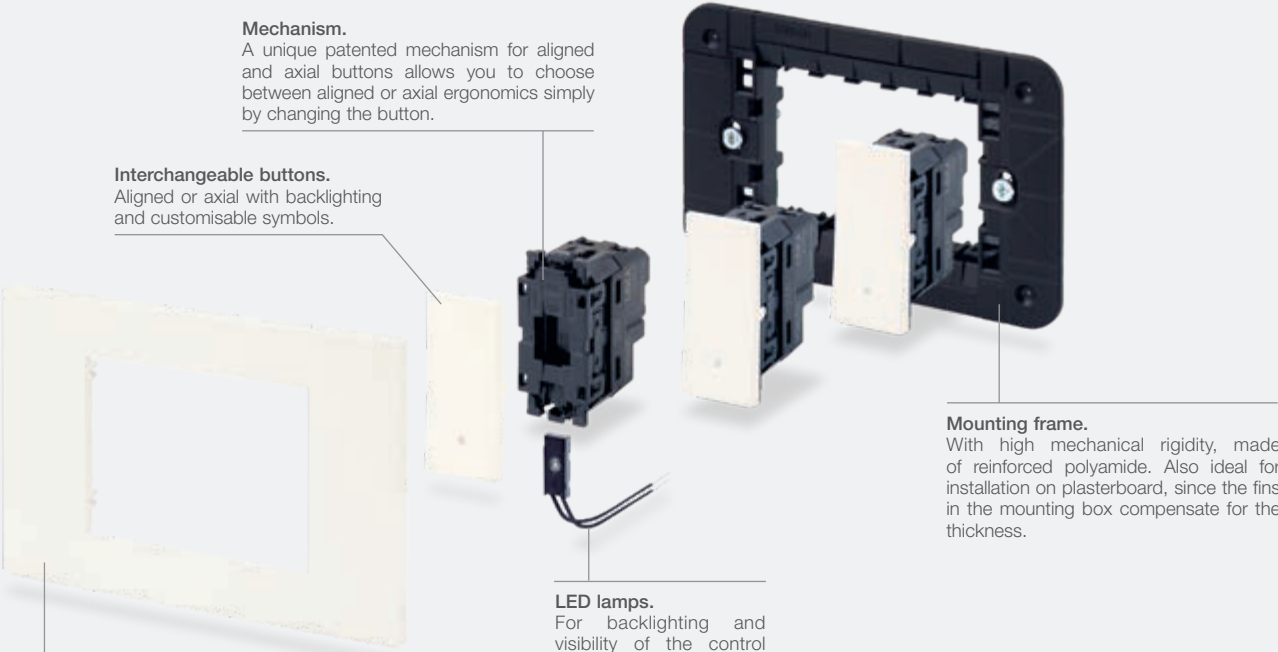
Mechanism.
A unique patented mechanism for aligned and axial buttons allows you to choose between aligned or axial ergonomics simply by changing the button.

Interchangeable buttons.
Aligned or axial with backlighting and customisable symbols.

Cover plates.
With a minimum thickness of just 5.7 mm, in a wide range of colours and different materials.

LED lamps.
For backlighting and visibility of the control even in the dark.

Mounting frame.
With high mechanical rigidity, made of reinforced polyamide. Also ideal for installation on plasterboard, since the fins in the mounting box compensate for the thickness.



Other devices

Half blank modules to allow central installation of a 2 module device.









Dial thermostat, 2 modules, installed in the centre.

Socket outlet with SICURY shutter.

Flush-fitting socket outlet.
P40 universal socket outlets with SICURY protective shutter. The flush-fitting well of the cover plate slides inside the socket outlet when the plug is inserted. What's more, it is fitted with a patented mechanism that ensure seamless shifting of the well when the plug is pulled out.


PATENTED VIMAR




Composition	Boxes	Mounting frames	Devices	Cover plates
 3 modules	 flush mounting for masonry walls  flush mounting for hollow walls	 with screws	 1 and 2 modules  3 x 1 module  3 modules	 3 modules
 4 modules	 flush mounting for masonry walls  flush mounting for hollow walls	 with screws	 2x 1 and 2 modules  4 x 1 module  1 and 3 modules	 4 modules
 7 modules	 flush mounting for masonry walls  flush mounting for hollow walls	 with screws	 3 x 1 and 2 x 2 modules  7 x 1 module  2 x 2 modules and 3 modules	 7 modules
 table mounting	 table mounting box	 with screws	 2 x 2 modules	 4 modules



Installation methods

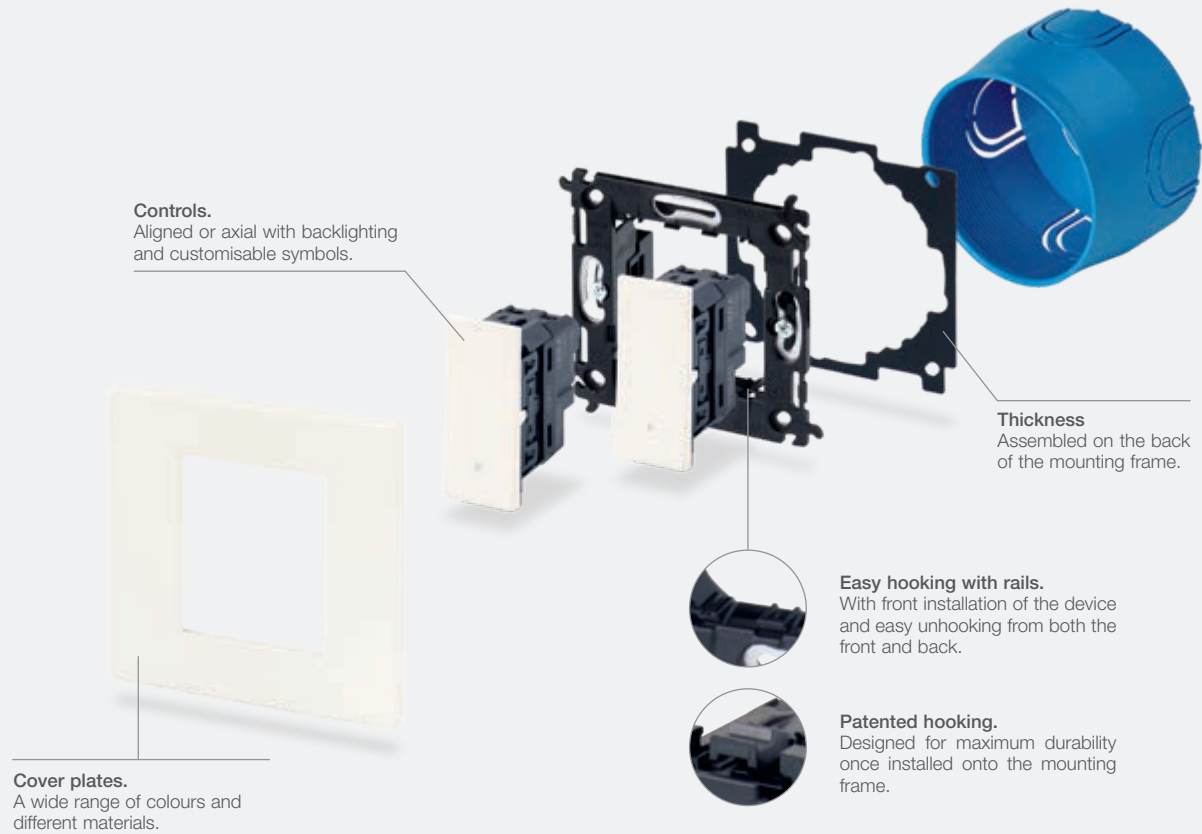ø 60 mm mounting boxes for masonry walls





ø 60 mm mounting boxes for hollow walls

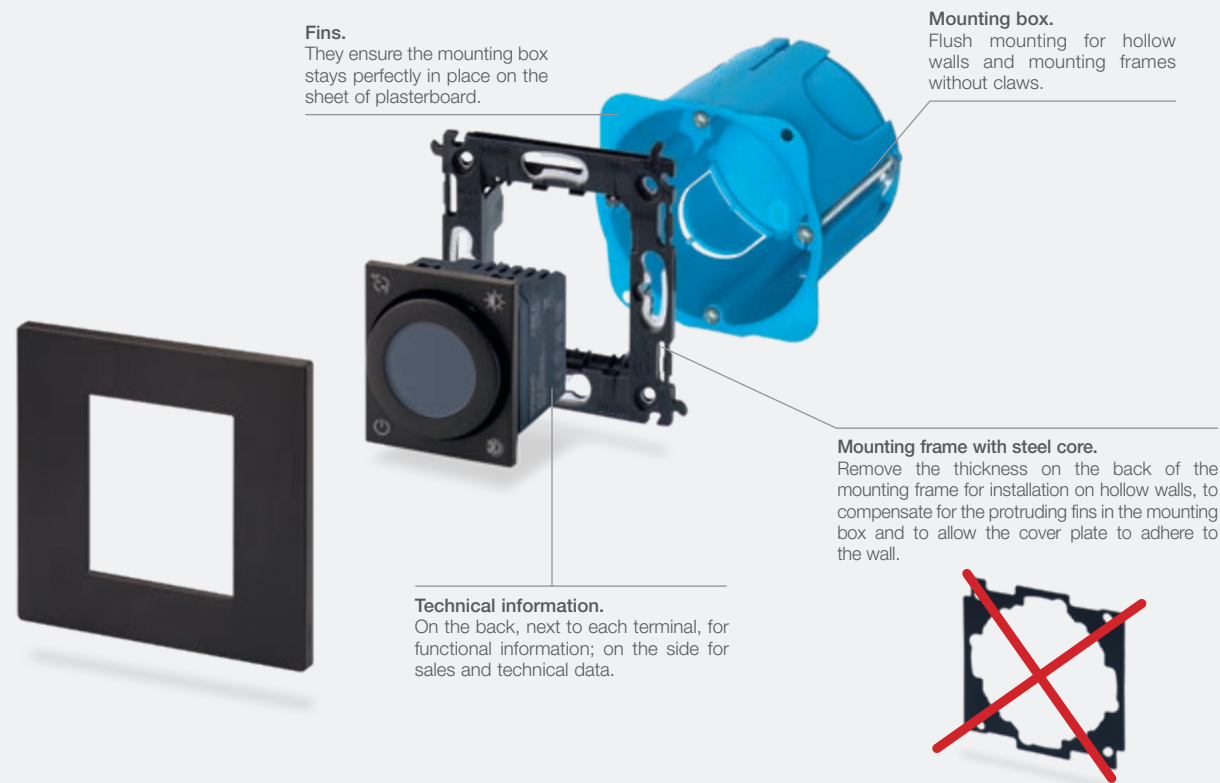

Composition	Boxes	Mounting frames	Devices	Cover plates
 2 modules	 flush mounting for masonry walls	 2-modules with removable claws	 1 module + 2 half blank modules	 2 modules
			 2 x 1 module	
 2 modules	 flush mounting for hollow walls and mounting frames without claws	 2-modules without screws	 2 modules	
			 2 modules	

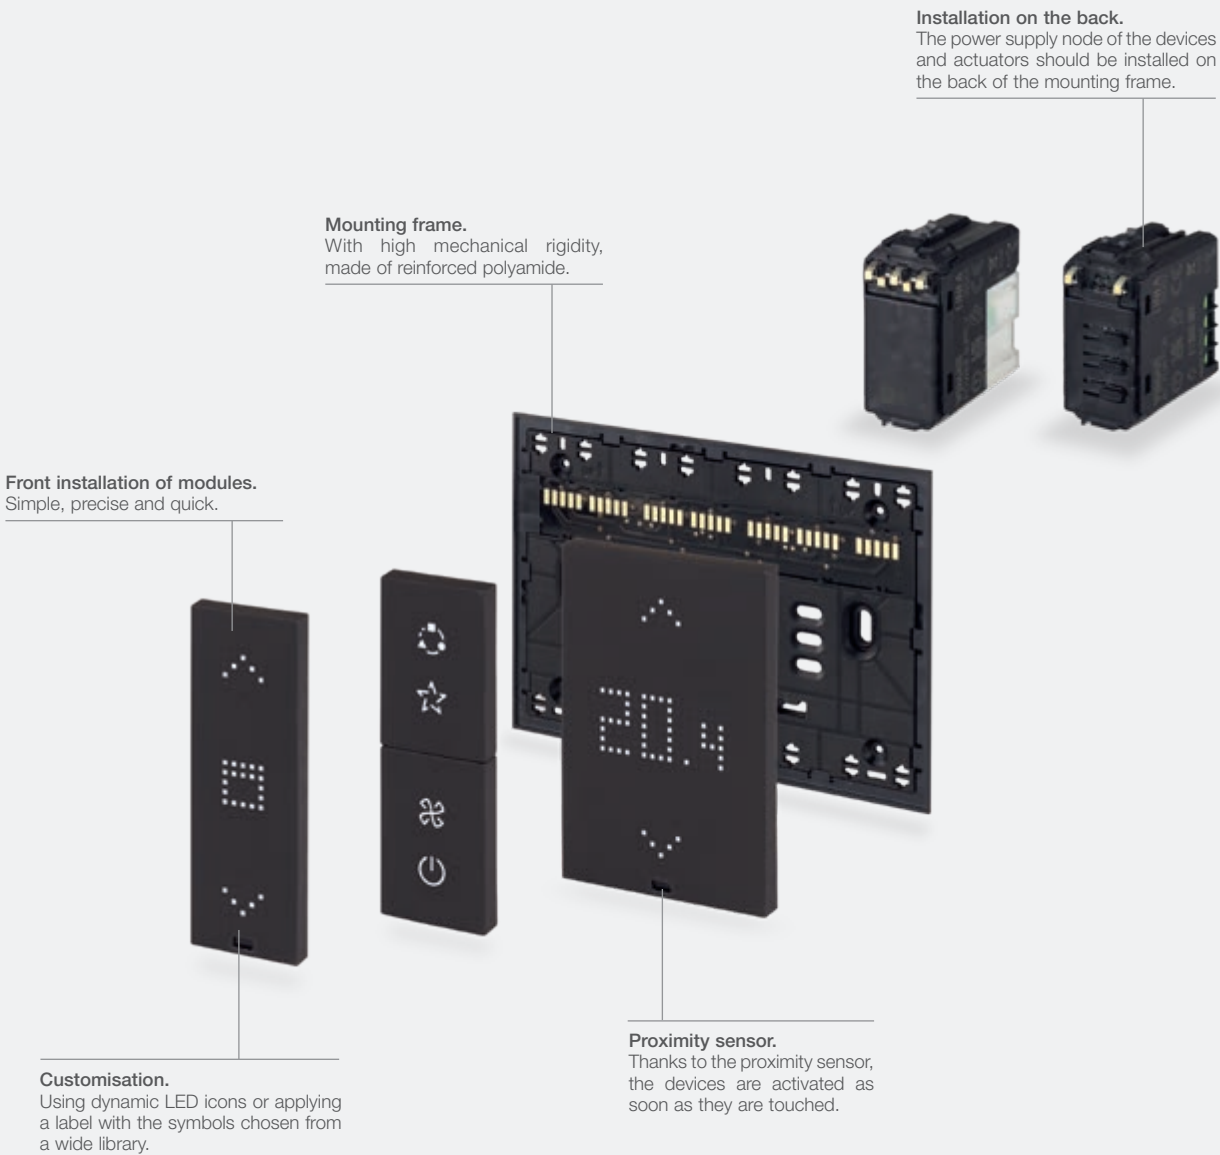Installation methods
Linea with XT platform



Composition	Boxes	Devices (back of mounting frame)	Mounting frames	Devices (front of mounting frame)
 2 modules	 flush mounting for hollow walls and mounting frames without claws	 1 power supply node  1 actuator	 without screws	 3 x 1 module  1 x 1 module and 1 x 2 modules
 3 modules	 flush mounting for masonry walls  flush mounting for hollow walls	 1 power supply node  2 actuators	 with screws	 4 x 1 module  2 x 1 module and 1 x 2 modules  2 x 2 modules
 4 modules	 flush mounting for masonry walls  flush mounting for hollow walls	 1 power supply node  3 actuators	 with screws	 5 x 1 module  3 x 1 module and 1 x 2 modules  1 x 1 module and 2 x 2 modules

Installation methods

Linea with XT platform and Linea



Installation on the back.
The power supply node of the devices and actuators should be installed on the back of the mounting frame.












Dedicated mounting frame for white and canvas finishes.
The edge of the mounting frame is the same colour as the cover plate and module, for perfectly matching styling.












Mounting frame with cover plate.
With high mechanical rigidity, the mounting frame complete with cover plate makes it possible to combine Linea devices with XT platform and Linea devices such as a socket outlet, for instance.



















Socket outlet with SICURY shutter.













Customisation.
Using dynamic LED icons or applying a label with the symbols chosen from a wide library.

Composition	Boxes	Devices (back of mounting frame)	Mixed mounting frames (electrified and for Linea cover plate)	Devices (front of mounting frame)
 3 modules	 flush mounting for masonry walls  flush mounting for hollow walls	 1 power supply node	 with screws	 XT platform: 1 x 1 module  Linea: 2 x 1 module  XT platform: 1 x 1 module  Linea: 1 x 2 modules
 4 modules	 flush mounting for masonry walls  flush mounting for hollow walls	 1 power supply node  1 actuator	 with screws	 XT platform: 2 x 1 module  Linea: 2 x 1 module  XT platform: 2 x 1 module  Linea: 1 x 2 modules  XT platform: 1 x 2 modules  Linea: 1 x 2 modules


Black			White			Canvas		
Blank modules and cable outlets								
								
30040.G Half blank module. Depth: 8,6 mm	30041.G Blank module. Depth: 9,2 mm	30044.G Cable outlet. Depth: 24,7 mm	30040.B Half blank module. Depth: 8,6 mm	30041.B Blank module. Depth: 9,2 mm	30044.B Cable outlet. Depth: 24,7 mm	30040.C Half blank module. Depth: 8,6 mm	30041.C Blank module. Depth: 9,2 mm	30044.C Cable outlet. Depth: 24,7 mm
Aligned 1P 250 V~ 1-way switches (lightable°)								
								
30000.G 10 AX. Depth: 31,8 mm	30000.2G 10 AX. - 2 modules Depth: 32,3 mm		30000.B 10 AX. Depth: 31,8 mm	30000.2B 10 AX. - 2 modules Depth: 32,3 mm		30000.C 10 AX. Depth: 31,8 mm	30000.2C 10 AX. - 2 modules Depth: 32,3 mm	
Aligned 1P 250 V~ 2-way switches (lightable°)								
								
30004.G 10 AX. Depth: 31,8 mm	30004.2G 10 AX. - 2 modules Depth: 32,3 mm		30004.B 10 AX. Depth: 31,8 mm	30004.2B 10 AX. - 2 modules Depth: 32,3 mm		30004.C 10 AX. Depth: 31,8 mm	30004.2C 10 AX. - 2 modules Depth: 32,3 mm	
Aligned 1P 250 V~ reversing switches (lightable°)								
								
30012.G 10 AX. Depth: 35,5 mm	30012.2G 10 AX. - 2 modules Depth: 36 mm		30012.B 10 AX. Depth: 35,5 mm	30012.2B 10 AX. - 2 modules Depth: 36 mm		30012.C 10 AX. Depth: 35,5 mm	30012.2C 10 AX. - 2 modules Depth: 36 mm	
Aligned 1P NO 250 V~ push buttons (lightable°)								
								
30008.G 10 A. Depth: 31,8 mm	30008.2G 10 A. - 2 modules Depth: 32,3 mm		30008.B 10 A. Depth: 31,8 mm	30008.2B 10 A. - 2 modules Depth: 32,3 mm		30008.C 10 A. Depth: 31,8 mm	30008.2C 10 A. - 2 modules Depth: 32,3 mm	
Axial 1P 1-way switches 250 V~ (lightable°)								
								
30000A.G 10 AX. Depth: 31,8 mm	30000A.2G 10 AX. - 2 modules Depth: 32,3 mm		30000A.B 10 AX. Depth: 31,8 mm	30000A.2B 10 AX. - 2 modules Depth: 32,3 mm		30000A.C 10 AX. Depth: 31,8 mm	30000A.2C 10 AX. - 2 modules Depth: 32,3 mm	

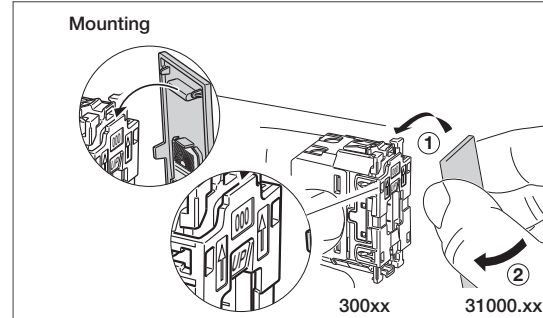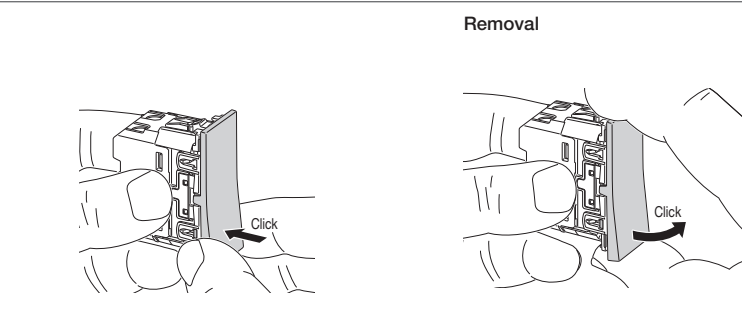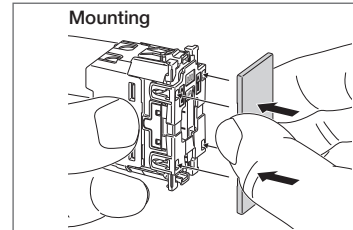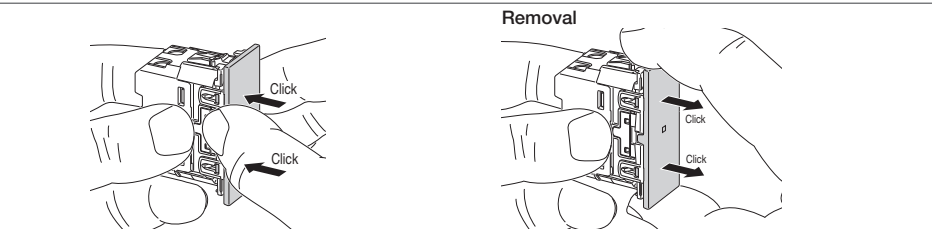Black		White		Canvas			
Axial 1P 2-way switches 250 V~ (lightable°)							
							
30004A.G 10 AX. Depth: 31,8 mm	30004A.2G 10 AX. - 2 modules Depth: 32,3 mm	30004A.B 10 AX. Depth: 31,8 mm	30004A.2B 10 AX. - 2 modules Depth: 32,3 mm	30004A.C 10 AX. Depth: 31,8 mm	30004A.2C 10 AX. - 2 modules Depth: 32,3 mm		
Axial 1P reversing switches 250 V~ (lightable°)							
							
30012A.G 10 AX. Depth: 35,5 mm	30012A.2G 10 AX. - 2 modules Depth: 36 mm	30012A.B 10 AX. Depth: 35,5 mm	30012A.2B 10 AX. - 2 modules Depth: 36 mm	30012A.C 10 AX. Depth: 35,5 mm	30012A.2C 10 AX. - 2 modules Depth: 36 mm		
Axial 1P NO push buttons 250 V~ (lightable°)							
							
30008A.G 10 A. Depth: 31,8 mm	30008A.2G 10 A. - 2 modules Depth: 32,3 mm	30008A.B 10 A. Depth: 31,8 mm	30008A.2B 10 A. - 2 modules Depth: 32,3 mm	30008A.C 10 A. Depth: 31,8 mm	30008A.2C 10 A. - 2 modules Depth: 32,3 mm		
Lightable mechanisms for aligned and axial 250 V~ buttons (common devices for the three versions)							
							
30000 1P 10 AX 1-way switch. Depth: 31,8 mm	30000.2 1P 10 AX 1-way switch. - 2 modules Depth: 31,8 mm	30004 1P 10 AX 2-way switch. Depth: 31,8 mm	30004.2 1P 10 AX 2-way switch. - 2 modules Depth: 31,8 mm	30012 1P 10 AX reversing switch. Depth: 35,5 mm	30012.2 1P 10 AX reversing switch. - 2 modules Depth: 35,5 mm	30008 1P NO 10 A push button. Depth: 31,8 mm	30008.2 1P NO 10 A push button. - 2 modules Depth: 31,8 mm
Mounting and removing the aligned button from the mechanism							
Mounting 				Removal 			
300xx				31000.xx			
Mounting and removing the axial button from the mechanism							
Mounting 				Removal 			
300xx				31000A.xx			


Black			White			Canvas		
1-module aligned interchangeable buttons for control mechanisms (lightable°)								
 31000.G No symbol	 31000S.G Vertical light beam	 31000.CG Bell symbol	 31000.B No symbol	 31000S.B Vertical light beam	 31000.CB Bell symbol	 31000.C No symbol	 31000S.C Vertical light beam	 31000.CC Bell symbol
 31000.LG Light symbol	 31000.PG Key symbol	 31000.DG With lightable and customisable diffuser	 31000.LB Light symbol	 31000.PB Key symbol	 31000.DB With lightable and customisable diffuser	 31000.LC Light symbol	 31000.PC Key symbol	 31000.DC With lightable and customisable diffuser
2-module aligned interchangeable buttons for control mechanisms (lightable°)								
 31000.2G No symbol	 31000S.2G Vertical light beam	 31000.2CG Bell symbol	 31000.2B No symbol	 31000S.2B Vertical light beam	 31000.2CB Bell symbol	 31000.2C No symbol	 31000S.2C Vertical light beam	 31000.2CC Bell symbol
 31000.2LG Light symbol	 31000.2PG Key symbol	 31000.2DG With lightable and customisable diffuser	 31000.2LB Light symbol	 31000.2PB Key symbol	 31000.2DB With lightable and customisable diffuser	 31000.2LC Light symbol	 31000.2PC Key symbol	 31000.2DC With lightable and customisable diffuser
1-module axial interchangeable buttons for control mechanisms (lightable°)								
 31000A.G No symbol	 31000A.CG Bell symbol	 31000A.LG Light symbol	 31000A.B No symbol	 31000A.CB Bell symbol	 31000A.LB Light symbol	 31000A.C No symbol	 31000A.CC Bell symbol	 31000A.LC Light symbol
 31000A.PG Key symbol	 31000A.DG With lightable and customisable diffuser		 31000A.PB Key symbol	 31000A.DB With lightable and customisable diffuser		 31000A.PC Key symbol	 31000A.DC With lightable and customisable diffuser	

Black			White			Canvas		
2-module axial interchangeable buttons for control mechanisms (lightable°)								
								
31000A.2G No symbol	31000A.2CG Bell symbol	31000A.2LG Light symbol	31000A.2B No symbol	31000A.2CB Bell symbol	31000A.2LB Light symbol	31000A.2C No symbol	31000A.2CC Bell symbol	31000A.2LC Light symbol
								
31000A.2PG Key symbol	31000A.2DG With lightable and customisable diffuser		31000A.2PB Key symbol	31000A.2DB With lightable and customisable diffuser		31000A.2PC Key symbol	31000A.2DC With lightable and customisable diffuser	
Traditional 1P 250 V~ 1-way rocker switches (lightable°)								
								
30020.G 10 AX. Depth: 23,5 mm			30020.B 10 AX. Depth: 23,5 mm			30020.C 10 AX. Depth: 23,5 mm		
Traditional 1P 250 V~ 2-way rocker switches (lightable°)								
								
30024.G 10 AX. Depth: 23,5 mm			30024.B 10 AX. Depth: 23,5 mm			30024.C 10 AX. Depth: 23,5 mm		
Traditional 1P 250 V~ reversing rocker switches (with white 110-250 V LED lighting as standard)								
								
30032.C 10 AX, lightable. Depth: 27.2 mm	30032.LC 10 AX, with white LED 250V~. Depth: 27.2 mm		30032.B 10 AX, lightable. Depth: 27.2 mm	30032.LB 10 AX, with white LED 250V~. Depth: 27.2 mm		30032.C 10 AX, lightable. Depth: 27.2 mm	30032.LC 10 AX, with white LED 250V~. Depth: 27.2 mm	



Black		White		Canvas	
250 V~ NO-NC change-over 1P push buttons (lightable°)					
					
30010.G 10 A. Depth: 31,8 mm		30010.B 10 A. Depth: 31,8 mm		30010.C 10 A. Depth: 31,8 mm	
Quid - Magnetic relay module for lighting (backfit)					
					
03991 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, for backfit		03992 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 input for reset push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, luminous signalling of load status, for backfit		03993 ON/OFF sequence pulse relay module, 1 input for NO push button, 2 NO 10 A 220-240 V~ 50/60 Hz sequence relay outputs, for backfit	
					
03994 Quid magnetic relay module with sequential ON/OFF pulses, 1 input for NO push-button on phase (L) or on neutral (N), 1 NO relay output 10 AX 220-240 V~ 50/60 Hz		00945.G LED signalling unit for aligned and axial controls, for Quid pulse relay module with pulse control push buttons 03992, green			
Dimmers**					
					
30135.G Universal. Depth: 43 mm 30135.120G As above, 120 V~		30135.B Universal. Depth: 43 mm 30135.120B As above, 120 V~		30135.C Universal. Depth: 43 mm 30135.120C As above, 120 V~	
Infrared switches					
					
30181.G Lighting switch, NO 6 A relay output, 220-240 V~ 50/60 Hz Depth: 41 mm		30181.B Lighting switch, NO 6 A relay output, 220-240 V~ 50/60 Hz Depth: 41 mm		30181.C Lighting switch, NO 6 A relay output, 220-240 V~ 50/60 Hz Depth: 41 mm	
					
30181.120G Lighting switch, NO 6 A relay output, 120 V~ 50/60 Hz Depth: 41 mm		30181.120B Lighting switch, NO 6 A relay output, 120 V~ 50/60 Hz Depth: 41 mm		30181.120C Lighting switch, NO 6 A relay output, 120 V~ 50/60 Hz Depth: 41 mm	
					
30186.G Bedside switch, NO 6 A relay output, 220-240 V~ 50/60 Hz Depth: 41 mm		30186.B Bedside switch, NO 6 A relay output, 220-240 V~ 50/60 Hz Depth: 41 mm		30186.C Bedside switch, NO 6 A relay output, 220-240 V~ 50/60 Hz Depth: 41 mm	
		02690 Lighting switch, 2000 W incandescent lamps, CFL 10-1000 W, LED 100 W, 220-240 V~ 50/60 Hz, ceiling mounting			



Black		White		Canvas													
2P 250 V~ 1-way rocker switches (lightable°)																	
																	
30016.G 20 AX. Depth: 30,4 mm		30016.B 20 AX. Depth: 30,4 mm		30016.C 20 AX. Depth: 30,4 mm													
1P special switches 250 V~																	
																	
30050 1P NO 10 A push button, luminous name plate, for LED signalling unit LED 00935... and 00936... (not supplied) - 2 modules. Depth: 26,5 mm																	
																	
30054.G NO-NC 10A change-over 1P push button with pull-cord Depth: 23,5 mm		30054.B NO-NC 10A change-over 1P push button with pull-cord Depth: 23,5 mm		30054.C NO-NC 10A change-over 1P push button with pull-cord Depth: 23,5 mm													
1P NO 10 A push buttons 250 V~																	
																	
30066.G Two NO 10 A, independents. Depth: 24,2 mm		30066.B Two NO 10 A, independents. Depth: 24,2 mm		30066.C Two NO 10 A, independents. Depth: 24,2 mm													
250 V~ controls with direction arrows																	
																	
30060.G 1P 10 AX 2-way switch, OFF-central. Depth: 25,2 mm		30061.G 2P 10 AX 2-way switch, OFF-central. Depth: 35,8 mm		30062.G 2 1P NO 10 A push buttons, interlocked. Depth: 24,2 mm		30060.B 1P 10 AX 2-way switch, OFF-central. Depth: 25,2 mm		30061.B 2P 10 AX 2-way switch, OFF-central. Depth: 35,8 mm		30062.B 2 1P NO 10 A push buttons, interlocked. Depth: 24,2 mm		30060.C 1P 10 AX 2-way switch, OFF-central. Depth: 25,2 mm		30061.C 2P 10 AX 2-way switch, OFF-central. Depth: 35,8 mm		30062.C 2 1P NO 10 A push buttons, interlocked. Depth: 24,2 mm	

Devices

Black	White	Canvas
-------	-------	--------

Quid - Electronic 2-way switch for roller shutter




 30196.G Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 41,5 mm	 30196.B Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 41,5 mm	 30196.C Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 41,5 mm
---	--	---

Quid - Electronic relay module and control unit module for roller shutters (backfit)

 03996 Centralizable relay module, slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving, for backfit or junction boxes installation	 03997 control unit module, 2 inputs for NO push button, 6 outputs for Quid roller shutter relay module (03996), 220-240 V~ 50/60 Hz power supply, for backfit or junction boxes installation
---	--

Radiofrequency smart devices

 01796.2 Multi-function actuator with relay output NO 10 A 230 V~ programmable with switch function for local control, transferable local input as ON/OFF control for other EnOcean® actuators, 230 V~ 50/60 Hz power supply	 30502 4-button flat device with RF transmission, 868 MHz, EnOcean® standard, to be completed with buttons 31506+31506.2 - 2 modules	 30504 4-button flat device with RF transmission, 2.4 GHz, Bluetooth® Low Energy <i>wireless technology</i>, to be completed with buttons 31506+31506.2 - 2 modules	 30506 4-button flat device with RF transmission, 2.4 GHz, Zigbee Green Power and Friends of Hue standard, to be completed with buttons 19506 31506+31506.2 - 2 modules
--	---	---	---

 31506.G Pair of 1-module buttons for RF devices, customizable	 31506.2G 2-module button for RF devices, customizable	 31506.B Pair of 1-module buttons for RF devices, customizable	 31506.2B 2-module button for RF devices, customizable	 31506.C Pair of 1-module buttons for RF devices, customizable	 31506.2C 2-module button for RF devices, customizable
 30507.G Frame for RF devices surface mounting, for 2 modules cover plates	 30507.B Frame for RF devices surface mounting, for 2 modules cover plates				

Socket outlets

Black	White	Canvas
-------	-------	--------

SICURY 2P+E Italian standard socket outlets 250 V~

 30201.G 10 A, P11. Depth: 28,1 mm	 30203.G Bpresa 16 A, P17/11. Depth: 28,1 mm	 30201.B 10 A, P11. Depth: 28,1 mm	 30203.B Bpresa 16 A, P17/11. Depth: 28,1 mm	 30201.C 10 A, P11. Depth: 28,1 mm	 30203.C Bpresa 16 A, P17/11. Depth: 28,1 mm
 30211.G 16 A universal flush-fitting socket outlet, P40 - 2 modules Depth: 30,4 mm	 30210.G 16 A, P40, universal - 2 modules. Depth: 30,4 mm	 30211.B 16 A universal flush-fitting socket outlet, P40 - 2 modules Depth: 30,4 mm	 30210.B 16 A, P40, universal - 2 modules. Depth: 30,4 mm	 30211.C 16 A universal flush-fitting socket outlet, P40 - 2 modules Depth: 30,4 mm	 30210.C 16 A, P40, universal - 2 modules. Depth: 30,4 mm


SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)

 30203.R Bpresa 16 A, P17/11, red. Depth: 28,1 mm	 30210.R 16 A, P40, universal, red - 2 modules. Depth: 30,4 mm
--	---




Socket outlets 250 V~ - German standard

 30208.G SICURY 2P+E 16 A, German - 2 modules. Depth: 33,4 mm	 30208.CG SICURY 2P+E 16 A German standard with cover - 2 modules. Depth: 33,4 mm	 30208.B SICURY 2P+E 16 A, German - 2 modules. Depth: 33,4 mm	 30208.CB SICURY 2P+E 16 A German standard with cover - 2 modules. Depth: 33,4 mm	 30208.C SICURY 2P+E 16 A, German - 2 modules. Depth: 33,4 mm	 30208.CC SICURY 2P+E 16 A German standard with cover - 2 modules. Depth: 33,4 mm
 ▲ 30208.USBG SICURY 2P+E 16 A standard tedesco, 1 uscita tipo USB-C 18 W Depth: 35,9 mm		 ▲ 30208.USBB SICURY 2P+E 16 A standard tedesco, 1 uscita tipo USB-C 18 W Depth: 35,9 mm		 ▲ 30208.USBC SICURY 2P+E 16 A standard tedesco, 1 uscita tipo USB-C 18 W Depth: 35,9 mm	

Socket outlets

Black		White		Canvas	
Socket outlets 250 V~ - French standard					
					
30212.G SICURY 2P+E 16 A, French - 2 modules. Depth: 30,4 mm	▲30212.FLFXG SICURY 2P+T 16 A French standard flush- fitting - 2 modules. Depth: 35,8 mm	30212.B SICURY 2P+E 16 A, French - 2 modules. Depth: 30,4 mm	▲30212.FLFXB SICURY 2P+T 16 A French standard flush- fitting - 2 modules. Depth: 35,8 mm	30212.C SICURY 2P+E 16 A, French - 2 modules. Depth: 30,4 mm	▲30212.FLFXC SICURY 2P+T 16 A French standard flush- fitting - 2 modules. Depth: 35,8 mm
Socket outlets 250 V~ - Israeli standard					
					
30240.G SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 34,6 mm	30240.B SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 34,6 mm	30240.C SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 34,6 mm			
127 V~ American standard socket outlets					
					
30242.G SICURY 2P+E 15 A, USA. Depth: 31,8 mm	30243.G Two SICURY 2P+E 15 A, USA - 3 modules. Depth: 30,5 mm	30242.B SICURY 2P+E 15 A, USA. Depth: 31,8 mm	30243.B Two SICURY 2P+E 15 A, USA - 3 modules. Depth: 30,5 mm	30242.C SICURY 2P+E 15 A, USA. Depth: 31,8 mm	30243.C Two SICURY 2P+E 15 A, USA - 3 modules. Depth: 30,5 mm
					
30296.G Two 2P+T 15 A American standard socket outlets with Ground Fault Circuit Interrupter (GFCI) - 3 modules. Depth: 33,6 mm	30296.B Two 2P+T 15 A American standard socket outlets with Ground Fault Circuit Interrupter (GFCI) - 3 modules. Depth: 33,6 mm	30296.C Two 2P+T 15 A American standard socket outlets with Ground Fault Circuit Interrupter (GFCI) - 3 modules. Depth: 33,6 mm			


Socket outlets

Black		White		Canvas	
SICURY socket outlets 250 V~ - Euro-American standard					
					
30234.G SICURY 2P 15 A, Euro-American (ø 4,8 mm). Depth: 29,3 mm	30248.G SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 30,1 mm	30234.B SICURY 2P 15 A, Euro-American (ø 4,8 mm). Depth: 29,3 mm	30248.B SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 30,1 mm	30234.C SICURY 2P 15 A, Euro-American (ø 4,8 mm). Depth: 29,3 mm	30248.C SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 30,1 mm
					
30249.G Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 28,6 mm		30249.B Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 28,6 mm		30249.C Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 28,6 mm	
250 V~ Thai standard socket outlets					
					
30248.THG SICURY 2P+T 16 A, Thai standard - 2 modules. Depth: 30,1 mm	30249.THG Two SICURY 2P+T 16 A, Thai standard - 3 modules. Depth: 28,6 mm	30248.THB SICURY 2P+T 16 A, Thai standard - 2 modules. Depth: 30,1 mm	30249.THB Two 2P+T 16 A, Thai standard - 3 modules. Depth: 28,6 mm	30248.THC SICURY 2P+T 16 A, Thai standard - 2 modules. Depth: 30,1 mm	30249.THC Two 2P+T 16 A, Thai standard - 3 modules. Depth: 28,6 mm
Socket outlets 250 V~ - Multistandard					
					
30257.G SICURY 2P+T 13 A multistandard - 2 modules. Depth: 22,7 mm	30257.B SICURY 2P+T 13 A multistandard - 2 modules. Depth: 22,7 mm	30257.C SICURY 2P+T 13 A multistandard - 2 modules. Depth: 22,7 mm			
Shaver supply units					
					
30290.G 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 46,3 mm	30290.B 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 46,3 mm	30290.C 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 46,3 mm			

Socket outlets • Signal reception socket outlets

Black	White	Canvas
250 V~ Italian standard socket outlets with USB power supply units		
 30210.USBG SICURY 2P+E 16 A universal, 1 USB C 5 V 3 A - 2 modules. Depth: 46,7 mm	 30210.USBB SICURY 2P+E 16 A universal, 1 USB C 5 V 3 A - 2 modules. Depth: 46,7 mm	 30210.USBC SICURY 2P+E 16 A universal, 1 USB C 5 V 3 A - 2 modules. Depth: 46,7 mm
USB supply unit		
 Δ 30292.ACG 5 V 2,4 A, USB A+C, 120-240 V~ 50/60 Hz. Depth: 41 mm	 ▲ 30292.AC15G 15 W, USB A+C, 120-240 V~ 50/60 Hz. Depth: 41 mm	 30292.CCG 15 W, 2 USB C for total of 3 A, 120-240 V~ 50/60 Hz. Depth: 41 mm
 Δ 30292.ACB 5 V 2,4 A, USB A+C, 120-240 V~ 50/60 Hz. Depth: 41 mm	 ▲ 30292.AC15B 15 W, USB A+C, 120-240 V~ 50/60 Hz. Depth: 41 mm	 30292.CCB 15 W, 2 USB C for total of 3 A, 120-240 V~ 50/60 Hz. Depth: 41 mm
 Δ 30292.ACC 5 V 2,4 A, USB A+C, 120-240 V~ 50/60 Hz. Depth: 41 mm	 ▲ 30292.AC15C 15 W, USB A+C, 120-240 V~ 50/60 Hz. Depth: 41 mm	 30292.CCC 15 W, 2 USB C for total of 3 A, 120-240 V~ 50/60 Hz. Depth: 41 mm
 ▲ 30292.C25G 25 W, USB C, 120-240 V~ 50/60 Hz. Depth: 41 mm	 30298.G 30 W, USB C, 120-240 V~ 50/60 Hz. Depth: 35,2 mm	 30298.60G 60 W, USB C, 120-240 V~ 50/60 Hz. Depth: 36,6 mm
 ▲ 30292.C25B 25 W, USB C, 120-240 V~ 50/60 Hz. Depth: 41 mm	 30298.B 30 W, USB C, 120-240 V~ 50/60 Hz. Depth: 35,2 mm	 30298.60B 60 W, USB C, 120-240 V~ 50/60 Hz. Depth: 36,6 mm
 ▲ 30292.C25C 25 W, USB C, 120-240 V~ 50/60 Hz. Depth: 41 mm	 30298.C 30 W, USB C, 120-240 V~ 50/60 Hz. Depth: 35,2 mm	 30298.60C 60 W, USB C, 120-240 V~ 50/60 Hz. Depth: 36,6 mm
Telephone socket outlet		
 ▲ 30324.G Standard israeliano Depth: 31,6 mm	 ▲ 30324.B Standard israeliano Depth: 31,6 mm	 ▲ 30324.C Standard israeliano Depth: 31,6 mm




Signal reception socket outlets


Black	White	Canvas
Special socket outlets		
 30346.HG HDMI, Keystone connection, 90° cable. Depth: 33,7 mm	 30346.HB HDMI, Keystone connection, 90° cable. Depth: 33,7 mm	 30346.HC HDMI, Keystone connection, 90° cable. Depth: 33,7 mm
Coaxial TV-RD-SAT 5-2400 MHz socket outlets		
 30300.01G Single connection, with male output, 1 dB Depth: 26,4 mm	 30300.10G Feed-through, with male output, 10 dB. Depth: 26,2 mm	 30302.01G Single connection, demixed, with male and type F female outputs, 1 dB. Depth: 26,4 mm
 30300.01B Single connection, with male output, 1 dB Depth: 26,4 mm	 30300.10B Feed-through, with male output, 10 dB. Depth: 26,2 mm	 30302.01B Single connection, demixed, with male and type F female outputs, 1 dB Depth: 26,4 mm
 30300.01C Single connection, with male output, 1 dB Depth: 26,4 mm	 30300.10C Feed-through, with male output, 10 dB. Depth: 26,2 mm	 30302.01C Single connection, demixed, with male and type F female outputs, 1 dB 26,4 mm
F-type socket outlets		
 30318.G With F type female connector. Depth: 14,1 mm	 30318.B With F type female connector. Depth: 14,1 mm	 30318.C With F type female connector. Depth: 14,1 mm
Terminal resistor and coaxial TV-RD-SAT 2400 MHz connectors		
 16330 Z 75 Ω, for frequencies up to 2400 MHz	 01644 Male, axial cable entry	 01645 Female, axial cable entry
 01634 Male, 90°-cable entry	 01635 Female, 90°-cable entry	 01654 Male F-type, for RG59 cable
Phone jack		
 30320.G RJ11, 6-position, 4-contact (6/4). Depth: 22,7 mm	 30320.B RJ11, 6-position, 4-contact (6/4). Depth: 22,7 mm	 30320.C RJ11, 6-position, 4-contact (6/4). Depth: 22,7 mm




Signal reception socket outlets • Signalling

Black		White		Canvas	
RJ45 data ports					
					
30339.13G Netsafe, Cat. 6, UTP. Depth: 36,5 mm	30339.16G Netsafe, Cat. 6a, FTP. Depth: 36,4 mm	30339.13B Netsafe, Cat. 6, UTP. Depth: 36,5 mm	30339.16B Netsafe, Cat. 6a, FTP. Depth: 36,4 mm	30339.13C Netsafe, Cat. 6, UTP. Depth: 36,5 mm	30339.16C Netsafe, Cat. 6a, FTP. Depth: 36,4 mm
Adapters for data ports					
					
30338.CG RJ45, Cat. 5/6 AMP, Lucent T. Depth: 14,1 mm	30339.CG RJ45, Keystone + cover. Depth: 9,5 mm	30338.CB RJ45, Cat. 5/6 AMP, Lucent T. Depth: 14,1 mm	30339.CB RJ45, Keystone + cover. Depth: 9,5 mm	30338.CC RJ45, Cat. 5/6 AMP, Lucent T. Depth: 14,1 mm	30339.CC RJ45, Keystone + cover. Depth: 9,5 mm
					
30340.CG MINI-COM Panduit. Depth: 14,1 mm	30341.CG Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 14,1 mm	30340.CB MINI-COM Panduit. Depth: 14,1 mm	30341.CB Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 14,1 mm	30340.CC MINI-COM Panduit. Depth: 14,1 mm	30341.CC Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 14,1 mm
Wi-Fi access point					
					
30195.G 72,2 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 220-240 V~ 50/60 Hz - 2 modules. Depth: 44,4 mm	30195.B 72,2 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 220-240 V~ 50/60 Hz - 2 modules. Depth: 44,4 mm		30195.C 72,2 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 220-240 V~ 50/60 Hz - 2 modules. Depth: 44,4 mm		
Ringtones and buzzers					
					
30370.G 12 V~ (SELV) 50/60 Hz. Depth: 35,1 mm	30372.G 120 V~ 50/60 Hz. Depth: 35,1 mm	30373.G 230 V~ 50/60 Hz. Depth: 35,1 mm	30370.B 12 V~ (SELV) 50/60 Hz. Depth: 35,1 mm	30372.B 120 V~ 50/60 Hz. Depth: 35,1 mm	30373.B 230 V~ 50/60 Hz. Depth: 35,1 mm
					
30370.C 12 V~ (SELV) 50/60 Hz. Depth: 35,1 mm	30372.C 120 V~ 50/60 Hz. Depth: 35,1 mm	30373.C 230 V~ 50/60 Hz. Depth: 35,1 mm			
Luminous indicator units					
					
30386.G Single, neutral diffuser. Depth: 21,1 mm	30388.G Doble, neutral diffusers. Depth: 21,1 mm	30386.B Single, neutral diffuser. Depth: 21,1 mm	30388.B Doble, neutral diffusers. Depth: 21,1 mm	30386.C Single, neutral diffuser. Depth: 21,1 mm	30388.C Doble, neutral diffusers. Depth: 21,1 mm


Signalling • Accessories

Black		White		Canvas	
Auxiliary emergency and step marker lamp					
					
30389.G With high-efficiency LED lamp, 100-240 V~ 50/60 Hz - 2 modules. Depth: 30,4 mm		30389.B With high-efficiency LED lamp, 100-240 V~ 50/60 Hz - 2 modules. Depth: 30,4 mm		30389.C With high-efficiency LED lamp, 100-240 V~ 50/60 Hz - 2 modules. Depth: 30,4 mm	
					
0K30389.G Step marker lamp kit containing: 1 step marker lamp 30389.G and 1 IR bedside motion switch 30186.G		0K30389.B Step marker lamp kit containing: 1 step marker lamp 30389.B and 1 IR bedside motion switch 30186.B		0K30389.C Step marker lamp kit containing: 1 step marker lamp 30389.C and 1 IR bedside motion switch 30186.C	
Removable hand lamp and auxiliary emergency and step marker lamp					
					
30397 With high-efficiency LED, 100-240 V~ 50/60 Hz. - 2 modules. Depth: 39 mm		30398 With high-efficiency LED, 100-240 V~ 50/60 Hz. Depth: 38,6 mm			
Rechargeable battery					
					
00914 Li-ion rechargeable battery 3.7V 250mAh spare for removable hand lamp LED 30397, 30389.G, 30389.B, 30389.C.					
1P+N residual current breaker with overcurrent protection (RCBO)					
					
30411.166G IΔn 6 mA, 3000 A - 2 modules. Depth: 30,4 mm		30411.166B IΔn 6 mA, 3000 A - 2 modules. Depth: 30,4 mm		30411.166C IΔn 6 mA, 3000 A - 2 modules. Depth: 30,4 mm	

Black	White	Canvas
Thermostats		
 30440.G Dial thermostat with relay output 5(2) A 240 V~, heating and air conditioning in ON/OFF mode, class I temperature control device (contribution 1%), white LED backlighting with brightness control, supply voltage 100-240 V 50/60 Hz - 2 modules. Depth: 31,8 mm	 30440.B Dial thermostat with relay output 5(2) A 240 V~, heating and air conditioning in ON/OFF mode, class I temperature control device (contribution 1%), white LED backlighting with brightness control, supply voltage 100-240 V 50/60 Hz - 2 modules. Depth: 31,8 mm	 30440.C Dial thermostat with relay output 5(2) A 240 V~, heating and air conditioning in ON/OFF mode, class I temperature control device (contribution 1%), white LED backlighting with brightness control, supply voltage 100-240 V 50/60 Hz - 2 modules. Depth: 31,8 mm
Switches for fan-coil regulation		
 30063.G 1P 10 AX 250 V~, with two buttons and central OFF position. Depth: 25,2 mm	 30063.B 1P 10 AX 250 V~, with two buttons and central OFF position Depth: 25,2 mm	 30063.C 1P 10 AX 250 V~, with two buttons and central OFF position Depth: 25,2 mm

Black	White	Canvas
Hotel solutions		
 30406 Control device with 4 push buttons 1P NO 24 vdc 50 mA max., to be completed with 2-module back-lightable interchangeable button caps - 2 modules. Depth: 17,9 mm	 30407 Control device with 6 push buttons 1P NO 24 vdc 50 mA max., to be completed with 2-module back-lightable interchangeable button caps - 3 modules. Depth: 15,2 mm	
 30408.G 1P 10 AX 250 V~ switch, Do Not Disturb and Make Up Room Depth: 25,2 mm	 30405.G Room status signalling unit, Do Not Disturb and Make Up Room Depth: 21,1 mm	 30439.G Volume control, 8 Ω 15 W - 2 modules. Depth: 35,7 mm
 30408.B 1P 10 AX 250 V~ switch, Do Not Disturb and Make Up Room Depth: 25,2 mm	 30405.B Room status signalling unit, Do Not Disturb and Make Up Room Depth: 21,1 mm	 30439.B Volume control, 8 Ω 15 W - 2 modules. Depth: 35,7 mm
	 30408.C 1P 10 AX 250 V~ switch, Do Not Disturb and Make Up Room Depth: 25,2 mm	 30405.C Room status signalling unit, Do Not Disturb and Make Up Room Depth: 21,1 mm
		 30439.C Volume control, 8 Ω 15 W - 2 modules. Depth: 35,7 mm
Access control system		
 30403.G Upright electronic badge switch, 4 A 250 V~ NO change-over relay output (NON SELV), 120-230 V~ 50/60 Hz - 2 modules Depth: 24,3 mm	 30403.B Upright electronic badge switch, 4 A 250 V~ NO change-over relay output (NON SELV), 120-230 V~ 50/60 Hz - 2 modules. Depth: 24,3 mm	 30403.C Upright electronic badge switch, 4 A 250 V~ NO change-over relay output (NON SELV), 120-230 V~ 50/60 Hz - 2 modules. Depth: 24,3 mm
 01817 Mifare transponder card		 16452.S ISO-card (badge)

Black	White	Canvas
View Wireless gateway		
  30807.G View Wireless gateway, Bluetooth® wireless technology 4.2 Wi-Fi, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 38,8 mm	  30807.B View Wireless gateway, Bluetooth® wireless technology 4.2 Wi-Fi, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 38,8 mm	  30807.C View Wireless gateway, Bluetooth® wireless technology 4.2 Wi-Fi, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 38,8 mm
Mounting frames for iPads		
 01430 Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied withtype C USB cable and no power supply unit, black	 01430.B Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied with type C USB cable and no power supply unit, white	 01430.N Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied withtype C USB cable and no power supply unit, Next
View Wireless connected 2-way switches		
 30802 Mechanism, 100-240 V 50/60 Hz output relay for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 60 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for actuator push button or recall a scenario. To complete with 1-module buttons. Depth: 33,8 mm		

Black	White	Canvas
1-module aligned interchangeable buttons (lightable*)		
 31000.G No symbol	 31000S.G Vertical light beam	 31000.LG Light symbol
 31000.B No symbol	 31000S.B Vertical light beam	 31000.LB Light symbol
 31000.PG Key symbol	 31000.DG With lighttable and customisable diffuser	 31000.PC Key symbol
 31000.DB With lighttable and customisable diffuser	 31000.DC With lighttable and customisable diffuser	
1-module axial interchangeable buttons (lightable*)		
 31000A.G No symbol	 31000A.LG Light symbol	 31000A.B No symbol
 31000A.LB Light symbol	 31000A.C No symbol	 31000A.LC Light symbol
 31000A.PG Key symbol	 31000A.DG With lighttable and customisable diffuser	 31000A.PB Key symbol
 31000A.DB With lighttable and customisable diffuser	 31000A.PC Key symbol	 31000A.DC With lighttable and customisable diffuser
View Wireless connected control device for roller shutter		
 30804 Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario, favourite position recall function. To complete with 1-module buttons. Depth: 33,8 mm		
 31000A.FG 1-module interchangeable button, arrows symbol	 31000A.FB 1-module interchangeable button, arrows symbol	 31000A.FC 1-module interchangeable button, arrows symbol
View Wireless connected actuator for 1 roller shutter - backside installation		
 03982 Actuator for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)		

Black	White	Canvas
-------	-------	--------

View Wireless connected dimmers



30805
View Wireless electronic dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, double Bluetooth® wireless technology 5.0 for the creation of View Wireless mesh system and on Zigbee 3.0 standard, 1 input for external push button for dimmer control or to recall a scenario, 220-240 V 50/60 Hz power supply. To be completed with 1-module interchangeable buttons. Depth: 39 mm




30805.120
As above, 120 V~



31000A.RG
1-module interchangeable button, dimmer symbol



31000A.RB
1-module interchangeable button, dimmer symbol



31000A.RC
1-module interchangeable button, dimmer symbol

View Wireless connected electronic controls




30801
View Wireless electronic control mechanism, local control with push button or remote control, Bluetooth® wireless technology 5.0, 100-240 V 50/60 Hz power supply, to be completed with 1-module interchangeable buttons. Depth: 33.8 mm







31000A.G
1-module interchangeable button, neutral



31000A.FG
1-module interchangeable button, arrows symbol



31000A.B
1-module interchangeable button, neutral



31000A.FB
1-module interchangeable button, arrows symbol



31000A.C
1-module interchangeable button, neutral



31000A.FC
1-module interchangeable button, arrows symbol




31000A.RG
1-module interchangeable button, dimmer symbol




31000A.SG
1-module interchangeable button, scenario symbol



31000A.RB
1-module interchangeable button, dimmer symbol



31000A.SB
1-module interchangeable button, scenario symbol



31000A.RC
1-module interchangeable button, dimmer symbol



31000A.SC
1-module interchangeable button, scenario symbol

Radiofrequency smart devices



03925
4-button flat device with RF transmission, 2.4 GHz, **Bluetooth®** Low Energy *wireless technology*, to be completed with buttons 31506+31506.2 - 2 modules



Compatible with **CASAMBI**


Black	White	Canvas
-------	-------	--------

View Wireless connected control device for socket outlet




30803.G
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 42,8 mm





30803.B
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 42,8 mm



30803.C
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 42,8 mm



View Wireless connected actuator - backside installation



03981
Control device with NO 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)



View Wireless connected energy meter



02963
Energy meter for measuring of consumption/production of instant and historical electric energy (hourly, daily, monthly and in the year mode), 1 input for supplied toroidal current sensor, detectable power 25 W-100 kW, single-phase power supply 100-240 V 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, occupies 1 17,5 mm module



View Wireless connected thermostats



30810.G
Dial thermostat with relay output 5(2) A 240 V~, IoT technology on *Bluetooth® wireless technology 5.0* for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 31,8 mm





30810.B
Dial thermostat with relay output 5(2) A 240 V~, IoT technology on *Bluetooth® wireless technology 5.0* for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 31,8 mm



30810.C
Dial thermostat with relay output 5(2) A 240 V~, IoT technology on *Bluetooth® wireless technology 5.0* for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 31,8 mm



View Wireless connected magnetic contact




03980
Connected magnetic contact for windows and doors, View Wireless, *Bluetooth® wireless technology 5.0* standard technology for mesh system realization, 1 clean-contact input, powered with AA LR6 1,5 V batteries (not supplied), white. To use as accessory of connected thermostat or with gateway as sensor for notification of magnetic contact open/close



Black	White	Canvas
-------	-------	--------

View Wireless connected radar sensors

 Bluetooth®	 Bluetooth®	 Bluetooth®
30179.G UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply. Depth: 43.3 mm	30179.B UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply. Depth: 43.3 mm	30179.C UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply. Depth: 43.3 mm

 Bluetooth®	 Bluetooth®
02692 UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, installation in false ceiling	02692.S.1 Round section adaptor for ceiling installation of the sensor 02692


View Wireless connected access control system

 Bluetooth®	 Bluetooth®	 Bluetooth®
30812.G NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 33,8 mm	30812.B NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 33,8 mm	30812.C NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 33,8 mm

Black	White	Canvas
-------	-------	--------

View Wireless connected access control system

 Bluetooth®	 Bluetooth®	 Bluetooth®
30813.G NFC/RFID energy saver card switch for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 34,3 mm	30813.B NFC/RFID energy saver card switch for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 34,3 mm	30813.C NFC/RFID energy saver card switch for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 34,3 mm

 01817 Mifare transponder card

LINEA
Cover plates



Total Look
(Technopolymer)



00 White



01 Canvas



02 Black

LINEA



Reflex
(Technopolymer)



40 White Reflex

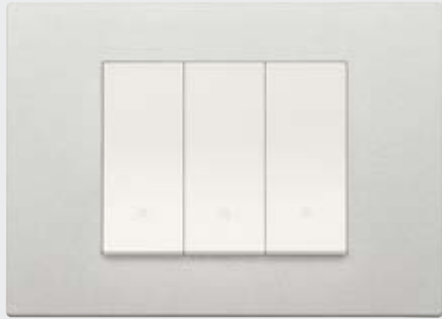


41 Canvas Reflex



42 Black Reflex

Painted technopolymers
(Technopolymer)



20 Silver



21 Clay



22 Metal

PVD metals
(Zinc-Titanium Alloy)






70 Brushed gold



71 Bronze





72 Satin finish stainless steel


2 modules (dimensions 90x88x7.9 mm)		3 modules (dimensions 122.8x88x5.7 mm)		4 modules (dimensions 146.6x88x5.7 mm)		7 modules (dimensions 208.5x88x7.9 mm)	
							
Total Look (Technopolymer)							
	White	30642.00	30653.00	30654.00	30657.00		
	Canvas	30642.01	30653.01	30654.01	30657.01		
	Black	30642.02	30653.02	30654.02	30657.02		
Painted technopolymers (Technopolymer)							
	Silver	30642.20	30653.20	30654.20	30657.20		
	Clay	30642.21	30653.21	30654.21	30657.21		
	Metal	30642.22	30653.22	30654.22	30657.22		
Reflex (Technopolymer)							
	White Reflex	30642.40	30653.40	30654.40	30657.40		
	Canvas Reflex	30642.41	30653.41	30654.41	30657.41		
	Black Reflex	30642.42	30653.42	30654.42	30657.42		
PVD metals (Zinc-Titanium Alloy)							
	Brushed gold	30642.70	30653.70	30654.70	30657.70		
	Bronze	30642.71	30653.71	30654.71	30657.71		
	Satin finish stainless steel	30642.72	30653.72	30654.72	30657.72		

Modules	Boxes		Mounting frames	Cover plates
2 for Ø 60 mm mounting boxes	Flush mounting			
	 V71001 For masonry walls GW 650 °C, sky blue V71001.AU GW 960 °C, black	 V71701 For hollow walls, for mounting frames without claws, GW 850 °C, sky blue	 30602 2 modules, with (removable) claws	 30603 2 modules, without screws
				 30642... 2 modules Dimensions: 90x88x7.9 mm
3	Flush mounting			
	 V71303 For masonry walls GW 650 °C, sky blue V71303.AU GW 960 °C, black	 V71703 For hollow walls, GW 850 °C, sky blue	 30613 3 modules, with screws	 30613AE 3 modules, with anti-tamper screws
				 30653... 3 modules Dimensions: 122.8x88x5.7 mm
4	Flush mounting	Table mounting		
	 V71304 For masonry walls GW 650 °C, sky blue V71304.AU GW 960 °C, black	 V71704 For hollow walls, GW 850 °C, sky blue	 30784.G 4 modules, black 30784.B 4 modules, white	 30614 4 modules, with screws
			 30614AE 4 modules, with anti-tamper screws	 30654... 4 modules Dimensions: 146.6x88x5.7 mm
7	Flush mounting			
	 V71306 For masonry walls GW 650 °C, sky blue V71306.AU GW 960 °C, black	 V71706 For hollow walls, GW 850 °C, sky blue	 30617 7 modules, with screws	 30617AE 7 modules, with anti-tamper screws
				 30657... 7 modules Dimensions: 208.5x88x7.9 mm

Linea with XT platform installation types

Modules	Boxes	Devices (back of mounting frame)	Electrified mounting frames	Linea device with XT platform (front of mounting frame)
2 for Ø 60 mm mounting boxes	 V71701 For hollow walls, for mounting frames without claws, GW 850 °C, sky blue	 32001 Power supply node  32002 Actuator	 32602.G 2 modules, without screws, black  32602.B 2 modules, without screws, white  32602.C 2 modules, without screws, canvas	 or   or   or 
3	 V71303 For masonry walls GW 650 °C, sky blue V71303.AU GW 960 °C, black  V71703 For hollow walls, GW 850 °C, sky blue	 32001 Power supply node  32002 Actuator	 32603.G 3 modules, with screws, black  32603.B 3 modules, with screws, white  32603.C 3 modules, with screws, canvas	 or  or   or  or   or  or 
4	 V71304 For masonry walls GW 650 °C, sky blue V71304.AU GW 960 °C, black  V71704 For hollow walls, GW 850 °C, sky blue	 32001 Power supply node  32002 Actuator	 32604.G 4 modules, with screws, black  32604.B 4 modules, with screws, white  32604.C 4 modules, with screws, canvas	 or  or   or  or   or  or 

Linea with XT platform and Linea device installation types

Modules	Boxes	Devices (back of mounting frame)	Mixed mounting frames (electrified and for Linea cover plate)	Combination of devices* Linea with XT platform and Linea
3	 V71303 For masonry walls GW 650 °C, sky blue V71303.AU GW 960 °C, black  V71703 For hollow walls, GW 850 °C, sky blue	 32001 Power supply node	 32613.G 3 modules, with screws, black  32613.B 3 modules, with screws, white  32613.C 3 modules, with screws, canvas	 +   +   + 
4	 V71304 For masonry walls GW 650 °C, sky blue V71304.AU GW 960 °C, black  V71704 For hollow walls, GW 850 °C, sky blue	 32001 Power supply node  32002 Actuator	 32614.G 4 modules, with screws, black  32614.B 4 modules, with screws, white  32614.C 4 modules, with screws, canvas	 or  +   or  +   or  + 

* The combinations shown only represent some of the devices that can be installed.

Accessory for anti-tamper mounting frames



30699
Extraction tool for
cover plate installed on
anti-tamper mounting
frame

Control devices	240
Power and signal socket outlets	254
Signalling, protection and detection	267
Comfort and climate	270
Stand alone and hotel solutions	271
Smart home View Wireless	274
Cover plates range	280
Installation types	288

Arké





Arké

Simplicity and personality to enjoy spaces in the best of ways. A contemporary, functional and pragmatic style, this series reflects the right balance between character, expressiveness and care for details, with more design opportunities.



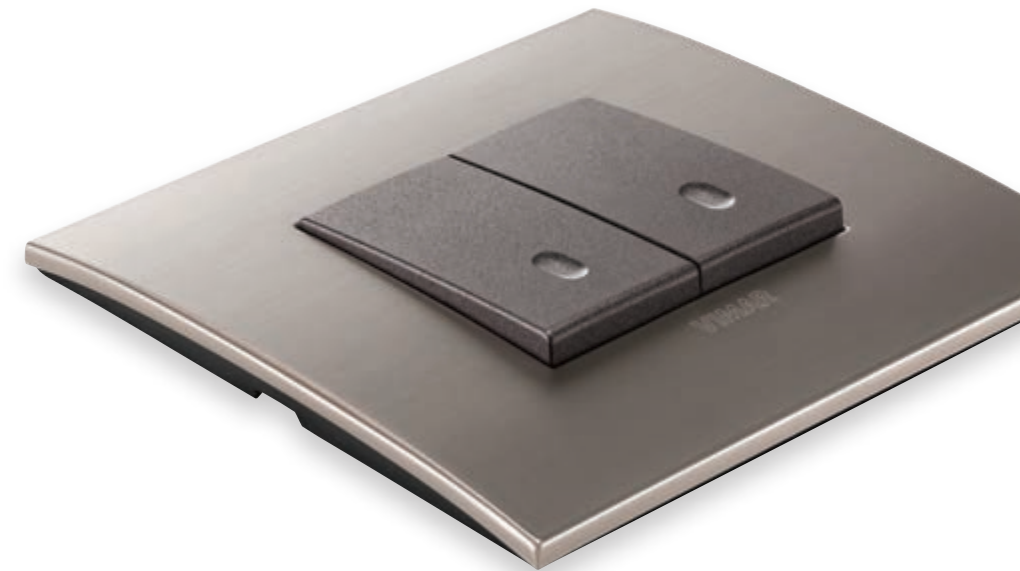
White Total Look



Black Total Look



Metal Total Look





Arké. Materials and finishes



Tecno-basic

Satin technopolymer. A simple, hard-wearing material which has been teamed with elegant and simple colours, such as black, white, grey and ivory.



Colour-Tech

Painted technopolymer. Generating a bewitching metal effect. Six different colours to emphasise a high-tech style.



Reflex Plus

Technopolymer. A material that embraces all the energy of modern life brimming with colour and shine. A diversified interpretation thanks to the strong appeal of the glass effect.



Wood

Solid wood. Iconic and contemporary, with a strong texture, conveying a sense of warmth and the vitality of the natural material par excellence.



Metal-Colour

Painted metal. Sophisticated finishes oozing trendy charm. All eyes are drawn to this seductive gleaming surface, making the surroundings gleam.



Alu_tech

Modern and hi-tech, aluminium emphasises the contemporary appeal of the series.



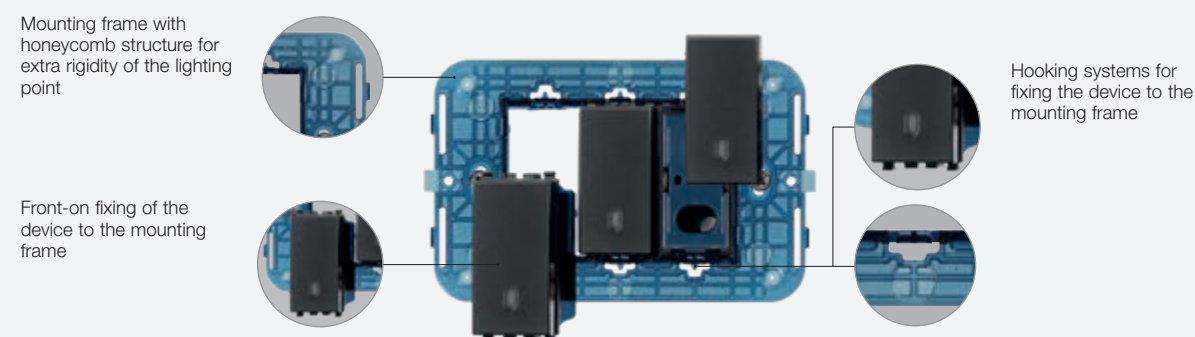
Metal-Elite

Faced metal. A noble interpretation of the most popular metals used in interior design, with even glossier material.

Quality and versatility of products, from its design concept.


Plack-clack hooking system

A Vimar patent that makes it quick and easy to fit the lighting components (devices and mounting frames) to the cover plate. The plack-clack is a hooking system with an extra-strong mounting frame (thanks also to the honeycomb structure of the mounting frame) and exceptional rigidity, simplifying the front-on fitting and removal of devices.




Modular devices and cover plates

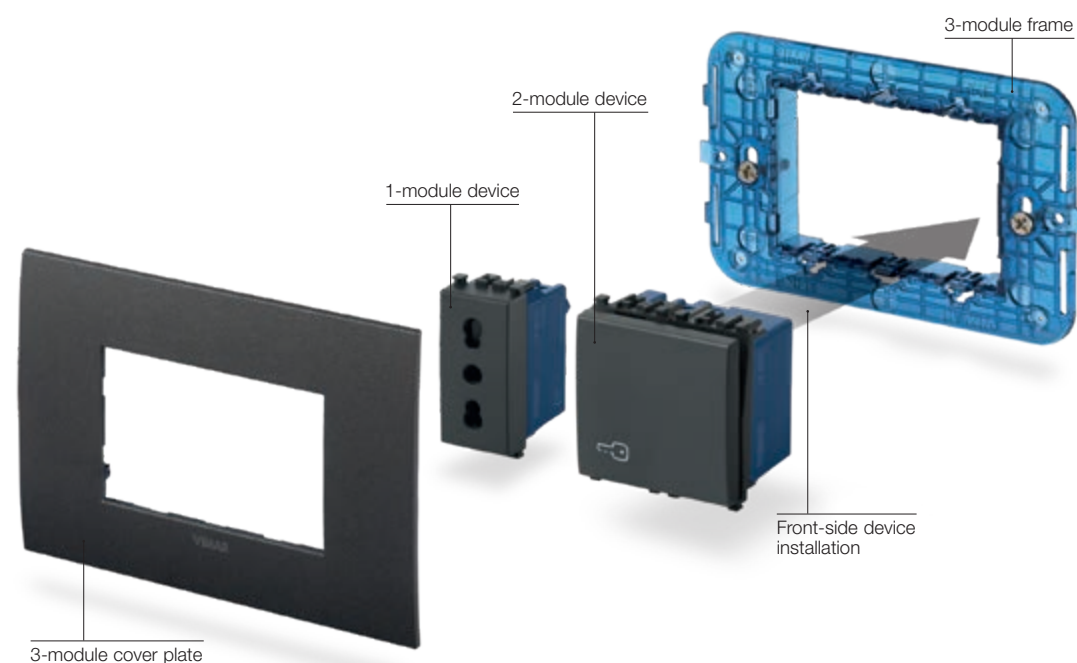The modular device with from 1 to 3 modules lets you install multiple devices of different modularity in a single mounting frame, up to a composition of 21 modules for cover plates size 7+7+7. The mounting frame that installs the devices is equipped with interlocking teeth that provide strong and reliable fixing for each single device and allows perfect alignment between devices such as to create an orderly and visually pleasing stylistic effect. The device can also be fixed front-on to the mounting frame, allowing work on the installation at any time without having to remove the mounting frame from the box.



Controls

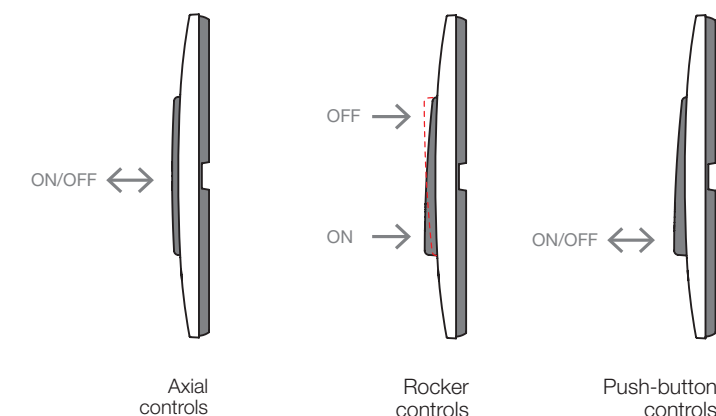Controlling the light, activating a scenario or managing loads are just some of the many uses of energy. The combination of mechanics and technology enables simplifying these daily gestures in operating a simple device, as a axial or rocker switches or push button, with precision and an intuitive understanding of the associated functions.



Backlighting and customization

The backlighting with different colours makes the controls visible even in the dark, while the symbols, either laser-engraved or customized on site, always give a clear indication of the various functions.



Customisation

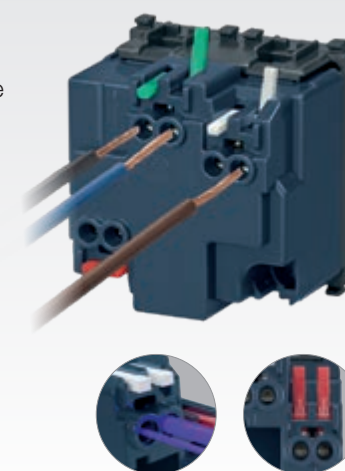


Backlighting

Screwless terminals

For solid, stranded and flexible cables. Quick, easy and safe.

The quick-wiring terminals can hold rigid, semi-rigid and flexible cables, responding to all installation needs. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm² and power circuit cables with cross-section 1,5-2,5 mm².



Screw terminals

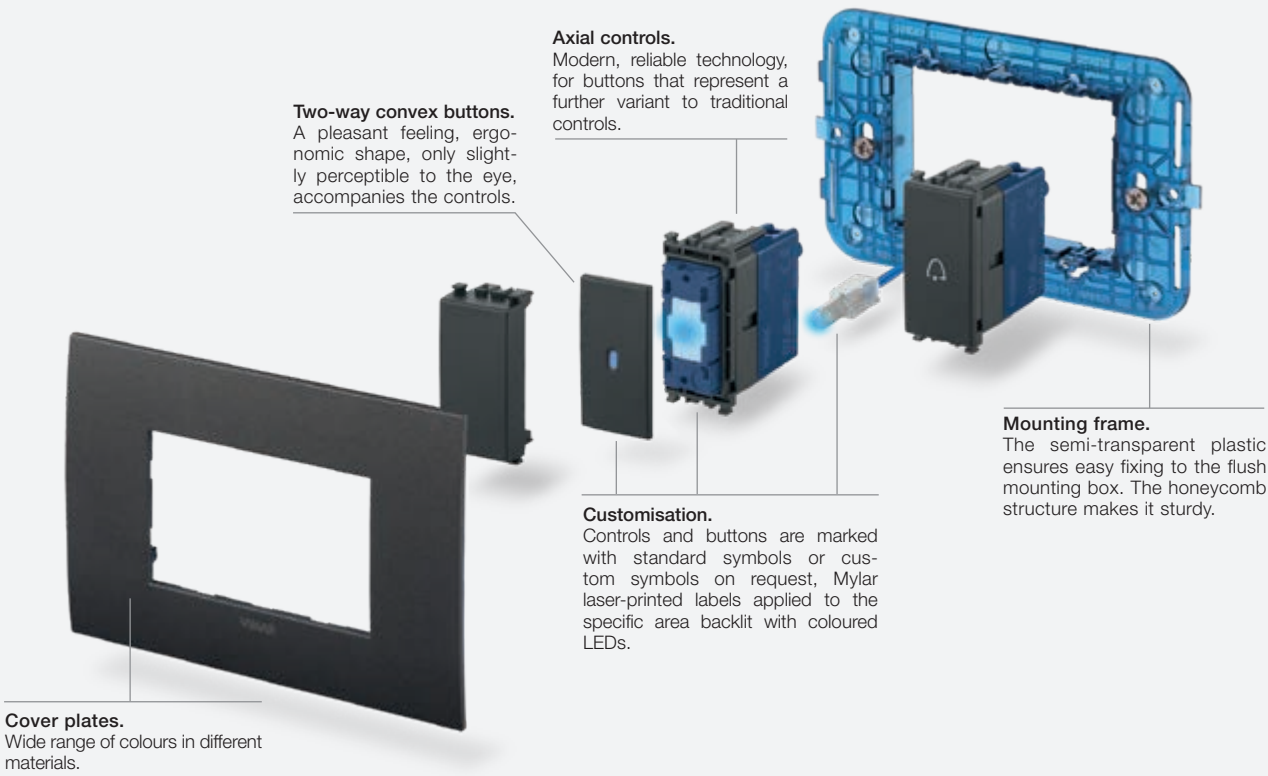
Ergonomic contacts.

The metal plate in the terminals is curved: a Vimar refinement allowing the wire to be held in place until clamped with the screw. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm² and power circuit cables with cross-section 1,5-2,5 mm².




Mounting features for other standards

Axial controls



Traditional controls

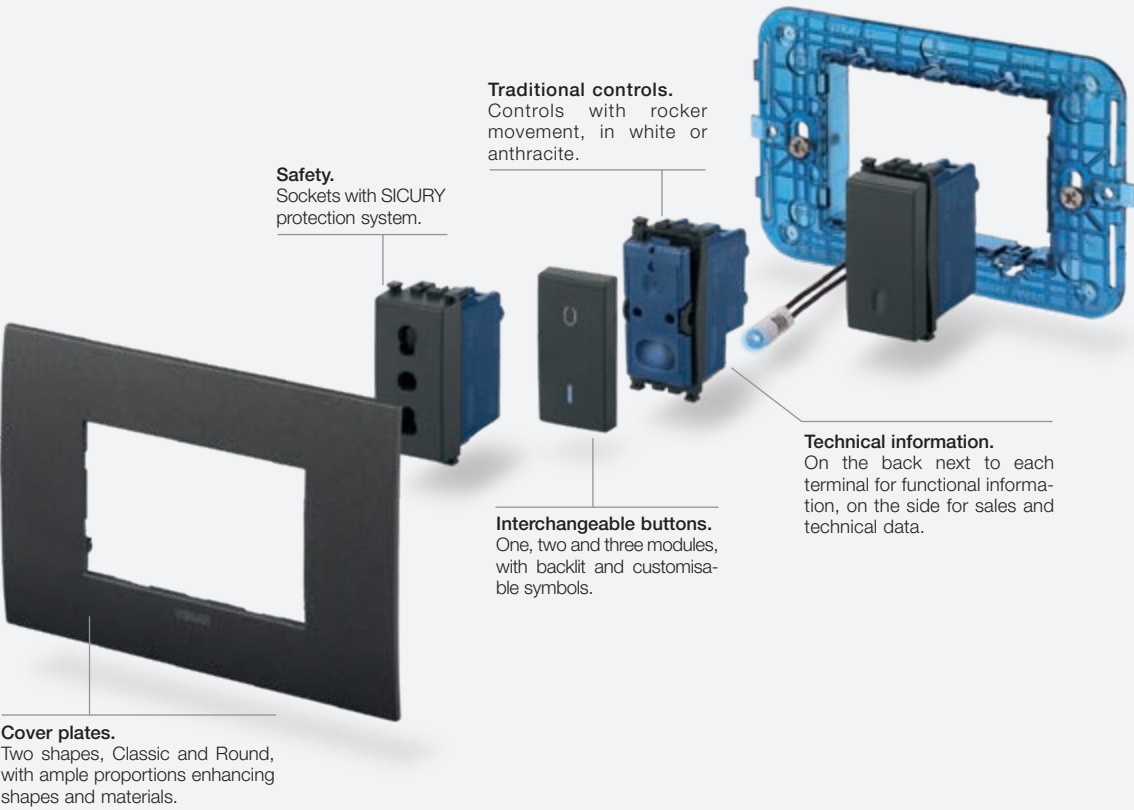

Composition	Box	Frame	Device	Cover plate
 panel mounting	 panel mounting	 with screws	 1-module	 from 1 to 2 modules Classic or Round*
 from 1 to 2 modules	 flush mounting	 2-module with/without screws or with claws	 2-module 2 x 1-module	 from 1 to 2 modules Classic or Round*
 2 central modules	 flush mounting	 with screws	 2 x 1-module 2-module	 2-central-module Classic or Round*
 from 3 to 7 modules		 with screws	 1- and 2-module 3 x 1-module 3-module	 From 3 to 7 modules Classic or Round*
 8-module	 flush mounting	 with screws	 video door entry unit 2 x 1-module and 1 x 2-module 4 x 1-module	 8-module Classic or Round*
 table mounting	 table box	 with screws	 1 x 2-module and 2 x 1-module	 4 and 7 modules Classic or Round*

* For other combinations, see the installation types from page 288

Mounting features for British standard
Modular devices mounting

Technical information
On the back next to each terminal for functional information, on the side for sales and technical data.

Interchangeable buttons
One or two modules, with backlit symbols and customizable.

Customisation
Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.

Lowered frame
Stainless steel mounting frame with earth terminal, with lugs for an easy and fast installation of the devices from the front.
Available also for 1 module with built-in blank module.

Cover plates
Wide range of colours and combinations.

Monobloc device (with built-in mounting frame)

Socket outlet
With SICURY patented system to prevent accidental contacts.









Monobloc device
Built-in mounting frame.

Fixing lugs
Possibility of horizontal and vertical mounting of device.

Signalling LED
Signalling of power supply, with integrated signalling unit, perfectly visible by day and night.

Matching possibility
Joining possibility with minimum 25 mm of distance between boxes

Cover plates
For vertical and horizontal mounting.


Composition	Box	Frame	Device	Cover plate
 1 module, modular mounting (1-gang)	 1-gang mounting box Fixing centres: 60,3 mm	 1-module with screws M 3,5	 1-gang switch, 1 module	 1 module*
 2 modules, modular mounting (1- and 2-gang switch)	 1-gang mounting box Fixing centres: 60,3 mm	 2-module with screws M 3,5	 2 x 1-gang switches, 1 module  1-gang switch, 2 modules	 2 modules*
 monobloc device or 3 modules modular mounting	 1-gang mounting box Fixing centres: 60,3 mm	 3-module with screws M 3,5	 Socket outlet monobloc device  ON/OFF unit monobloc device  1 x 2-module + 1 x 1-module	 monobloc horizontal mounting*  monobloc vertical mounting*  3 modules*
 monobloc device or 5 modules modular mounting	 2-gang mounting box Fixing centres: 120,6 mm	 5-module with screws M 3,5	 2-gang switched socket outlets monobloc device  2 x 2-module + 1 x 1-module (blank module)	 5 modules*

* For other combinations, see the installation types from page 292












Due to the graphic layout, the product photos are not represented with equivalent proportions.


Mounting features

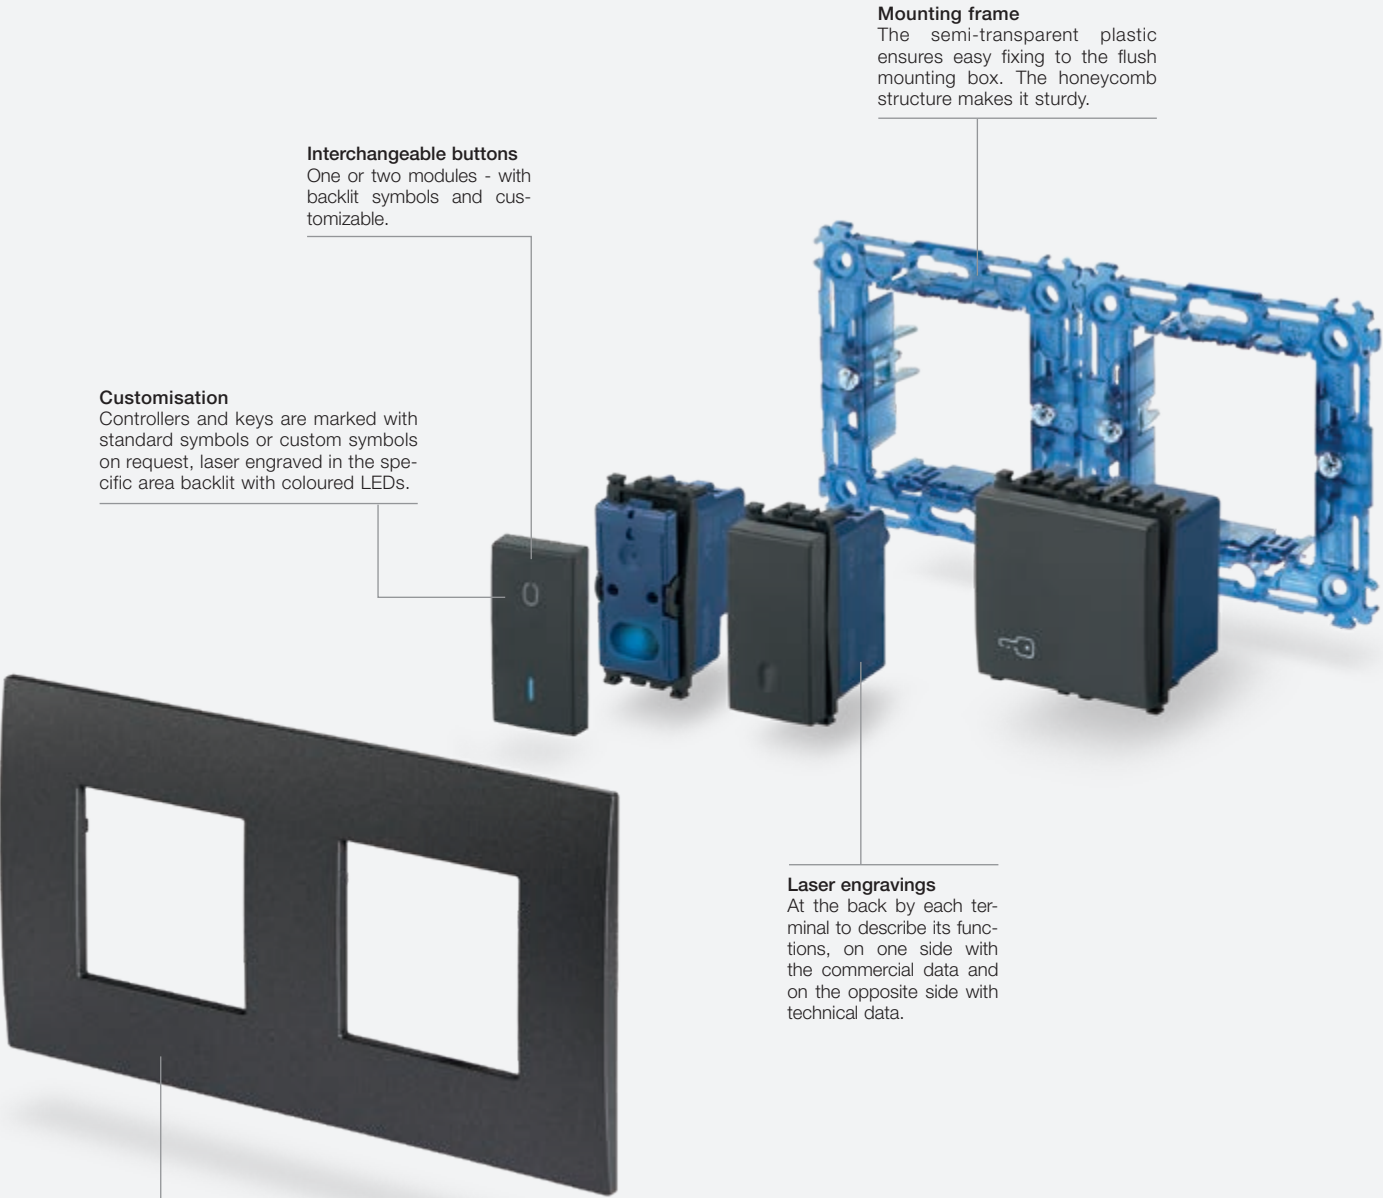Installation with 71 mm between centres
(German and French standards)



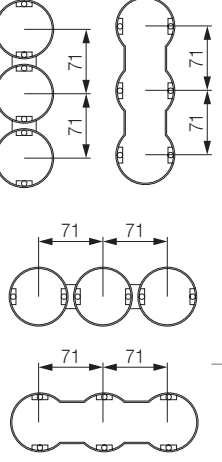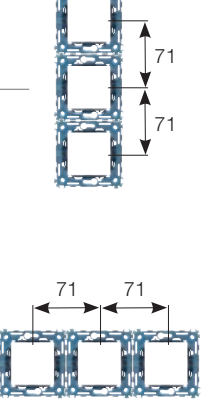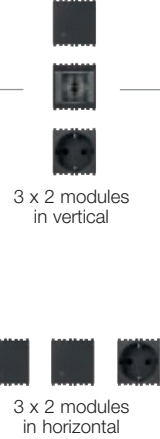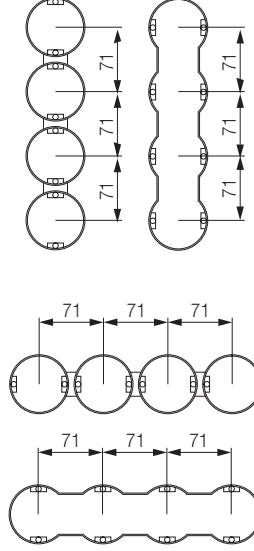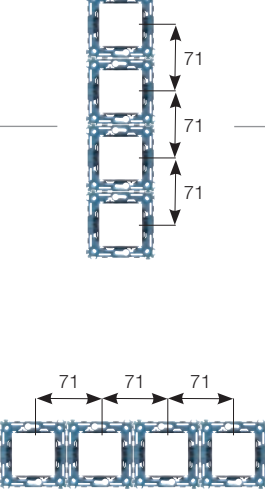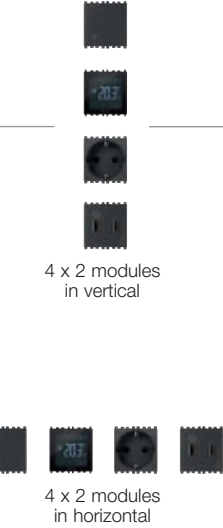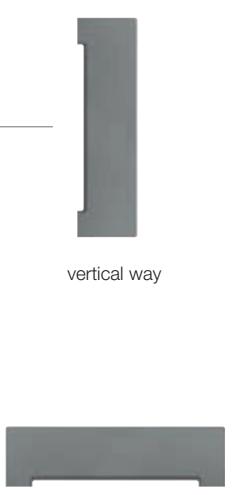Multi-module cover plates
Wide range of cover plates, from 2+2 to 2+2+2+2 modules, for safe and functional vertical and horizontal installation for any country.


Composition	Box	Frame	Device	Cover plate
 2 modules, ø 60 and 65 mm mounting box			 1-gang switch, 2 modules	 2 modules
 2+2 modules, 71 mm between centres			 2 x 2 modules in vertical 2 x 2 modules in horizontal	 vertical way horizontal way
 2+2+2 modules, 71 mm between centres			 3 x 2 modules in vertical 3 x 2 modules in horizontal	 vertical way horizontal way
 2+2+2+2 modules, 71 mm between centres			 4 x 2 modules in vertical 4 x 2 modules in horizontal	 vertical way horizontal way

Grey		White		Metal	
Blank modules and cable outlets					
					
19041 Blank module	19044 Cable outlet. Depth: 16,3 mm	19041.B Blank module	19044.B Cable outlet. Depth: 16,3 mm	19041.M Blank module. Depth: 10 mm	19044.M Cable outlet. Depth: 16,3 mm
19041.AB As above, antibacterial treatment. Depth: 10 mm		19041.AB.B As above, antibacterial treatment. Depth: 10 mm			
					
19042 Blank module - 2 modules. Depth: 11 mm		19042.B Blank module - 2 modules. Depth: 11 mm		19042.M Blank module - 2 modules. Depth: 11 mm	
					
19046² Cable outlet + 2P+E 20 A terminal bar. Depth: 22,1 mm	19047² 2P+E 45 A 1-gang cable outlet supplied with cover. Depth: 20 mm	19046.B² Cable outlet + 2P+E 20 A terminal bar. Depth: 22,1 mm	19047.B² 2P+E 45 A 1-gang cable outlet supplied with cover. Depth: 20 mm	19046.M² Cable outlet + 2P+E 20 A terminal bar. Depth: 22,1 mm	19047.M² 2P+E 45 A 1-gang cable outlet supplied with cover. Depth: 20 mm
					
19049.L³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm		19049.L.B³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm		19049.L.M³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm	
1P 1-way switches 250 V~ (lightable°)					
					
19000 10 AX	19000.2 10 AX - 2 modules. Depth: 25 mm	19000.B 10 AX	19000.2.B 10 AX - 2 modules. Depth: 25 mm	19000.M 10 AX	19000.2.M 10 AX - 2 modules. Depth: 25 mm
19001 16 AX 19001.AB As above, antibacterial treatment. Depth: 25 mm		19001.B 16 AX 19001.AB.B As above, antibacterial treatment. Depth: 25 mm		19001.M 16 AX. Depth: 25 mm	

Grey		White		Metal	
1P 1-way switches 250 V~ (lightable°)					
					
19002 20 AX. Depth: 25 mm	19002.2 20 AX - 2 modules. Depth: 25 mm	19002.B 20 AX. Depth: 25 mm	19002.2.B 20 AX - 2 modules. Depth: 25 mm	19002.M 20 AX. Depth: 25 mm	19002.2.M 20 AX - 2 modules. Depth: 25 mm
1P 1-way switches 250 V~, screwless terminals (lightable°)					
					
19000.FX 10 AX. Depth: 29,7 mm	19000.FX.2 10 AX - 2 modules. Depth: 29,7 mm	19000.FX.B 10 AX. Depth: 29,7 mm	19000.FX.2.B 10 AX - 2 modules. Depth: 29,7 mm	19000.FX.M 10 AX. Depth: 29,7 mm	19000.FX.2.M 10 AX - 2 modules. Depth: 29,7 mm
Axial 1P 1-way switches 250 V~ (lightable°)					
					
19100 10 AX Depth: 35,5 mm	▲ 19100.2 10 AX Depth: 35,5 mm	19100.B 10 AX Depth: 35,5 mm	▲ 19100.2.B 10 AX Depth: 35,5 mm	19100.M 10 AX Depth: 35,5 mm	▲ 19100.2.M 10 AX Depth: 35,5 mm

Grey	White	Metal
------	-------	-------

2P 1-way switches 250 V~ (lightable°)

 19015 16 AX 19015.AB As above, antibacterial treatment. Depth: 25 mm	 19015.2 16 AX - 2 modules. Depth: 25 mm	 19015.B 16 AX 19015.AB.B As above, antibacterial treatment. Depth: 25 mm	 19015.2.B 16 AX - 2 modules. Depth: 25 mm	 19015.M 16 AX. Depth: 25 mm	 19015.2.M 16 AX - 2 modules. Depth: 25 mm
 19016 20 AX. Depth: 26 mm	 19016.2 20 AX, ON/OFF - 2 modules. Depth: 26 mm	 19016.B 20 AX. Depth: 26 mm	 19016.2.B 20 AX, ON/OFF - 2 modules. Depth: 26 mm	 19016.M 20 AX. Depth: 26 mm	 19016.2.M 20 AX, ON/OFF - 2 modules. Depth: 26 mm
 19016.WH 20 AX, Water/Heater. Depth: 26 mm	 19016.2.WH 20 AX, Water/Heater - 2 modules. Depth: 26 mm	 19016.WH.B 20 AX, Water/Heater. Depth: 26 mm	 19016.2.WH.B 20 AX, Water/Heater - 2 modules. Depth: 26 mm	 19016.WH.M 20 AX, Water/Heater. Depth: 26 mm	 19016.2.WH.M 20 AX, Water/Heater - 2 modules. Depth: 26 mm

2P 1-way switches 250 V~ (lightable°)

 19017 32 A, 1-gang, ON/OFF. Depth: 22,5 mm	 19017.WH 32 A, 1-gang, Water/Heater. Depth: 22,5 mm	 19017.B 32 A, 1-gang, ON/OFF. Depth: 22,5 mm	 19017.WH.B 32 A, 1-gang, Water/Heater. Depth: 22,5 mm	 19017.M 32 A, 1-gang, ON/OFF. Depth: 22,5 mm	 19017.WH.M 32 A, 1-gang, Water/Heater. Depth: 22,5 mm
 19018 45 A, 1-gang, ON/OFF. Depth: 22,5 mm	 19018.CK 45 A, 1-gang, cooker unit. Depth: 22,5 mm	 19018.B 45 A, 1-gang, ON/OFF. Depth: 22,5 mm	 19018.CK.B 45 A, 1-gang, cooker unit. Depth: 22,5 mm	 19018.M 45 A, 1-gang, ON/OFF. Depth: 22,5 mm	 19018.CK.M 45 A, 1-gang, cooker unit. Depth: 22,5 mm
 19019 45 A, 1-gang, ON/OFF for 2-gang boxes. Depth: 22,5 mm	 19019.CK 45 A, 1-gang, cooker unit for 2-gang boxes. Depth: 22,5 mm	 19019.B 45 A, 1-gang, ON/OFF. Depth: 22,5 mm	 19019.CK.B 45 A, 1-gang, cooker unit for 2-gang boxes. Depth: 22,5 mm	 19019.M 45 A, 1-gang, ON/OFF for 2-gang boxes. Depth: 22,5 mm	 19019.CK.M 45 A, 1-gang, cooker unit for 2-gang boxes. Depth: 22,5 mm

Grey	White	Metal
------	-------	-------

1P 2-way switches 250 V~ (lightable°)

 19004 10 AX 19005 16 AX 19005.AB As above, antibacterial treatment. Depth: 25 mm	 19004.2 10 AX - 2 modules. Depth: 25 mm	 19004.B 10 AX 19005.B 16 AX 19005.AB.B As above, antibacterial treatment. Depth: 25 mm	 19004.2.B 10 AX - 2 modules. Depth: 25 mm	 19004.M 10 AX 19005.M 16 AX. Depth: 25 mm	 19004.2.M 10 AX - 2 modules. Depth: 25 mm
 19006 20 AX. Depth: 26 mm	 19006.2 20 AX, - 2 modules. Depth: 26 mm	 19006.B 20 AX. Depth: 26 mm	 19006.2.B 20 AX, - 2 modules. Depth: 26 mm	 19006.M 20 AX. Depth: 26 mm	 19006.2.M 20 AX, - 2 modules. Depth: 26 mm


1P 2-way switches 250 V~, screwless terminals (lightable°)

 19004.FX 10 AX. Depth: 29,7 mm	 19004.FX.2 10 AX - 2 modules. Depth: 29,7 mm	 19004.FX.B 10 AX. Depth: 29,7 mm	 19004.FX.2.B 10 AX - 2 modules. Depth: 29,7 mm	 19004.FX.M 10 AX. Depth: 29,7 mm	 19004.FX.2.M 10 AX - 2 modules. Depth: 29,7 mm
--	---	--	---	--	---

Axial 1P 2-way switches 250 V~ (lightable°)

 19104 10 AX Depth: 34,5 mm	 19104.2 10 AX - 2 modules. Depth: 34,5 mm	 19104.B 10 AX Depth: 34,5 mm	 19104.2.B 10 AX - 2 modules. Depth: 34,5 mm	 19104.M 10 AX Depth: 34,5 mm	 19104.2.M 10 AX - 2 modules. Depth: 34,5 mm
--	--	--	--	--	--

View Wireless connected 2-way switches



19592.0
Mechanism, 100-240 V 50/60 Hz output relay for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 60 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for actuator push button or recall a scenario. To complete with 1-, 2- or 3-module buttons. Depth: 36,5 mm



Grey		White		Metal	
1P reversing switches 250 V~ (lightable°)					
 19013 16 AX 19013.AB As above, antibacterial treatment. Depth: 25 mm	 19013.2 16 AX - 2 modules. Depth: 25 mm	 19013.B 16 AX 19013.AB.B As above, antibacterial treatment. Depth: 25 mm	 19013.2.B 16 AX - 2 modules. Depth: 25 mm	 19013.M 16 AX. Depth: 25 mm	 19013.2.M 16 AX - 2 modules. Depth: 25 mm
1P reversing switches 250 V~, screwless terminals (lightable°)					
 19009.FX 10 AX. Depth: 27,7 mm	 19009.FX.2 10 AX - 2 modules. Depth: 27,7 mm	 19009.FX.B 10 AX. Depth: 27,7 mm	 19009.FX.2.B 10 AX - 2 modules. Depth: 27,7 mm	 19009.FX.M 10 AX. Depth: 27,7 mm	 19009.FX.2.M 10 AX - 2 modules. Depth: 27,7 mm
Axial 1P reversing switches 250 V~ (lightable°)					
 19113 16 AX. Depth: 34,5 mm	 19113.2 16 AX - 2 modules. Depth: 34,5 mm	 19113.B 16 AX. Depth: 34,5 mm	 19113.2.B 16 AX - 2 modules. Depth: 34,5 mm	 19113.M 16 AX. Depth: 34,5 mm	 19113.2.M 16 AX - 2 modules. Depth: 34,5 mm
1P NO 10 A push buttons 250 V~ (lightable°)					
 19008 10 A 19008.AB As above, antibacterial treatment. Depth: 26 mm	 19008.2 10 A - 2 modules. Depth: 26 mm	 19008.B 10 A 19008.AB.B As above, antibacterial treatment. Depth: 26 mm	 19008.2.B 10 A - 2 modules. Depth: 26 mm	 19008.M 10 A. Depth: 26 mm	 19008.2.M 10 A - 2 modules. Depth: 26 mm
 19008.2.C Bell symbol - 2 modules. Depth: 26 mm	 19008.2.L Light symbol - 2 modules. Depth: 26 mm	 19008.2.C.B Bell symbol - 2 modules. Depth: 26 mm	 19008.2.L.B Light symbol - 2 modules. Depth: 26 mm	 19008.2.C.M Bell symbol - 2 modules. Depth: 26 mm	 19008.2.L.M Light symbol - 2 modules. Depth: 26 mm
1P NO 10 A push buttons 250 V~, screwless terminals (lightable°)					
 19008.FX 10 A. Depth: 26,7 mm	 19008.FX.2 10 A - 2 modules. Depth: 26,7 mm	 19008.FX.B 10 A. Depth: 26,7 mm	 19008.FX.2.B 10 A - 2 modules. Depth: 26,7 mm	 19008.FX.M 10 A. Depth: 26,7 mm	 19008.FX.2.M 10 A - 2 modules. Depth: 26,7 mm




* Not to be used in European Countries





▲ New article

Δ Available until stocks last





Grey		White		Metal				
Axial 1P NO 10 A push buttons 250 V~ (lightable°)								
								
19108 10 A. Depth: 35,5 mm	19108.2 10 A - 2 modules. Depth: 35,5 mm	19108.B 10 A. Depth: 35,5 mm	19108.2.B 10 A - 2 modules. Depth: 35,5 mm	19108.M 10 A. Depth: 35,5 mm	19108.2.M 10 A - 2 modules. Depth: 35,5 mm			
1P NC 10 A push button 250 V~ (lightable°)								
								
19010 10 A. Depth: 25 mm	19010.B 10 A. Depth: 25 mm	19010.M 10 A. Depth: 25 mm						
Quid - Magnetic relay module for lighting (backfit)								
								
03991 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, for backfit	03992 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 input for reset push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, luminous signalling of load status, for backfit	03993 ON/OFF sequence pulse relay module, 1 input for NO push button, 2 NO 10 A 220-240 V~ 50/60 Hz sequence relay outputs, for backfit						
								
▲ 03994 Quid magnetic relay module with sequential ON/OFF pulses, 1 input for NO push-button on phase (L) or on neutral (N), 1 NO relay output 10 AX 220-240 V~ 50/60	00932 Pre-wired LED unit for signalling the load status, for 03992, supply voltage 220-240 V~ 50/60 Hz, 0,5 W, green							
Lightable° mechanisms 250 V~ (common devices for the three versions)								
								
19000.0 1P 10 AX 1-way switch. Depth: 25 mm	19001.0 1P 16 AX 1-way switch. Depth: 25 mm	19015.0 2P 16 AX 1-way switch. Depth: 25 mm	19004.0 1P 10 AX 2-way switch. Depth: 25 mm	19005.0 1P 16 AX 2-way switch. Depth: 25 mm	19013.0 1P 16 AX reversing switch. Depth: 25 mm	19008.0 1P NO 10 A push button. Depth: 25 mm	19010.0 1P NC 10 A push button. Depth: 25 mm	19016.0 2P 20 AX 1-way switch. Depth: 25 mm
Lightable° mechanisms 250 V~, axial (common devices for the three versions)								
								
19100.0 1P 10 AX 1-way switch. Depth: 35,5 mm	19104.0 1P 10 AX 2-way switch. Depth: 35,5 mm							
Lightable° mechanisms 250 V~, screwless terminals (common devices for the three versions)								
								
19000.FX.0 1P 10 AX 1-way switch. Depth: 29,7 mm	19004.FX.0 1P 10 AX 2-way switch. Depth: 29,7 mm	19009.FX.0 1P 10 AX reversing switch. Depth: 27,7 mm	19008.FX.0 1P NO 10 A push button. Depth: 26,7 mm					

° Lamps and signalling units, page 458

Grey				White				Metal			
1-module interchangeable buttons (lightable°)											
											
19021 No symbol	19026 With diffuser	19026.DND Do Not Disturb with diffuser	19026.PLS Please Clean with diffuser	19021.B No symbol	19026.B With diffuser	19026.DND.B Do Not Disturb with diffuser	19026.PLS.B Please Clean with diffuser	19021.M No symbol	19026.M With diffuser	19026.DND.M Do Not Disturb with diffuser	19026.PLS.M Please Clean with diffuser
											
19021.C Bell symbol	19021.L Light symbol	19021.P Key symbol		19021.C.B Bell symbol	19021.L.B Light symbol	19021.P.B Key symbol		19021.C.M Bell symbol	19021.L.M Light symbol	19021.P.M Key symbol	
											
19021.99 O I symbols	19038 Smooth, non-lightable			19021.99.B O I symbols	19038.B Smooth, non-lightable			19021.99.M O I symbols	19038.M Smooth, non-lightable		
1-module interchangeable buttons for axial controls (lightable°)											
											
19131 No symbol	19131.C Bell symbol	19131.L Light symbol		19131.B No symbol	19131.C.B Bell symbol	19131.L.B Light symbol		19131.M No symbol	19131.C.M Bell symbol	19131.L.M Light symbol	
											
19131.P Key symbol				19131.P.B Key symbol				19131.P.M Key symbol			
2-module interchangeable buttons (lightable°)											
											
19022 No symbol 19022.AB As above, antibacterial treatment	19027 With diffuser			19022.B No symbol 19022.AB.B As above, antibacterial treatment	19027.B With diffuser			19022.M No symbol	19027.M With diffuser		

Grey			White			Metal		
2-module interchangeable buttons (lightable°)								
								
19022.C Bell symbol	19022.L Light symbol	19022.P Key symbol	19022.C.B Bell symbol	19022.L.B Light symbol	19022.P.B Key symbol	19022.C.M Bell symbol	19022.L.M Light symbol	19022.P.M Key symbol
								
19022.99 O I symbols	19039 Smooth, non-lightable		19022.99.B O I symbols	19039.B Smooth, non-lightable		19022.99.M O I symbols	19039.M Smooth, non-lightable	
2-module interchangeable buttons for axial controls (lightable°)								
								
19132 No symbol	19132.C Bell symbol	19132.L Light symbol	19132.B No symbol	19132.C.B Bell symbol	19132.L.B Light symbol	19132.M No symbol	19132.C.M Bell symbol	19132.L.M Light symbol
								
19132.P Key symbol			19132.P.B Key symbol			19132.P.M Key symbol		
3-module interchangeable buttons (lightable°)								
								
19023 No symbol	19028 With diffuser	19023.B No symbol	19028.B With diffuser	19023.M No symbol	19028.M With diffuser			
								
19023.C Bell symbol		19023.C.B Bell symbol		19023.C.M Bell symbol				

Devices

Grey			White			Metal		
1P special switches 250 V~								
								
19050 NO 10 A, with lightable name- plate - 2 modules 19050.AB As above, antibacterial treatment. Depth: 26,2 mm	19052 NO 10 A cord-operated 19052.AB As above, antibacterial treatment. Depth: 26 mm	19053 NC 10 A cord- operated. Depth: 26 mm	19050.B NO 10 A, with lightable name- plate - 2 modules 19050.AB.B As above, antibacterial treatment. Depth: 26,2 mm	19052.B NO 10 A cord-operated 19052.AB.B As above, antibacterial treatment. Depth: 26 mm.	19053.B NC 10 A cord- operated. Depth: 26 mm	19050.M NO 10 A, with lightable name- plate - 2 modules. Depth: 26,2 mm	19052.M NO 10 A cord-operated. Depth: 26 mm	19053.M NC 10 A cord- operated. Depth: 26 mm
Additional 1P switches 250 V~								
								
19056.33 10 A, NO + NC-contact, OFF symbol. Depth: 29 mm	19056.34 10 A, NO + NC-contact, ON symbol. Depth: 29 mm	19058 Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29 mm	19056.33.B 10 A, NO + NC-contact, OFF symbol. Depth: 29 mm	19056.34.B 10 A, NO + NC-contact, ON symbol. Depth: 29 mm	19058.B Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29 mm	19056.33.M 10 A, NO + NC-contact, OFF symbol. Depth: 29 mm	19056.34.M 10 A, NO + NC-contact, ON symbol. Depth: 29 mm	19058.M Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29 mm
1P NO 10 A push buttons 250 V~								
								
19066 Two NO 10 A, independents. Depth: 29 mm	19068 With white diffuser (for signalling unit). Depth: 28,5 mm		19066.B Two NO 10 A, independents. Depth: 29 mm	19068.B With white diffuser (for signalling unit). Depth: 28,5 mm		19066.M Two NO 10 A, independents. Depth: 29 mm	19068.M With white diffuser (for signalling unit). Depth: 28,5 mm	
Switches 250 V~								
								
19060 2P 10 AX 2-way switch, OFF-central. Depth: 33,5 mm	19061 2P 10 A 2-way push button, OFF-central. Depth: 35 mm	19062 2 1P NO 10 A push buttons, interlocked 19062.AB As above, antibacterial treatment. Depth: 29 mm	19060.B 2P 10 AX 2-way switch, OFF-central. Depth: 33,5 mm	19061.B 2P 10 A 2-way push button, OFF-central. Depth: 35 mm	19062.B 2 1P NO 10 A push buttons, interlocked 19062.AB.B As above, antibacterial treatment. Depth: 29 mm	19060.M 2P 10 AX 2-way switch, OFF-central. Depth: 33,5 mm	19061.M 2P 10 A 2-way push button, OFF-central. Depth: 35 mm	19062.M 2 1P NO 10 A push buttons, interlocked. Depth: 29 mm
Quid - Electronic 2-way switch for roller shutter								
								
19196 Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 40,5 mm	19196.B Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 40,5 mm	19196.M Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 40,5 mm						

Devices

Grey		White		Metal	
Quid - Electronic relay module and control unit module for roller shutters (backfit)					
	03996 Centralizable relay module, slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving, for backfit or junction boxes installation		03997 control unit module, 2 inputs for NO push button, 6 outputs for Quid roller shutter relay module (03996), 220-240 V~ 50/60 Hz power supply, for backfit or junction boxes installation		
View Wireless connected control device for roller shutter					
	 19594.0 Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario, favourite position recall function. To complete with 2 1-module half-button. Depth: 37,5 mm	 Bluetooth®	 zigbee certified product		
	19755.2 2 1-module interchangeable half-button, arrows symbol		19755.2.B 2 1-module interchangeable half-button, arrows symbol		19755.2.M 2 1-module interchangeable half-button, arrows symbol
2P key-operated switches 250 V~ (add .CU to the basic code for switches with 000 unified key)					
	19083 16 AX 1-way switch, key removable in both positions. Depth: 33 mm		19086 NO 16 A push button, key removable in "O" position. Depth: 33 mm		19083.B 16 AX 1-way switch, key removable in both positions. Depth: 33 mm
	19086.B NO 16 A push button, key removable in "O" position. Depth: 33 mm		19083.M 16 AX 1-way switch, key removable in both positions. Depth: 33 mm		19086.M NO 16 A push button, key removable in "O" position. Depth: 33 mm
Dimmers**					
	19135.1 MASTER, universal. Depth: 41,5 mm 19135.1.120 As above, 120 V~		19135.AB.1 MASTER, universal, antibacterial treatment. Depth: 41,5 mm		19136.1 MASTER, universal, with potentiometer. Depth: 40,5 mm
	19135.1.B MASTER, universal. Depth: 41,5 mm 19135.1.120.B As above, 120 V~		19135.AB.1.B MASTER, universal, antibacterial treatment. Depth: 41,5 mm		19136.1.B MASTER, universal, with potentiometer. Depth: 40,5 mm
	19135.1.M MASTER, universal. Depth: 41,5 mm 19135.1.120.M As above, 120 V~		19136.1.M MASTER, universal, with potentiometer. Depth: 40,5 mm		

Grey			White			Metal		
Dimmers**								
								
19150 100-500 W, with potentiometer, 230 V~. Depth: 39,5 mm	19153 100-500 W, push-push + potentiometer, 230 V~. Depth: 39,5 mm	*19147 30-500 W/ 30-300 VA, potentiometer, 120 V~. Depth: 39,5 mm	19150.B 100-500 W, with potentiometer, 230 V~. Depth: 39,5 mm	19153.B 100-500 W, push-push + potentiometer, 230 V~. Depth: 39,5 mm	*19147.B 30-500 W/ 30-300 VA, potentiometer, 120 V~. Depth: 39,5 mm	19150.M 100-500 W, with potentiometer, 230 V~. Depth: 39,5 mm	19153.M 100-500 W, push-push + potentiometer, 230 V~. Depth: 39,5 mm	*19147.M 30-500 W/ 30-300 VA, potentiometer, 120 V~. Depth: 39,5 mm

Dimmer - controllable loads

Type	UNIVERSAL							
LOADS	19135.1 - 19135.1.120				19136.1			
	2-wire connection		3-wire connection		2-wire connection		3-wire connection	
	LE	TE	LE	TE	LE	TE	LE	TE
Incandescence	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W
LED	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps
Electronic transformers for halogen	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 
Supply units for LED (arts. 01874, 01875)			max 10 units	NOT useful			max 10 units	NOT useful
Step marker lamps (art. 02662)			max 10 lamps	NOT useful			max 10 lamps	NOT useful

Type	STANDARD		
LOADS	DIMMER		
	19150 (with rotary potentiometer)	19153 (with push-push switch and rotary potentiometer control)	19147 (with rotary potentiometer)
Incandescence	100 - 500 W	100 - 500 W	30 - 500 W
Ferromagnetic transformers			30 - 300 VA

Electronic supply unit




01876
230 V~ 50 Hz, for controllable LED RGB lamps, 12-24 Vdc

Grey		White		Metal	
Infrared switches					
 19181 Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz 19181.120 As above, 120 V~. Depth: 36 mm		 19181.B Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz 19181.120.B As above, 120 V~. Depth: 36 mm		 19181.M Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz 19181.120.M As above, 120 V~. Depth: 36 mm	
 00800.14 Frame for orientable support surface mounting		 00805.14 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm		 00801.14 Orientable support - 1 module	
 00800 Frame for orientable support surface mounting		 00805 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm		 00801 Orientable support - 1 module	
 02690 Lighting switch, 2000 W incandescent lamps, CFL 10-1000 W, LED 100 W, 220-240 V~ 50/60 Hz, ceiling mounting					
Set/Reset push buttons					
 19183 For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules. Depth: 38,2 mm		 19183.B For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules. Depth: 38,2 mm		 19183.M For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules. Depth: 38,2 mm	


Grey	White	Metal
------	-------	-------

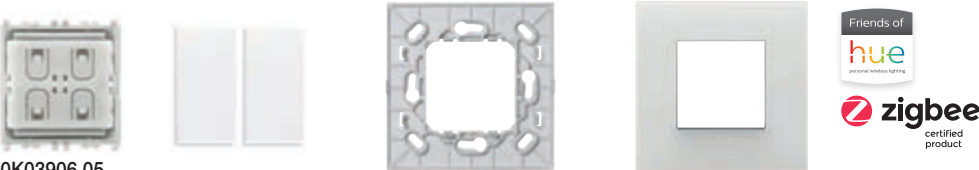Radiofrequency kits




OK03906.05
Kit Friends of Hue Arké Classic. Contains:

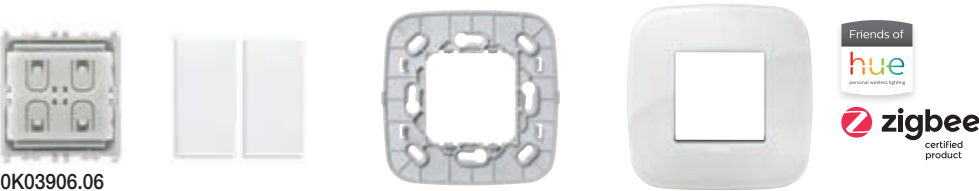- 1 4-button RF device 03906
- 1 mounting frame 19507.CL.B, white
- 2 buttons 19506.B, white
- 2-module cover plate 19642.B66, Reflex Ice total look



OK03906.06
Kit Friends of Hue Arké Round. Contains:

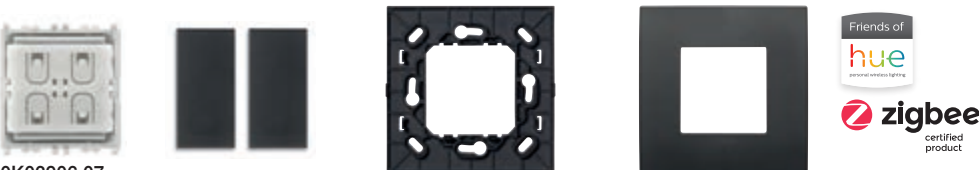- 1 4-button RF device 03906
- 1 mounting frame 19507.RN.B, white
- 2 buttons 19506.B, white
- 2-module cover plate 19672.B66, Reflex Ice total look



OK03906.07
Kit Friends of Hue Arké Classic. Contains:

- 1 4-button RF device 03906
- 1 mounting frame 19507.CL, grey
- 2 buttons 19506, grey
- 2-module cover plate 19642.71, Black




OK03906.08
Kit Friends of Hue Arké Round. Contains:

- 1 4-button RF device 03906
- 1 mounting frame 19507.RN, grey
- 2 buttons 19506, grey
- 2-module cover plate 19672.81, Black

Grey	White	Metal
------	-------	-------

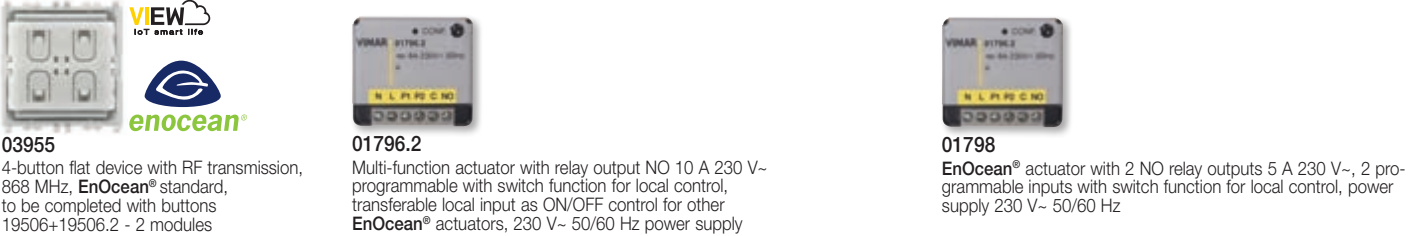
Radiofrequency smart devices



03955
4-button flat device with RF transmission, 868 MHz, **EnOcean**® standard, to be completed with buttons 19506+19506.2 - 2 modules

01796.2
Multi-function actuator with relay output NO 10 A 230 V~ programmable with switch function for local control, transferable local input as ON/OFF control for other **EnOcean**® actuators, 230 V~ 50/60 Hz power supply

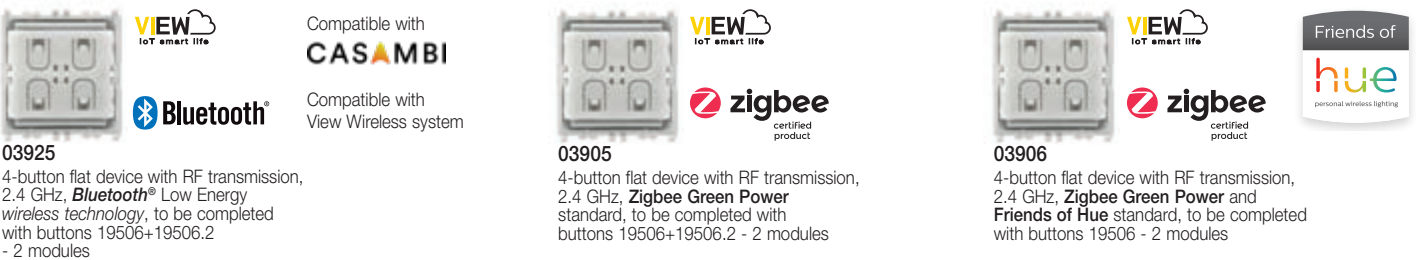01798
EnOcean® actuator with 2 NO relay outputs 5 A 230 V~, 2 programmable inputs with switch function for local control, power supply 230 V~ 50/60 Hz



03925
4-button flat device with RF transmission, 2.4 GHz, **Bluetooth**® Low Energy wireless technology, to be completed with buttons 19506+19506.2 - 2 modules

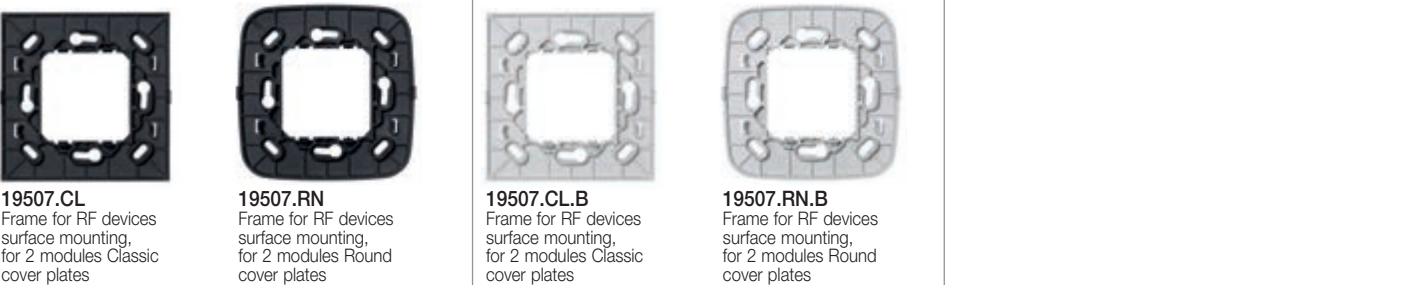
03905
4-button flat device with RF transmission, 2.4 GHz, **Zigbee Green Power** standard, to be completed with buttons 19506+19506.2 - 2 modules

03906
4-button flat device with RF transmission, 2.4 GHz, **Zigbee Green Power** and **Friends of Hue** standard, to be completed with buttons 19506 - 2 modules



19507
Frame for RF devices surface mounting, for 2 modules or 2 cental modules cover plates

19507.B
Frame for RF devices surface mounting, for 2 modules or 2 cental modules cover plates




19507.CL
Frame for RF devices surface mounting, for 2 modules Classic cover plates

19507.RN
Frame for RF devices surface mounting, for 2 modules Round cover plates

19507.CL.B
Frame for RF devices surface mounting, for 2 modules Classic cover plates

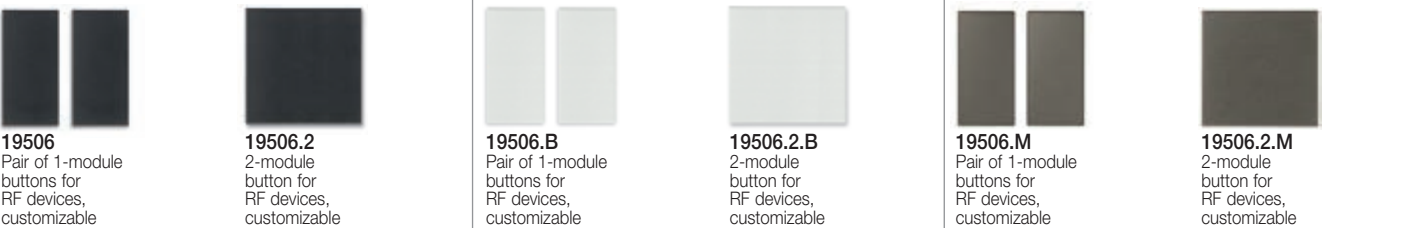19507.RN.B
Frame for RF devices surface mounting, for 2 modules Round cover plates



19506
Pair of 1-module buttons for RF devices, customizable

19506.2
2-module button for RF devices, customizable


19506.B
Pair of 1-module buttons for RF devices, customizable

19506.2.B
2-module button for RF devices, customizable


19506.M
Pair of 1-module buttons for RF devices, customizable

19506.2.M
2-module button for RF devices, customizable

Socket outlets

Grey		White		Metal	
SICURY 2P+E Italian standard socket outlets 250 V~					
 19201 10 A, P11 19201.AB As above, antibacterial treatment. Depth: 25,3 mm	 19203 Bpresa 16 A, P17/11 19203.AB As above, antibacterial treatment. Depth: 25,3 mm	 19201.B 10 A, P11 19201.AB.B As above, antibacterial treatment. Depth: 25,3 mm	 19203.B Bpresa 16 A, P17/11 19203.AB.B As above, antibacterial treatment. Depth: 25,3 mm	 19201.M 10 A, P11. Depth: 25,3 mm	 19203.M Bpresa 16 A, P17/11. Depth: 25,3 mm
 19209 16 A, P30 - 2 modules. Depth: 29 mm	 19210 16 A, universal - 2 modules 19210.AB As above, antibacterial treatment. Depth: 26 mm	 19209.B 16 A, P30 - 2 modules. Depth: 29,4 mm	 19210.B 16 A, universal - 2 modules 19210.AB.B As above, antibacterial treatment. Depth: 26 mm	 19209.M 16 A, P30 - 2 modules. Depth: 29 mm	 19210.M 16 A, universal - 2 modules. Depth: 26 mm
View Wireless connected control device for socket outlet					
 19593 Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39 mm	 19593.B Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39 mm	 19593.M Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39 mm			
SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)					
 19203.R Bpresa 16 A, P17/11, red. Depth: 25,3 mm	 19209.A 16 A, P30, orange - 2 modules. Depth: 29 mm	 19209.R 16 A, P30, red - 2 modules. Depth: 29 mm	 19209.V 16 A, P30, green - 2 modules. Depth: 29 mm	 19210.R 16 A, universal, red - 2 modules. Depth: 29 mm	
Socket outlets 250 V~ - German standard					
 19208 SICURY 2P+E 16 A, German - 2 modules 19208.AB As above, antibacterial treatment. Depth: 29 mm	 19208.C SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 29,9 mm	 ▲19208.USB SICURY 2P+T 16 A standard tedesco, USB-C 18 W - 2 moduli Depth: 32 mm	 19208.B SICURY 2P+E 16 A, German - 2 modules. 19208.AB.B As above, antibacterial treatment. Depth: 29 mm	 19208.C.B SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 29,9 mm	 ▲19208.USB.B SICURY 2P+T 16 A standard tedesco, USB-C 18 W - 2 moduli Depth: 32 mm
 19208.M SICURY 2P+E 16 A, German - 2 modules. Depth: 29 mm	 19208.C.M SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 29,9 mm	 ▲19208.USB.M SICURY 2P+T 16 A standard tedesco, USB-C 18 W - 2 moduli Depth: 32 mm			

Socket outlets

Grey		White		Metal	
Socket outlets 250 V~, screwless terminals - German standard					
 19208.FX SICURY 2P+E 16 A, German - 2 modules. Depth: 33,1 mm	 19208.FX.C SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 34,6 mm	 19208.FX.B SICURY 2P+E 16 A, German - 2 modules. Depth: 33,1 mm	 19208.FX.C.B SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 34,6 mm	 19208.FX.M SICURY 2P+E 16 A, German - 2 modules. Depth: 33,1 mm	 19208.FX.C.M SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 34,6 mm
Socket outlets 250 V~ - French standard					
 19212 SICURY 2P+E 16 A, French - 2 modules 19212.AB As above, antibacterial treatment. Depth: 26 mm	 19212.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 26,9 mm	 19212.B SICURY 2P+E 16 A, French - 2 modules 19212.AB.B As above, antibacterial treatment. Depth: 26 mm	 19212.C.B SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 26,9 mm	 19212.M SICURY 2P+E 16 A, French - 2 modules. Depth: 26 mm	 19212.C.M SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 26,9 mm
Socket outlets 250 V~, screwless terminals - French standard					
 19212.FX SICURY 2P+E 16 A, French - 2 modules. Depth: 30,1 mm	 19212.FX.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,6 mm	 ▲19212.FL.FX SICURY 2P+T 16 A standard francese a filo - 2 moduli. Prof.: 31,7 mm	 19212.FX.B SICURY 2P+E 16 A, French - 2 modules. Depth: 30,1 mm	 19212.FX.C.B SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,6 mm	 ▲19212.FL.FX.B SICURY 2P+T 16 A standard fran- cese a filo - 2 moduli. Prof.: 31,7 mm
 19212.FX.M SICURY 2P+E 16 A, French - 2 modules. Depth: 30,1 mm	 19212.FX.C.M SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,6 mm	 ▲19212.FL.FX.M SICURY 2P+T 16 A standard fran- cese a filo - 2 moduli. Prof.: 31,7 mm			
Socket outlets 250 V~ - English standard					
 19214 SICURY 2P+E 5 A, English - 2 modules. Depth: 18,1 mm	 19219⁴ 2P+E 13 A, English - 2 modules. Depth: 17,5 mm	 19214.B SICURY 2P+E 5 A, English - 2 modules. Depth: 18,1 mm	 19219.B⁴ 2P+E 13 A, English - 2 modules. Depth: 17,5 mm	 19214.M SICURY 2P+E 5 A, English - 2 modules. Depth: 18,1 mm	 19219.M⁴ 2P+E 13 A, English - 2 modules. Depth: 17,5 mm
Socket outlets 250 V~ - Swiss standard					
 19226 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,05 mm	 19226.B 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,05 mm	 19226.M 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,05 mm			

Socket outlets

Grey			White			Metal		
SICURY socket outlets 250 V~ - Euro-American standard								
								
19234 2P 16 A, Euro-American (ø 4,8 mm). Depth: 27,8 mm	19248 2P+E 16 A, Euro-American - 2 modules. Depth: 26 mm	19249 Two 2P+E 16 A, Euro-American - 3 modules. Depth: 24 mm	19234.B 2P 16 A, Euro-American (ø 4,8 mm). Depth: 27,8 mm	19248.B 2P+E 16 A, Euro-American - 2 modules. Depth: 26 mm	19249.B Two 2P+E 16 A, Euro-American - 3 modules. Depth: 24 mm	19234.M 2P 16 A, Euro-American (ø 4,8 mm). Depth: 27,8 mm	19248.M 2P+E 16 A, Euro-American - 2 modules. Depth: 26 mm	19249.M Two 2P+E 16 A, Euro-American - 3 modules. Depth: 24 mm
Socket outlets 127 V~ - USA and Saudi Arabian standards								
								
19242 SICURY 2P+E 15 A, USA and Arabian. Depth: 26,9 mm	19243 Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25,5 mm	19242.B SICURY 2P+E 15 A, USA and Arabian. Depth: 26,9 mm	19243.B Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25,5 mm	19242.M SICURY 2P+E 15 A, USA and Arabian. Depth: 26,9 mm	19243.M Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25,5 mm			
								
19245 2P+E 15 A, USA and Arabian. Depth: 26,9 mm	19246 Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25,5 mm	19245.B 2P+E 15 A, USA and Arabian. Depth: 26,9 mm	19246.B Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25,5 mm	19245.M 2P+E 15 A, USA and Arabian. Depth: 26,9 mm	19246.M Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25,5 mm			
Socket outlets 250 V~ - Israeli standard								
								
19240 SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 29,2 mm	19240.B SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 29,2 mm	19240.M SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 29,2 mm						
Socket outlets 250 V~ - Chinese standard								
								
19254 SICURY 2P+E 16 A, Chinese - 2 modules. Depth: 29,3 mm	19254.B SICURY 2P+E 16 A, Chinese - 2 modules. Depth: 29,3 mm	19254.M SICURY 2P+E 16 A, Chinese - 2 modules. Depth: 29,3 mm						
Socket outlets 250 V~ - Australian standard								
								
19262 SICURY 2P+E 15 A, Australian - 2 modules. Depth: 29,7 mm	19262.B SICURY 2P+E 15 A, Australian - 2 modules. Depth: 29,7 mm	19262.M SICURY 2P+E 15 A, Australian - 2 modules. Depth: 29,7 mm						

Socket outlets

Grey		White		Metal	
Socket outlets 250 V~ - Multistandard					
					
19255 SICURY 2P+E 13 A, with 1P 1-way switch, lightable - 3 modules. Depth: 18,8 mm	*19257 SICURY 2P+E 13 A, - 2 modules. Depth: 18,3 mm	19255.B SICURY 2P+E 13 A, with 1P 1-way switch, lightable - 3 modules. Depth: 18,8 mm	*19257.B SICURY 2P+E 13 A, - 2 modules. Depth: 18,3 mm	19255.M SICURY 2P+E 13 A, with 1P 1-way switch, lightable - 3 modules. Depth: 18,8 mm	*19257.M SICURY 2P+E 13 A, - 2 modules. Depth: 18,3 mm
British standard socket outlets 250 V~ (with signalling unit 00930 included)					
					
19221⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm	19222⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm	19221.B⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm	19222.B⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm	19221.M⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm	19222.M⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm
					
19221.L⁴ SICURY 2P+E 13 A, 1-gang, switched +indicator unit. Depth: 17,5 mm	19222.L⁴ SICURY 2P+E 13 A, 2-gang, switched+indicator unit. Depth: 17,5 mm	19221.L.B⁴ SICURY 2P+E 13 A, 1-gang, switched, +indicator unit. Depth: 17,5 mm	19222.L.B⁴ SICURY 2P+E 13 A, 2-gang, switched+indicator unit. Depth: 17,5 mm	19221.L.M⁴ SICURY 2P+E 13 A, 1-gang, switched, +indicator unit. Depth: 17,5 mm	19222.L.M⁴ SICURY 2P+E 13 A, 2-gang, switched+indicator unit. Depth: 17,5 mm
					
19215⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm	19217⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm	19215.B⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm	19217.B⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm	19215.M⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm	19217.M⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm
Socket outlets 125 V~ - 2P+E 15 A 60 Hz American standard					
					
19296 Double American standard with GFCI - 3 modules. Depth: 31,6 mm	19296.B Double American standard with GFCI - 3 modules. Depth: 31,6 mm	19296.M Double American standard with GFCI - 3 modules. Depth: 31,6 mm			

Socket outlets

Grey	White	Metal
------	-------	-------

British Standard 250 V~ - socket outlets and USB supply units



■ **19223.A**
SICURY 2P+E 13 A 250 V~
with 2P 1-way switch and 1 USB-A.
Depth: 21 mm



19223.C
SICURY 2P+E 13 A 250 V~
with 2P 1-way switch and 1 USB-C.
Depth: 22,8 mm



■ **19224.AC**
SICURY 2P+E 13 A 250 V~
with 2 2P 1-way switches,
1 USB-A and 1 USB-C.
Depth: 21 mm



19224.CC
SICURY 2P+E 13 A 250 V~
with 2 2P 1-way switches
and 2 USB-C.
Depth: 22,8 mm



■ **19266.A**
SICURY 2P+E 13 A 250 V~,
multistandard, with 1 2P 1-way
switch and 1 USB-A.
Depth: 21 mm



19266.C
SICURY 2P+E 13 A 250 V~,
multistandard, with 1 2P 1-way
switch and 1 USB-C.
Depth: 22,8 mm



■ **19223.A.B**
SICURY 2P+E 13 A 250 V~
with 2P 1-way switch and 1 USB-A.
Depth: 21 mm



19223.C.B
SICURY 2P+E 13 A 250 V~
with 2P 1-way switch and 1 USB-C.
Depth: 22,8 mm



■ **19224.AC.B**
SICURY 2P+E 13 A 250 V~
with 2 2P 1-way switches,
1 USB-A and 1 USB-C.
Depth: 21 mm



19224.CC.B
SICURY 2P+E 13 A 250 V~
with 2 2P 1-way switches
and 2 USB-C.
Depth: 22,8 mm



■ **19266.A.B**
SICURY 2P+E 13 A 250 V~,
multistandard, with 1 2P 1-way
switch and 1 USB-A.
Depth: 21 mm



19266.C.B
SICURY 2P+E 13 A 250 V~,
multistandard, with 1 2P 1-way
switch and 1 USB-C.
Depth: 22,8 mm



■ **19223.A.M**
SICURY 2P+E 13 A 250 V~
with 2P 1-way switch and 1 USB-A.
Depth: 21 mm



19223.C.M
SICURY 2P+E 13 A 250 V~
with 2P 1-way switch and 1 USB-C.
Depth: 22,8 mm



■ **19224.AC.M**
SICURY 2P+E 13 A 250 V~
with 2 2P 1-way switches,
1 USB-A and 1 USB-C.
Depth: 21 mm



19224.CC.M
SICURY 2P+E 13 A 250 V~
with 2 2P 1-way switches
and 2 USB-C.
Depth: 22,8 mm



■ **19266.A.M**
SICURY 2P+E 13 A 250 V~,
multistandard, with 1 2P 1-way
switch and 1 USB-A.
Depth: 21 mm



19266.C.M
SICURY 2P+E 13 A 250 V~,
multistandard, with 1 2P 1-way
switch and 1 USB-C.
Depth: 22,8 mm

Socket outlets

Grey	White	Metal
------	-------	-------

Possibles matches - Foreign standard plugs and socket outlets

PLUG \ SOCKET OUTLET	German	French	English			Swiss	Israeli	British standard					
	19208	19212	19214	19219	19220	19226	19240	19221	19221.L	19222	19222.L	19215	19217
S10 Italian standard	●	●					●						
2P 2,5 A Europlug	●	●				●	●						
2P+E 16 A 250 V~ German standard	●						○						
2P+E 16 A 250 V~ German and French standards	●	●					○						
2P 16 A 250 V~ German and French standards	●	●					●						
2P+E 16 A 250 V~ French standard		●					○						
2P+E 10 A 250 V~ Swiss standard						●							
2P+E 16 A 250 V~ Israeli standard							●						
2P+E 5 A 250 V~ English standard			●									●	
2P+E 13 A 250 V~ English standard				●	●			●	●	●	●		
2P+E 15 A 250 V~ English standard													●
2P 13 A 220 V~ Saudi Arabian standard								●	●	●	●		

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

Possibles matches - Foreign standard plugs and socket outlets

PLUG \ SOCKET OUTLET	Multistandard		American	Euroamerican			American Saudi Arabian		Chinese	Australian
	19255	19257	19296	19234	19248	19249	19242	19243	19254	19262
S10 Italian standard	●	●		●	●	●				
2P 2,5 A Europlug	●	●		●	●	●				
2P+E 16 A 250 V~ German standard	○	○		○	○	○				
2P+E 16 A 250 V~ German and French standards				○	○	○				
2P 16 A 250 V~ German and French standards				●	●	●				
2P+E 16 A 250 V~ French standard				○	○	○				
2P+E 15 A 125 V~ American standard					●	●				
2P+E 10 A 250 V~ Swiss standard	●	●								
2P+E 5 A 250 V~ English standard	●	●								
2P+E 13 A 250 V~ English standard	●	●								
2P+E 15 A 125 V~ American standard			●				●	●		
2P 15 A 127 V~ American and Saudi Arabian standards							●	●		
2P+E 10 A 250 V~ Brazilian standard	●	●								
2P+E 10 A 250 V~ Chinese standard	●	●							●	
2P+E 10 A 250 V~ Australian standard	●	●								
2P+E 15 A 250 V~ Australian standard										●

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

Socket outlets

Grey	White	Metal
SICURY 2P+E interlocked socket outlets with CB and RCBO I _{Δn} 10 mA,  (120-230 V~ 50/60 Hz)		
 19276 16 A P30 250 V~, 1P+N C 16 - 3 modules. Depth: 39,6 mm	 19276.B 16 A P30 250 V~, 1P+N C 16 - 3 modules. Depth: 39,6 mm	 19276.M 16 A P30 250 V~, 1P+N C 16 - 3 modules. Depth: 39,6 mm
 19286 16 A P30 250 V~, 1P+N C 16 - 4 modules. Depth: 39,6 mm	 19286.B 16 A P30 250 V~, 1P+N C 16 - 4 modules. Depth: 39,6 mm	 19286.M 16 A P30 250 V~, 1P+N C 16 - 4 modules. Depth: 39,6 mm

Shaver supply units

 19290 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules 19290.AB As above, antibacterial treatment. Depth: 41,5 mm	 19291⁶ 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41,5 mm	 19290.B 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules 19290.AB.B As above, antibacterial treatment. Depth: 41,5 mm	 19291.B⁶ 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41,5 mm	 19290.M 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 41,5 mm	 19291.M⁶ 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41,5 mm
---	--	--	--	---	--

250 V~ Italian standard socket outlets with USB power supply units

 20210.USB SICURY 2P+T 16 A universal, 1 USB C 5 V 3 A - 2 modules. Depth: 46.7 mm	 20210.USB.B SICURY 2P+T 16 A universal, 1 USB C 5 V 3 A - 2 modules. Depth: 46.7 mm	 20210.USB.N SICURY 2P+T 16 A universal, 1 USB C 5 V 3 A - 2 modules. Depth: 46.7 mm
--	---	--


USB supply unit

 19292 5 V 1,5 A, 1 USB-A, 120-230 V~ 50/60 Hz. Depth: 36,5 mm	 Δ 19292.AC 12 W, USB-A+C, 120-240 V~ 50/60 Hz Δ 19292.AC.AB As above, antibacterial treatment. Depth: 36 mm	 ▲ 19292.AC.15 15 W, USB-A+C, 120-240 V~ 50/60 Hz ▲ 19292.AC15AB As above, antibacterial treatment. Depth: 36,5 mm	 19292.B 5 V 1,5 A, 1 USB-A, 120-230 V~ 50/60 Hz. Depth: 36,5 mm	 Δ 19292.AC.B 12 W, USB-A+C, 120-240 V~ 50/60 Hz Δ 19292.AC.AB.B As above, antibacterial treatment. Depth: 36 mm	 ▲ 19292.AC.15.B 15 W, USB-A+C, 120-240 V~ 50/60 Hz ▲ 19292.AC15ABB As above, antibacterial treatment. Depth: 36,5 mm	 19292.M 5 V 1,5 A, 1 USB-A, 120-230 V~ 50/60 Hz. Depth: 36,5 mm	 Δ 19292.AC.M 12 W, USB-A+C, 120-240 V~ 50/60 Hz. Depth: 36 mm	 ▲ 19292.AC.15.M 15 W, 1 USB-A, 120-230 V~ 50/60 Hz. Depth: 36,5 mm
--	--	--	---	--	---	--	---	--

Socket outlets


Grey	White	Metal			
USB supply unit					
 Δ 19292.C 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm	 ▲ 19292.C.25 25 W, 1 USB-C, 120-240 V~ 50/60 Hz. Prof.: 36,5 mm	 Δ 19292.C.B 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm	 ▲ 19292.C.25.B 25 W, 1 USB-C, 120-240 V~ 50/60 Hz. Prof.: 36,5 mm	 Δ 19292.C.M 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm	 ▲ 19292.C.25.M 25 W, 1 USB-C, 120-240 V~ 50/60 Hz. Prof.: 36,5 mm
 19292.CC 15 W, 2 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm	 Δ 19295 5 V 2,1 A, 2 USB-A for total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm	 19292.CC.B 15 W, 2 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm	 Δ 19295.B 5 V 2,1 A, 2 USB-A for total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm	 19292.CC.M 15 W, 2 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm	 Δ 19295.M 5 V 2,1 A, 2 USB-A for total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm
 19295.AC 15 W, USB-A+C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules 19295.AC.AB As above, antibacterial treatment. Depth: 29,3 mm	 19295.CC 15 W, 2 USB-C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm	 19295.AC.B 15 W, USB-A+C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules 19295.AC.AB.B As above, antibacterial treatment. Depth: 29,3 mm	 19295.CC.B 15 W, 2 USB-C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm	 19295.AC.M 15 W, USB-A+C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29,3 mm	 19295.CC.M 15 W, 2 USB-C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm
 19298 30W, USB C, 120-240 V~ 50/60 Hz - 2 modules. Depth: 32.65 mm	 19298.60 60W, USB C, 120-240 V~ 50/60 Hz - 2 modules. Depth: 32.2 mm	 19298.B 30W, USB C, 120-240 V~ 50/60 Hz - 2 modules. Depth: 32.65 mm	 19298.60.B 60W, USB C, 120-240 V~ 50/60 Hz - 2 modules. Depth: 32.2 mm	 19298.M 30W, USB C, 120-240 V~ 50/60 Hz - 2 modules. Depth: 32.65 mm	 19298.60.M 60W, USB C, 120-240 V~ 50/60 Hz - 2 modules. Depth: 32.2 mm

Signal reception socket outlets


Grey	White	Metal
Bluetooth® wireless technology smart sound		
 21588 Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm	 21588.B Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm	 21588.N Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame, Next. Depth: 48 mm
 20587 Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm	 19099 Volume control - 2 modules. Depth: 40 mm	
 20587.B Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm	 19099.B Volume control - 2 modules. Depth: 40 mm	
 20587.N Passive speaker, 8 Ω 3 W, Next - 3 modules. Depth: 40 mm	 19099.M Volume control - 2 modules. Depth: 40 mm	
 19590¹ 4+4 W stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in <i>Bluetooth</i>® <i>wireless technology</i> receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36,7 mm	 19590.B¹ 4+4 W stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in <i>Bluetooth</i>® <i>wireless technology</i> receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36,7 mm	 19590.M¹ 4+4 W stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in <i>Bluetooth</i>® <i>wireless technology</i> receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36,7 mm

¹ The article can be ordered with Bluetooth network customisation
(see specifications on page 439)





Signal reception socket outlets

Grey	White	Metal
Special socket outlets		
 19330 2P 6 A 24 V (SELV), for plug 01620. Depth: 24,5 mm	 19331 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 24,5 mm	 19345 USB outlet, screw terminals. Depth: 24,2 mm
 19330.B 2P 6 A 24 V (SELV), for plug 01620. Depth: 24,5 mm	 19331.B 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 24,5 mm	 19345.B USB outlet, screw terminals. Depth: 24,2 mm
 19330.M 2P 6 A 24 V (SELV), for plug 01620. Depth: 24,5 mm	 19331.M 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 24,5 mm	 19345.M USB outlet, screw terminals. Depth: 24,2 mm
 19335 3 RCA outlets, screw terminals. Depth: 24,4 mm	 19583 Spring connector for speaker. Depth: 18,9 mm	
 19335.B 3 RCA outlets, screw terminals. Depth: 24,4 mm	 19583.B Spring connector for speaker. Depth: 18,9 mm	
 19335.M 3 RCA outlets, screw terminals. Depth: 24,4 mm	 19583.M Spring connector for speaker. Depth: 18,9 mm	
 19346 HDMI, Keystone connection. Depth: 36,9 mm	 19346.H HDMI, Keystone connection, 90° cable. Depth: 36,9 mm	
 19346.B HDMI, Keystone connection. Depth: 36,9 mm	 19346.H.B HDMI, Keystone connection, 90° cable. Depth: 36,9 mm	
 19346.M HDMI, Keystone connection. Depth: 36,9 mm	 19346.H.M HDMI, Keystone connection, 90° cable. Depth: 36,9 mm	
Phone jack		
 19320 RJ11, 6-position, 4-contact (6/4) 19320.AB As above, antibacterial treatment. Depth: 33,1 mm	 19320.B RJ11, 6-position, 4-contact (6/4) 19320.AB.B As above, antibacterial treatment. Depth: 33,1 mm	 19320.M RJ11, 6-position, 4-contact (6/4). Depth: 33,1 mm

Signal reception socket outlets

Grey		White		Metal	
Phone jack					
					
19324 Israeli standard, screw terminals. Depth: 33 mm	19327 8-contact, French standard - 2 modules. Depth: 21,3 mm	19324.B Israeli standard, screw terminals. Depth: 33 mm	19327.B 8-contact, French standard - 2 modules. Depth: 21,3 mm	19324.M Israeli standard, screw terminals. Depth: 33 mm	19327.M 8-contact, French standard - 2 modules. Depth: 21,3 mm
					
19322 RJ11, 6-position 4-contact (6/4) + cover. Depth: 33 mm		19322.B RJ11, 6-position 4-contact (6/4) + cover. Depth: 33 mm		19322.M RJ11, 6-position 4-con- tact (6/4) + cover. Depth: 33 mm	
Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output male and female)					
					
19300.01 Single connection, 1 dB 19300.01.AB As above, antibacterial treatment. Depth: 22,1 mm	19300.10 Through-line, 10 dB. Depth: 22,5 mm	19300.01.B Single connection, 1 dB 19300.01.AB.B As above, antibacterial treatment. Depth: 22,1 mm	19300.10.B Through-line, 10 dB. Depth: 22,5 mm	19300.01.M Single connection, 1 dB. Depth: 22,1 mm	19300.10.M Through-line, 10 dB. Depth: 22,5 mm
Coaxial TV-RD-SAT 5-2400 MHz socket outlets, demix (male and F-type outputs)					
					
19302.01 Single connection 1 dB - 2 modules. Depth: 22,5 mm	19302.10 Through-line 10 dB - 2 modules. Depth: 22,5 mm	19302.01.B Single connection 1 dB - 2 modules. Depth: 22,5 mm	19302.10.B Through-line 10 dB - 2 modules. Depth: 22,5 mm	19302.01.M Single connection 1 dB - 2 modules. Depth: 22,5 mm	19302.10.M Through-line 10 dB - 2 modules. Depth: 22,5 mm
Coaxial TV-FM-SAT 5-2400 MHz socket outlets (male, female and F-type outputs)					
					
19303 Single connection 1 dB - 2 modules. Depth: 21,9 mm		19303.B Single connection 1 dB - 2 modules. Depth: 21,9 mm		19303.M Single connection 1 dB - 2 modules. Depth: 21,9 mm	

Signal reception socket outlets

Grey		White		Metal	
F-type socket outlets					
 19318 With F type female connector. Depth: 10 mm		 19318.B With F type female connector. Depth: 10 mm		 19318.M With F type female connector. Depth: 10 mm	
Coaxial TV 40-862 MHz socket outlets (1 output: female)					
 *19313 Single connection. Depth: 28,5 mm		 *19313.B Single connection. Depth: 28,5 mm		 *19313.M Single connection. Depth: 28,5 mm	
Adaptors for coaxial TV-RD-SAT socket outlets					
 19319 For 2 or 3 outputs - 2 modules		 19319.B For 2 or 3 outputs - 2 modules		 19319.M For 2 or 3 outputs - 2 modules	
Terminal resistor and coaxial TV-RD-SAT 2400 MHz connectors					
 16330 Z 75 Ω, for frequencies up to 2400 MHz		 01644 Male, axial cable entry		 01645 Female, axial cable entry	
 01634 Male, 90°-cable entry		 01635 Female, 90°-cable entry		 01654 Male F-type, for RG59 cable	
RJ45 data ports					
 19339.11 Netsafe, Cat. 5e, UTP		 19339.11.B Netsafe, Cat. 5e, UTP		 19339.11.M Netsafe, Cat. 5e, UTP	
 19339.13 Netsafe, Cat. 6, UTP		 19339.13.B Netsafe, Cat. 6, UTP		 19339.13.M Netsafe, Cat. 6, UTP	
 19339.14 Netsafe, Cat. 6, FTP. Depth: 29,8 mm		 19339.14.B Netsafe, Cat. 6, FTP. Depth: 29,8 mm		 19339.14.M Netsafe, Cat. 6, FTP. Depth: 29,8 mm	
 19339.11.AB As above, antibacterial treatment. Depth: 29,8 mm		 19339.11.AB.B As above, antibacterial treatment. Depth: 29,8 mm		 19339.11.AB.M As above, antibacterial treatment. Depth: 29,8 mm	
 19339.13.AB As above, antibacterial treatment. Depth: 29,8 mm		 19339.13.AB.B As above, antibacterial treatment. Depth: 29,8 mm		 19339.13.AB.M As above, antibacterial treatment. Depth: 29,8 mm	
 19339.14.AB As above, antibacterial treatment. Depth: 29,8 mm		 19339.14.AB.B As above, antibacterial treatment. Depth: 29,8 mm		 19339.14.AB.M As above, antibacterial treatment. Depth: 29,8 mm	

Signal reception socket outlets

Grey				White				Metal			
RJ45 data ports											
19339.15 Netsafe, Cat. 6A, UTP. Depth: 29,8 mm				19339.15.B Netsafe, Cat. 6A, UTP. Depth: 29,8 mm				19339.15.M Netsafe, Cat. 6A, UTP. Depth: 29,8 mm			
19339.16 Netsafe, Cat. 6A, FTP. Depth: 29,8 mm				19339.16.B Netsafe, Cat. 6A, FTP. Depth: 29,8 mm				19339.16.M Netsafe, Cat. 6A, FTP. Depth: 29,8 mm			
19340.1 Panduit, Cat. 5e, UTP. Depth: 28,3 mm				19340.1.B Panduit, Cat. 5e, UTP. Depth: 28,3 mm							
19340.2 Panduit, Cat. 5e, FTP. Depth: 29,1 mm				19340.2.B Panduit, Cat. 5e, FTP. Depth: 29,1 mm							
Wi-Fi access point											
19195 72,2 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 230 V - 50/60 Hz - 2 modules. Depth: 40,7 mm				19195.B 72,2 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 230 V - 50/60 Hz - 2 modules. Depth: 40,7 mm				19195.M 72,2 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 230 V - 50/60 Hz - 2 modules. Depth: 40,7 mm			
Adapters for data ports											
19337.C RJ45 Keystone + cover. Depth: 10 mm				19337.C.B RJ45 Keystone + cover. Depth: 10 mm				19337.C.M RJ45 Keystone + cover. Depth: 10 mm			
19338.C RJ45, Cat. 5/6 AMP, Lucent T. Depth: 10 mm				19338.C.B RJ45, Cat. 5/6 AMP, Lucent T. Depth: 10 mm				19338.C.M RJ45, Cat. 5/6 AMP, Lucent T. Depth: 10 mm			
19340.C For MINI-COM Panduit. Depth: 10 mm				19340.C.B For MINI-COM Panduit. Depth: 10 mm				19340.C.M For MINI-COM Panduit. Depth: 10 mm			
19341.C For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 10 mm				19341.C.B For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 10 mm				19341.C.M For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 10 mm			
19343.K Slanting adaptor for RJ45 Keystone. Depth: 10 mm				19343.K.B Slanting adaptor for RJ45 Keystone. Depth: 10 mm				19343.K.M Slanting adaptor for RJ45 Keystone. Depth: 10 mm			
Sockets for fibre optic cable											
19350.SC Monomode 9/125 µm, with SC/APC simplex adapter. Depth: 19,4 mm				19350.SC.B Monomode 9/125 µm, with SC/APC simplex adapter. Depth: 19,4 mm				19350.SC.M Monomode 9/125 µm, with SC/APC simplex adapter. Depth: 19,4 mm			
19350.LC Monomode 9/125 µm, with LC duplex adapter. Depth: 19,3 mm				19350.LC.B Monomode 9/125 µm, with LC duplex adapter. Depth: 19,3 mm				19350.LC.M Monomode 9/125 µm, with LC duplex adapter. Depth: 19,3 mm			
19351.SC Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm				19351.SC.B Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm				19351.SC.M Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm			
19351.LC Multimode 50/125 µm, with LC duplex adapter. Depth: 18,2 mm				19351.LC.B Multimode 50/125 µm, with LC duplex adapter. Depth: 18,2 mm				19351.LC.M Multimode 50/125 µm, with LC duplex adapter. Depth: 18,2 mm			

Signalling

Grey			White			Metal		
Electronic bells								
								
19380 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 36,5 mm			19380.B 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 36,5 mm			19380.M 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 36,5 mm		
Ringtone/Buzzer								
								
▲19370.SR 12 V~ (SELV) 50/60 Hz. Depth: 31,5 mm			▲19372.SR 120 V~ 50/60 Hz. Depth: 31,5 mm			▲19373.SR 230 V~ 50/60 Hz. Depth: 31,5 mm		
								
▲19370.SR.B 12 V~ (SELV) 50/60 Hz. Depth: 31,5 mm			▲19372.SR.B 120 V~ 50/60 Hz. Depth: 31,5 mm			▲19373.SR.B 230 V~ 50/60 Hz. Depth: 31,5 mm		
								
▲19370.SR.M 12 V~ (SELV) 50/60 Hz. Depth: 31,5 mm			▲19372.SR.M 120 V~ 50/60 Hz. Depth: 31,5 mm			▲19373.SR.M 230 V~ 50/60 Hz. Depth: 31,5 mm		
Luminous indicator units (for 1 or 2 signalling units ^o)								
								
19386 Single, white diffuser. Depth: 22,5 mm			19388 Doble, neutral diffusers. Depth: 22,5 mm			19386.B Single, white diffuser. Depth: 22,5 mm		
								
19386.M Single, white diffuser. Depth: 22,5 mm			19388.M Doble, neutral diffusers. Depth: 22,5 mm			19388.B Doble, neutral diffusers. Depth: 22,5 mm		
Prismatic indicator units - 2 modules (for 14771 and 14777 lamps - supplied without lamp)								
								
19387.B White diffuser - 2 modules. Depth: 25 mm			19387.R Red diffuser - 2 modules. Depth: 25 mm			19387.V Green diffuser - 2 modules. Depth: 25 mm		

Signalling

Grey	White	Metal
------	-------	-------

Step marker lamps (with high-efficiency LED)

 19389 230 V~ 50/60 Hz - 2 modules. Depth: 36,5 mm	 19389.B 230 V~ 50/60 Hz - 2 modules. Depth: 36,5 mm	 19389.M 230 V~ 50/60 Hz - 2 modules. Depth: 36,5 mm
--	---	--

 19381 230 V~ 50/60 Hz Depth: 37 mm

Emergency lighting devices (with automatic emergency device)

 19384 With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules. Depth: 36,5 mm	 02660.1 With high-efficiency LED, 230 V~ 50/60 Hz, rechargeable Ni-Cd battery and built-in 7-module frame. Depth: 43 mm
---	--

Hand lamp and step marker lamp

 19397 Auxiliary emergency removable hand lamp and controllable step marker lamp, high-efficiency LED 100-240 V~ 50/60 Hz, neutral - 2 modules. Depth: 36.4 mm	 19398 Auxiliary emergency and controllable step marker lamp, high-effi- ciency LED 100-240 V~ 50/60 Hz, neutral. Depth: 36.2 mm
--	---

Rechargeable batteries

 00908 3 x Ni-MH 1,2 V 800 mAh, HR03 (AAA)	 00910 Ni-MH 4,8 V 80 mAh battery, spare part for TORCIA	 00913 Ni-Cd 4,8 V 800 mAh spare rechargeable battery for 02660.1	 00914 Li-ion 3,7 V 250 mAh spare for removable hand lamps LED 19397
--	---	--	---

Protection • Detection

Grey	White	Metal
------	-------	-------

Protection devices


 19416 1P 16 A 250 V~ fuse carrier. Depth: 28,5 mm	 19416.B 1P 16 A 250 V~ fuse carrier. Depth: 28,5 mm	 19416.M 1P 16 A 250 V~ fuse carrier. Depth: 28,5 mm
---	---	---


1P+N circuit breakers (120-230 V~ 50/60 Hz)

 19405.06 C 6, breaking capacity 1500 A. Depth: 39 mm	 19405.10 C 10, breaking capacity 3000 A. Depth: 39 mm	 19405.16 C 16, breaking capacity 3000 A. Depth: 39 mm	 19405.06.B C 6, breaking capacity 1500 A. Depth: 39 mm	 19405.10.B C 10, breaking capacity 3000 A. Depth: 39 mm	 19405.16.B C 16, breaking capacity 3000 A. Depth: 39 mm	 19405.06.M C 6, breaking capacity 1500 A. Depth: 39 mm	 19405.10.M C 10, breaking capacity 3000 A. Depth: 39 mm	 19405.16.M C 16, breaking capacity 3000 A. Depth: 39 mm
--	---	---	--	---	---	--	---	---

1P+N residual current breakers with overcurrent protection (RCBO) (120-230 V~ 50/60 Hz)

 19411.06 C 6, I_{Δn} 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm	 19411.10 C 10, I_{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.06.B C 6, I_{Δn} 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm	 19411.10.B C 10, I_{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.06.M C 6, I_{Δn} 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm	 19411.10.M C 10, I_{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm
 19411.16 C 16, I_{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.16.6 C 16, I_{Δn} 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.16.B C 16, I_{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.16.6.B C 16, I_{Δn} 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.16.M C 16, I_{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.16.6.M C 16, I_{Δn} 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm

Grey		White		Metal	
Thermostats					
					
02970 Dial thermostat with relay output 5(2) A 240 V~, heating and air conditioning in ON/OFF mode, class I temperature control device (contribution 1%), white LED backlighting with brightness control, supply voltage 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm		02970.B Dial thermostat with relay output 5(2) A 240 V~, heating and air conditioning in ON/OFF mode, class I temperature control device (contribution 1%), white LED backlighting with brightness control, supply voltage 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm		02970.M Dial thermostat with relay output 5(2) A 240 V~, heating and air conditioning in ON/OFF mode, class I temperature control device (contribution 1%), white LED backlighting with brightness control, supply voltage 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm	
Connected thermostats					
					
02973 Dial thermostat with relay output 5(2) A 240 V~, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm		02973.B Dial thermostat with relay output 5(2) A 240 V~, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm		02973.M Dial thermostat with relay output 5(2) A 240 V~, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm	
Connected magnetic contact					
					
03980 Connected magnetic contact for windows and doors, View Wireless, <i>Bluetooth® wireless technology</i> 5.0 standard technology for mesh system realization, 1 clean-contact input, powered with AA LR6 1,5 V batteries (not supplied), white. To use as accessory of connected thermostat or with gateway as sensor for notification of magnetic contact open/close					
Electronic sensors					
					
19432 Electronic temperature sensor. Depth: 24,4 mm		19433 Electronic humidity sensor, 1 0-10 V or 4-20 mA output- 2 modules. Depth: 37 mm		19432.B Electronic temperature sensor. Depth: 24,4 mm	
					
		19433.B Electronic humidity sensor, 1 0-10 V or 4-20 mA output- 2 modules. Depth: 37 mm		19432.M Electronic temperature sensor. Depth: 24,4 mm	
					
				19433.M Electronic humidity sensor, 1 0-10 V or 4-20 mA output- 2 modules. Depth: 37 mm	
Switches for fan-coil regulation					
					
19095 Slide, 1P 6(2) A 250 V~, 4-position. Depth: 39,5 mm		19063 2P 10 AX 250 V~, Depth: 33,5 mm		19095.B Slide, 1P 6(2) A 250 V~, 4-position. Depth: 39,5 mm	
					
		19063.B 2P 10 AX 250 V~, Depth: 33,5 mm		19095.M Slide, 1P 6(2) A 250 V~, 4-position. Depth: 39,5 mm	
					
				19063.N 2P 10 AX 250 V~, Depth: 33,5 mm	

Grey		White		Metal	
Power meter			Wired temperature sensor		
 02960 3 inputs for sensor 01457, 50 W-10 kW detectable power, for DIN (60715 TH35) rail installation 1x17,5 mm. Supplied with 01457			 02965.1 Wired temperature sensor, NTC 10 kΩ, cable length 3 m		
Hotel solutions					
 02686.1 Control device with four push buttons 1P NO 24 vdc 50 mA max., to be completed with 2-module back-lightable interchangeable button caps - 2 modules. Depth: 15 mm					
 19026.DND Do Not Disturb with diffuser		 19026.PLS Please Clean with diffuser		 19026.DND.M Do Not Disturb with diffuser	
 19026.DND.B Do Not Disturb with diffuser		 19026.PLS.B Please Clean with diffuser		 19026.PLS.M Please Clean with diffuser	
 19099 Volume control, 8 Ω 15 W - 2 modules. Depth: 30,1 mm		 19099.B Volume control, 8 Ω 15 W - 2 modules. Depth: 30,1 mm		 19099.M Volume control, 8 Ω 15 W - 2 modules. Depth: 30,1 mm	
 19097 1P NO 10 A 250 V~, for hotel "Do Not Disturb" and "Please Clean" lightable - 2 modules 19097.AB As above, antibacterial treatment. Depth: 28 mm		 00975 Card to customise for 19097 button		 02685 4 signalling indicator: IN, Do Not Disturb, OUT, waitress symbol, white - 2 modules. Depth: 22 mm	
 19290 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules 19290.AB As above, antibacterial treatment. Depth: 41,5 mm		 19290.B 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules 19290.AB.B As above, antibacterial treatment. Depth: 41,5 mm		 19290.M 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 41,5 mm	
 19291⁶ 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41,5 mm		 19291.B⁶ 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41,5 mm		 19291.M⁶ 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41,5 mm	
 02690 Lighting switch, 2000 W incandescent lamps, CFL 10-1000 W, LED 100 W, 220-240 V~ 50/60 Hz, ceiling mounting					

Hotel solutions

Grey	White	Metal
------	-------	-------

Hotel solutions

Access control system

 19463 Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules 19463.AB As above, antibacterial treatment. Depth: 20,5 mm	 19465 Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules 19465.AB As above, antibacterial treatment. Depth: 37 mm	 19463.B Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules 19463.AB.B As above, antibacterial treatment. Depth: 20,5 mm	 19465.B Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules 19465.AB.B As above, antibacterial treatment. Depth: 37 mm	 19463.M Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 20,5 mm	 19465.M Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm
 19468 NFC/RFID electronic reader, suitable for AGB Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm	 19468.1 NFC/RFID electronic reader, suitable for CISA Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm	 19468.B NFC/RFID electronic reader, suitable for AGB Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm	 19468.1.M NFC/RFID electronic reader, suitable for CISA Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm	 19468.M NFC/RFID electronic reader, suitable for AGB Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm	 19468.1.M NFC/RFID electronic reader, suitable for CISA Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm
 19469 NFC/RFID electronic reader, suitable for Mifare Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm	 19469.B NFC/RFID electronic reader, suitable for Mifare Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm	 19469.M NFC/RFID electronic reader, suitable for Mifare Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm			



16452.S
ISO-card (badge)

Hotel solutions

Grey	White	Metal
------	-------	-------

Hotel solutions

Connected access control system


 19462 NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31,7 mm	 19462.B NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31,7 mm	 19462.M NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31,7 mm
 19467 NFC/RFID energy saver card switch for installation inside the room, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm	 19467.B NFC/RFID energy saver card switch for installation inside the room, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm	 19467.M NFC/RFID energy saver card switch for installation inside the room, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm
 19467.C Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules	 19467.C.B Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules	 19467.C.M Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules



01817
Mifare transponder card

Grey	White	Metal
------	-------	-------

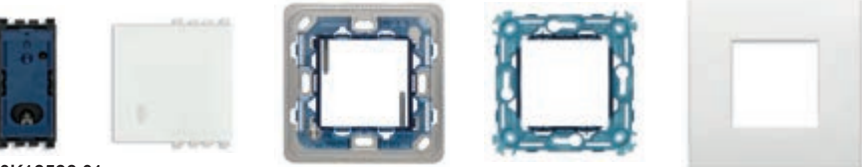View Wireless connected 2-way switches kits




**Bluetooth®**

**zigbee**
certified product

0K19592.01
Kit with:

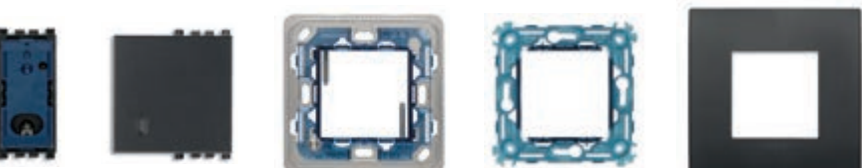- 1 19592.0 2-way switch mechanism
- 1 19022.B 2-module interchangeable button, white
- 1 19607 2-module British standard mounting frame
- 1 19603 2-module mounting frame without screws
- 1 19642.74 2-module technopolymer Classic cover plate, white



**Bluetooth®**

**zigbee**
certified product

0K19592.02
Kit with:

- 1 19592.0 2-way switch mechanism
- 1 19022 2-module interchangeable button, grey
- 1 19607 2-module British standard mounting frame
- 1 19603 2-module mounting frame without screws
- 1 19642.71 2-module technopolymer Classic cover plate, black

View Wireless gateway



**Bluetooth®**

**Wi-Fi**

19597
View Wireless gateway, Bluetooth® wireless technology 4.2 Wi-Fi, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 37 mm



**Bluetooth®**

**Wi-Fi**

19597.B
View Wireless gateway, Bluetooth® wireless technology 4.2 Wi-Fi, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 37 mm



**Bluetooth®**

**Wi-Fi**

19597.M
View Wireless gateway, Bluetooth® wireless technology 4.2 Wi-Fi, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 37 mm

Grey	White	Metal
------	-------	-------

Mounting frames for iPads



01430
Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied withtype C USB cable and no power supply unit, black



01430.B
Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied with type C USB cable and no power supply unit, white



01430.N
Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied withtype C USB cable and no power supply unit, Next

View Wireless connected 2-way switches



19592.0
Mechanism, 100-240 V 50/60 Hz output relay for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 60 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for actuator push button or recall a scenario. To complete with 1-, 2- or 3-module buttons. Depth: 36,5 mm

**Bluetooth®**

**zigbee**
certified product

1-module interchangeable buttons for connected switch mechanism (lightable°)



19021
No symbol

19026
With diffuser

19026.DND
Do Not Disturb with diffuser

19026.PLS
Please Clean with diffuser



19021.B
No symbol

19026.B
With diffuser

19026.DND.B
Do Not Disturb with diffuser

19026.PLS.B
Please Clean with diffuser



19021.M
No symbol

19026.M
With diffuser

19026.DND.M
Do Not Disturb with diffuser

19026.PLS.M
Please Clean with diffuser



19021.L
Light symbol

19021.P
Key symbol

19038
Smooth, non-lightable



19021.L.B
Light symbol

19021.P.B
Key symbol

19038.B
Smooth, non-lightable



19021.L.M
Light symbol

19021.P.M
Key symbol

19038.M
Smooth, non-lightable

2-module interchangeable buttons for connected switch mechanism (lightable°)



19022
No symbol

19027
With diffuser

19039
Smooth, non-lightable



19022.B
No symbol

19027.B
With diffuser

19039.B
Liscio



19022.M
No symbol

19027.M
With diffuser

19039.M
Smooth, non-lightable



19022.L
Light symbol

19022.P
Key symbol



19022.L.B
Light symbol

19022.P.B
Key symbol



19022.L.M
Light symbol

19022.P.M
Key symbol

Grey		White		Metal	
3-module interchangeable buttons for connected switch mechanism (lightable°)					
					
19023 No symbol	19028 With diffuser	19023.B No symbol	19028.B With diffuser	19023.M No symbol	19028.M With diffuser

View Wireless connected control device for roller shutter		
	19594.0 Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario, favourite position recall function. To complete with 2 1-module half-button. Depth: 37,5 mm 	
		
19755.2 2 1-module interchangeable half-button, arrows symbol	19755.2.B 2 1-module interchangeable half-button, arrows symbol	19755.2.M 2 1-module interchangeable half-button, arrows symbol

View Wireless connected actuator for 1 roller shutter - backside installation		
	03982 Actuator for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit) 	

Connected dimmer		
		
19595.0	VIEW Wireless electronic dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external push button for dimmer control or to recall a scenario, dimmer off operation, RGB LED visible in darkness with brightness control, 220-240 V 50/60 Hz power supply, to be completed with 1-module interchangeable buttons. Depth: 36.5 mm	
19595.0.120	As above, power supply 120 V 50/60 Hz.	

1-module interchangeable buttons and half-button caps for connected dimmer controls		
		
19755.3 Dimmer symbols	19755.3.B Dimmer symbols	19755.3.N Dimmer symbols

Grey	White	Metal
Connected electronic controls		
 19591.0 VIEW Wireless electronic control mechanism, local control with push button or remote control, IoT technology on Bluetooth 5.0 standard, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply, to be completed with 1-module interchangeable buttons. Depth: 36.5 mm		
1-module interchangeable buttons and half-button caps for connected electronic controls		
 19755.2 Arrows symbols	 19755.2.B Arrows symbols	 19755.2.N Arrows symbols
 19755.3 Dimmer symbols	 19755.3.B Dimmer symbols	 19755.3.N Dimmer symbols
 19755.6 Scenarios symbols	 19755.6.B Scenarios symbols	 19755.6.N Scenarios symbols
 19755 Neutral customisable	 19755.B Neutral customisable	 19755.N Neutral customisable

Radiofrequency smart devices		
		Compatible with 
03925	4-button flat device with RF transmission, 2.4 GHz, Bluetooth® Low Energy wireless technology, to be completed with buttons 19506+19506.2 - 2 modules	

Grey	White	Metal
View Wireless connected control device for socket outlet		
 Bluetooth® zigbee certified product	 Bluetooth® zigbee certified product	 Bluetooth® zigbee certified product
19593 Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39 mm	19593.B Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39 mm	19593.M Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39 mm

View Wireless connected actuator - backside installation		
	Bluetooth® zigbee certified product	
03981 Control device with NO 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)		

View Wireless connected energy meter		
	Bluetooth®	
02963 Energy meter for measuring of consumption/production of instant and historical electric energy (hourly, daily, monthly and in the year mode), 1 input for supplied toroidal current sensor, detectable power 25 W-100 kW, single-phase power supply 100-240 V 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, occupies 1 17,5 mm module		

View Wireless connected thermostats		
 Bluetooth®	 Bluetooth®	 Bluetooth®
02973 Dial thermostat with relay output 5(2) A 240 V~, IoT technology on <i>Bluetooth® wireless technology 5.0</i> for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm	02973.B Dial thermostat with relay output 5(2) A 240 V~, IoT technology on <i>Bluetooth® wireless technology 5.0</i> for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm	02973.M Dial thermostat with relay output 5(2) A 240 V~, IoT technology on <i>Bluetooth® wireless technology 5.0</i> for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm

View Wireless connected magnetic contact		
	Bluetooth®	
03980 Connected magnetic contact for windows and doors, View Wireless, <i>Bluetooth® wireless technology 5.0</i> standard technology for mesh system realization, 1 clean-contact input, powered with AA LR6 1,5 V batteries (not supplied), white. To use as accessory of connected thermostat or with gateway as sensor for notification of magnetic contact open/close		

Grey	White	Metal			
Radar sensors					
 Bluetooth®	 Bluetooth®	 Bluetooth®			
19179 UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply. Depth: 39.5 mm	19179.B UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply. Depth: 39.5 mm	19179.N UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply. Depth: 39.5 mm			
					
02692 UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, false ceiling installation.	02692.S.1 Round section adaptor for ceiling installation of the IoT connected radar sensor 02692.				
Controllo accessi connesso View Wireless					
 Bluetooth®	 Bluetooth®	 Bluetooth®	 Bluetooth®	 Bluetooth®	 Bluetooth®
19462 NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on <i>Bluetooth® wireless technology 5.0</i> standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31,7 mm	19467 NFC/RFID energy saver card switch for installation inside the room, IoT technology on <i>Bluetooth® wireless technology 5.0</i> standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm	19462.B NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on <i>Bluetooth® wireless technology 5.0</i> standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31,7 mm	19467.B NFC/RFID energy saver card switch for installation inside the room, IoT technology on <i>Bluetooth® wireless technology 5.0</i> standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm	19462.M NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on <i>Bluetooth® wireless technology 5.0</i> standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31,7 mm	19467.M NFC/RFID energy saver card switch for installation inside the room, IoT technology on <i>Bluetooth® wireless technology 5.0</i> standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm
					
19467.C Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules	19467.C.B Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules	19467.C.M Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules			
	01817 Mifare transponder card				

Metal-Elite
(Refined metal)



07 Gold



08 Brushed inox



09 Black chrome



10 Black nickel



11 Brushed copper



12.01 Brushed brass

Metal-Color
(Varnished metal)



01 Matt graphite



02 Matt slate



04 Matt titanium



05 Matt pearl



B06 Polar total look
(with white frame)



B26 Polar matt total look
(with white frame)



13 Matt champagne

Alu-Tech
(Aluminium)



15 Aluminium



16 Lava



17 Dark bronze

Reflex Plus
(Reflex)



61 Smoke grey



63 Orange



65 Sagegreen



66 Ice



B66 Ice total look
(with white frame)



67 Ivory

Color-Tech
(Varnished technopolymer)



76 Matt blue



78 Matt gold



79 Silver matt



80 Metal

Tecno-Basic
(Satin technopolymer)



71 Black



72 Grey



73 Ivory






74 White

Cover plates: guideline

	1-central-module	2-module	2-central-module	3-module	4-module
					
	Classic	Classic	Classic	Classic	Classic
Metal-Elite (Refined metal)					
 Gold	19641.07	19642.07	19652.07	19653.07	19654.07
 Brushed inox	19641.08	19642.08	19652.08	19653.08	19654.08
 Black nickel	19641.10	19642.10	19652.10	19653.10	19654.10
 Brushed brass	19641.12.01	19642.12.01	19652.12.01	19653.12.01	19654.12.01
Metal-Color (Varnished metal)					
 Matt graphite	19641.01	19642.01	19652.01	19653.01	19654.01
 Matt slate	19641.02	19642.02	19652.02	19653.02	19654.02
 Matt titanium	19641.04	19642.04	19652.04	19653.04	19654.04
 Matt pearl	19641.05	19642.05	19652.05	19653.05	19654.05
 Polar total look (with white frame)	19641.B06	19642.B06	19652.B06	19653.B06	19654.B06
 Polar matt total look (with white frame)	19641.B26	19642.B26	19652.B26	19653.B26	19654.B26
 Matt champagne	19641.13	19642.13	19652.13	19653.13	19654.13
Alu-Tech (Aluminium)					
 Aluminium	19641.15	19642.15	19652.15	19653.15	19654.15
 Lava	19641.16	19642.16	19652.16	19653.16	19654.16
 Dark bronze	19641.17	19642.17	19652.17	19653.17	19654.17


Cover plates: guideline

7-module	8-module	14-module	21-module	Panel mounting 1-module	Panel mounting 2-module
					
Classic	Classic	Classic	Classic	Classic	Classic
19657.07	19668.07	-	-	-	-
19657.08	19668.08	-	-	-	-
19657.10	19668.10	-	-	-	-
19657.12.01	19668.12.01	-	-	-	-
19657.01	19668.01	-	-	-	-
19657.02	19668.02	-	-	-	-
19657.04	19668.04	-	-	-	-
19657.05	19668.05	-	-	-	-
19657.B06	19668.B06	-	-	-	-
19657.B26	19668.B26	-	-	-	-
19657.13	19668.13	-	-	-	-
19657.15	19668.15	-	-	-	-
19657.16	19668.16	-	-	-	-
19657.17	19668.17	-	-	-	-

Cover plates: guideline


	1-central-module	2-module	2-central-module	3-module	4-module
					
	Classic	Classic	Classic	Classic	Classic
Reflex Plus (Reflex)					
 Smoke grey	19641.61	19642.61	19652.61	19653.61	19654.61
 Orange	19641.63	19642.63	19652.63	19653.63	19654.63
 Sagegreen	19641.65	19642.65	19652.65	19653.65	19654.65
 Ice total look (with white frame)	19641.B66	19642.B66	19652.B66	19653.B66	19654.B66
 Ivory	19641.67	19642.67	19652.67	19653.67	19654.67
Color-Tech (Varnished technopolymer)					
 Matt blue	19641.76	19642.76	19652.76	19653.76	19654.76
 Matt gold	19641.78	19642.78	19652.78	19653.78	19654.78
 Matt silver	19641.79	19642.79	19652.79	19653.79	19654.79
 Metal	19641.80	19642.80	19652.80	19653.80	19654.80
Tecno-basic (Technopolymer)					
 Black**	19641.71	19642.71 19642.AB.71	19652.71	19653.71 19653.AB.71	19654.71 19654.AB.71
 Grey	19641.72	19642.72	19652.72	19653.72	19654.72
 Ivory	19641.73	19642.73	19652.73	19653.73	19654.73
 White**	19641.74	19642.74 19642.AB.74	19652.74	19653.74 19653.AB.74	19654.74 19654.AB.74

Cover plates: guideline

7-module	8-module	14-module	21-module	Panel mounting 1-module	Panel mounting 2-module
					
Classic	Classic	Classic	Classic	Classic	Classic
19657.61	19668.61	-	-	-	-
19657.63	19668.63	-	-	-	-
19657.65	19668.65	-	-	-	-
19657.B66	19668.B66	-	-	-	-
19657.67	19668.67	-	-	-	-
19657.76	19668.76	-	-	-	-
19657.78	19668.78	-	-	-	-
19657.79	19668.79	-	-	-	-
19657.80	19668.80	-	-	-	-
19657.71 19657.AB.71	19668.71	19660.71	19661.71	19666.71	19667.71
19657.72	19668.72	19660.72	19661.72	19666.72	19667.72
19657.73	19668.73	19660.73	19661.73	19666.73	19667.73
19657.74 19657.AB.74	19668.74	19660.74	19661.74	19666.74	19667.74


** .AB: antibacterial treatment




German and French standard cover plates: guideline

2-module		2+2-module (between centres 71 mm)		2+2+2-module (between centres 71 mm)		2+2+2+2-module (between centres 71 mm)	
							
Metal-Elite (Refined metal)							
	Brushed inox	19642.08	19643.08	19644.08	19669.08		
	Brushed brass	19642.12.01	19643.12.01	19644.12.01	19669.12.01		
Metal-Color (Varnished metal)							
	Matt graphite	19642.01	19643.01	19644.01	19669.01		
	Matt titanium	19642.04	19643.04	19644.04	19669.04		
	Polar	19642.06	-	-	-		
	Polar total look (white diaphragm)	-	-	19644.B06	19669.B06		
	Matt champagne	19642.13	19643.13	19644.13	19669.13		
Color-Tech (Varnished technopolymer)							
	Matt gold	19642.78	19643.78	19644.78	19669.78		
	Matt silver	19642.79	19643.79	19644.79	19669.79		
	Metal	19642.80	19643.80	19644.80	19669.80		
Tecno-basic (Technopolymer)							
	Black**	19642.71 19642.AB.71	19643.71 19643.AB.71	19644.71 19644.AB.71	19669.71 19669.AB.71		
	Ivory	19642.73	19643.73	19644.73	19669.73		
	White**	19642.74 19642.AB.74	19643.74 19643.AB.74	19644.74 19644.AB.74	19669.74 19669.AB.74		

British standard cover plates: guideline


		1 module	2 modules	3 modules	5 modules
					
Metal-Elite (Refined metal)					
	Brushed inox	19641.08	19642.08	19648.08	19649.08
	Black nickel	19641.10	19642.10	19648.10	19649.10
	Brushed copper	19641.11	19642.11	-	-
	Brushed brass	19641.12.01	19642.12.01	19648.12.01	19649.12.01
Metal-Color (Varnished metal)					
	Matt graphite	19641.01	19642.01	19648.01	19649.01
	Matt titanium	19641.04	19642.04	19648.04	19649.04
	Polar total look (with white frame)	19641.B06	19642.B06	19648.B06	19649.B06
	Matt champagne	19641.13	19642.13	19648.13	19649.13
Alu-Tech (Aluminium)					
	Aluminium	19641.15	19642.15	19648.15	19649.15
	Lava	19641.16	19642.16	19648.16	19649.16
	Dark bronze	19641.17	19642.17	19648.17	19649.17
Color-Tech (Varnished technopolymer)					
	Matt silver	19641.79	19642.79	19648.79	19649.79
	Metal	19641.80	19642.80	19648.80	19649.80
Tecno-basic (Technopolymer)					
	Black**	19641.71	19642.71 19642.AB.71	19648.71	19649.71
	White**	19641.74	19642.74 19642.AB.74	19648.74	19649.74










Module	Box	Frame	Classic* cover plates
1 for ø 60 mm mounting box	Flush mounting  V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black	 19601 1-module, with claws	 19641... 1-module Dimensions: 90x90x8,6 mm
2 and 2 centrals for ø 60 mm mounting box	 V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	 19602 2-module, with claws 19603 2-module, without screws	 19642... 2-module Dimensions: 90x90x8,6 mm  19652... 2-central-module Dimensions: 122x90x8,6 mm
2 centrals	Flush mounting  V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black	 19612 2-central-module, with screws	 19652... 2-central-module Dimensions: 122x90x8,6 mm
3	 V71703 For hollow walls, GW 850 °C, light blue	 19613 3-module, with screws	 19653... 3-module Dimensions: 122x90x8,6 mm
4	Flush mounting  V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black  V71704 For hollow walls, GW 850 °C, light blue Table mounting  19784 4-module, grey 19784.B: white	 19614 4-module, with screws	 19654... 4-module Dimensions: 144,5x90x8,6 mm

Module	Box	Frame	Classic* cover plates
1	Panel mounting  16776.AU GW 960 °C	 19626 1-module, with screws	 19666... 1-module Dimensions: 40x82x8,6 mm
2	Panel mounting  16776.AU x 2 GW 960 °C	 19627 2-module, with screws	 19667... 2-module Dimensions: 40x139x8,6 mm
1 and 2 for ø 60 mm and 65 mm mounting box	Flush mounting 	 19601 1-module, with claws  19602 2-module, with claws 19603 2-module, without screws  19602 2-module, with claws 19603 2-module, without screws	 19641... 1-module Dimensions: 90x90x8,6 mm  19642... 2-module Dimensions: 90x90x8,6 mm  19652... 2-central-module Dimensions: 122x90x8,6 mm










* Cover plates range, page 282

Module	Box		Frame	Classic* cover plates
7	Flush mounting	Table mounting		
	 V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black V71706 For hollow walls, GW 850 °C, light blue	 19787 7-module, grey 19787.B: white	 19617 7-module, with screws	 19657... 7-module Dimensions: 210x90x8,6 mm
8	Flush mounting	Table mounting		
	 V71318 For masonry GW 650 °C, light blue V71718 For hollow walls, GW 850 °C, light blue	 19788 8-module with Classic and Round frame, grey 19788.B: white Dimensions: 141x151,9x135 mm	 01420 4,3" IP touch screen, grey 01420.B: white 01420.BN: neutral 21848.1... Colour touch screen, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame 19618 8-module (4+4), with screws	 19668... 8-module Dimensions: 146,5x163x9,3 mm Cover plate rotated at a 90° angle
14 (7+7)	Flush mounting			
	 V71320 For masonry GW 650 °C, light blue V71720 For hollow walls, GW 850 °C, light blue		 19620 14-module (7+7), with screws	 19660... 14-module (7+7) Dimensions: 210x161x8,6 mm
21 (7+7+7)	Flush mounting			
	 V71321 For masonry GW 650 °C, light blue		 19621 21-module (7+7+7), with screws	 19661... 21-module (7+7+7) Dimensions: 206x222x11 mm

Modules	Boxes	Frames/Devices	Cover plates*
1 and 2	 1-gang mounting box Fixing centres: 60,3 mm	 19606' 1-module, with screws M 3,5, grey  19607' 2-module, with screws M 3,5 	 19641... 1-module Dimensions: 90x90x8,6 mm  19642... 2-module Dimensions: 90x90x8,6 mm

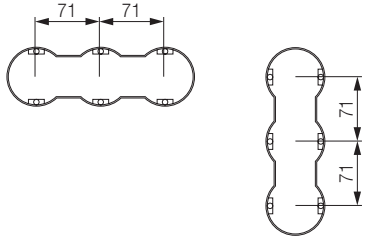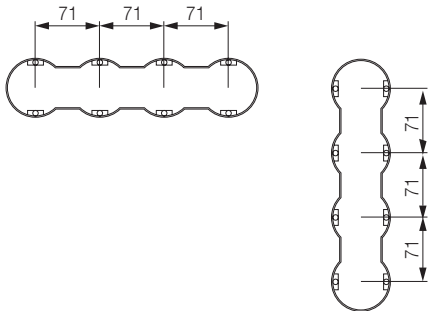Module	Box	Frame	Cover plate*
2+2 71 mm between centres		 2 x 19602 2-module, with claws  2 x 19603 2-module, without screws	  19643... 4-module (2+2), for horizontal and vertical installation. Dimensions: 161x90 mm
2+2+2 71 mm between centres		 3 x 19602 2-module, with claws  3 x 19603 2-module, without screws	  19644... 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 232x90 mm
2+2+2+2 71 mm between centres		 4 x 19602 2-module, with claws  4 x 19603 2-module, without screws	  19669... 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 303x90 mm

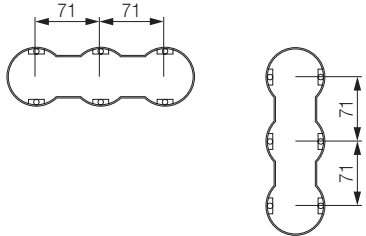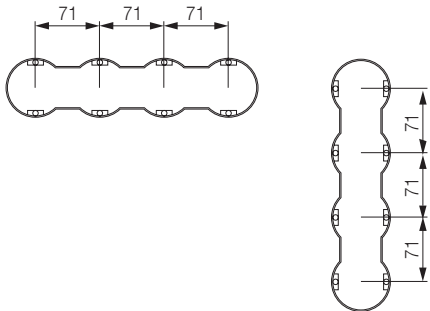* Cover plates range, page 294

Module	Box	Frame	Cover plate*
2+2 71 mm between centres		 2 x 19602 2-module, with claws  2 x 19603 2-module, without screws	  19643... 4-module (2+2), for horizontal and vertical installation. Dimensions: 161x90 mm
2+2+2 71 mm between centres		 3 x 19602 2-module, with claws  3 x 19603 2-module, without screws	  19644... 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 232x90 mm
2+2+2+2 71 mm between centres		 4 x 19602 2-module, with claws  4 x 19603 2-module, without screws	  19669... 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 303x90 mm

Plana

Control devices	312
Power and signal socket outlets	323
Signalling, protection and detection	335
Comfort and climate	339
Stand alone and hotel solutions	340
Smart home View Wireless	344
Cover plates range	350
Installation types	355

Plana





Plana

Simplicity becomes a lifestyle: essential and rigorous, at the service of energy with the utmost linearity and with material and colour variations with a palette that is always as fresh and bright as the ensuing combinations.



White Total Look



Silver Total Look



Technopolymer
A modern eclectic material with a simple appearance available in fifteen attractive colour variations.



Reflex
Fresh and always fashionable, this material creates a special frosted effect in twelve colour variations.



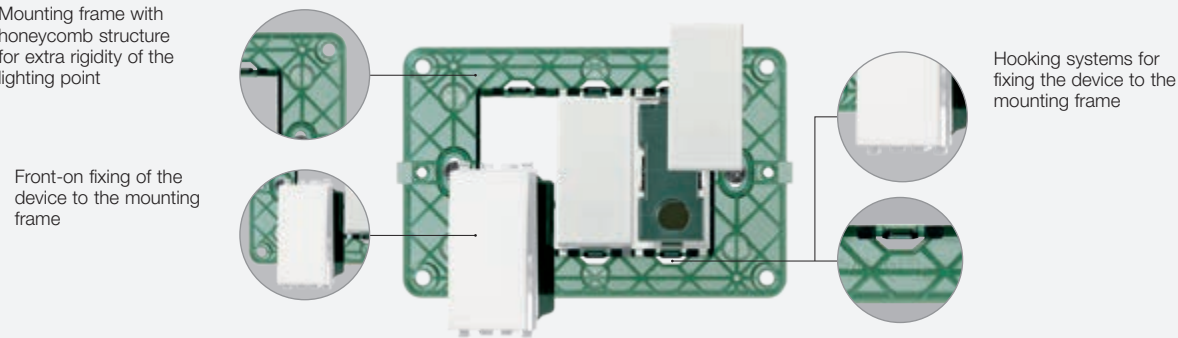
Metal
An elegant and at the same time hard-wearing material, in seven different shades with metallic or pearl finishes.

Materials and finishes

Quality and versatility of products,
from its design concept.


Plack-clack hooking system

A Vimar patent that makes it quick and easy to fit the lighting components (devices and mounting frames) to the cover plate. The plack-clack is a hooking system with an extra-strong mounting frame (thanks also to the honeycomb structure of the mounting frame) and exceptional rigidity, simplifying the front-on fitting and removal of devices.




Modular devices and cover plates

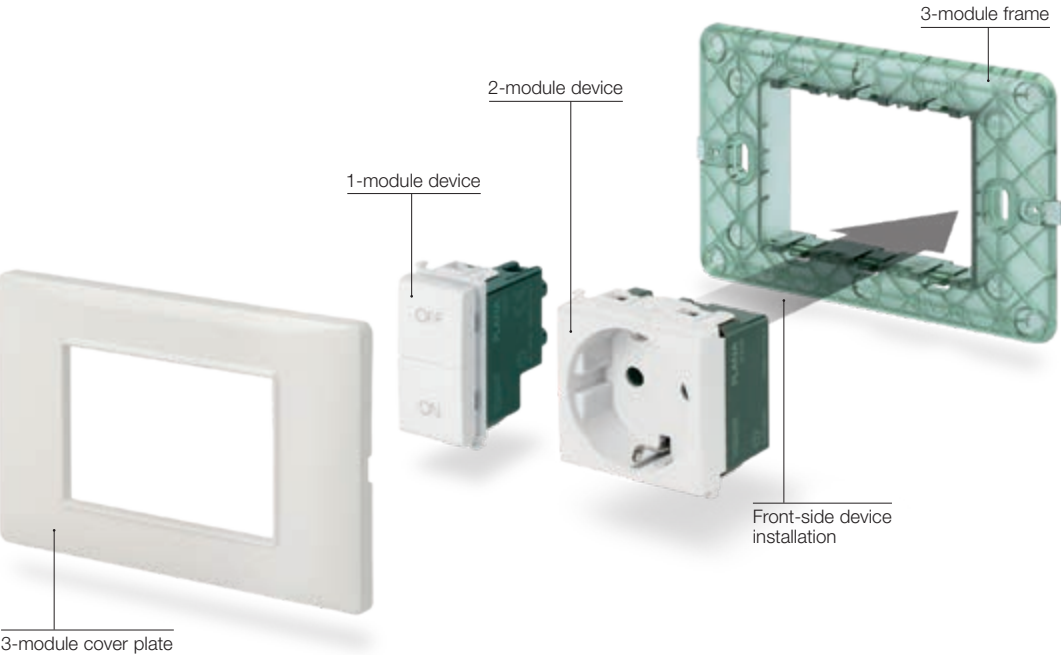The modular device with from 1 to 3 modules lets you install multiple devices of different modularity in a single mounting frame, up to a composition of 21 modules for cover plates size 7+7+7. The mounting frame that installs the devices is equipped with interlocking teeth that provide strong and reliable fixing for each single device and allows perfect alignment between devices such as to create an orderly and visually pleasing stylistic effect. The device can also be fixed front-on to the mounting frame, allowing work on the installation at any time without having to remove the mounting frame from the box.




Controls

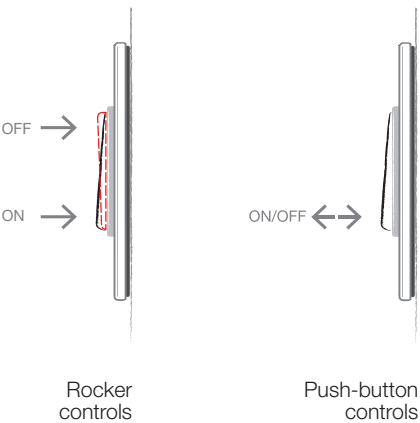Controlling the light, activating a scenario or managing loads are just some of the many uses of energy. The combination of mechanics and technology enables simplifying these daily gestures in operating a simple device, as a rocker switches or push button, with precision and an intuitive understanding of the associated functions.




Backlighting and customization

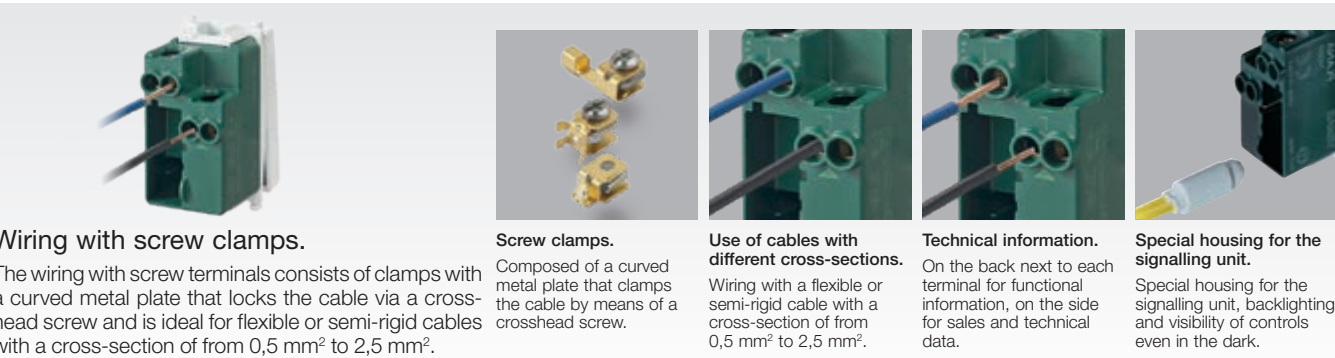The backlighting with different colours makes the controls visible even in the dark, while the symbols, either laser-engraved or customized on site, always give a clear indication of the various functions.




Wiring with screw clamps.

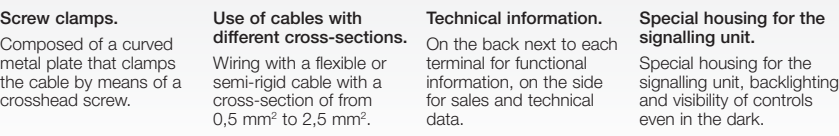The wiring with screw terminals consists of clamps with a curved metal plate that locks the cable via a cross-head screw and is ideal for flexible or semi-rigid cables with a cross-section of from 0,5 mm² to 2,5 mm².



Smartfix rapid wiring.

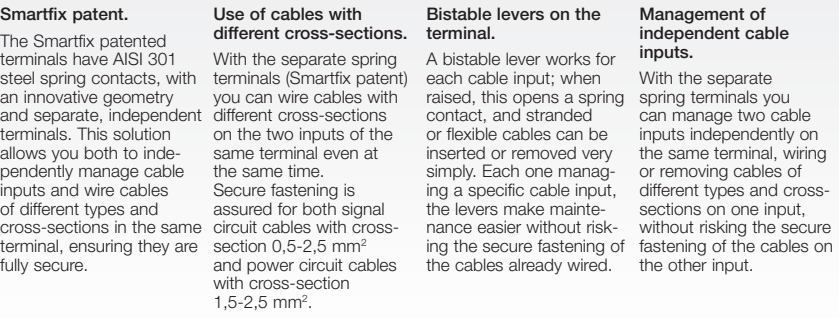Smartfix rapid wiring is a Vimar patent with screwless terminals with separate terminals and bistable levers. The contact lever is used to fit and/or remove solid, stranded and flexible cables even with different sizes and the separate terminals allow the independent management of each cable, facilitating specific maintenance without compromising the hold on the already wired cables.



Mounting features
3-module installation

Interchangeable buttons
One, two or three modules - with backlit symbols and customizable.

Laser engravings
At the back by each terminal to describe its functions, on one side with the commercial data and on the opposite side with technical data.

Cover plates
38 colours, a wide range of combinations in three materials: metal, natural wood and technopolymer - Reflex.

Night&Day symbols
Laser engraved in the specific backlit area of the button. Perfectly visible by day and night.

Lowered frame
Sturdy because of the honeycomb structure and semi-transparent to facilitate the wiring and installation of devices. Minimum projection from the wall of the lighting controls.

Plak-clack® fixing

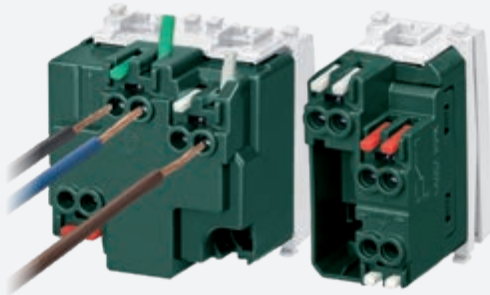


Devices fixing. Devices removing.

SCREWLESS TERMINALS

For solid, stranded and flexible cables. Quick, easy and safe.

The quick-wiring terminals can hold rigid, semi-rigid and flexible cables, responding to all installation needs. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm² and power circuit cables with cross-section 1,5-2,5 mm².



SCREW TERMINALS

Ergonomic contacts.

The metal plate in the terminals is curved: a Vimar refinement allowing the wire to be held in place until clamped with the screw. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm² and power circuit cables with cross-section 1,5-2,5 mm².




Composition	Boxes	Frames	Devices	Cover plates
 Panel mounting	 Flush mounting	 With screws	 1 module	 From 1 to 2 modules*
 From 1 to 2 modules	 Flush mounting Surface mounting	 2-module with/without screws or with claws	 1 x 2 modules 2 x 1 module	 From 1 to 2 modules*
 For 2 central modules From 3 to 7 modules	 Flush mounting Surface mounting	 With screws With screws	 2 x 1 module 1 x 2 modules 1 and 2 modules 3 x 1 module 1 x 3 modules	 2 central modules* From 3 to 7 modules*
 8 modules Table mounting	 Flush mounting Table box	 With screws With screws	 4,3" touch screen "Energy" 2 x 1 module and 1 x 2 modules 4 x 1 module 1 and 2 modules	 8 modules 4 and 7 modules*

* For other combinations, see the installation types from page 358

Mounting features for British standard
Modular devices mounting

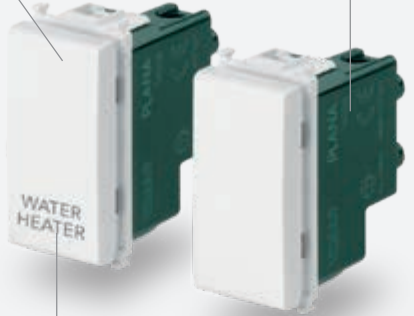
Interchangeable buttons
One or two modules - with backlit symbols and customizable.




Technical information
On the back next to each terminal for functional information, on the side for sales and technical data.



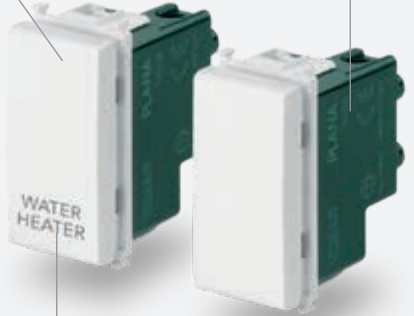Customisation
Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.



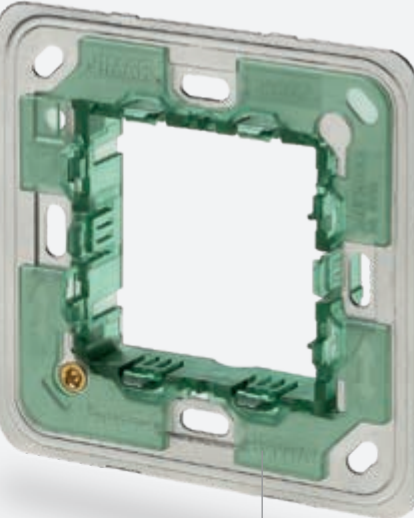Mounting frame
Stainless steel mounting frame with earth terminal, with lugs for an easy and fast installation of the devices from the front. Available also for 1 module with built-in blank module.



Cover plates
Wide range colours, in technopolymer and Reflex.



Monobloc device (with built-in mounting frame)


Socket outlet
With SICURY patented system to prevent accidental contacts.



Monobloc device
Built-in mounting frame.



Fixing lugs
Possibility of horizontal and vertical mounting of device.



Signalling LED
Signalling of power supply, with integrated signalling unit, perfectly visible by day and night.








Matching possibility



Joining possibility with minimum 25 mm of distance between boxes.

Cover plates
For vertical and horizontal mounting, it is available in a wide range of colours in technopolymer and Reflex.












Composition	Box	Frame	Device	Cover plate
 1 module, modular mounting (1-gang)	 1-gang mounting box Fixing centres: 60,3 mm	 1-module with screws M 3,5	 1-gang switch, 1 module	 1 module*
 2 modules, modular mounting (1-, 2-, 3-gang switch)	 1-gang mounting box Fixing centres: 60,3 mm	 2-module with screws M 3,5	 3-gang switch, 2 modules  Two 1-gang switches, 1 module  1-gang switch, 2 modules	 2 modules*
 monobloc device or 3 modules modular mounting	 1-gang mounting box Fixing centres: 60,3 mm	 Socket outlet monobloc device  ON/OFF unit monobloc device  3-module with screws M 3,5	 1 x 2 modules + 1 x 1 module	 Monobloc horizontal mounting*  Monobloc vertical mounting*  3 modules*
 monobloc device or 5 modules modular mounting	 2-gang mounting box Fixing centres: 120,6 mm	 2-gang switched socket outlets monobloc device  5-module with screws M 3,5	 2 x 2 modules + 1 x 1 module (blank module)	 5 modules*

* For other combinations, see the installation types from page 361

Mounting features

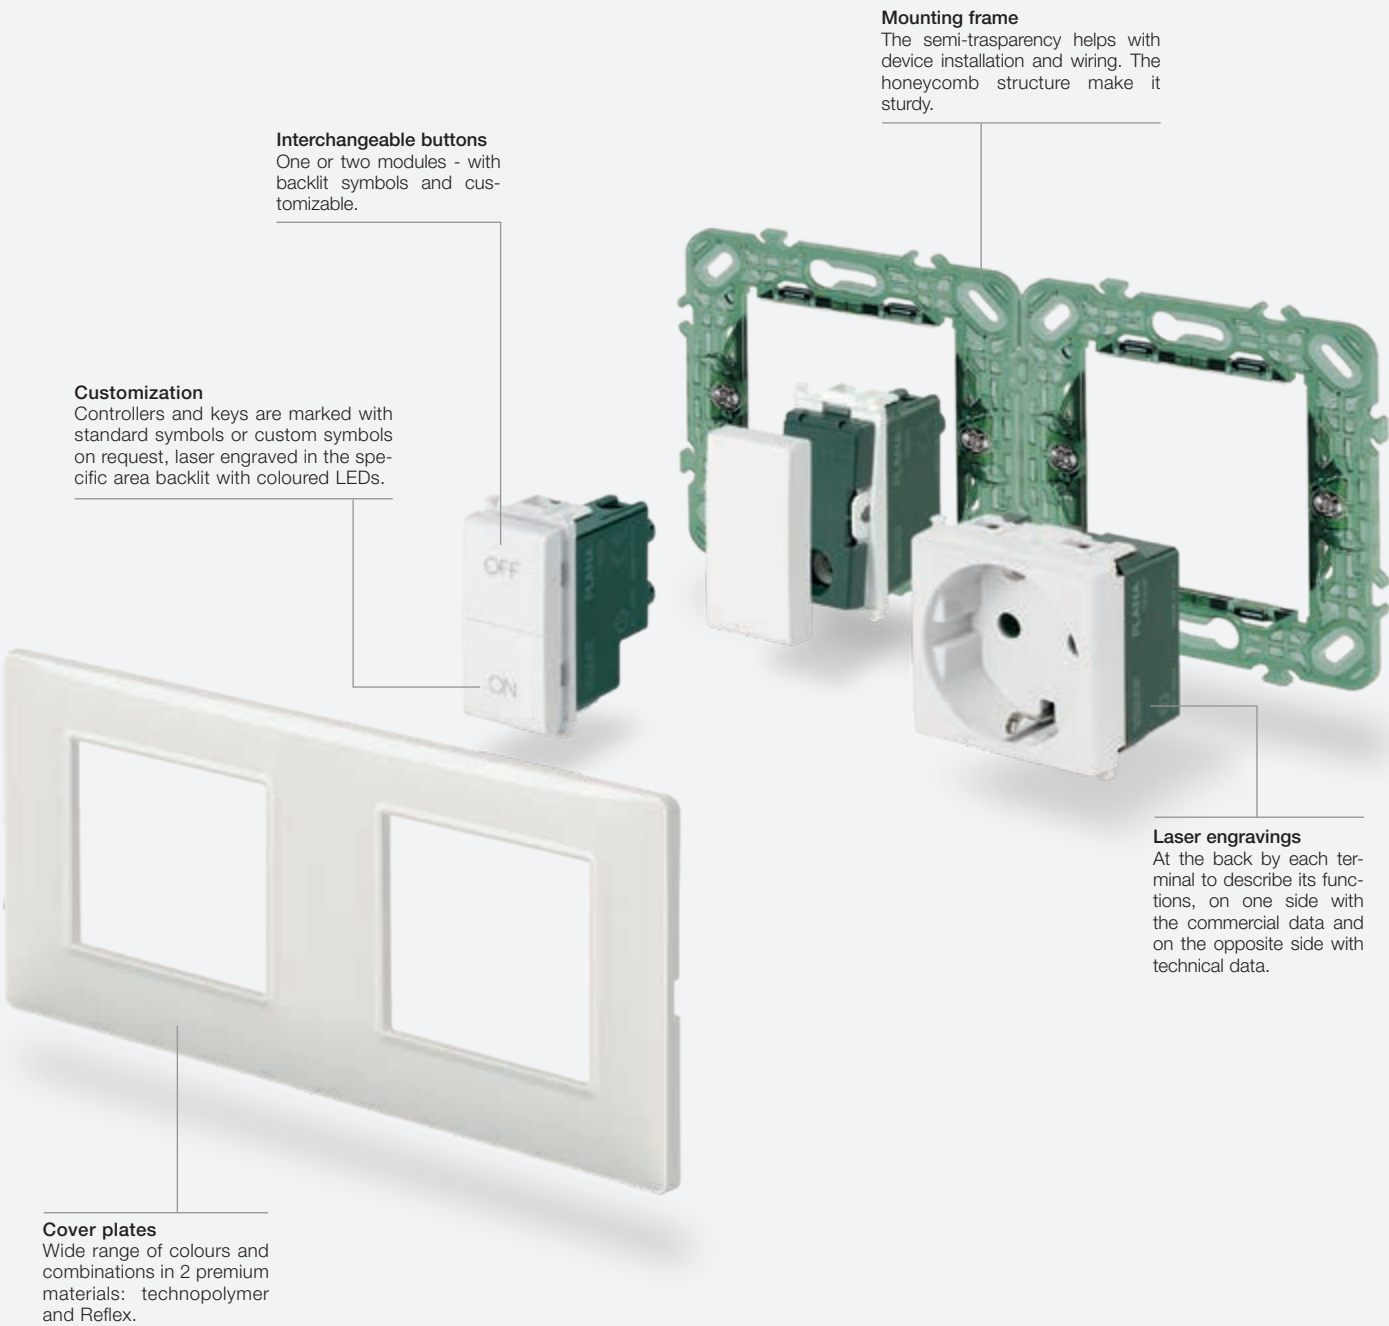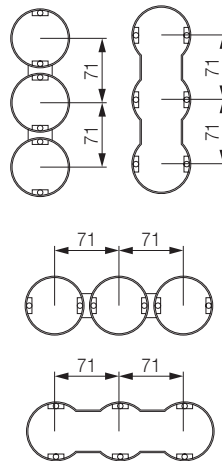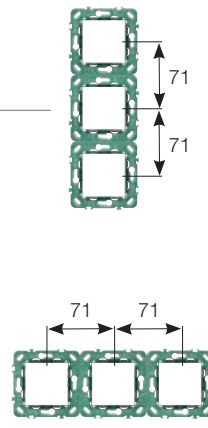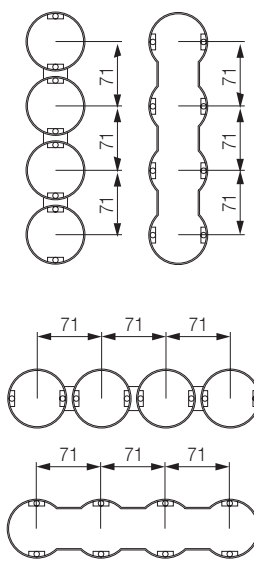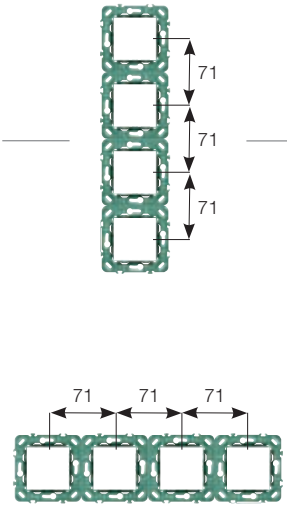ø 60 mm, ø 65x65 mm and 71 mm between centres
(German and French standards)



Composition	Box	Frame	Device	Cover plate
 2 modules, ø 60 and 65 mm mounting box			 1-gang switch, 2 modules	 2 modules
 2+2 modules, 71 mm between centres			 2 x 2 modules in vertical  2 x 2 modules in horizontal	 vertical way  horizontal way
 2+2+2 modules, 71 mm between centres			 3 x 2 modules in vertical  3 x 2 modules in horizontal	 vertical way  horizontal way
 2+2+2+2 modules, 71 mm between centres			 4 x 2 modules in vertical  4 x 2 modules in horizontal	 vertical way  horizontal way

Mounting features


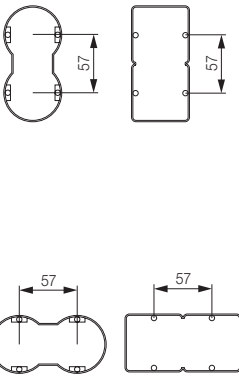
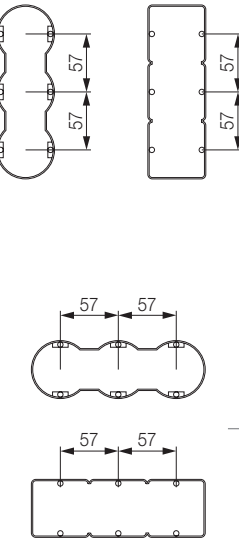
ø 60 mm, ø 65x65 mm and 57 mm between centres
(French standard)

Mounting frame
The semi-transparency helps with device installation and wiring. The honeycomb structure make it sturdy.

Interchangeable buttons
One or two modules - with backlit symbols and customizable.

Customization
Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.

Cover plates
Wide range of colours and combinations in 3 premium materials: metal, natural wood and technopolymer - Reflex.

Composition	Box	Frame	Device	Cover plate
 2 modules, ø 60 and 65 mm mounting box			 1-gang switch, 2 modules	 2 modules
 2 + 2 modules, 57 mm between centres			 1 x 2 modules and 2 x 1 module in vertical  1 x 2 modules and 2 x 1 module in horizontal	 vertical way  horizontal way
 2 + 2 + 2 modules, 57 mm between centres			 2 x 2 modules and 2 x 1 module in vertical  2 x 2 modules and 2 x 1 module in horizontal	 vertical way  horizontal way

* For other combinations, see the installation types from page 362

White	Silver
Blank modules and cable outlets	
 14041 Blank module 14041.AB As above, antibacterial treatment. Depth: 10 mm	 14041.SL Blank module. Depth: 10 mm
 14042 Blank module - 2 modules. Depth: 10 mm	 14042.SL Blank module - 2 modules. Depth: 10 mm
 14044 Cable outlet. Depth: 19,5 mm	 14044.SL Cable outlet. Depth: 19,5 mm
 14046² Cable outlet + terminalbar 20 A. Depth: 22,1 mm	 14046.SL² Cable outlet + terminalbar 20 A. Depth: 22,1 mm
 14047² 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm	 14047.SL² 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm
 14049³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm	 14049.SL³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm
1P 1-way switches 250 V~ (lightable°)	
 14000 10 AX	 14000.SL 10 AX
 14001 16 AX 14001.AB As above, antibacterial treatment. Depth: 24 mm	 14001.SL 16 AX. Depth: 24 mm
 14002 20 AX. Depth: 24 mm	 14002.SL 20 AX. Depth: 24 mm
 14002.2 20 AX, - 2 modules. Depth: 24 mm	 14002.2.SL 20 AX, - 2 modules. Depth: 24 mm
 14003 20 AX, 3-gang Depth: 24 mm	 14003.SL 20 AX, 3-gang Depth: 24 mm
1P 1-way switches 250 V~, screwless terminals (lightable°)	
 14000.FX 10 AX. Depth: 25,7 mm	 14000.FX.SL 10 AX. Depth: 25,7 mm
 14000.FX.2 10 AX - 2 modules. Depth: 25,7 mm	 14000.FX.2.SL 10 AX - 2 modules. Depth: 25,7 mm

White	Silver
2P 1-way switches 250 V~ (lightable°)	
 14015 16 AX	 14015.SL 16 AX. Depth: 24 mm
 14015.2 16 AX, - 2 modules. Depth: 24 mm	 14015.2.SL 16 AX, - 2 modules. Depth: 24 mm
 14020 32 A, - 2 modules. Depth: 29,5 mm	
2P 1-way switches 250 V~ (lightable°)	
 14016 20 AX. Depth: 24 mm	 14016.SL 20 AX. Depth: 24 mm
 14016.2 20 AX, ON/OFF, - 2 modules. Depth: 24 mm	 14016.2.SL 20 AX, ON/OFF, - 2 modules. Depth: 24 mm
 14016.WH 20 AX, Water/Heater. Depth: 24 mm	 14016.WH.SL 20 AX, Water/Heater. Depth: 24 mm
 14016.2.WH 20 AX, Water/Heater - 2 modules. Depth: 24 mm	 14016.2.WH.SL 20 AX, Water/Heater - 2 modules. Depth: 24 mm
 14017 32 A, 1-gang, ON/OFF. Depth: 22,5 mm	 14017.WH.SL 32 A, 1-gang, Water/Heater. Depth: 22,5 mm
 14017.WH 32 A, 1-gang, Water/Heater. Depth: 22,5 mm	
 14018 45 A, 1-gang, ON/OFF. Depth: 22,5 mm	 14018.SL 45 A, 1-gang, ON/OFF. Depth: 22,5 mm
 14018.CK 45 A, 1-gang, cooker unit. Depth: 22,5 mm	 14018.CK.SL 45 A, 1-gang, cooker unit. Depth: 22,5 mm

White	Silver
2P 1-way switches 250 V~ (lightable°)	
 14019 45 A, 1-gang, ON/OFF for 2-gang boxes. Depth: 22,5 mm 14019.CK 45 A, 1-gang, cooker unit for 2-gang boxes. Depth: 22,5 mm	 14019.SL 45 A, 1-gang, ON/OFF for 2-gang boxes. Depth: 22,5 mm 14019.CK.SL 45 A, 1-gang, cooker unit for 2-gang boxes. Depth: 22,5 mm
Badge switch (lightable°)	
 14466 Badge switch. Depth: 27,4 mm	 14466.SL Badge switch. Depth: 27,4 mm
1P 2-way switches 250 V~ (lightable°)	
 14004 10 AX 14005 16 AX 14005.AB As above, antibacterial treatment. Depth: 24 mm 14004.2 10 AX, - 2 modules 14005.2 16 AX, - 2 modules. Depth: 24 mm	 14004.SL 10 AX 14005.SL 16 AX, Depth: 24 mm 14004.2.SL 10 AX, - 2 modules 14005.2.SL 16 AX, - 2 modules. Depth: 24 mm
1P 2-way switches 250 V~, screwless terminals (lightable°)	
 14004.FX 10 AX. Depth: 25,7 mm 14004.FX.2 10 AX, - 2 modules. Depth: 25,7 mm	 14004.FX.SL 10 AX. Depth: 25,7 mm 14004.FX.2.SL 10 AX, - 2 modules. Depth: 25,7 mm
1P 2-way switches 250 V~ (lightable°)	
 14006 20 AX. Depth: 24 mm 14006.2 20 AX, - 2 modules. Depth: 24 mm 14007 20 AX, 3-gang - 2 modules. Depth: 30,6 mm	 14006.SL 20 AX. Depth: 24 mm 14006.2.SL 20 AX, - 2 modules. Depth: 24 mm 14007.SL 20 AX, 3-gang - 2 modules. Depth: 30,6 mm

White	Silver
View Wireless connected 2-way switches	
 14592.0 Mechanism, 100-240 V 50/60 Hz output relay for 500 W incan- descent lamps, 100 W LED lamps, 250 VA electronic transformers, 60 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for actuator push button or recall a scenario. To complete with 1-, 2- or 3-module buttons. Depth: 36,5 mm 	
1P reversing switches 250 V~ (lightable°)	
 14013 16 AX 14013.AB As above, antibacterial treatment. Depth: 24 mm 14013.2 16 AX, - 2 modules. Depth: 24 mm	 14013.SL 16 AX. Depth: 24 mm 14013.2.SL 16 AX, - 2 modules. Depth: 24 mm
1P reversing switches 250 V~, screwless terminals (lightable°)	
 14009.FX 10 AX. Depth: 27,7 mm 14009.FX.2 10 AX - 2 modules. Depth: 27,7 mm	 14009.FX.SL 10 AX. Depth: 27,7 mm 14009.FX.2.SL 10 AX - 2 modules. Depth: 27,7 mm
1P NO push buttons 250 V~ (lightable°)	
 14008 10 A 14008.AB As above, antibacterial treatment. Depth: 24 mm 14008.2 10 A - 2 modules. Depth: 24 mm 14008.2.C 10 A, bell symbol - 2 modules. Depth: 24 mm 14008.2.L 10 A, light symbol - 2 modules. Depth: 24 mm	 14008.SL 10 A. Depth: 24 mm 14008.2.SL 10 A - 2 modules. Depth: 24 mm 14008.2.C.SL 10 A, bell symbol - 2 modules. Depth: 24 mm 14008.2.L.SL 10 A, light symbol - 2 modules. Depth: 24 mm
1P NO push buttons 250 V~, screwless terminals (lightable°)	
 14008.FX 10 A. Depth: 25,7 mm 14008.FX.2 10 A - 2 modules. Depth: 25,7 mm	 14008.FX.SL 10 A. Depth: 25,7 mm 14008.FX.2.SL 10 A - 2 modules. Depth: 25,7 mm



White	Silver
1P NC push buttons 250 V~ (lightable°)	
 14010 10 A, Depth: 24 mm	 14010.SL 10 A, Depth: 24 mm

Quid - Magnetic relay module for lighting (backfit)		
 03991 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, for backfit	 03992 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 input for reset push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, luminous signalling of load status, for backfit	 03993 ON/OFF sequence pulse relay module, 1 input for NO push button, 2 NO 10 A 220-240 V~ 50/60 Hz sequence relay outputs, for backfit
 ▲03994 Quid magnetic relay modulewith sequential ON/OFF pulses, 1 input for NO push-button on phase (L) or on neutral (N), 1 NO relay output 10 AX 220-240 V~ 50/60 Hz	 00932 Pre-wired LED unit for signalling the load status, for 03992, supply voltage 220-240 V~ 50/60 Hz, 0,5 W, green	

Lightable° mechanisms 250 V~ (common devices for the two versions)					
 14000.0 1P 10 AX 1-way switch. Depth: 24 mm	 14001.0 1P 16 AX 1-way switch. Depth: 24 mm	 14015.0 2P 16 AX 1-way switch. Depth: 24 mm	 14004.0 1P 10 AX 2-way switch. Depth: 24 mm	 14005.0 1P 16 AX 2-way switch. Depth: 24 mm	 14013.0 1P 16 AX reversing switch. Depth: 24 mm
 14008.0 1P NO 10 A push button. Depth: 24 mm	 14010.0 1P NC 10 A push button. Depth: 24 mm	 14002.0 1P 20 AX 1-way switch. Depth: 24 mm	 14016.0 2P 20 AX 1-way switch. Depth: 24 mm	 14006.0 1P 20 AX 2-way switch. Depth: 24 mm	

Lightable° mechanisms 250 V~, screwless terminals (common devices for the two versions)			
 14000.FX.0 1P 10 AX 1-way switch. Depth: 25,7 mm	 14004.FX.0 1P 10 AX 2-way switch. Depth: 25,7 mm	 14009.FX.0 1P 10 AX reversing switch. Depth: 27,7 mm	 14008.FX.0 1P NO 10 A push button. Depth: 25,7 mm

White				Silver			
1-module interchangeable buttons (lightable°)							
							
14021 No symbol	14021.G Customizable	14026 With diffuser	14026.DND Do Not Disturb, with diffuser	14021.SL No symbol	14021.G.SL Customizable	14026.SL With diffuser	14026.DND.SL Do Not Disturb, with diffuser
							
14026.PLS Please Clean, with diffuser	14029 With name- plate	14021.C Bell symbol	14021.L Light symbol	14026.PLS.SL Please Clean, with diffuser	14029.SL With name- plate	14021.C.SL Bell symbol	14021.L.SL Light symbol
							
14021.P Key symbol	14021.99 O I symbols for DP switches	14021.PS 'Press' marked		14021.PSL Key symbol	14021.99.SL O I symbols for DP switches	14021.PS.SL 'Press' marked	
2-module interchangeable buttons (lightable°)							
							
14022 No symbol	14022.AB No symbol, antibacterial treatment	14022.G Customizable	14027 With diffuser	14022.SL No symbol	14022.G.SL Customizable	14027.SL With diffuser	
							
14022.C Bell symbol	14022.L Light symbol	14022.P Key symbol		14022.C.SL Bell symbol	14022.L.SL Light symbol	14022.P.SL Key symbol	
							
14022.99 O I symbols for 14015.0 switches				14022.99.SL O I symbols for 14015.0 switches			

White	Silver
3-module interchangeable buttons 250 V~ (lightable°)	
 14023 No symbol  14023.G Customizable	 14023.SL No symbol  14023.G.SL Customizable
 14028 With diffuser  14023.C Bell symbol	 14028.SL With diffuser  14023.C.SL Bell symbol
1P special switches 250 V~	
 14052 NO 10 A, cord-operated. Depth: 24 mm  14052.AB NO 10 A, cord-operated, antibacterial treatment. Depth: 24 mm  14053 NO 10 A, cord-operated. Depth: 24 mm	 14052.SL NO 10 A, cord-operated. Depth: 24 mm  14053.SL NC 10 A, cord-operated. Depth: 24 mm
 14050 NO 10 A, with lightable name-plate - 2 modules. Depth: 24 mm	
Additional 1P switches 250 V~	
 14056.33 10 A, NO+ NC-contact, OFF symbol. Depth: 28 mm  14056.34 10 A, NO+ NC-contact, ON symbol. Depth: 28 mm  14058 Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 28 mm	 14056.33.SL 10 A, NO+ NC-contact, OFF symbol. Depth: 28 mm  14056.34.SL 10 A, NO+ NC-contact, ON symbol. Depth: 28 mm  14058.SL Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 28 mm
1P NO 10 A push buttons 250 V~	
 14066 Two NO 10 A, independents. Depth: 28 mm  14068.B With white diffuser (for signalling unit). Depth: 28 mm	 14066.SL Two NO 10 A, independents. Depth: 28 mm  14068.B.SL With white diffuser (for signalling unit). Depth: 28 mm

White	Silver
Switches 250 V~	
 14060 2P 10 AX 2-way switch, OFF-central. Depth: 32,5 mm  14062 1P NO 10 A 2-gang push buttons, interlocked. Depth: 28 mm	 14060.SL 2P 10 AX 2-way switch, OFF-central. Depth: 32,5 mm  14062.SL 1P NO 10 A 2-gang push buttons, interlocked. Depth: 28 mm
Quid - Electronic 2-way switch for roller shutter	
 14196 Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 40,5 mm	 14196.SL Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 40,5 mm
Quid - Electronic relay module and control unit module for roller shutters (backfit)	
 03996 Centralizable relay module, slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving, for backfit or junction boxes installation	 03997 control unit module, 2 inputs for NO push button, 6 outputs for Quid roller shutter relay module (03996), 220-240 V~ 50/60 Hz power supply, for backfit or junction boxes installation
View Wireless connected control device for roller shutter	
 14594.0 Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario, favourite position recall function. To complete with 2 1-module half-button. Depth: 36,5 mm	 Bluetooth®  zigbee certified product
 14755.2 2 1-module interchangeable half-button, arrows symbol	 14755.2.SL 2 1-module interchangeable half-button, arrows symbol
2P key-operated switches 250 V~ (add .CU to the basic code for switches with 000 unified key)	
 14083 16 AX 1-way switch. Depth: 30,5 mm  14083.S 16 AX 1-way switch, key removable in "O" (OFF) position. Depth: 30,5 mm  14087 NO 16 A push button. Depth: 30,5 mm	 14083.SL 16 AX 1-way switch. Depth: 30,5 mm  14083.S.SL 16 AX 1-way switch, key removable in "O" (OFF) position. Depth: 30,5 mm  14087.SL NO 16 A push button. Depth: 30,5 mm

White

Silver

Dimmers**



14135.1
MASTER,
universal
14135.1.120
As above,
120 V~.
Depth:
40,5 mm



14136.1
MASTER,
universal, with
potentiometer.
Depth:
40,5 mm



14136.AB.1
MASTER,
universal, with
potentiometer,
antibacterial
treatment.
Depth:
40,5 mm



14150
100-500 W,
potentiometer,
230 V~.
Depth:
39 mm



14135.1.SL
MASTER,
universal
14135.1.120.SL
As above,
120 V~.
Depth:
40,5 mm



14136.1.SL
MASTER,
universal, with
potentiometer.
Depth:
40,5 mm



14150.SL
100-500 W,
potentiometer,
230 V~.
Depth:
39 mm



14153
100-500 W
push-push +
potentiometer,
230 V~.
Depth:
39 mm



14147
30-500 W
30-300 VA,
potentiometer,
120 V~.
Depth:
39 mm



14153.SL
100-500 W
push-push +
potentiometer,
230 V~.
Depth:
39 mm



14147.SL
30-500 W
30-300 VA,
potentiometer,
120 V~.
Depth:
39 mm

Dimmer - controllable loads

Type	UNIVERSAL							
LOADS	14135.1				14136.1 - 14136.AB.1			
	2-wire connection		3-wire connection		2-wire connection		3-wire connection	
	LE	TE	LE	TE	LE	TE	LE	TE
Incandescence	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W
LED	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps
Electronic transformers for halogen	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 
Supply units for LED (arts. 01874, 01875)			max 10 units	NOT useful			max 10 units	NOT useful
Step marker lamps (art. Δ 02662)			max 10 lamps	NOT useful			max 10 lamps	NOT useful

White

Silver

Dimmer - controllable loads

Type	STANDARD	
LOADS	DIMMER	
	14150 (with rotary potentiometer)	14153 (with push-push switch and rotary potentiometer control)
Incandescence	100 - 500 W	100 - 500 W

Electronic supply unit



01876
230 V~ 50 Hz, for controllable LED RGB lamps, 12-24 Vdc

Infrared switches



14181
Lighting switch,
NO 6 A 230 V~
relay output,
50/60 Hz



00801
Orientable
support
- 1 module



00805
Adaptor for
orientable
support flush
mounting
- 2 modules.
Depth: 36,5 mm



00800
Frame for orientable
support surface
mounting



14181.SL
Lighting switch,
NO 6 A 230 V~
relay output,
50/60 Hz



00801.20
Orientable
support
- 1 module



00805.20
Adaptor for
orientable
support flush
mounting
- 2 modules.
Depth: 36,5 mm



00800.20
Frame for orientable
support surface
mounting



02690
Lighting switch, 2000 W incandescent lamps,
CFL 10-1000 W, LED 100 W, 220-240 V~
50/60 Hz, ceiling mounting

320

* Not to be used in European Countries

New article

Δ Available until stocks last

° Lamps and signalling units, page 458

** Please refer to instruction sheets for load type

321


White		Silver	
Set/Reset push buttons			
 14183 For emergency call, 2 NO 5 A 250 V~ relay outputs, supply 12 V~/12-24 Vdc (SELV) - 2 modules. Depth: 36 mm		 14183.SL For emergency call, 2 NO 5 A 250 V~ relay outputs, supply 12 V~/12-24 Vdc (SELV) - 2 modules. Depth: 36 mm	
Radiofrequency kits			
		 0K03906.04 Kit Friends of Hue. Contains: • 1 4-button RF device 03906 • 1 mounting frame 14507, white • 2 buttons 14506, white • 1 2-module cover plate 14642.01, white	
Radiofrequency smart devices			
 03955 4-button flat device with RF transmission, 868 MHz, EnOcean ® standard, to be completed with buttons 14506+14506.2 - 2 modules		 01796.2 Multi-function actuator with relay output NO 10 A 230 V~ programmable with switch function for local control, transferable local input as ON/OFF control for other EnOcean ® actuators, 230 V~ 50/60 Hz power supply	
 03925 4-button flat device with RF transmission, 2.4 GHz, Bluetooth ® Low Energy <i>wireless technology</i> , to be completed with buttons 14506+14506.2 - 2 modules		Compatible with CASAMBI Compatible with View Wireless system	
 03905 4-button flat device with RF transmission, 2.4 GHz, ZigBee Green Power standard, to be completed with buttons 14506+14506.2 - 2 modules		 03906 4-button flat device with RF transmission, 2.4 GHz, ZigBee Green Power and Friends of Hue standard, to be completed with buttons 14506 - 2 modules	
 20507.B Frame for RF devices surface mounting, white		 20507 Frame for RF devices surface mounting, grey	
 14506 Pair of 1-module buttons for RF devices, customizable		 14506.SL Pair of 1-module buttons for RF devices, customizable	
 14506.2 2-module button for RF devices, customizable		 14506.2.SL 2-module button for RF devices, customizable	

White					Silver				
SICURY 2P+E Italian standard socket outlets 250 V~									
									
14201 10 A, P11. Depth: 25 mm	14203 Bpresa 16 A, P17/11 14203.AB As above, antibacterial treatment. Depth: 25 mm	14209 16 A. P30 - 2 modules. Depth: 28,4 mm	14210 16 A, universal - 2 modules 14210.AB As above, antibacterial treatment. Depth: 25 mm	14210.C.AB 16 A, universal P40, with cover, antibacterial material - 2 modules. Depth: 26.3 mm	14201.SL 10 A, P11. Depth: 25 mm	14203.SL Bpresa 16 A, P17/11. Depth: 25 mm	14209.SL 16 A. P30 - 2 modules. Depth: 28,4 mm	14210.SL 16 A, universal - 2 modules. Depth: 25 mm	14210.C.AB.R 16 A, universal P40, with cover, antibacterial mate- rial - 2 modules. Depth: 26.3 mm
View Wireless connected control device for socket outlet									
 VIEW IoT smart life  Bluetooth®  zigbee certified product					 VIEW IoT smart life  Bluetooth®  zigbee certified product				
14593 Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 38,5 mm					14593.SL Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 38,5 mm				
SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)									
									
14203.R Bpresa 16 A P17/11, red	14209.A 16 A P30, orange - 2 modules. Depth: 28,4 mm	14209.R 16 A P30, red - 2 modules. Depth: 28,4 mm	14209.V 16 A P30, green - 2 modules. Depth: 28,4 mm	14210.AB.A 16 A, universal, orange, antibacterial treatment - 2 modules. Depth: 25 mm	14210.R 16 A, universal, red - 2 modules 14210.AB.R As above, antibacterial treatment. Depth: 25 mm	14210.AB.V 16 A, universal, green, antibacterial treatment - 2 modules. Depth: 25 mm			
14203.AB.R As above, antibacterial treatment. Depth: 25 mm									
Socket outlets 250 V~ - German standard									
									
14208 SICURY 2P+E 16 A, German - 2 modules 14208.AB As above, antibacterial treatment. Depth: 28,4 mm	14208.C SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 29,6 mm	14208.SL SICURY 2P+E 16 A, German - 2 modules. Depth: 28,4 mm				14208.C.SL SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 29,6 mm			


Socket outlets

White			Silver		
Socket outlets 250 V~, screwless terminals - German standard					
					
14208.FX SICURY 2P+E 16 A, German - 2 modules. Depth: 32,5 mm	14208.FX.C SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 29,6 mm	▲14208.USB SICURY 2P+T 16 A German standard, with 1 USB-C output 18 W - 2 modules. Depth: 31.4 mm	14208.FX.SL SICURY 2P+E 16 A, German - 2 modules. Depth: 32,5 mm	14208.FX.C.SL SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 29,6 mm	▲14208.USB.SL SICURY 2P+T 16 A German standard, with 1 USB-C output 18 W - 2 modules. Depth: 31.4 mm
Socket outlets 250 V~ - French standard					
					
14212 SICURY 2P+E 16 A, French - 2 modules 14212.AB As above, antibacterial treatment. Depth: 25,4 mm	14212.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 26,7 mm		14212.SL SICURY 2P+E 16 A, French - 2 modules. Depth: 25,4 mm	14212.C.SL SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 26,7 mm	
Socket outlets 250 V~, screwless terminals - French standard					
					
14212.FX SICURY 2P+E 16 A, French - 2 modules. Depth: 29,5 mm	14212.FX.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 29,9 mm		14212.FX.SL SICURY 2P+E 16 A, French - 2 modules. Depth: 29,5 mm	14212.FX.C.SL SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 29,9 mm	
Socket outlets 250 V~ - English standard					
					
14214 SICURY 2P+E 5 A, English - 2 modules. Depth: 16,8 mm	14218 SICURY 2P+E 16 A, English - 2 modules. Depth: 25,2 mm	14219 2P+E 13 A, English - 2 modules. Depth: 17 mm	14214.SL SICURY 2P+E 5 A, English - 2 modules. Depth: 16,8 mm	14218.SL SICURY 2P+E 16 A, English - 2 modules. Depth: 25,2 mm	14219.SL 2P+E 13 A, English - 2 modules. Depth: 17 mm
Socket outlets 250 V~ - Swiss standard					
					
14226 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 41 mm			14226.SL 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 41 mm		



Socket outlets

White				Silver			
Socket outlets 250 V~ - Euro-American standard							
							
14233 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28 mm	14234 SICURY 2P 16 A, Euro-American. Depth: 27 mm	14248 SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 25,5 mm	14249 Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 23,5 mm	14233.SL 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28 mm	14234.SL SICURY 2P 16 A, Euro-American. Depth: 27 mm	14248.SL SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 25,5 mm	14249.SL Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 23,5 mm
Socket outlets 127 V~ - USA and Arabian standard							
							
14242 SICURY 2P+E 15 A, USA and Arabian	14243 Two SICURY 2P+E 15 A, USA and Arabian - 3 modules			14242.SL SICURY 2P+E 15 A, USA and Arabian	14243.SL Two SICURY 2P+E 15 A, USA and Arabian - 3 modules		
14245 2P+E 15 A, USA and Arabian. Depth: 26,4 mm	14246 Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25 mm			14245.SL 2P+E 15 A, USA and Arabian. Depth: 26,4 mm	14246.SL Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25 mm		
Socket outlets 250 V~ - American standard							
							
14247 2P+E 15 A, American. Depth: 26,4 mm				14247.SL 2P+E 15 A, American. Depth: 26,4 mm			
Socket outlets 250 V~ - Israeli standard							
							
14240 SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm				14240.SL SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm			
Socket outlets 250 V~ - Argentinian standard							
							
14250 SICURY 2P+E 10 A, Argentinian. Depth: 26 mm	14253 SICURY 2P+E 20 A, Argentinian - 2 modules. Depth: 27,8 mm			14250.SL SICURY 2P+E 10 A, Argentinian. Depth: 26 mm	14253.SL SICURY 2P+E 20 A, Argentinian - 2 modules. Depth: 27,8 mm		

Socket outlets

White		Silver	
Socket outlets 250 V~ - Chinese standard			
			
14254 SICURY 2P+E 16 A, Chinese - 2 modules. Depth: 27,8 mm		14254.SL SICURY 2P+E 16 A, Chinese - 2 modules. Depth: 27,8 mm	
Socket outlets 250 V~ - Australian standard			
			
14261 SICURY 2P+E 10 A, Australian - 2 modules. Depth: 28,2 mm		14262 SICURY 2P+E 15 A, Australian - 2 modules. Depth: 28,2 mm	
			
14261.SL SICURY 2P+E 10 A, Australian - 2 modules. Depth: 28,2 mm		14262.SL SICURY 2P+E 15 A, Australian - 2 modules. Depth: 28,2 mm	
Socket outlets 250 V~ - Brazilian standard			
			
14264 SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm		14265 SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm	
			
14264.SL SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm		14265.SL SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm	
Socket outlets 250 V~ - Multistandard			
			
14255 SICURY 2P+E 13 A, multistandard - 3 modules. Depth: 18,54 mm		*14257 SICURY 2P+E 13 A, multistandard - 2 modules. Depth: 17,7 mm	
			
14255.SL SICURY 2P+E 13 A, multistandard - 3 modules. Depth: 18,54 mm		*14257.SL SICURY 2P+E 13 A, multistandard - 2 modules. Depth: 17,7 mm	
Socket outlets 250 V~ - British standard (lightable with signalling unit 00930°)			
			
14221 ⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm		14222 ⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm	
			
14221.SL ⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm		14222.SL ⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm	

Socket outlets

White		Silver	
Socket outlets 250 V~ - British standard (lightable with signalling unit 00930°)			
			
14215⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm	14217⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm	14215.SL⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm	14217.SL⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm
British Standard 250 V~ - socket outlets and USB supply units			
			
■ 14223.A SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-A. Depth: 21 mm	14223.C SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-C. Depth: 22,8 mm	■ 14223.A.SL SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-A. Depth: 21 mm	14223.C.SL SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-C. Depth: 22,8 mm
			
■ 14224.AC SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches, 1 USB-A and 1 USB-C. Depth: 21 mm	14224.CC SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches and 2 USB-C. Depth: 22,8 mm	■ 14224.AC.SL SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches, 1 USB-A and 1 USB-C. Depth: 21 mm	14224.CC.SL SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches and 2 USB-C. Depth: 22,8 mm
			
■ 14266.A SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-A. Depth: 21 mm	14266.C SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-C. Depth: 22,8 mm	■ 14266.A.SL SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-A. Depth: 21 mm	14266.C.SL SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-C. Depth: 22,8 mm

Socket outlets

White	Silver
-------	--------

Possibles matches - Foreign standard plugs and socket outlets

SOCKET OUTLET PLUG	German	French	English				Swiss	Israeli	British standard			
	14208...	14212...	14214	14218	14219	14220	14226	14240	14221	14222	14215	14217
S10 Italian standard	●	●						●				
2P 2,5 A Europlug	●	●					●	●				
2P+E 16 A 250 V~ German standard	●							○				
2P+E 16 A 250 V~ German and French standards	●	●						○				
2P 16 A 250 V~ German and French standards	●	●						●				
2P+E 16 A 250 V~ French standard		●						○				
2P+E 10 A 250 V~ Swiss standard							●					
2P+E 16 A 250 V~ Israeli standard								●				
2P+E 5 A 250 V~ English standard			●								●	
2P+E 13 A 250 V~ English standard					●	●			●	●		
2P+E 16 A 250 V~ English standard				●								
2P+E 15 A 250 V~ English standard												●
2P 13 A 220 V~ Saudi Arabian standard									●	●		

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

Possibles matches - Foreign standard plugs and socket outlets

SOCKET OUTLET PLUG	Multistandard		American		Euroamerican				American Saudi Arabian			
	14257	14255	14247	14296	14233	14234	14248	14249	20242	20245	20243	20246
S10 Italian standard	●	●			●	●	●	●				
2P 2,5 A Europlug	●	●			●	●	●	●				
Spina 2P+E 16 A 250 V~ German standard	○	○			○	○	○	○				
2P+E 16 A 250 V~ German and French standards					○	○	○	○				
2P 16 A 250 V~ German and French standards					●	●	●	●				
2P+E 16 A 250 V~ French standard					○	○	○	○				
2P+E 15 A 125 V~ American standard				●			●	●				
2P+E 15 A 250 V~ American standard			●									
2P+E 10 A 250 V~ Swiss standard	●	●										
2P+E 5 A 250 V~ English standard	●	●										
2P+E 13 A 250 V~ English standard	●	●										
2P+E 15 A 125 V~ American standard									●	●	●	●
2P 15 A 127 V~ American and Saudi Arabian standards									●	●	●	●
2P+E 10 A 250 V~ Brazilian standard	●	●										
2P+E 10 A 250 V~ Chinese standard	●	●										
2P+E 10 A 250 V~ Australian standard	●	●										

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

Socket outlets

White	Silver
-------	--------

Possibles matches - Foreign standard plugs and socket outlets

SOCKET OUTLET PLUG	Argentinian		Brazilian		Chinese	Australian	
	14250	14253	14264	14265	14254	20261	14262
2P 2,5 A Europlug			●	●			
2P+E 10 A 250 V~ Argentinian standard	●						
2P+E 20 A 250 V~ Argentinian standard		●					
2P+E 10 A 250 V~ Brazilian standard			●	●			
2P+E 20 A 250 V~ Brazilian standard				●			
2P+E 16 A 250 V~ Chinese standard					●		
2P+E 10 A 250 V~ Australian standard						●	
2P+E 15 A 250 V~ Australian standard							●

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

SICURY 2P+E interlocked socket outlets with CB and RCBO I_{Δn} 10 mA, (120-230 V~ 50/60 Hz)



14273
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 2 modules.
Depth: 38,7 mm



14276
16 A P30 250 V~,
1P+N C 16
- 3 modules.
Depth: 38,8 mm



14273.SL
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 2 modules.
Depth: 38,7 mm



14276.SL
16 A P30 250 V~,
1P+N C 16
- 3 modules.
Depth: 38,8 mm



14283
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 3 modules.
Depth: 38,7 mm



14286
16 A P30 250 V~,
1P+N C 16 - 4 modules.
Depth: 38,7 mm



14283.SL
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 3 modules.
Depth: 38,7 mm



14286.SL
16 A P30 250 V~,
1P+N C 16 - 4 modules.
Depth: 38,7 mm

Shaver supply units



14290
230 V~ 50/60 Hz, with 20 VA
isolating transformer, 230 V~ and
120 V~ outputs - 3 modules
14290.AB
As above,
antibacterial treatment.
Depth: 41 mm



14291⁶
230 V~ 50/60 Hz, with 20 VA
isolating transformer, 230 V~ and
120 V~ outputs. Depth: 41 mm



14290.SL
230 V~ 50/60 Hz, with 20 VA
isolating transformer, 230 V~ and
120 V~ outputs - 3 modules.
Depth: 41 mm



14291.SL⁶
230 V~ 50/60 Hz, with 20 VA
isolating transformer, 230 V~ and
120 V~ outputs. Depth: 41 mm

Socket outlets • Signal reception socket outlets

White			Silver		
250 V~ Italian standard socket outlets with USB power supply units					
					
14210.USB SICURY 2P+T 16 A universal, 1 USB C 5 V 3 A - 2 modules. Depth: 46.7 mm			14210.USB.SL SICURY 2P+T 16 A universal, 1 USB C 5 V 3 A - 2 modules. Depth: 46.7 mm		
USB supply unit					
					
14292 5 V 1,5 A, 1 USB-A, 120-230 V~ 50/60 Hz. Depth: 36 mm			14292.SL 5 V 1,5 A, 1 USB-A, 120-230 V~ 50/60 Hz. Depth: 36 mm		
					
Δ 14292.C 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm			Δ 14292.C.SL 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm		
					
▲ 14292.C.25 25 W, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm			▲ 14292.C.25.SL 25 W, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm		
					
Δ 14292.AC 5 V 2,4 A, USB-A+C, 120-240 V~ 50/60 Hz. Depth: 36 mm			Δ 14292.AC.SL 5 V 2,4 A, USB-A+C, 120-240 V~ 50/60 Hz. Depth: 36 mm		
					
▲ 14292.AC.15 15 W, 1 USB-A + 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm			▲ 14292.AC.15.SL 15 W, 1 USB-A + 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm		
					
14292.CC 15 W, 2 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm			14292.CC.SL 15 W, 2 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm		
					
Δ 14295 5 V 2,1 A, 2 USB-A for total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 36 mm			Δ 14295.SL 5 V 2,1 A, 2 USB-A for total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 36 mm		
					
14295.AC 15 W, USB-A+C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm			14295.AC.SL 15 W, USB-A+C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm		
					
14295.CC 15 W, 2 USB-C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm			14295.CC.SL 15 W, 2 USB-C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm		
					
14298 30W, USB C, 120-240 V~ 50/60 Hz - 2 modules. Depth: 32.35 mm			14298.SL 30W, USB C, 120-240 V~ 50/60 Hz - 2 modules. Depth: 32.35 mm		
					
14298.60 60W, USB C, 120-240 V~ 50/60 Hz - 2 modules. Depth: 31.9 mm			14298.60.SL 60W, USB C, 120-240 V~ 50/60 Hz - 2 modules. Depth: 31.9 mm		

Signal reception socket outlets

White		Silver	
Sound system			
			
21588.B Passive speaker, 8 Ω 10 W, with built-in 8-module frame. Depth: 48 mm	20587.B Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm	21588.N Passive speaker, 8 Ω 10 W, with built-in 8-module frame. Depth: 48 mm	20587.N Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm
			
14099 Volume control, 8 Ω 15 W - 2 modules. Depth: 29,7 mm			
			
			
14590¹ 4+4 W stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in <i>Bluetooth®</i> <i>wireless technology</i> receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36 mm		14590.SL¹ 4+4 W stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in <i>Bluetooth®</i> <i>wireless technology</i> receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36 mm	
¹ The article can be ordered with Bluetooth network customisation (see specifications on page 439)			
Special socket outlets			
			
14330 2P 6 A 24 V (SELV), for 01620 plug	14331 2P 6 A 24 V (SELV), for 01616/01617 plugs. Depth: 24 mm	14345 USB outlet, screw terminals. Depth: 30,9 mm	14330.SL 2P 6 A 24 V (SELV), for 01620 plug. Depth: 24 mm
14330.AB As above, antibacterial treatment. Depth: 24 mm			14331.SL 2P 6 A 24 V (SELV), for 01616/01617 plugs. Depth: 24 mm
			14345.SL USB outlet, screw terminals. Depth: 30,9 mm

Signal reception socket outlets

White	Silver
Special socket outlets	
 14335 3 RCA outlets, screw terminals. Depth: 23,4 mm  14346 HDMI outlet, Keystone connection. Depth: 36,4 mm  14346.H HDMI outlet, Keystone connection, with 90° cable. Depth: 29,4 mm	 14335.SL 3 RCA outlets, screw terminals. Depth: 23,4 mm  14346.SL HDMI outlet, Keystone connection. Depth: 36,4 mm  14346.H.SL HDMI outlet, Keystone connection, with 90° cable. Depth: 29,4 mm
 14583 Spring connector for speaker. Depth: 18,4 mm	 14583.SL Spring connector for speaker. Depth: 18,4 mm
Phone socket outlets	
 14320 RJ11, 6-position 4-contact (6/4) 14320.AB As above, antibacterial treatment. Depth: 32,4 mm  14324 Israeli standard, screw terminals. Depth: 32,4 mm  14327 8-contact, French standard - 2 modules. Depth: 21 mm	 14320.SL RJ11, 6-position 4-contact (6/4). Depth: 32,4 mm  14324.SL Israeli standard, screw terminals. Depth: 32,4 mm  14327.SL 8-contact, French standard - 2 modules. Depth: 21 mm
 14322 RJ11, 6-position 4-contact (6/4) + cover. Depth: 32,4 mm	 14322.SL RJ11, 6-position 4-contact (6/4) + cover. Depth: 32,4 mm

Signal reception socket outlets

White	Silver
Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output male and female)	
 14300.AB.01 Single connection 1 dB, antibacterial treatment. Depth: 22,6 mm  14300.01 Single connection 1 dB. Depth: 22,6 mm  14300.10 Through-line 10 dB. Depth: 22,4 mm	 14300.01.SL Single connection 1 dB. Depth: 22,6 mm  14300.10.SL Through-line 10 dB. Depth: 22,4 mm
Coaxial TV-RD-SAT 5-2400 MHz socket outlets, demix (2 outputs: male and F-type female)	
 14302.01 Single connection 1 dB - 2 modules. Depth: 22,4 mm  14302.10 Through-line 10 dB - 2 modules. Depth: 22,4 mm	 14302.01.SL Single connection 1 dB - 2 modules. Depth: 22,4 mm  14302.10.SL Through-line 10 dB - 2 modules. Depth: 22,4 mm
Coaxial TV-FM-SAT 5-2400 MHz socket outlets (3 outputs: male and female + F-type)	
 14303 Single connection 1 dB - 2 modules. Depth: 20,5 mm	 14303.SL Single connection 1 dB - 2 modules. Depth: 20,5 mm
Coaxial F-type socket outlets	
 14318 With F-type female connector. Depth: 10 mm	 14318.SL With F-type female connector. Depth: 10 mm
Coaxial TV 40-862 MHz socket outlets (1 output: female)	
 *14313 Single connection. Depth: 28 mm	 *14313.SL Single connection. Depth: 28 mm
Adaptor for TV-RD-SAT socket outlets	
 14319 For 2 or 3 outputs - 2 modules	 14319.SL For 2 or 3 outputs - 2 modules

Signal reception socket outlets

White					Silver
Terminal resistors and coaxial TV-RD-SAT 2400 MHz connectors					
					
16330 Z 75 Ω, for frequencies up to 2400 MHz	01644 Male, axial cable entry	01645 Female, axial cable entry	01634 Male, 90°-cable entry	01635 Female, 90°-cable entry	01654 Male, F-type, for RG59 cable
RJ45 data ports					
					
14338.8 Netsafe, Cat. 5e, UTP. Depth: 22,6 mm	14339.4 Netsafe, Cat. 5e, UTP 110. Depth: 23,7 mm	14339.5 Netsafe, Cat. 5e, FTP 110. Depth: 36,5 mm	14339.6 Netsafe, Cat. 6, UTP 110. Depth: 24 mm	14342.AB 8-position, 8-contact (8/8) antibacterial treatment. Depth: 32,6 mm	14338.8.SL Netsafe, Cat. 5e, UTP. Depth: 22,6 mm
					
14340.1 Panduit, Cat. 5e, UTP. Depth: 27,4 mm	14340.2 Panduit, Cat. 5e, FTP. Depth: 28 mm	14337.6 Cat. 6, UTP, shuttered. Depth: 25,1 mm	14339.11 Netsafe, Cat. 5e, UTP. Depth: 29,3 mm		14340.1.SL Panduit, Cat. 5e, UTP. Depth: 27,4 mm
					
14339.13 Netsafe, Cat. 6, UTP	14339.14 Netsafe, Cat. 6, FTP	14339.15 Netsafe, Cat. 6A, UTP. Depth: 29,3 mm	14339.16 Netsafe, Cat. 6A, FTP. Depth: 29,3 mm		14339.13.SL Netsafe, Cat. 6, UTP. Depth: 29,3 mm
14339.AB.13 As above, antibacterial treatment. Depth: 29,3 mm	14339.AB.14 As above, antibacterial treatment. Depth: 29,3 mm				14339.14.SL Netsafe, Cat. 6, FTP. Depth: 29,3 mm
					14339.15.SL Netsafe, Cat. 6A, UTP. Depth: 29,3 mm
					14339.16.SL Netsafe, Cat. 6A, FTP. Depth: 29,3 mm
Wi-Fi access point					
					
14195 54 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 230 V~ 50/60 Hz - 2 modules. Depth: 41 mm					14195.SL 54 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 230 V~ 50/60 Hz - 2 modules. Depth: 41 mm

Signal reception socket outlets • Signalling

White					Silver				
Adapters for data ports									
									
14337.C RJ45 Keystone + cover. Depth: 10 mm	14338.C RJ45 Cat. 5/6 AMP, Lucent T. Depth: 10 mm	14340.C For MINI-COM Panduit. Depth: 10 mm	14341.C For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 10 mm	14343.K Slanting adaptor for RJ45 Keystone. Depth: 10 mm	14337.C.SL RJ45 Keystone + cover. Depth: 10 mm	14338.C.SL RJ45 Cat. 5/6 AMP, Lucent T. Depth: 10 mm	14340.C.SL For MINI-COM Panduit. Depth: 10 mm	14341.C.SL For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 10 mm	14343.K.SL Slanting adaptor for RJ45 Keystone. Depth: 10 mm
Sockets for fibre optic cable									
									
14350.SC Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm	14350.LC Monomode 9/125 µm, with LC duplex adapter. Depth: 19,6 mm	14351.SC Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm	14351.LC Multimode 50/125 µm, with LC duplex adapter. Depth: 19,6 mm		14350.SC.SL Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm	14350.LC.SL Monomode 9/125 µm, with LC duplex adapter. Depth: 19,6 mm	14351.SC.SL Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm	14351.LC.SL Multimode 50/125 µm, with LC duplex adapter. Depth: 19,6 mm	
Electronic bells									
									
14380 3-sound sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 36 mm					14380.SL 3-sound sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 36 mm				
Ringtones/Buzzers									
									
14370.SR 12 V~ (SELV) 50/60 Hz. Depth: 31 mm	▲14372.SR 120 V~ 50/60 Hz. Depth: 31 mm	14373.SR 230 V~ 50/60 Hz. Depth: 31 mm			14370.SR.SL 12 V~ (SELV) 50/60 Hz. Depth: 31 mm	▲14372.SR.SL 120 V~ 50/60 Hz. Depth: 31 mm	14373.SR.SL 230 V~ 50/60 Hz. Depth: 31 mm		

Signalling

White		Silver			
Luminous indicator units (for 1 or 2 signalling units [°])					
					
14386.B White diffuser. Depth: 22 mm	14388 Neutral diffusers. Depth: 22 mm	14386.B.SL White diffuser. Depth: 22 mm	14388.SL Neutral diffusers. Depth: 22 mm		
Prismatic indicator units - 2 modules (for 14771 and 14777 lamps - not supplied)					
					
14387.B White diffuser. Depth: 24 mm	14387.R Red diffuser. Depth: 24 mm	14387.V Green diffuser. Depth: 24 mm	14387.B.SL White diffuser. Depth: 24 mm	14387.R.SL Red diffuser. Depth: 24 mm	14387.V.SL Green diffuser. Depth: 24 mm
Step marker lamps (with high-efficiency LED)					
					
14389 230 V~ 50/60 Hz - 2 modules. Depth: 36 mm	14381 230 V~ 50/60 Hz Depth: 36 mm	14389.SL 230 V~ 50/60 Hz - 2 modules. Depth: 36 mm	14381.SL 230 V~ 50/60 Hz Depth: 36 mm		

Signalling • Protection

White		Silver	
Emergency lighting fittings (with automatic emergency device)			
			
14384 With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules. Depth: 36 mm		14384.SL With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules. Depth: 36 mm	
Hand lamp and step marker lamp			
			
14397 Removable auxiliary emergency torch and controllable step marker lamp, high-efficiency LED 100–240 V~ 50/60 Hz, also usable as courtesy light or step marker controlled by an external switch, replaceable rechargeable Li-ion battery, 2.5 hours autonomy, neutral – 2 modules. Depth: 36.4 mm		14398 Auxiliary emergency lamp and controllable step marker, high-efficiency LED 100–240 V~ 50/60 Hz, also usable as courtesy light or step marker controlled by an external switch, non-replaceable rechargeable Li-ion battery, 2.5 hours autonomy, neutral. Depth: 35.2 mm	
Emergency lighting fittings			
			
02660.1 With high-efficiency LED, supply voltage 230 V~ 50/60 Hz, rechargeable Ni-Cd battery, built-in mounting frame for 7-module flush mounting boxes. Depth: 43 mm			
Rechargeable batteries			
			
00908 3 x Ni-MH 1,2 V 800 mAh, HR03 (AAA)	00910 Ni-MH 4,8 V 80 mAh battery, spare part for TORCIA	00913 Ni-Cd 4,8 V 800 mAh spare rechargeable battery for 02660.1	00914 Li-ion 3.7 V 250 mAh spare for removable hand lamps LED 14397
Protection devices			
			
14416 1P 16 A 250 V~ fuse carrier. Depth: 28 mm	14418 SCUDO, transient voltage suppressor. Depth: 34,3 mm	14416.SL 1P 16 A 250 V~ fuse carrier. Depth: 28 mm	14418.SL SCUDO, transient voltage suppressor. Depth: 34,3 mm

Protection • Detection

White			Silver		
1P circuit breakers (120-230 V~ 50/60 Hz)					
					
14404.10 C 10, breaking capacity 1500 A. Depth: 38 mm	14404.16 C 16, breaking capacity 1500 A. Depth: 38 mm		14404.10.SL C 10, breaking capacity 1500 A. Depth: 38 mm	14404.16.SL C 16, breaking capacity 1500 A. Depth: 38 mm	
1P+N circuit breakers (120-230 V~ 50/60 Hz)					
					
14405.06 C 6, breaking capacity 1500 A. Depth: 38 mm	14405.10 C 10, breaking capacity 3000 A. Depth: 38 mm	14405.16 C 16, breaking capacity 3000 A. Depth: 38 mm	14405.06.SL C 6, breaking capacity 1500 A. Depth: 38 mm	14405.10.SL C 10, breaking capacity 3000 A. Depth: 38 mm	14405.16.SL C 16, breaking capacity 3000 A. Depth: 38 mm
1P+N residual current breakers with overcurrent protection (RCBO) (120-230 V~ 50/60 Hz )					
					
14411.06 C 6, I _{Δn} 10 mA breaking capacity 1500 A - 2 modules. Depth: 38 mm	14411.10 C 10, I _{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 38 mm		14411.06.SL C 6, I _{Δn} 10 mA breaking capacity 1500 A - 2 modules. Depth: 38 mm	14411.10.SL C 10, I _{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 38 mm	
					
14411.16 C 16, I _{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 38 mm	14411.16.6 C 16, I _{Δn} 6 mA breaking capacity 3000 A - 2 modules. Depth: 38 mm	14411.16.30 C 16, I _{Δn} 30 mA breaking capacity 3000 A - 2 modules. Depth: 38 mm	14411.16.SL C 16, I _{Δn} 10 mA breaking capacity 3000 A - 2 modules. Depth: 38 mm	14411.16.6.SL C 16, I _{Δn} 6 mA breaking capacity 3000 A - 2 modules. Depth: 38 mm	


Climate

White		Silver
Thermostats		
		
14440 6(2) A 230 V~ change-over relay output - 2 modules. Depth: 36 mm	02970.B Dial thermostat with relay output 5(2) A 240 V~, heating and air conditioning in ON/OFF mode, class I temperature control device (contribution 1%), white LED backlighting with brightness control, supply voltage 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm	14440.SL 6(2) A 230 V~ change-over relay output - 2 modules. Depth: 36 mm
Connected thermostats		
	  Bluetooth®	
02973.B Dial thermostat with relay output 5(2) A 240 V~, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm		
Connected magnetic contact		
	  Bluetooth®	
03980 Connected magnetic contact for windows and doors, View Wireless, <i>Bluetooth® wireless technology</i> 5.0 standard technology for mesh system realization, 1 clean-contact input, powered with AA LR6 1,5 V batteries (not supplied), white. To use as accessory of connected thermostat or with gateway as sensor for notification of magnetic contact open/close		

Climate • Stand alone solutions

White		Silver	
Electronic sensors			
			
14432 Electronic temperature sensor. Depth: 23,4 mm	14433 Electronic active humidity sensor, 1 output 0-10 V or 4-20 mA, power supply 12/24V, - 2 modules. Depth: 36 mm	14432.SL Electronic temperature sensor. Depth: 23,4 mm	14433.SL Electronic active humidity sensor, 1 output 0-10 V or 4-20 mA, power supply 12/24V, - 2 modules. Depth: 36 mm
Switches for fan-coil regulation			
			
14095 Slide, 1P 6(2) A 250 V~, 4-position. Depth: 39 mm	14063 2P 10 AX 250 V~, 4-position. Depth: 33,5 mm	14095.SL Slide, 1P 6(2) A 250 V~, 4-position. Depth: 39 mm	14063.SL 2P 10 AX 250 V~, 4-position. Depth: 33,5 mm
Power meter		Wired temperature sensor	
	02960 Power meter, 3 inputs for sensor 01457, 50 W-10 kW detectable power, for DIN (60715 TH35) rail installation 1x17,5 mm. Supplied with 01457		02965.1 Wired temperature sensor, NTC 10 kΩ, cable length 3 m
Video door entry system			
			
14570 Inner light, with LED. Depth: 36 mm	14570.SL Inner light, with LED. Depth: 36 mm		

Hotel solutions





White		Silver	
Hotel solutions			
	02686.1 Control device with four push buttons 1P NO 24 vdc 50 mA max., to be completed with 2-module back-lightable interchangeable button caps - 2 modules. Depth: 15 mm		
	14026.DND Do Not Disturb, with diffuser		14026.PLS Please Clean, with diffuser
			14026.PLS.SL Please Clean, with diffuser
			14026.DND.SL Do Not Disturb, with diffuser
	14099 Volume control, 8 Ω 15 W - 2 modules. Depth: 29,7 mm		14097 1P NO 10 A 250 V~, for hotel "Do Not Disturb" and "Please Clean" lighttable - 2 modules. Depth: 27 mm
			00975 Card to customise for 14097 button
			02685 4 signalling indicator: IN, Do Not Disturb, OUT, waitress symbol, white - 2 modules. Depth: 22 mm
			02690 Lighting switch, 2000 W incandescent lamps, CFL 10-1000 W, LED 100 W, 220-240 V~ 50/60 Hz, ceiling mounting
	14290 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules		14290.SL 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 41 mm
14290.AB As above, antibacterial treatment. Depth: 41 mm			14291.SL⁶ 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41 mm

Hotel solutions

White	Silver
-------	--------

Hotel solutions

Connected access control system

 14462 NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm	 14467 NFC/RFID energy saver card switch for installation inside the room, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm	 14462.SL NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm	 14467.SL NFC/RFID energy saver card switch for installation inside the room, IoT technology on <i>Bluetooth® wireless technology</i> 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm
--	--	---	---

Connected access control system

 14467.C Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules	 14467.C.SL Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules
 01817 Mifare transponder card	

Hotel solutions

Access control system

 14463 Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz ~ 2 modules. Depth: 20,5 mm	 14465 Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) ~ 3 modules. Depth: 36 mm	 14463.SL Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz ~ 2 modules. Depth: 20,5 mm	 14465.SL Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) ~ 3 modules. Depth: 36 mm
--	--	--	--

Hotel solutions

White	Silver
-------	--------

Hotel solutions

Access control system

 14468 NFC/RFID electronic reader, suitable for AGB Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz ~ 3 modules. Depth: 29,5 mm	 14468.1 NFC/RFID electronic reader, suitable for CISA Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz ~ 3 modules. Depth: 30,5 mm	 14469 NFC/RFID electronic reader, suitable for Mifare Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz ~ 3 modules. Depth: 30,5 mm	 14468.SL NFC/RFID electronic reader, suitable for AGB Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz ~ 3 modules. Depth: 29,5 mm	 14468.1.SL NFC/RFID electronic reader, suitable for CISA Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz ~ 3 modules. Depth: 30,5 mm	 14469.SL NFC/RFID electronic reader, suitable for Mifare Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz ~ 3 modules. Depth: 30,5 mm
 16452.S ISO-card (badge)					

White	Silver
-------	--------

View Wireless gateway





14597
View Wireless gateway, Bluetooth® wireless technology 4.2 Wi-Fi, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 37 mm





14597.SL
View Wireless gateway, Bluetooth® wireless technology 4.2 Wi-Fi, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 37 mm

Mounting frames for iPads



01430
Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied with type C USB cable and no power supply unit, black



01430.B
Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied with type C USB cable and no power supply unit, white



01430.N
Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied with type C USB cable and no power supply unit, Next

View Wireless connected 2-way switches



14592.0
Mechanism, 100-240 V 50/60 Hz output relay for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 60 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for actuator push button or recall a scenario. To complete with 1-, 2- or 3-module buttons. Depth: 36,5 mm



1-module interchangeable buttons for connected switch mechanism (lightable°)



14021
No symbol



14021.G
Customizable



14021.L
Light symbol



14021.P
Key symbol



14021.SL
No symbol



14021.G.SL
Customizable



14021.L.SL
Light symbol



14021.P.SL
Key symbol

White	Silver
-------	--------

1-module interchangeable buttons for connected switch mechanism (lightable°)



14026
With diffuser



14029
With name plate



14026.DND
Do Not Disturb with diffuser



14026.PLS
Please Clean with diffuser



14026.SL
With diffuser



14029.SL
With name plate



14026.DND.SL
Do Not Disturb with diffuser



14026.PLS.SL
Please Clean with diffuser

2-module interchangeable buttons for connected switch mechanism (lightable°)



14022
No symbol



14022.G
Customizable



14027
With diffuser



14022.SL
No symbol



14022.G.SL
Customizable



14027.SL
With diffuser



14022.L
Light symbol



14022.P
Key symbol



14022.L.SL
Light symbol



14022.P.SL
Key symbol

3-module interchangeable buttons for connected switch mechanism (lightable°)



14023
No symbol



14023.G
Customizable



14028
With diffuser



14023.SL
No symbol



14023.G.SL
Customizable



14028.SL
With diffuser

View Wireless connected control device for roller shutter



14594.0
Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario, favourite position recall function. To complete with 2 1-module half-button. Depth: 36,5 mm





14755.2
2 1-module interchangeable half-button, arrows symbol



14755.2.SL
2 1-module interchangeable half-button, arrows symbol

View Wireless connected actuator for 1 roller shutter - backside installation



03982
Actuator for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)



White	Silver
-------	--------

Connected dimmer





Bluetooth®



zigbee

certified product

14595.0
VIEW Wireless electronic dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external push button for dimmer control or to recall a scenario, dimmer off operation, RGB LED visible in darkness with brightness control, 220-240 V 50/60 Hz power supply, to be completed with 1-module interchangeable buttons
Depth: 36.5 mm

14595.0.120
As above, power supply 120 V 50/60 Hz.

1-module interchangeable buttons and half-button caps for connected dimmer controls



14755.3
Dimmer symbols



14755.3.SL
Dimmer symbols

Connected electronic controls



14591.0
VIEW Wireless electronic control mechanism, local control with push button or remote control, IoT technology on Bluetooth 5.0 standard, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply, to be completed with 1-module interchangeable buttons. Depth: 36.5 mm

1-module interchangeable buttons and half-button caps for connected electronic controls



14755.2
Arrows symbols



14755.2.SL
Arrows symbols



14755.3
Dimmer symbols



14755.3.SL
Dimmer symbols



14755.6
Scenarios symbols



14755.6.SL
Scenarios symbols



14755
Neutral customisable



14755.SL
Neutral customisable

White	Silver
-------	--------

Radiofrequency smart devices






Bluetooth®

Compatible with
CASAMBI

03925
4-button flat device with RF transmission, 2.4 GHz, **Bluetooth®** Low Energy *wireless technology*, to be completed with buttons 14506+14506.2
- 2 modules

View Wireless connected control device for socket outlet





Bluetooth®



zigbee

certified product

14593
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39 mm





Bluetooth®



zigbee

certified product

14593.SL
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39 mm

View Wireless connected actuator - backside installation





Bluetooth®



zigbee

certified product

03981
Control device with NO 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)

View Wireless connected energy meter





Bluetooth®

02963
Energy meter for measuring of consumption/production of instant and historical electric energy (hourly, daily, monthly and in the year mode), 1 input for supplied toroidal current sensor, detectable power 25 W-100 kW, single-phase power supply 100-240 V 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, occupies 1 17,5 mm module

White	Silver
-------	--------

View Wireless connected thermostats





02973.B
Dial thermostat with relay output 5(2) A 240 V~, IoT technology on *Bluetooth® wireless technology* 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm

View Wireless connected magnetic contact





03980
Connected magnetic contact for windows and doors, View Wireless, *Bluetooth® wireless technology* 5.0 standard technology for mesh system realization, 1 clean-contact input, powered with AA LR6 1,5 V batteries (not supplied), white. To use as accessory of connected thermostat or with gateway as sensor for notification of magnetic contact open/close

Radar sensors





14179
UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply. Depth: 39 mm





14179.SL
UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply. Depth: 39 mm



02692
UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, false ceiling installation.



02692.S.1
Round section adaptor for ceiling installation of the IoT connected radar sensor 02692.

White	Silver
-------	--------

View Wireless connected access control system





14462
NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on *Bluetooth® wireless technology* 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm





14467
NFC/RFID energy saver card switch for installation inside the room, IoT technology on *Bluetooth® wireless technology* 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm



14467.C
Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules



01817
Mifare transponder card





14462.SL
NFC/RFID smart card outdoor reader, card configuration using View Wireless app, Bluetooth technology standard, IoT technology on *Bluetooth® wireless technology* 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm





14467.SL
NFC/RFID energy saver card switch for installation inside the room, IoT technology on *Bluetooth® wireless technology* 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 31 mm



14467.C.SL
Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules

PLANA

Cover plates



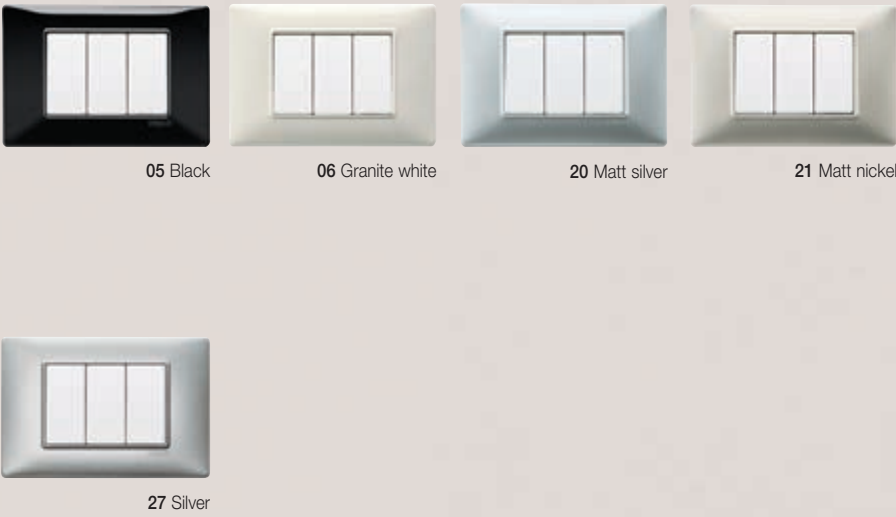
PLANA




Metal



Techno-polymer



Reflex

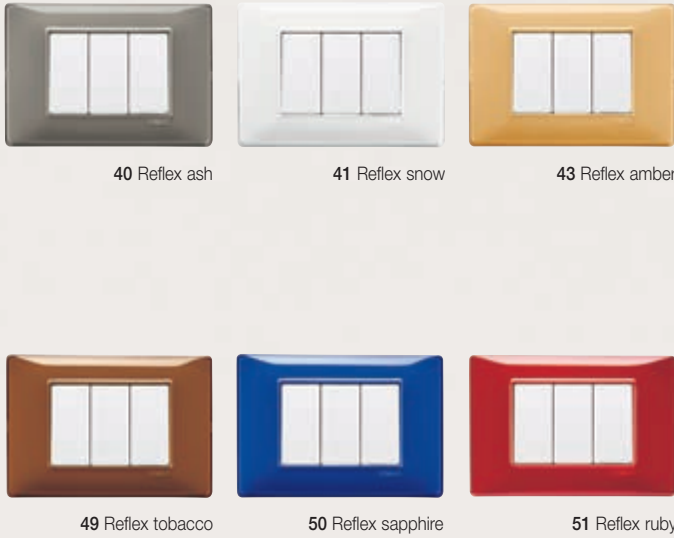

Δ Available until stocks last

Note: Changes in the grain, colour or evenness of the surface of cover plates made of natural wood are a prized feature and guarantee of the material's authenticity

PLANA

German and French standard cover plates



Metallized technopolymer



Technopolymer



Reflex



PLANA

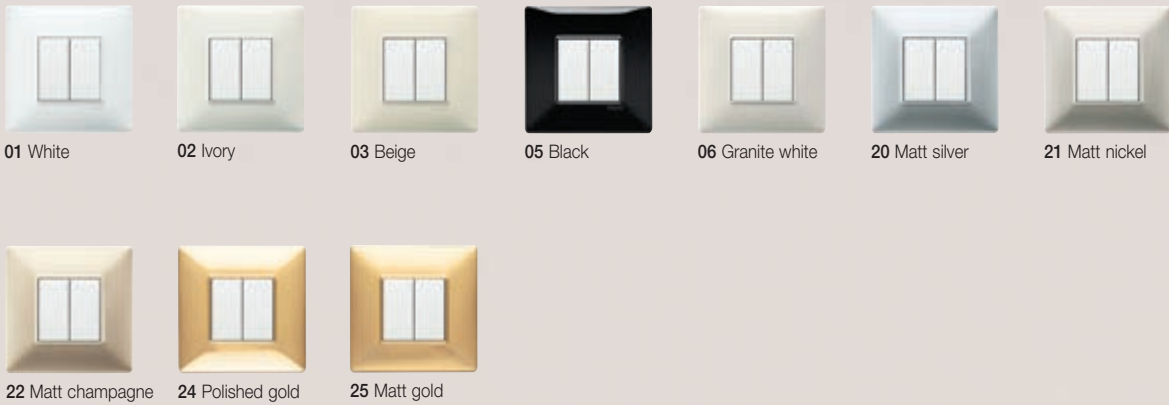
British standard cover plates



Metallized technopolymer



Technopolymer



Reflex



Cover plates guideline

		1-module	2-module	2-central-module	3-module	4-module	7-module
							
Metal							
	Metalized bronze	14641.70	14642.70	14652.70	14653.70	14654.70	14657.70
	Metalized silver	14641.71	14642.71	14652.71	14653.71	14654.71	14657.71
	Pearl nickel	14641.74	14642.74	14652.74	14653.74	14654.74	14657.74
	Brushed aluminium	14641.81	14642.81	14652.81	14653.81	14654.81	14657.81
Technopolymer							
	White**	14641.01	14642.01-14642.AB.01	14652.01	14653.01-14653.AB.01	14654.01-14654.AB.01	14657.01-14657.AB.01
	Ivory	14641.02	14642.02	14652.02	14653.02	14654.02	14657.02
	Beige	14641.03	14642.03	14652.03	14653.03	14654.03	14657.03
	Black	14641.05	14642.05	14652.05	14653.05	14654.05	14657.05
	Granite white	14641.06	14642.06	14652.06	14653.06	14654.06	14657.06
	Matt silver	14641.20	14642.20	14652.20	14653.20	14654.20	14657.20
	Matt nickel	14641.21	14642.21	14652.21	14653.21	14654.21	14657.21
	Matt champagne	14641.22	14642.22	14652.22	14653.22	14654.22	14657.22
	Polished gold	14641.24	14642.24	14652.24	14653.24	14654.24	14657.24
	Matt gold	14641.25	14642.25	14652.25	14653.25	14654.25	14657.25
	Silver	14641.27	-	14652.27	14653.27	14654.27	14657.27
Reflex							
	Reflex ash	14641.40	14642.40	14652.40	14653.40	14654.40	14657.40
	Reflex snow	14641.41	14642.41	14652.41	14653.41	14654.41	14657.41
	Reflex amber	14641.43	14642.43	14652.43	14653.43	14654.43	14657.43
	Reflex mint	14641.44	14642.44	14652.44	14653.44	14654.44	14657.44
	Reflex water	14641.45	14642.45	14652.45	14653.45	14654.45	14657.45
	Reflex emerald	14641.47	14642.47	14652.47	14653.47	14654.47	14657.47
	Reflex orange	14641.48	14642.48	14652.48	14653.48	14654.48	14657.48
	Reflex tobacco	14641.49	14642.49	14652.49	14653.49	14654.49	14657.49
	Reflex sapphire	14641.50	14642.50	14652.50	14653.50	14654.50	14657.50
	Reflex ruby	14641.51	14642.51	14652.51	14653.51	14654.51	14657.51

Cover plates guideline

8-module	6-module	14-module	21-module	Panel mounting 1-module	Panel mounting 2-module
					
14668.70*	-	-	-	-	-
14668.71*	-	-	-	-	-
14668.74*	-	-	-	-	-
-	-	-	-	-	-
14668.01	14659.01	14690.01	14691.01	14666.01	14667.01
14668.02	14659.02	14690.02	14691.02	14666.02	14667.02
14668.03	14659.03	-	-	-	-
14668.05	14659.05	14690.05	14691.05	14666.05	14667.05
14668.06	14659.06	-	-	-	-
14668.20	-	14690.20	14691.20	14666.20	14667.20
14668.21	-	14690.21	14691.21	14666.21	14667.21
14668.22	-	-	-	-	-
14668.24	-	-	-	-	-
14668.25	-	-	-	-	-
14668.27	-	14690.27	14691.27	14666.27	14667.27
14668.40	-	-	-	-	-
14668.41	-	-	-	-	-
14668.43	-	-	-	-	-
14668.44	-	-	-	-	-
14668.45	-	-	-	-	-
14668.47	-	-	-	-	-
14668.48	-	-	-	-	-
14668.49	-	-	-	-	-
14668.50	-	-	-	-	-
14668.51	-	-	-	-	-

German and French standard cover plates: guideline

2-module		2+2-module (between centres 71 mm)	2+2+2-module (between centres 71 mm)	2+2+2+2-module (between centres 71 mm)	2+2-module (between centres 57 mm)	2+2+2-module (between centres 57 mm)
						
Metallized technopolymer						
	Metallized bronze	14642.26	14643.26	14644.26	14669.26	-
	Metallized silver	14642.27	14643.27	14644.27	14669.27	-
Technopolymer						
	White**	14642.01-14642.AB.01	14643.01-14643.AB.01	14644.01-14644.AB.01	14669.01-14669.AB.01	14645.01
	Ivory	14642.02	14643.02	14644.02	14669.02	-
	Beige	14642.03	14643.03	14644.03	14669.03	-
	Black	14642.05	14643.05	14644.05	14669.05	-
	Granite white	14642.06	14643.06	14644.06	14669.06	-
	Matt silver	14642.20	14643.20	14644.20	14669.20	-
	Matt nickel	14642.21	14643.21	14644.21	14669.21	-
	Matt champagne	14642.22	14643.22	14644.22	14669.22	-
	Polished gold	14642.24	14643.24	14644.24	14669.24	-
	Matt gold	14642.25	14643.25	14644.25	14669.25	-
Reflex						
	Reflex ash	14642.40	14643.40	14644.40	14669.40	-
	Reflex snow	14642.41	14643.41	14644.41	14669.41	-
	Reflex amber	14642.43	14643.43	14644.43	14669.43	-
	Reflex mint	14642.44	14643.44	14644.44	14669.44	-
	Reflex water	14642.45	14643.45	14644.45	14669.45	-
	Reflex emerald	14642.47	14643.47	14644.47	14669.47	-
	Reflex orange	14642.48	14643.48	14644.48	14669.48	-
	Reflex tobacco	14642.49	14643.49	14644.49	14669.49	-
	Reflex sapphire	14642.50	14643.50	14644.50	14669.50	-
	Reflex ruby	14642.51	14643.51	14644.51	14669.51	-



British standard cover plates: guideline

2-module		3-module/monobloc	5-module/monobloc
			
Metallized technopolymer			
	Metallized bronze	14647.70	14648.70
Technopolymer			
	White	14647.01	14648.01
	Ivory	14647.02	14648.02
	Beige	14647.03	14648.03
	Black	14647.05	14648.05
	Granite white	14647.06	14648.06
	Matt silver	14647.20	14648.20
	Matt nickel	14647.21	14648.21
	Matt champagne	14647.22	14648.22
	Polished gold	14647.24	14648.24
	Matt gold	14647.25	14648.25
	Silver	14647.27	14648.27
Reflex			
	Reflex ash	14647.40	14648.40
	Reflex snow	14647.41	14648.41
	Reflex amber	14647.43	14648.43
	Reflex mint	14647.44	14648.44
	Reflex water	14647.45	14648.45
	Reflex emerald	14647.47	14648.47
	Reflex orange	14647.48	14648.48
	Reflex tobacco	14647.49	14648.49
	Reflex sapphire	14647.50	14648.50
	Reflex ruby	14647.51	14648.51


** .AB: antibacterial treatment

Δ Available until stocks last

Types of mounting





Module	Box		Frame	Cover plate*
1 and 2 for ø 60 mm mounting box	Flush mounting	Surface mounting		
	 V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black	 09971.A 43,5 mm deep, RAL 9001 ivory 09971.01: white	 14601 1-module, with claws 14601.G As above, grey	 14641... 1-module Dimensions: 80x80x9 mm
	 V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	 09972.01 30 mm deep, white	 14602 2-module, with claws 14602.G As above, grey	 14642... 2-module Dimensions: 80x80x9 mm
	 V71703 For hollow walls GW 850 °C, light blue	 09975.A 43,5 mm deep, RAL 9001 ivory 09975.01: white	 14603 2-module, without screws 14603.G As above, grey	 14642.C.01 2-module, with cover, white Dimensions: 80x80x14 mm
2 central	Flush mounting	Surface mounting		
	 V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black	 09971.A 43,5 mm deep, RAL 9001 ivory 09971.01: white	 14602 2-module, with claws 14602.G As above, grey	 14652... 2-central-module, horizontal and vertical installation, Dimensions.: 119,5x80x9 mm
	 V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	 09972.01 30 mm deep, white	 14603 2-module, without screws 14603.G As above, grey	
	 V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black	 09975.A 43,5 mm deep, RAL 9001 ivory 09975.01: white	 14604 2-module, with claws	
	 V71703 For hollow walls GW 850 °C, light blue	 09975.01: white	 14605 2-module, without screws	
	 V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black	 09975.A 43,5 mm deep, RAL 9001 ivory 09975.01: white	 14612 2-central-module, with screws	
3	Flush mounting	Surface mounting		
	 V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black	 09975.A 43,5 mm deep, RAL 9001 ivory 09975.01: white	 14613 3-module, with screws 14613.G As above, grey	 14653... 3-module Dimensions.: 119,5x80x9 mm

Types of mounting

Module	Box		Frame	Cover plate*
4	Flush mounting	Table mounting		
	 V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black	 V71704 For hollow walls GW 850 °C, light blue	 14784 4-module, white	 14614 4-module, with screws
	 V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black	 V71706 For hollow walls GW 850 °C, light blue	 14787 7-module, white	 14657... 7-module Dimensions: 206x80x9 mm
8 (4+4)	Flush mounting	Table mounting		
	 V71318 For masonry GW 650 °C, light blue	 V71718 For hollow walls GW 850 °C, light blue	 01420 4,3" IP touch screen, grey 01420.B: white 01420.BN: neutral	 14668... 8-module Dimensions: 142,5x151x9 mm
	 V71318 For masonry GW 650 °C, light blue	 V71718 For hollow walls GW 850 °C, light blue	 21848.1... Colour touch screen, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame	 14668... 8-module Dimensions: 142,5x151x9 mm
	 V71318 For masonry GW 650 °C, light blue	 V71718 For hollow walls GW 850 °C, light blue	 14788 8-module, white Dimensions: 142,2x150,3x134 mm	 14618 8-module (4+4), with screws
6 (3+3)	Flush mounting			
	 09996 For masonry, GW 650 °C, light blue 09996.AU GW 960 °C, black		 14619 6-module (3+3) 4x4", with screws	 14659... 6-module Dimensions: 120x132x11 mm

Types of mounting




Module	Box	Frame	Cover plate*
14 (7+7)	Flush mounting  V71320 For masonry GW 650 °C, light blue V71720 For hollow walls GW 850 °C, light blue Surface mounting  09920.01, White		
21 (7+7+7)	Flush mounting  V71321 For masonry, GW 650 °C, light blue Surface mounting  09921.01, White  14621 21-module (7+7+7), with screws		
1	Panel mounting  16776.AU GW 960 °C	 14626 1-module, with screws	 14666... 1-module Dimensions: 40x80x9 mm
2	Panel mounting  16776.AU x 2 GW 960 °C	 14627 2-module, with screws	 14667... 2-module Dimensions: 40x137x9 mm
1 and 2 for ø 60 and 65 mm	  	 14601 1-module, with claws 14601.G As above, grey  14600 1-module, without screws 14600.G As above, grey	 14641... 1-module, Dimensions: 80x80x9 mm
		 14602 2-module, with claws 14602.G As above, grey  14603 2-module, without screws 14603.G As above, grey  14604 2-module, with claws  14605 2-module, without screws	 14642... 2-module, Dimensions: 80x80x9 mm  14642.C.01 2-module, with cover, white Dimensions: 80x80x14 mm
		 14602 2-module, with claws 14602.G As above, grey  14603 2-module, without screws 14603.G As above, grey  14604 2-module, with claws  14605 2-module, without screws	 14652... 2-central-module Dimensions: 119,5x80x9 mm 

14620...
14-module (7+7),
with screws

British standard mounting



Module	Box	Frames/Devices	Cover plate*
1 and 2	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 14606' 1-module, with screws M 3,5, white  14606.SL' 1-module, with screws M 3,5, Silver  14607' 2-module, with screws M 3,5 	

14647'...
2-module.
Dimensions: 95x95x9 mm

Module	Box	Frame	Cover plate*
2+2 71 mm between centres		 	
2+2+2 71 mm between centres		 	
2+2+2+2 71 mm between centres		 	
2+2 57 mm between centres		 	
2+2+2 57 mm between centres		 	

Neve Up

Control devices	378
Power and signal socket outlets	384
Signalling, protection and detection	388
Comfort and climate	388
Stand alone and hotel solutions	389
Smart home View Wireless	390
Cover plates range	396
Installation types	400

Neve Up





Neve Up

The intelligent choice. Now it's connected. A good solution for any residential, hospitality or office space.



White Total Look




Black Total Look



Glossy
Glossy painted technopolymer.



Matt
Matt painted technopolymer.




Metal
Technopolymer painted with metallic paint


Materials and finishes

Neve Up. Free to change.
Flexible modular system installations.

Thanks to the many mounting frames available, ranging from 1 up to a maximum of 7 or 2+2+2+2 modules, control devices and socket outlets sized 1, 2, 3 modules, many solutions can be found for all installation needs. The lighting switch can be completed with the cover plate in the colour and material of your choice.



2 modules

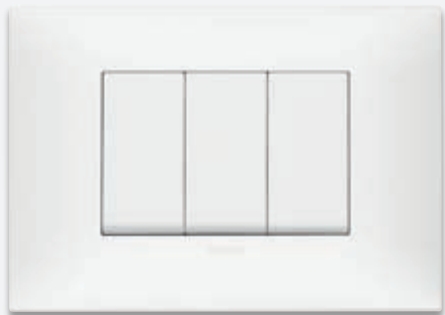


3 modules

Customization and backlighting
Backlit and customized switches are available both in white and carbon matt colours, to easily locate the switch and immediately know its function.



Modular devices

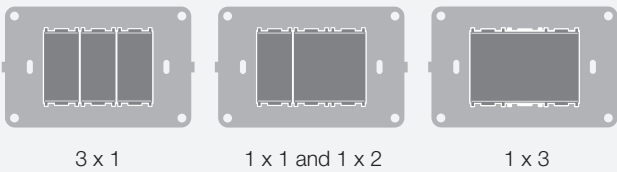Combinations with 1, 2 and 3 module devices on 3 module mounting frames.




COVER PLATES + INTERCHANGEABLE SWITCHES + MOUNTING FRAME



**Add and change functions over time,
depending on your specific living needs.**




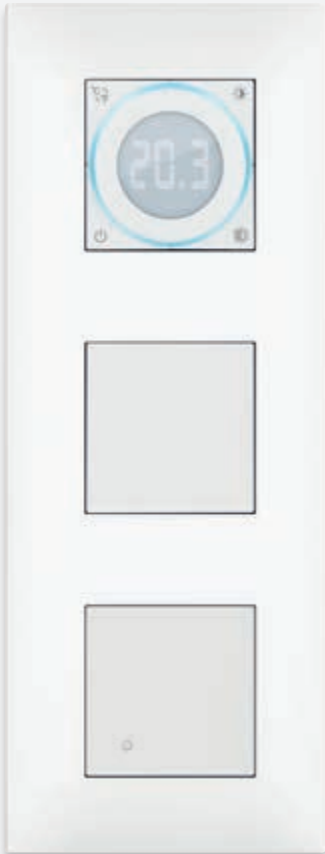2+2 modules




2+2+2 modules, vertical use

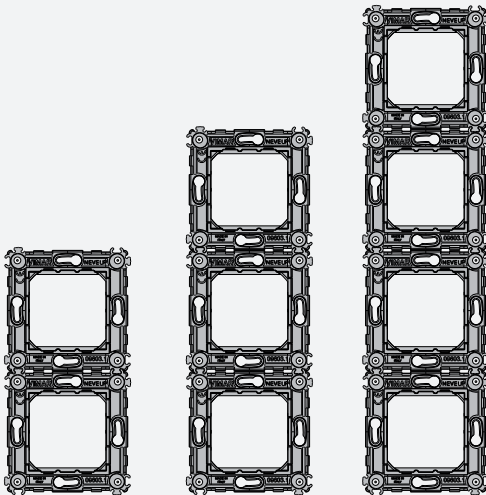2+2+2 modules, horizontal use



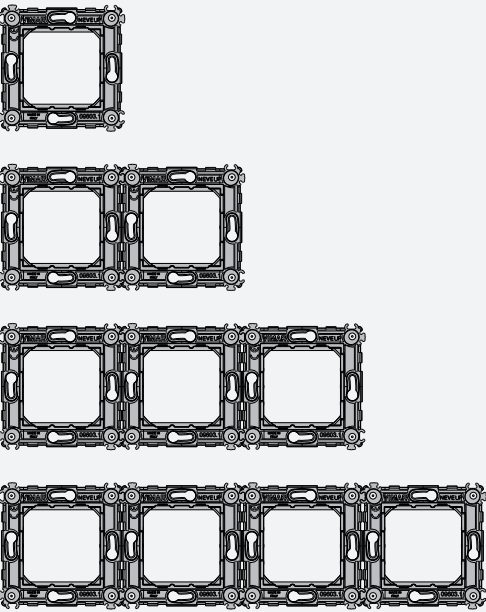90°
Multigang switches can be used horizontally or vertically depending on specific needs of the space.



Neve Up is quality for a quick and easy installation. We take care of every detail.

Your installation, it's easy to fit

Installation is made easier thanks to the mounting frame with interlocking teeth that provide strong and reliable fixing for each single device and allows perfect alignment between switches to create a tidy and visually pleasing stylistic effect. The devices are fixed front-on to the mounting frame, allowing work on the installation at any time without having to remove the mounting frame from the box.



Improved electrical load transmission

The use of noble metals such as silver for the terminal contacts makes the conduction of the electrical load easier, hence lowering the operating temperature of the contacts making the switch last longer.

Screw terminals

The metal plate in the terminals is curved: a Vimar refinement allowing different cross section wires to be held in place when clamped even at the same time. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm² and power circuit cables with cross-section 1,5-2,5 mm².

It's easy and flexible to upgrade over time

- Front clamping system for an easy mechanism installation when the support frame is already installed on the wall
- Specially designed terminal blocks prevent the mechanism to be put under strain when the screw is overloosened, allowing a power drill to be used for tightening and loosening the screws without damaging the mechanism



Perfect alignment of buttons on the mounting frame

The stiffness of the mounting frame along with the small production tolerances provide the required dimensional accuracy to guarantee perfect aligned rockers. The special structure also makes it possible to compensate for the thickness of the mounting box for plasterboard, guaranteeing the perfect fit of the cover plate with the wall.

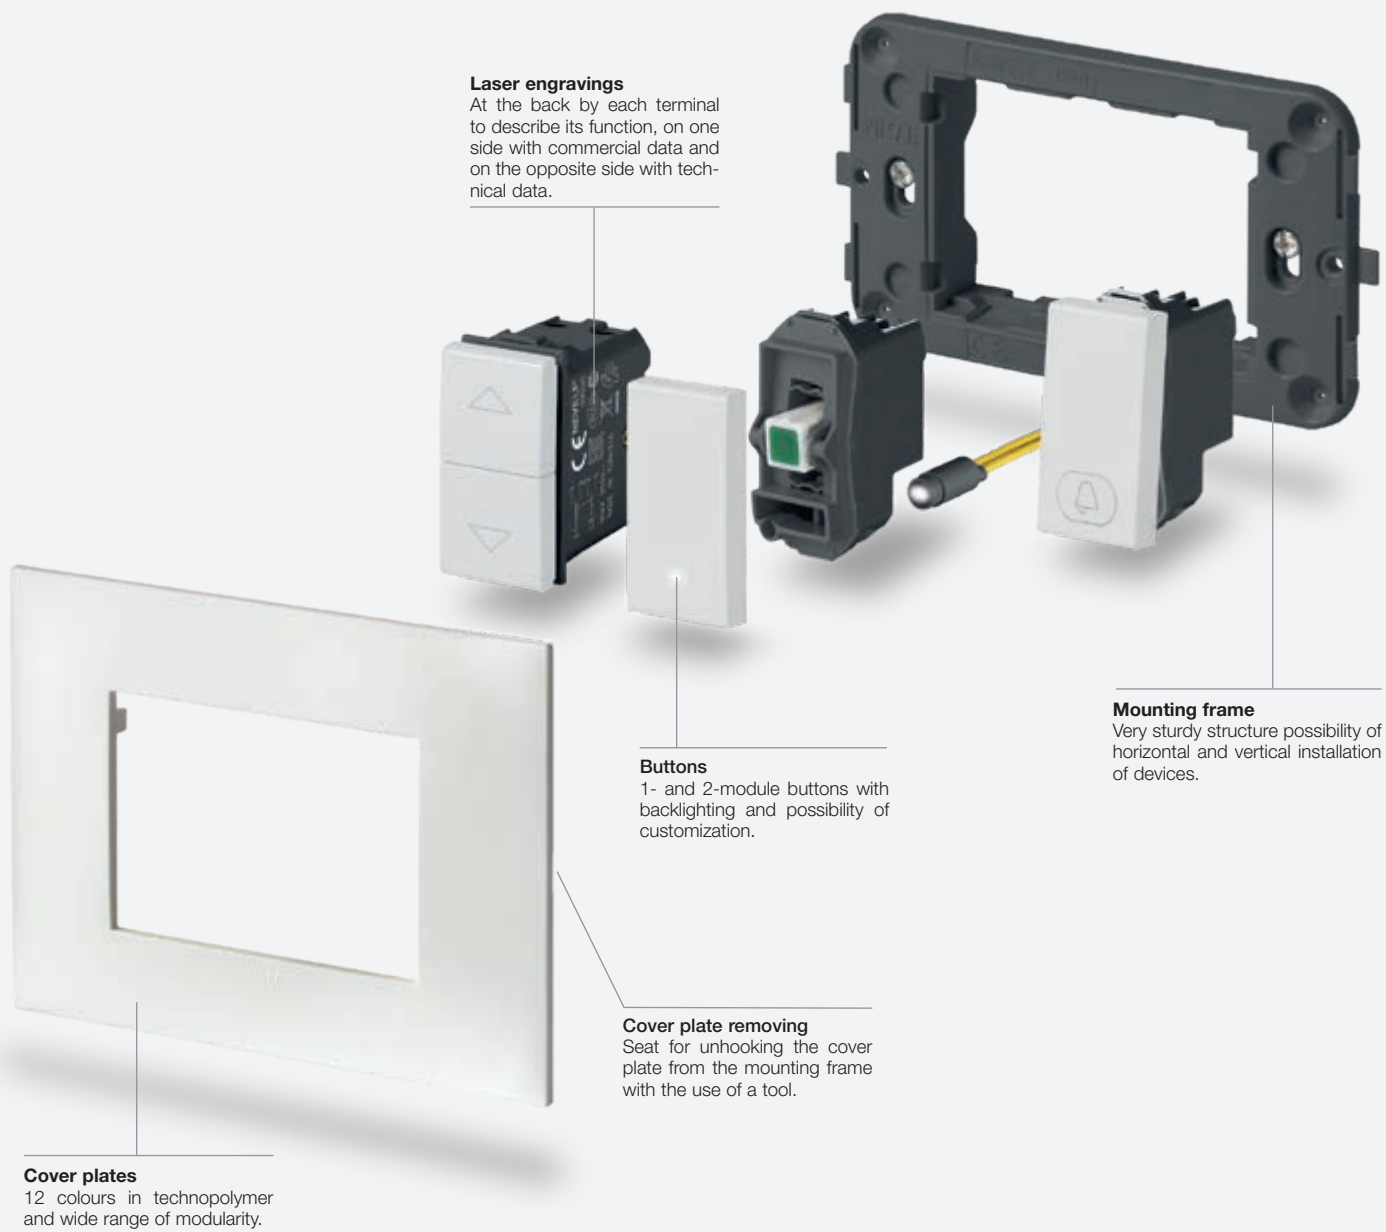
Perfect styling result,
even on plasterboard walls.



Neve Up is the ideal on plasterboard

The special structure of the mounting frame affords an attractive flush-fit effect, where the cover plate blends in seamlessly with the wall. In installations on plasterboard walls, it also covers the protrusion of the mounting box perfectly.




Mounting features
Italian and American standards



Composition	Boxes	Frames	Devices	Cover plates
 1-central module, round box  2 modules, round box	 Flush mounting	 With/without screws or with claws	 1 module  1 x 2 modules  2 x 1 module	 1-central module*  2 modules*
 2-central modules, for round or 3-module box	 Flush mounting  Flush mounting	 With screws  With screws	 2 modules  2 x 1 module	 2-central modules*, vertical way  2-central modules*, horizontal way
 From 1-central and 2-separate modules, for 3-module box  From 3 to 7 modules	 Flush mounting	 With screws  With screws  With screws	 1 module  2 x 1 module  1 and 2 modules  3 x 1 module  3 modules	 1-central modules*  2-separate modules*  From 3 to 7 modules*  Blank module*
Plana devices installation				
 3 modules with Plana devices	 Flush mounting	 Mounting frame for Plana devices, with screws	 3 x 1 module, Plana devices	 Neve Up cover plate, 3 modules*

* For other combinations, see the installation types from page 400

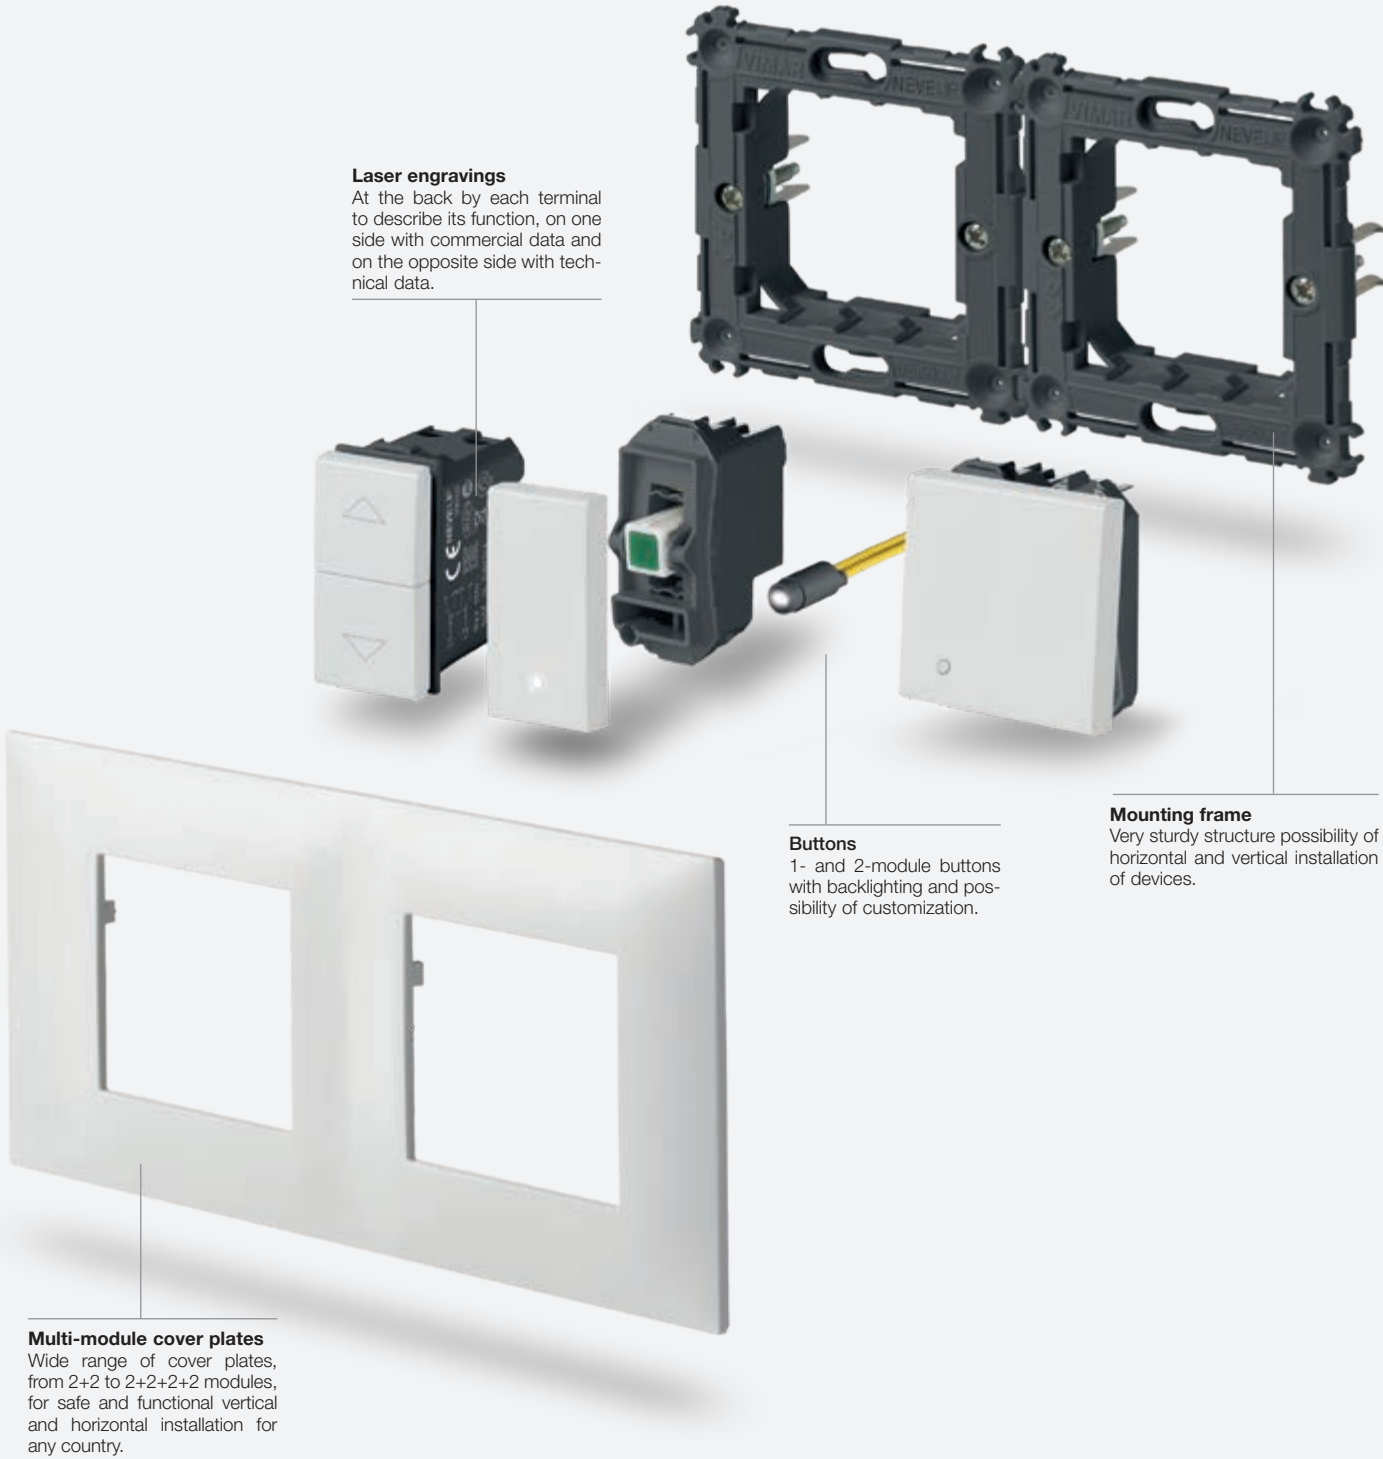
Mounting features
German and French standards




Due to the graphic layout, the product photos are not represented with equivalent proportions.

Composition	Box	Frame	Device	Cover plate
 2 modules, ø 60 and 65 mm mounting box			 1-gang switch, 2 modules	 2 modules*
 2+2 modules, 71 mm between centres			 2 x 2 modules in vertical 2 x 2 modules in horizontal	 vertical horizontal
 2+2+2 modules, 71 mm between centres			 3 x 2 modules in vertical 3 x 2 modules in horizontal	 vertical horizontal
 2+2+2+2 modules, 71 mm between centres			 4 x 2 modules in vertical 4 x 2 modules in horizontal	 vertical horizontal

* For other combinations, see the installation types from page 402

White				Carbon Matt											
Blank modules and cable outlets															
 09041 Blank module. Depth: 9 mm				 09044 Cable outlet. Depth: 11,1 mm				 09041.CM Blank module. Depth: 9 mm				 09044.CM Cable outlet. Depth: 11,1 mm			
1P 1-way switches 250 V~															
 09001 16 AX. Depth: 23,1 mm				 09001.2 16 AX, - 2 modules. Depth: 23,1 mm				 09001.CM 16 AX. Depth: 23,1 mm				 09001.2.CM 16 AX, - 2 modules. Depth: 23,1 mm			
2P 1-way switches 250 V~ (lightable°)															
 09015 16 AX. Depth: 32,7 mm		 09016 20 AX. Depth: 25,4 mm		 09016.G 20 AX. Depth: 25,4 mm		 09016.2.G 20 AX, - 2 modules. Depth: 25,4 mm		 09015.CM 16 AX. Depth: 32,7 mm		 09016.CM 20 AX. Depth: 25,4 mm		 09016.G.CM 20 AX. Depth: 25,4 mm		 09016.2.G.CM 20 AX, - 2 modules. Depth: 25,4 mm	
 09020 32 A, - 2 modules. Depth: 30,5 mm				 09020.CM 32 A, - 2 modules. Depth: 30,5 mm											

White		Carbon Matt	
Connected actuators - backside installation			
	03981 Control device with NO 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, <i>Bluetooth® wireless technology</i> 5.0 for View Wireless mesh system and Zigbee 3.0	  	
1P 2-way switches 250 V~			
			
09005 16 AX. Depth: 23,1 mm	09005.2 16 AX, - 2 modules. Depth: 23,1 mm	09005.CM 16 AX. Depth: 23,1 mm	09005.2.CM 16 AX, - 2 modules. Depth: 23,1 mm
1P reversing switches 250 V~			
			
09013 16 AX. Depth: 26,7 mm	09013.2 16 AX, - 2 modules. Depth: 26,7 mm	09013.CM 16 AX. Depth: 26,7 mm	09013.2.CM 16 AX, - 2 modules. Depth: 26,7 mm
1P NO push buttons 250 V~			
			
09008 10 A. Depth: 23,1 mm	09008.2 10 A, - 2 modules. Depth: 23,1 mm	09008.CM 10 A. Depth: 23,1 mm	09008.2.CM 10 A, - 2 modules. Depth: 23,1 mm

White		Carbon Matt		
Quid - Magnetic relay modules for lighting - backside installation				
	03991 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output		03992 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 input for reset push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, luminous signalling of load status	
			▲ 03994 Quid magnetic relay module with sequential ON/OFF pulses, 1 input for NO push-button on phase (L) or on neutral (N), 1 NO relay output 10 AX 220-240 V~ 50/60 Hz.	
				03993 ON/OFF sequence pulse relay module, 1 input for NO push button, 2 NO 10 A 220-240 V~ 50/60 Hz sequence relay outputs
Backlit mechanisms ^o (to be combined with white or carbon matt rockers)				
	09001.0.250¹ 1P 16 AX 250 V~ 1-way switch. Depth: 23,1 mm		09005.0.250¹ 1P 16 AX 250 V~ 2-way switch. Depth: 23,1 mm	
			09008.0.12¹ 1P NO 10 A 12 V push button. Depth: 23,1 mm	
				09008.0.250¹ 1P NO 10 A 250 V~ push button. Depth: 23,1 mm
1-module interchangeable rockers				
	09021 Not lightable		09021.N Neutral, lightable	
			09021.G Customizable	
			09026.DND Do Not Disturb, with diffuser, lightable	
			09021.CM Not lightable	
			09021.N.CM Neutral, lightable	
			09021.G.CM Customizable	
			09026.DND.CM Do Not Disturb, with diffuser, lightable	
	09026.PLS Please Clean, with diffuser, lightable		09021.C Bell symbol, lightable	
			09021.L Light symbol, lightable	
			09021.P Key symbol, lightable	
			09026.PLS.CM Please Clean, with diffuser, lightable	
			09021.C.CM Bell symbol, lightable	
			09021.L.CM Light symbol, lightable	
			09021.P.CM Key symbol, lightable	
	09021.F Fan symbol, lightable		09021.H Flame symbol, lightable	
			09021.S Switch ON symbol, lightable	
			09021.F.CM Fan symbol, lightable	
			09021.H.CM Flame symbol, lightable	
			09021.S.CM Switch ON symbol, lightable	

White		Carbon Matt	
2-module interchangeable buttons			
	09022 Not lightable		09022.N Neutral, lightable
	09022.CM Not lightable		09022.N.CM Neutral, lightable
1P special switches 250 V~			
	09052 NO 10 A, cord-operated. Depth: 24,7 mm		09050 NO 10 A, with lightable name-plate - 2 modules. Depth: 25,2 mm
	09052.CM NO 10 A, cord-operated. Depth: 24,7 mm		
1P push buttons 250 V~			
	09066 Two independent NO 10 A Depth: 29 mm		09066.CM Two independent NO 10 A Depth: 29 mm
Switches for roller blind control 250 V~			
	09060 2P 10 AX 2-way switch, OFF-central. Depth: 33,5 mm		09062 1P NO 10 A 2-interlocked push buttons. Depth: 29 mm
	09060.CM 2P 10 AX 2-way switch, OFF-central. Depth: 33,5 mm		09062.CM 1P NO 10 A 2-interlocked push buttons. Depth: 29 mm
Quid - Electronic relay modules and control unit modules for roller shutters			
	03996 Centralizable relay module, slat orientation, with relay outputs for cosφ 0.6 motor 2 A 220-240 V~ 50/60 Hz, position saving, for backside or junction boxes installation		03997 Control unit module, 2 inputs for NO push button, 6 outputs for Quid roller shutter relay module (03996), 220-240 V~ 50/60 Hz power supply, for backside or junction boxes installation

White

Carbon Matt

Dimmers**



09135.1
MASTER,
universal
09135.1.120
As above,
120 V~.
Depth: 41,5 mm



09153
100-500 W
push-push +
potentiometer,
230 V~.
Depth: 40 mm



***09146**
60-900 W
60-300 VA,
potentiometer,
230 V~.
Depth: 40 mm



09147
30-500 W
30-300 VA,
potentiometer,
120 V~.
Depth: 40 mm



09135.1.CM
MASTER,
universal
09135.1.120.CM
As above,
120 V~.
Depth: 41,5 mm



09153.CM
100-500 W
push-push +
potentiometer,
230 V~.
Depth: 40 mm



***09146.CM**
60-900 W
60-300 VA,
potentiometer,
230 V~.
Depth: 40 mm



09147.CM
30-500 W
30-300 VA,
potentiometer,
120 V~.
Depth: 40 mm

Dimmer - controllable loads

Type	UNIVERSAL							
LOADS	09135.1				09135.1.120			
	2-wire connection		3-wire connection		2-wire connection		3-wire connection	
	LE	TE	LE	TE	LE	TE	LE	TE
Incandescence	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W
Compact fluorescent lamps (CFL)	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps
LED	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 8 lamps	3 ÷ 200 W max 16 lamps
Electronic transformers for halogen lamps	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 

Dimmer - controllable loads

Type	STANDARD		
DIMMER			
LOADS	09153 (with push-push switch and rotary potentiometer control)	09146 (with rotary potentiometer)	09147 (with rotary potentiometer)
Incandescence	100 - 500 W	60 - 900 W	30 - 500 W
Ferromagnetic transformers for halogen lamps		60 - 300 VA 230 V~, 50/60 Hz	30 - 300 VA 120 V~, 50/60 Hz

Infrared switches



09181
Lighting switch, NO 6 A 230 V~
relay output, 50/60 Hz.
Depth: 37 mm



09181.CM
Lighting switch, NO 6 A 230 V~
relay output, 50/60 Hz.
Depth: 37 mm

White

Carbon Matt

Smart radio frequency devices



03955
Flat control with four push buttons with 868 MHz radio frequency transmitter, EnOcean standard, energy harvesting power supply provided by the built-in electro-dynamic generator, 2 modules.



03925
Flat control with four push buttons with 2.4 GHz radio frequency transmitter, Bluetooth Low Energy standard, energy harvesting power supply provided by the built-in electro-dynamic generator, 2 modules.



03905
Flat control with four push buttons with 2.4 GHz radio frequency transmitter, ZigBee Green Power standard without batteries, power supply provided by the built-in electro-dynamic generator, 2 modules.



03906
Flat control with four push buttons with 2.4 GHz radio frequency transmitter, ZigBee Green Power and Friends of Hue standard, energy harvesting power supply provided by the built-in electro-dynamic generator, 2 modules.



01796.2
Multi-function actuator with relay output NO 10 A 230 V~, program-mable with switch function for local control, local input transferable as ON/OFF circuit to other EnOcean® actuators, power supply 230 V~ 50/60 Hz.




01798
EnOcean® actuator with 2 NO relay outputs 5 A 230 V~, 2 programmable inputs with switch function for local control, power supply 230 V~ 50/60 Hz




09507
Mounting frame for surface mounting of EnOcean, Bluetooth, ZigBee radio controls to be completed with Neve UP 2-module cover plates



09507.CM
Mounting frame for surface mounting of EnOcean, Bluetooth, ZigBee radio controls to be completed with Neve UP 2-module cover plates



09506
1-module interchangeable button for EnOcean, Bluetooth, ZigBee radio control - 2 pieces




09506.2
2-module interchangeable button for EnOcean, Bluetooth, ZigBee radio control



09506.CM
1-module interchangeable button for EnOcean, Bluetooth, ZigBee radio control - 2 pieces



09506.2.CM
2-module interchangeable button for EnOcean, Bluetooth, ZigBee radio control

White				Carbon Matt			
SICURY 2P+E Italian standard socket outlets 250 V~							
							
09201 10 A, P11. Depth: 23,2 mm	09203 Bpresa 16 A, P17/11. Depth: 23,2 mm	09209 16 A. P30 - 2 modules. Depth: 29,3 mm	09210 16 A, universal - 2 modules. Depth: 26,4 mm	09201.CM 10 A, P11. Depth: 23,2 mm	09203.CM Bpresa 16 A, P17/11. Depth: 23,2 mm	09209.CM 16 A. P30 - 2 modules. Depth: 29,3 mm	09210.CM 16 A, universal - 2 modules. Depth: 26,4 mm
SICURY 2P+E socket outlets 250 V~ - German standard							
							
09208 16 A, German - 2 modules. Depth: 29,5 mm	09208.C 16 A, German, with cover - 2 modules. Depth: 29,5 mm	▲09208.USB 16 A, German standard, 1 USB-C output 18 W - 2 modules. Depth: 32,4 mm		09208.CM 16 A, German - 2 modules. Depth: 29,5 mm	09208.C.CM 16 A, German, with cover - 2 modules. Depth: 29,5 mm	▲09208.USB.CM 16 A, German standard, 1 USB-C output 18 W - 2 modules. Depth: 32,4 mm	
SICURY 2P+E socket outlets 250 V~ - French standard							
							
09212 16 A, French - 2 modules. Depth: 26,4 mm				09212.CM 16 A, French - 2 modules. Depth: 26,4 mm			
Socket outlets 250 V~ - Euro-American standard							
							
09233 2P 16 A, Euro-American (ø 4,8 mm). Depth: 30 mm	09234 SICURY 2P 16 A, Euro-American. Depth: 30 mm	09248 SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	09249 Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm	09233.CM 2P 16 A, Euro-American (ø 4,8 mm). Depth: 30 mm	09234.CM SICURY 2P 16 A, Euro-American. Depth: 30 mm	09248.CM SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	09249.CM Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm
Socket outlets 127 V~ - USA and Arabian standard							
							
09242 SICURY 2P+E 15 A, USA and Arabian	09243 Two SICURY 2P+E 15 A, USA and Arabian - 3 modules			09242.CM SICURY 2P+E 15 A, USA and Arabian	09243.CM Two SICURY 2P+E 15 A, USA and Arabian - 3 modules		
09245 2P+E 15 A, USA and Arabian. Depth: 27 mm	09246 Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm			09245.CM 2P+E 15 A, USA and Arabian. Depth: 27 mm	09246.CM Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm		

White

Carbon Matt

SICURY 2P+E socket outlets 250 V~ - Israeli standard



09240

16 A, Israeli

- 2 modules.

Depth: 29,7 mm



09240.CM

16 A, Israeli

- 2 modules.

Depth: 29,7 mm

SICURY 2P+E socket outlets 250 V~ - Multistandard



*09257

13 A, multistandard

- 2 modules.

Depth: 18,7 mm




*09257.CM

13 A, multistandard

- 2 modules.

Depth: 18,7 mm

Socket outlets 2P+E 15 A 125 V~ 60 Hz - American standard



00296

Double American standard with GFCI

- 3 modules.

Depth: 30,1 mm



00296.CM

Double American standard with GFCI

- 3 modules.

Depth: 30,1 mm

Possible matches between plugs and sockets according to different national standards

SOCKET OUTLET PLUG	German	Italian					French	Euroamerican				American Saudi Arabian				Israeli	Multistandard
	09208..	09201..	09203..	09209..	09210..	09212..	09233	09234	09248	09249	09242	09245	09243	09246	09240	09257	
S10 Italian standard	●	●	●	●	●	●	●	●	●	●					●	●	
S11 Italian standard		●	●	●	●												
S17 Italian standard			●		●												
2P 2,5 A Europlug	●	●	●	●	●	●	●	●	●	●					●	●	
2P+E 16 A 250 V~ German standard	●			●	●		○	○	○	○					○	○	
2P+E 16 A 250 V~ German and French standards	●			●	●	●	○	○	○	○					○		
2P 16 A 250 V~ German and French standards	●			●	●	●	●	●	●	●					●		
2P+E 16 A 250 V~ French standard				○	○	●	○	○	○	○					○		
2P+E 10 A 250 V~ Swiss standard																●	
2P+E 16 A 250 V~ Israeli standard															●		
2P+E 5 A 250 V~ English standard																●	
2P+E 13 A 250 V~ English standard																●	
2P+E 15 A 125 V~ American standard									●	●	●	●	●	●			
2P 15 A 127 V~ American and Saudi Arabian standards											●	●	●	●			
2P+E 10 A 250 V~ Brazilian standard																●	
2P+E 10 A 250 V~ Chinese standard																●	
2P+E 10 A 250 V~ Australian standard																●	

● Plug standard matches socket outlet;

○ Plug standard matches the socket outlet without earth connection.

• Plug standard matches socket outlet; ◦ Plug standard matches the socket outlet without earth connection.

Socket outlets • Signal reception socket outlets

White	Carbon Matt
Shaver supply units	
 09290 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm	 09290.CM 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm
SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)	
 09203.R Bpresa 16 A, P17/11, red. Depth: 23,2 mm	 09210.R 16 A, universal, red - 2 modules. Depth: 26,4 mm
 09208.A 16 A, German, orange - 2 modules. Depth: 29,5 mm	 09208.R 16 A, German, red - 2 modules. Depth: 29,5 mm
 09208.V 16 A, German, green - 2 modules. Depth: 29,5 mm	 09240.R 16 A, Israeli, red - 2 modules. Depth: 29,7 mm
USB supply unit	
 09292 7,5 W 1,5 A, 1 USB-A, 120-240 V~ 50/60 Hz. Depth: 37 mm	 09292.CM 7,5 W 1,5 A, 1 USB-A, 120-240 V~ 50/60 Hz. Depth: 37 mm
 Δ 09292.C 7,5 W 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 37 mm	 Δ 09292.C.CM 7,5 W 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 37 mm
 ▲ 09292.AC.15 15 W, USB A+C, 120-240 V ~ 50/60 Hz. Depth: 37 mm	 ▲ 09292.AC.15.CM 15 W, USB A+C, 120-240 V ~ 50/60 Hz. Depth: 37 mm
 Δ 09292.AC 12 W 2,4 A, USB A+C, 120-240 V ~ 50/60 Hz. Depth: 37 mm	 Δ 09292.AC.CM 12 W 2,4 A, USB A+C, 120-240 V ~ 50/60 Hz. Depth: 37 mm
 09292.CC 15 W 3 A, USB C+C, 120-240 V ~ 50/60 Hz. Depth: 37 mm	 09292.CC.CM 15 W 3 A, USB C+C, 120-240 V ~ 50/60 Hz. Depth: 37 mm
 ▲ 09292.C.25 25 W, 1 uscita USB-C, 120-240 V ~ 50/60 Hz. Depth: 37 mm	 ▲ 09292.C.25.CM 25 W, 1 uscita USB-C, 120-240 V ~ 50/60 Hz. Depth: 37 mm
Special socket outlets	
 09330 2P 6 A 24 V (SELV), for 01620 plug. Depth: 25 mm	 09330.CM 2P 6 A 24 V (SELV), for 01620 plug. Depth: 25 mm
Phone socket outlets	
 09320 RJ11, 6-position 4-contact (6/4). Depth: 33,6 mm	 09320.CM RJ11, 6-position 4-contact (6/4). Depth: 33,6 mm
 09324 Israeli standard, screw terminals. Depth: 33,4 mm	 09324.CM Israeli standard, screw terminals. Depth: 33,4 mm

Signal reception socket

White	Carbon Matt
Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output Ø 9,5 mm male and F-type female)	
 09300.01 Male, single connection 1 dB. Depth: 26,1 mm	 09300.01.CM Male, single connection 1 dB. Depth: 26,1 mm
 09300.10 Male, through-line 10 dB. Depth: 26,1 mm	 09300.10.CM Male, through-line 10 dB. Depth: 26,1 mm
 09302.01 Demix, male and F-type, single connection 1 dB - 2 modules. Depth: 22,1 mm	 09302.01.CM Demix, male and F-type, single connection 1 dB - 2 modules. Depth: 22,1 mm
Coaxial TV-FM-SAT 5-2400 MHz socket outlets (3 outputs: Ø 9,5 mm male and female + F-type)	
 09303 Single connection 1 dB - 2 modules. Depth: 22 mm	 09303.CM Single connection 1 dB - 2 modules. Depth: 22 mm
Coaxial TV 40-862 MHz socket outlets (1 output: Ø 9,5 mm female) and F-type socket outlets	
 *09313 Single connection. Depth: 29 mm	 09318 With F-type female connector. Depth: 9 mm
 *09313.CM Single connection. Depth: 29 mm	 09318.CM With F-type female connector. Depth: 9 mm
Terminal resistors and coaxial TV-RD-SAT 2400 MHz connectors	
 16330 Z 75 Ω, for frequencies up to 2400 MHz	 01644 Male, axial cable entry
 01645 Female, axial cable entry	 01634 Male, 90°-cable entry
 01635 Female, 90°-cable entry	 01654 Male, F-type, for RG59 cable
RJ45 data ports	
 09338.9 Netsafe, Cat. 5e, UTP. Depth: 26 mm	 09338.9.CM Netsafe, Cat. 5e, UTP. Depth: 26 mm
 09339.6 Netsafe, Cat. 6, UTP 110. Depth: 34,2 mm	 09339.6.CM Netsafe, Cat. 6, UTP 110. Depth: 34,2 mm
 09339.14 Netsafe, Cat. 6, FTP. Depth: 39,7 mm	 09339.14.CM Netsafe, Cat. 6, FTP. Depth: 39,7 mm
 09339.16 Netsafe, Cat. 6a, FTP. Depth: 39,7 mm	 09339.16.CM Netsafe, Cat. 6a, FTP. Depth: 39,7 mm
 Δ 09338.C Adaptor, RJ45 Cat. 5/6 AMP, Keystone, Lucent T. Depth: 9 mm	 Δ 09338.C.CM Adaptor, RJ45 Cat. 5/6 AMP, Keystone, Lucent T. Depth: 9 mm

White	Carbon Matt
Keystone universal adaptors	
 09339.C Adaptor, Keystone. Depth: 9 mm	 09339.C.CM Adaptor, Keystone. Depth: 9 mm
Electromechanical bells - Buzzers	
 ▲09372.SR Ringtone/buzzer 120 V~ 50-60 Hz. Depth: 31.8 mm	 ▲09372.SR.CM Ringtone/buzzer 120 V~ 50-60 Hz. Depth: 31.8 mm
 09373.SR Ringtone/buzzer 230 V~ 50-60 Hz. Depth: 31.8 mm	 09373.SR.CM Ringtone/buzzer 230 V~ 50-60 Hz. Depth: 31.8 mm
Double pilot lights (for signalling unit)	
 09388 Dual indicator light for 2 signalling units, neutral diffusers Depth: 23 mm	 09388.CM Dual indicator light for 2 signalling units, neutral diffusers Depth: 23 mm
TORCIA, electronic hand-lamps (with automatic emergency device)	
 09395 With high-efficiency LED, 230 V~ 50/60 Hz - 2 modules. Depth: 41,3 mm	 09395.CM With high-efficiency LED, 230 V~ 50/60 Hz - 2 modules. Depth: 41,3 mm
	 00910 Ni-MH 4,8 V 80 mAh battery, spare part for TORCIA
Thermostats and timer-thermostats (heating and air-conditioning)	
 09470 Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, heating and air-conditioning ON/OFF, class I temperature control device (contribution 1%) in ON/OFF mode, white LED backlighting and brightness regulation, 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm	 09470.CM Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, heating and air-conditioning ON/OFF, class I temperature control device (contribution 1%) in ON/OFF mode, white LED backlighting and brightness regulation, 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm
 02900.1 Electronic thermostat for ON/OFF ambient temperature control (heating and air-conditioning), class I temperature control device (contribution 1%), change-over relay output 5(2) A 240 V~, AA LR6 1,5 V battery-powered (not supplied), surface mounting, white	 01910 Electronic timer-thermostat for ON/OFF ambient temperature control (heating and air-conditioning), daily/weekly programming, class I temperature control device (contribution 1%), change-over relay output 5(2) A 250 V~, AA LR6 1,5 V battery-powered (not supplied), surface mounting, white

White	Carbon Matt
Switches for fan coil speed adjustment	
 09063 2P 10 AX 250 V~ switch for fan coil	 09063.CM 2P 10 AX 250 V~ switch for fan coil
Hotel solutions	
 09026.DND 1-module interchan-geable button, Do Not Disturb, with diffuser, lightable	 09026.DND.CM 1-module interchan-geable button, Do Not Disturb, with diffuser, lightable
 09026.PLS 1-module interchan-geable button, Please Clean, with diffuser, lightable	 09026.PLS.CM 1-module interchan-geable button, Please Clean, with diffuser, lightable
 09388.SC Double room status indicator for 2 signalling units: do not disturb and make up room	 09388.SC.CM Double room status indicator for 2 signalling units: do not disturb and make up room
 09097 1P NO 10 A 230 V~ push button, for hotel "Do Not Disturb" and "Please Clean" lighttable - 2 modules. Depth: 27,2 mm	
 *09257 2P+E 13 A 250 V~ SICURY socket outlet, multistandard - 2 modules. Depth: 18,7 mm	 *09257.CM 2P+E 13 A 250 V~ SICURY socket outlet, multistandard - 2 modules. Depth: 18,7 mm
 09290 Shaver supply unit with 20 VA isolating transformer, 230 V~ 50/60 Hz, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm	 09290.CM Shaver supply unit with 20 VA isolating transformer, 230 V~ 50/60 Hz, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm
 09463 Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 24,7 mm	 09463.CM Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 24,7 mm
 09465 Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm	 09465.CM Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm

White	Carbon Matt
-------	-------------

Gateway



09597
IoT Bluetooth Wi-Fi Gateway for integration, configuration, supervision of VIEW Wireless, via Cloud and App for smartphone, tablet, 100-240 V 50/60 Hz power supply - 2 modules
Depth: 37.2 mm



09597.CM
IoT Bluetooth Wi-Fi Gateway for integration, configuration, supervision of VIEW Wireless, via Cloud and App for smartphone, tablet, 100-240 V 50/60 Hz power supply - 2 modules
Depth: 37.2 mm



0K14597.01
Wi-Fi Bluetooth wireless technology gateway for integration, configuration and supervising of View Wireless system by Cloud and app for smartphone and tablet, supply voltage 100-240 V 50/60 Hz, on DIN (60715 TH35) rail installation, occupies 2 17,5 mm modules



Gateway installed into the supplied frame for DIN rail

Mounting frames for iPads



01430
Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied with type C USB cable and no power supply unit, black



01430.B
Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied with type C USB cable and no power supply unit, white



01430.N
Support for 10.9-11 inch iPad devices, comprising a decorative frame with surface-mounting with wall plugs, supplied with type C USB cable and no power supply unit, Next

White	Carbon Matt
-------	-------------

Connected 2-way switch for lights



09592
VIEW Wireless electronic 2-way switch with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external button for actuator control or to recall a scenario, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply
Depth: 37.9 mm



09592.2
As for 09592, 2 modules
Depth: 37.9 mm



09592.CM
VIEW Wireless electronic 2-way switch with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external button for actuator control or to recall a scenario, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply
Depth: 37.9 mm



09592.2.CM
As for 09592.CM, 2 modules
Depth: 37.9 mm

Connected controls for roller shutters



09594.0
VIEW Wireless electronic control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, local control with push button or remote control, double IoT technology on Bluetooth® technology 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external push button to recall a scenario, favourite position recall function, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply, to be completed with two interchangeable half-button caps, 1 Neve UP module.
Depth: 37.9 mm



09755.2
Two 1-module interchangeable arrow symbol half-button caps, 1 module



09755.2.CM
Two 1-module interchangeable arrow symbol half-button caps, 1 module

Connected actuator for roller shutters



03982
Actuator for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0



White	Carbon Matt
-------	-------------

Connected dimmers



09595.0

VIEW Wireless electronic dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external push button for dimmer control or to recall a scenario, dimmer off operation, RGB LED visible in darkness with brightness control, 220-240 V 50/60 Hz power supply, to be completed with Neve UP 1-module interchangeable buttons

Depth: 37.8 mm



09595.0.120

VIEW Wireless electronic dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external push button for dimmer control or to recall a scenario, RGB LED visible in darkness with brightness control, 120 V 50/60 Hz power supply, to be completed with Neve UP 1-module interchangeable buttons

Depth: 37.8 mm

Connected electronic control



09591.0

VIEW Wireless electronic control mechanism, local control with push button or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply, to be completed with Neve UP 1-module interchangeable buttons.

Depth: 37.9 mm



09755

Two interchangeable half-button caps, neutral, 1 module



09755.2

Two interchangeable half-button caps, arrow symbol, 1 module




09755.3

Two interchangeable half-button caps, dimmer symbols, 1 module




09755.6

Two interchangeable half-button caps, scenario symbols, 1 module



09755.CM

Two interchangeable half-button caps, neutral, 1 module



09755.2.CM

Two interchangeable half-button caps, arrow symbol, 1 module



09755.3.CM

Two interchangeable half-button caps, dimmer symbols, 1 module



09755.6.CM

Two interchangeable half-button caps, scenario symbols, 1 module

Connected socket outlet actuators



09593

VIEW Wireless electronic control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, function for measuring the instant power and energy consumed and load cut-off threshold, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply. Depth: 40 mm



09593.CM

VIEW Wireless electronic control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, function for measuring the instant power and energy consumed and load cut-off threshold, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply. Depth: 40 mm

White	Carbon Matt
-------	-------------

Connected actuator



03981

Control device with NO 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0

Connected Energy meter



02963

IoT device for consumption meter/production of instantaneous electricity and consumption logs (with hourly, daily, monthly, annual resolution), load control function (max 8 loads), 1 input for toroidal current sensor supplied, detectable power 25 W-10 kW, single-phase power supply 100-240 V 50/60 Hz, IoT technology on Bluetooth technology 5.0 standard for the creation of VIEW Wireless mesh system, installation on DIN rail (60715 TH35), occupies 1 module measuring 17.5 mm.

Connected thermostats



09473

Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, IoT technology on Bluetooth® wireless technology 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm



09473.CM

Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, IoT technology on Bluetooth® wireless technology 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm

White	Carbon Matt
-------	-------------

Connected sensors



 **Bluetooth®**

03980
Magnetic contact for doors and windows, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 input for voltage-free contact, powered by AA LR6 1.5 V batteries (not supplied), white. For use as an accessory of the connected thermostat or, in combination with the IoT gateway, as a sensor for magnetic contact or voltage-free contact input opening/closing notifications.

Connected radar sensor



 **Bluetooth®**

09179
UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply
Depth: 39.9 mm



 **Bluetooth®**

09179.CM
UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply
Depth: 39.9 mm



 **Bluetooth®**

02692
UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, false ceiling installation.



 **Bluetooth®**

02692.S.1
Round section adaptor for ceiling installation of the IoT connected radar sensor 02692.

White	Carbon Matt
-------	-------------

Connected access control



 **Bluetooth®**

09462
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 32.5 mm





09467
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, LED visible in darkness with brightness control, 100-240 V~ 50/60 Hz power supply, Next - 2 modules. Depth: 32.5 mm

09467.C
Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules.



 **Bluetooth®**

09462.CM
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 32.5 mm





09467.CM
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, LED visible in darkness with brightness control, 100-240 V~ 50/60 Hz power supply, Next - 2 modules. Depth: 32.5 mm

09467.C.CM
Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules.

Glossy
(Technopolymer)



01 White (Total Look)



02 Ivory

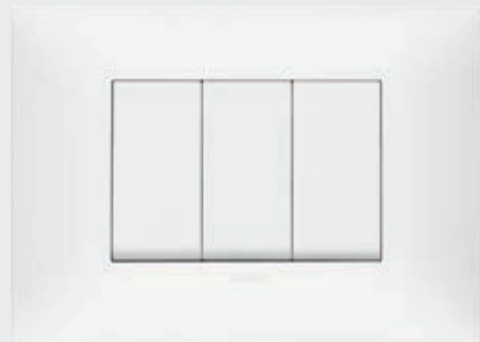


03 Slate grey



04 Black

Matt
(Matt painted technopolymer)



11 Matt white



12 Matt dove grey

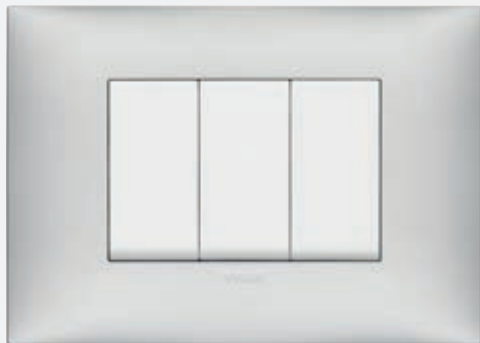


13 Matt clay



14 Carbon matt (Total Look)

Metal
(Metallic painted technopolymer)



21 Matt silver



22 Matt nickel






23 Matt titanium



24 Matt copper

	1-central-module	2-module	1-central-module	2-separate-module	2-central-module	3-module
						
Glossy (Technopolymer)						
 White (Total Look)	09661.01	09662.01	09671.01	09679.01	09672.01	09673.01
 Ivory	09661.02	09662.02	09671.02	09679.02	09672.02	09673.02
 Slate grey	09661.03	09662.03	09671.03	09679.03	09672.03	09673.03
 Black	09661.04	09662.04	09671.04	09679.04	09672.04	09673.04
Matt (Matt painted technopolymer)						
 Matt white	09661.11	09662.11	09671.11	09679.11	09672.11	09673.11
 Matt dove grey	09661.12	09662.12	09671.12	09679.12	09672.12	09673.12
 Matt clay	09661.13	09662.13	09671.13	09679.13	09672.13	09673.13
 Carbon matt (Total Look)	09661.14	09662.14	09671.14	09679.14	09672.14	09673.14
Metal (Metallic painted technopolymer)						
 Matt silver	09661.21	09662.21	09671.21	09679.21	09672.21	09673.21
 Matt nickel	09661.22	09662.22	09671.22	09679.22	09672.22	09673.22
 Matt titanium	09661.23	09662.23	09671.23	09679.23	09672.23	09673.23
 Matt copper	09661.24	09662.24	09671.24	09679.24	09672.24	09673.24

3-blank-module	4-module	7-module	2+2-module (between centres 71 mm)	2+2+2-module (between centres 71 mm)	2+2+2+2-module (between centres 71 mm)
					
09670.01	09674.01	09677.01	09664.01	09666.01	09668.01
09670.02	09674.02	09677.02	09664.02	09666.02	09668.02
09670.03	09674.03	09677.03	09664.03	09666.03	09668.03
09670.04	09674.04	09677.04	09664.04	09666.04	09668.04
09670.11	09674.11	09677.11	09664.11	09666.11	09668.11
09670.12	09674.12	09677.12	09664.12	09666.12	09668.12
09670.13	09674.13	09677.13	09664.13	09666.13	09668.13
09670.14	09674.14	09677.14	09664.14	09666.14	09668.14
09670.21	09674.21	09677.21	09664.21	09666.21	09668.21
09670.22	09674.22	09677.22	09664.22	09666.22	09668.22
09670.23	09674.23	09677.23	09664.23	09666.23	09668.23
09670.24	09674.24	09677.24	09664.24	09666.24	09668.24


NEVE UP
Types of mounting





















Module	Box	Frame	Cover plate*
2-central for ø 60 mm and 3-module mounting box	 V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black  V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	 09606 2-central module, for horizontal installation  09607 2-central module, for vertical installation	 09672... 2-central-module, for horizontal and vertical installation. Dimensions: 120x86x8,5 mm  09672... 2-central-module, for horizontal and vertical installation. Dimensions: 120x86x8,5 mm
	 V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black  V71703 For hollow walls, GW 850 °C, light blue  4x2" mounting box		
3	 4x2" mounting box	 09613 3-module  09623 3-module, to use for installation of Plana devices	 09671... 1-central-module. Dimensions: 120x86x8,9 mm  09679... 2-separate-module. Dimensions: 120x86x9 mm

NEVE UP
Types of mounting



Module	Box	Frame	Cover plate*
3	 4x2" mounting box	 09613 3-module	 09673... 3-module. Dimensions: 120x86x8,5 mm
	 V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black  V71703 For hollow walls, GW 850 °C, light blue	 09623 3-module, to use for installation of Plana devices	 09670... Blank module. Dimensions: 120x86x9,8 mm
4	 V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black  V71704 For hollow walls, GW 850 °C, light blue	 09614 4-module	 09674... 4-module. Dimensions: 142,4x86x8,4 mm
7	 V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black  V71706 For hollow walls, GW 850 °C, light blue	 09617 7-module	 09677... 7-module. Dimensions: 210x86x8,4 mm

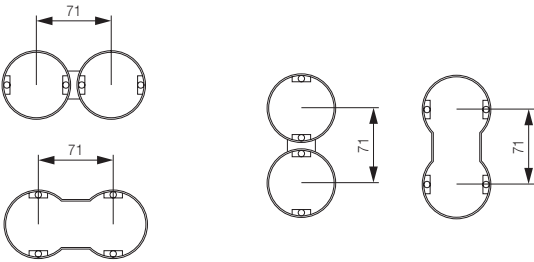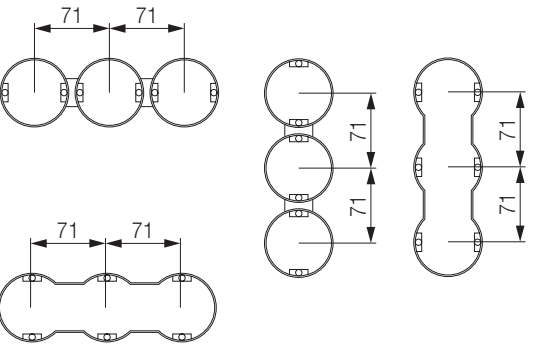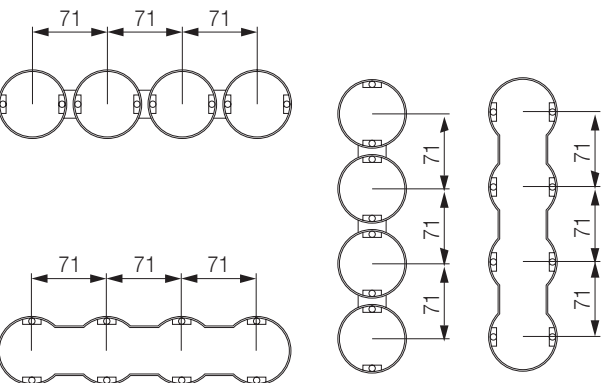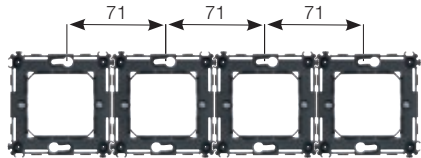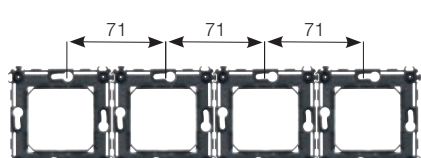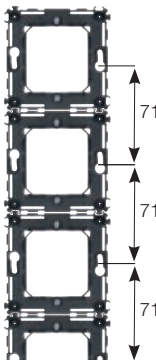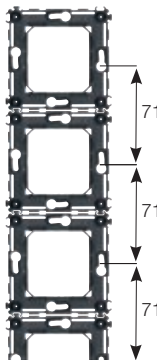* Cover plates range, page 398

Module	Box	Frame	Cover plate*
1 for ø 60 mm mounting box	 V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black	 09602.1 2-module, with claws  09603.1 2-module, without screws	 09661... 1-central-module. Dimensions: 86x86x8,8 mm
2 for ø 60 mm mounting box	V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	 09602.1 2-module, with claws  09603.1 2-module, without screws	 09662... 2-module. Dimensions: 86x86x8,5 mm
2+2 71 mm between centres		 2 x 09602.1 2-module, with claws  2 x 09603.1 2-module, without screws  2 x 09602.1 2-module, with claws  2 x 09603.1 2-module, without screws	 09664... 4-module (2+2), for horizontal and vertical installation. Dimensions: 157x86x8,5 mm 
2+2+2 71 mm between centres		 3 x 09602.1 2-module, with claws  3 x 09603.1 2-module, without screws  3 x 09602.1 2-module, with claws  3 x 09603.1 2-module, without screws	 09666... 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 228x86x8,5 mm 
2+2+2+2 71 mm between centres		 4 x 09602.1 2-module, with claws  4 x 09603.1 2-module, without screws  4 x 09602.1 2-module, with claws  4 x 09603.1 2-module, without screws	 09668... 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 299x86x8,5 mm 

Smart Home&Building



Supervision



01425
Colour 10" IP touch screen, used as a home automation system supervisor, IP/Due Fili Plus video door entry indoor station, IP video camera and CCTV system manager, PoE or 12-30 VDC, surface mounting with bracket on round mounting box, 3 module rectangular (horizontal and vertical), 8 module (4+4) and BS square mounting box, black



21665.11
Aluminium
Dimensions: 345x250 mm



21665.70
Diamond white
Dimensions: 345x250 mm



21665.76
Diamond black
Dimensions: 345x250 mm



01422
Colour 7" IP touch screen, used as a home automation system supervisor, IP/Due Fili Plus video door entry indoor station, IP camera and CCTV system manager, PoE or 12-30 VDC, surface mounting with bracket on round mounting box, rectangular 3 module (horizontal and vertical), 8 module (4+4) and BS square mounting box, black



01422.B
White



01420
Colour 4.3" IP touch screen, used as a home automation system supervisor, IP/Due Fili Plus video door entry indoor station, IP camera and CCTV system manager, PoE or 12-30 VDC, complete with mounting frame for flush mounting in 8 module boxes (4+4), to completed with Eikon, Arké or Plana cover plates, black



01420.B
White



01420.BN
Neutral

Mounting frames for iPads



01430
Mounting frame for 10.9-11 inch iPad devices, comprising a decorative frame with surface mounting frame with wall plugs, supplied with type C USB cable and no power supply unit, black



01430.B
White



01430.N
Next

EIKON

LINEA

ARKÉ

PLANA

IP Gateway and infrastructure devices



01410
By-me Plus home automation system IoT gateway, via IP/LAN network, Cloud and App for smartphone, tablet, PC or touch IP supervisor, **light version** for max. 32 devices, 4 modules size 17.5 mm



01411
IoT gateway for By-me Plus home automation system, via IP/LAN network, Cloud and App for smartphone, tablet, PC or touch IP supervisor, 4 modules size 17.5 mm



01415
IoT gateway for Due Fili Plus video door entry system with IP/LAN network, Cloud and App for smartphone, tablet, PC or touch supervisor, 6 modules size 17.5 mm



01416
IoT router for IP video door entry with IP/LAN network, Cloud and App for smartphone, tablet, PC or touch supervisor, 4 modules size 17.5 mm



03812
Burglar alarm system gateway with IP/LAN for connection to Vimar Cloud, smartphone, tablet and supervision touch screen

Wi-Fi access point



20195
72.2Mb/s Wi-Fi access point, 2 LAN 10-100 Mb/s ports, input remote Wi-Fi radio ON/OFF push button, 230V~50/60Hz power supply, grey - 2 modules.
Depth: 41 mm



30195.G
72.2 Mb/s Wi-Fi access point 2 LAN 10-100 Mb/s ports, input for remote Wi-Fi radio ON/OFF push button, 230V~240V~50/60Hz power supply, black - 2 modules.
Depth: 44.4 mm



19195
72.2Mb/s Wi-Fi access point, 2 LAN 10-100 Mb/s ports, input remote Wi-Fi radio ON/OFF push button, 230V~50/60Hz power supply, grey - 2 modules.
Depth: 40.7 mm




14195
72.2Mb/s Wi-Fi access point, 2 LAN 10-100 Mb/s ports, input remote Wi-Fi radio ON/OFF push button, 230V~50/60Hz power supply, white - 2 modules.
Depth: 40 mm



20195.B
As above, white



20195.N
As above, Next



30195.B
As above, white



30195.C
As above, canvas.



19195.B
As above, white



19195.M
As above, metal



14195.SL
As above, silver

EIKON

LINEA

ARKÉ

IDEA

PLANA

Infrastructure devices

RJ11 socket outlets



20329
Special RJ11 socket outlet for Bus, screw terminals, grey.
Depth: 33.6 mm



30320.G
Special RJ11 socket outlet for Bus, screw terminals, black.
Depth: 22.7 mm



19329
Special RJ11 socket outlet for Bus, screw terminals, grey.
Depth: 33.6 mm



16339
Special RJ11 socket outlet for Bus, screw terminals, grey.
Depth: 33.2 mm



14329
Special RJ11 socket outlet for Bus, screw terminals, white.
Depth: 32.6 mm



20329.B
As above, white



20329.N
As above, Next



30320.B
As above, white



30320.C
As above, canvas



19329.B
As above, white



19329.M
As above, Metal



16339.B
As above, white



14329.SL
As above, silver

EIKON LINEA ARKÉ IDEA PLANA

Infrastructure devices, controls and actuations

Logic unit, couplers and power supply units



01468
Unit for implementing logic, mathematical, timing and messaging functions, 1 module of 17.5 mm



01400
Power supply unit, output 29 VDC 400 mA, 230 V~ 50/60 Hz, 2 modules of 17.5 mm



01401
Power supply unit, output 29 VDC 1280 mA, 120-230 V~ 50/60 Hz, 8 modules of 17.5 mm



01830
Power supply unit, output 12 VDC, 120-230 V~ 50/60 Hz, 4 modules of 17.5 mm



01831.1
Power supply unit, 12 VDC 1250 mA, 100-240 V~ 50/60 Hz, 1 modules of 17.5 mm



01845.1
Line coupler, 2 modules of 17.5 mm

Cables and accessories



01840.C
Cable for By-me Bus system, 2x0.50 mm², with LSZH sheath, CPR Cca s1b d1 a1 class, suitable for installation with Category I power cables (U0 = 400 V), yellow - 100 m



01840.E
Cable for By-me Bus system, 2x0.50 mm² with LSZH sheath, CPR Eca class, suitable for installation with Category I power cables (U0 = 400 V), white - 100 m



01840.E.B
Cable for By-me Bus system sound system, 2x0.50 mm² with LSZH sheath, CPR Eca class, suitable for installation with Category I power cables (U0 = 400 V), blue - 100 m spool



01841.E
Cable for By-me Bus system, 2x0.50 mm² shielded, with LSZH sheath, CPR Eca class, suitable for installation with Category I power cables (U0 = 400 V), for marine applications, white - 100 m



01839
Removable terminal 2 screw pins for Bus system

Flush mounting power supply units



20580
Power supply unit, output 32 VDC 100 mA, 110-230 V~50/60 Hz, grey, Depth: 40 mm



30492.G
Power supply unit, output 32 VDC 100 mA, 120-230 V~ 50-60 Hz, black, Depth: 43.6 mm



19580
Power supply unit, output 32 VDC 100 mA, 110-230 V~50/60 Hz, grey, Depth: 40 mm




20580.B
As above, white



20580.N
As above, Next



30492.B
As above, white



30492.C
As above, canvas



19580.B
As above, white



19580.M
As above, Metal



14580
Power supply unit, output 32 VDC 100 mA, 110-230 V~50/60 Hz, white, Depth: 39 mm




14580.SL
As above, Silver

Infrastructure devices, controls and actuations

Eikon Tactil controls



21520.1
4 independent push buttons or 2 rocker buttons, 4 independent RGB LEDs - 2 modules. Depth: 38 mm



21540.1
6 independent push buttons or 3 rocker buttons, 6 independent RGB LEDs - 3 modules. Depth: 38 mm



▲ 21847.5
8 sheets of stickers with symbols and lettering for customising Eikon Tactil controls



▲ 21847.6
4 sheets of stickers with lighttable symbols and lettering for external/internal hotel room or cabin functions to customise Eikon Tactil controls



▲ 21847.7
4 sheets of stickers with lighttable symbols and lettering for standard functions for customising Eikon Tactil controls



21847.P
Sheet of stickers with lighttable symbols and lettering for customisable functions for customising Eikon Tactil controls

Eikon Exé Flat and Tondo controls



01480.AX
4 push buttons, RGB LED visible in darkness with brightness control - 2 modules Depth: 21.5 mm



01485.AX
6 push buttons, RGB LED visible in darkness with brightness control - 3 modules Depth: 21.5 mm

Controls to be completed with Eikon, Arké and Plana interchangeable half-button caps



01480
4 push buttons - 2 modules
01480.TR
As above, tropicalised. Depth: 20 mm

01481
4 push buttons + relay actuator 16 A NO 120-240 V~ 50/60 Hz - 2 modules. Depth: 37 mm

01482
4 push buttons + actuator for 1 roller shutter with slat control, relay output for motor cosφ 0.6 2 A 120-240 V~ 50/60 Hz - 2 modules. Depth: 37 mm



01485
6 push buttons - 3 modules
01485.TR
As above, tropicalised. Depth: 20 mm

01486
6 push buttons + relay actuator 16 A NO 120-240 V~ 50/60 Hz - 3 modules. Depth: 37 mm

01487
6 push buttons + actuator for 1 roller shutter with slat control, relay output for motor cosφ 0.6 2 A 120-240 V~ 50/60 Hz - 3 modules. Depth: 37 mm



01488
4 push buttons + dimmer 240 V~ 50/60 Hz phase cutting, incandescent 40-200 W, electronic transformers 40-300 VA at 240 V~, 20-150 VA at 120 V~, CFL 10-200 W at 240 V~, 5-100 W at 120 V~, LED 3-200 W at 240 V~, 3-100 W at 120 V~, RGB LED visible in darkness with brightness control - 2 modules. Depth: 37 mm

01489
4 push buttons, 1 output 0/1-10 V SELV, 1 contact relay output NO 2A 120-240 V~ 50/60 Hz for ballast and LED driver, RGB LED visible in darkness with brightness control - 2 modules. Depth: 37 mm

Controls to be completed with Linea interchangeable half-button caps



30480
4 push buttons, RGB LED visible in darkness with brightness control - 2 modules. Depth: 20.2 mm

30481
4 push buttons + actuator with relay output NO 16A 120-240 V~ 50/60 Hz, RGB LED visible in darkness with brightness control - 2 modules. Depth: 37.2 mm

30482
4 push buttons + actuator for 1 roller shutter with slat control with change-over relay output for motor cosφ 0.6 2 A 120-240 V~ 50/60 Hz, RGB LED visible in darkness with brightness control - 2 modules. Depth: 37.2 mm



30485
6 push buttons, RGB LED visible in darkness with brightness control - 3 modules. Depth: 20.2 mm

30486
6 push buttons + actuator with relay output NO 16A 120-240 V~ 50/60 Hz, RGB LED visible in darkness with brightness control - 3 modules. Depth: 37.2 mm

30487
6 push buttons and actuator for 1 roller shutter with slat control with change-over relay output for motor cosφ 0.6 2 A 120-240 V~ 50/60 Hz, RGB LED visible in darkness with brightness control - 3 modules. Depth: 37.2 mm



30488
4 push buttons and dimmer 240 V~ 50/60 Hz with phase cutting, for incandescent lamps 40-200 W, electronic transformers 40-300 VA at 240 V~, 20-150 VA at 120 V~, CFL lamps 10-200 W at 240 V~, 5-100 W at 120 V~, LED lamps 3-200 W at 240 V~, 3-100 W at 120 V~, RGB LED visible in darkness with brightness control - 2 modules. Depth: 38.05 mm

30489
4 push buttons, 1 output 0/1-10 V SELV, 1 contact relay output NO 2A 120-240 V~ 50/60 Hz for ballast and LED driver, RGB LED visible in darkness with brightness control - 2 modules. Depth: 38.05 mm

EIKON	LINEA	ARKÉ	IDEA	PLANA
-------	-------	------	------	-------

Controls and actuators

Flush mounting detectors



20485
Passive infrared motion detector, grey.
Depth: 26.5 mm



30475.G
Passive infrared motion detector, black.
Depth: 30.8 mm



19485
Passive infrared motion detector, grey.
Depth: 26.2 mm



16935
Passive infrared motion detector, grey.
Depth: 26 mm



14485
Passive infrared motion detector, white.
Depth: 25.5 mm



20485.B
As above, white

20485.N
As above, Next



30475.B
As above, white



19485.B
As above, white

19485.M
As above, Metal



16935.B
As above, white



14485.SL
As above, Silver



30475.C
As above, canvas



20486
Adjustable passive infrared motion detector, grey.
Depth: 26.5 mm




19486
Adjustable passive infrared motion detector, grey.
Depth: 26.5 mm



20486.B
As above, white

20486.N
As above, Next



19486.B
As above, white

19486.M
As above, Metal

Input/output interfaces



20518
Interface 2 traditional controls, grey.
Depth: 40 mm



30472.G
Interface 2 traditional controls, black.
Depth: 43.3 mm



19518
Interface 2 traditional controls, grey.
Depth: 39.5 mm



16958
Interface 2 traditional controls, grey.
Depth: 39.5 mm



14518
Interface 2 traditional controls, white.
Depth: 39 mm



20518.B
As above, white

20518.N
As above, Next



30472.B
As above, white

30472.C
As above, canvas



19518.B
As above, white

19518.M
As above, Metal



16958.B
As above, white



14518.SL
As above, Silver

EIKON	LINEA	ARKÉ	IDEA	PLANA
-------	-------	------	------	-------

Controls and actuators

Actuators



20534
Actuator with change-over relay output 6 A 120-230 V~, grey.
Depth: 40 mm



30473.G
Actuator with change-over relay output 6 A 120-240 - black.
Depth: 43.3 mm



19534
Actuator with change-over relay output 6 A 120-230 V~, grey.
Depth: 39.5 mm



16974
Actuator with change-over relay output 6 A 120-230 V~, grey.
Depth: 39.5 mm



14534
Actuator with change-over relay output 6 A 120-230 V~, white.
Depth: 39 mm



20534.B
As above, white



20534.N
As above, Next



30473.B
As above, white



30473.C
As above, canvas



19534.B
As above, white



19534.M
As above, Metal



16974.B
As above, white



14534.SL
As above, Silver

Input/output interfaces



20584.1
For transmission of By-me Plus controls to IR receiver, with 3 m cable, grey. Depth: 40 mm



19584.1
For transmission of By-me Plus controls to IR receiver, with 3 m cable, grey. Depth: 39 mm



14584.1
For transmission of By-me Plus controls to IR receiver, with 3 m cable, grey. Depth: 39 mm



20584.1.B
As above, white



19584.1.B
As above, white



14584.1.SL
As above, Silver




20584.1.N
As above, Next



19584.1.M
As above, Metal

Modules for retrofit installation



01475
Module with 3 programmable digital inputs for potential-free contacts, 3 outputs for LED control, By-me home automation system



01476
Module with 2 programmable digital inputs for potential-free contacts, 1 output for a roller shutter with slat orientation with relay for motor cos ϕ 0.6 2 A 120-230 V~, 2 outputs for LED control, By-me home automation system



01477
Module with 2 programmable digital inputs for potential-free contacts, 1 lights control output with NO relay 10 A 120-230 V~ 50/60 Hz, 2 outputs for LED control, By-me home automation system

EIKON	LINEA	ARKÉ	PLANA
-------	-------	------	-------

Controls and actuators

Interfaces, actuators and dimmers



01417
Actuator + RGB(W) dimmer, 4 PWM outputs up to 5 A 12-48 VDC, with constant voltage control, brightness control of max. 4 monochrome LEDs or RGB(W) LED strips or spotlights or Dynamic White LED strips or spotlights, 1 NO relay output 6 A 120-240 V~ for LED power supply units, push buttons for local control, 4 modules size 17.5 mm



01418
Universal phase cutting dimmer 120-240 V~ 50/60 Hz, 2 outputs for incandescent lamps 40-300 W at 240 V~, 20-150 W at 120 V~, electronic transformers 40-300 VA at 240 V~, 20-150 VA at 120 V~, CFL lamps 10-200 W at 240 V~, 5-100 W at 120 V~, LED lamps 3-200 W at 240 V~, 3-100 W at 120 V~, push buttons for local control, protection fuse, 4 modules size 17.5 mm



01466.1
Actuator with 4 proportional analogue outputs (0)4-20 mA or 0-10 V with re-scalable Max voltage or current, 120-230 V~ 50/60 Hz, 4 modules size 17.5 mm. Combined with By-me temperature probes and thermostats to make a modulating room thermostat class V (3% contribution). Combined with relay actuators it regulates lamps controlled by drivers 0/1-10 V



01419.1
Actuator for DALI/DALI-2 lamps with integrated power supply unit, MASTER controller function, max. 64 lamps configurable in 16 By-me Functional Blocks via View PRO App, DALI Device Type 8 for dynamic white and RGB(W) management, By-me home automation system, push button for local control, 120-240 V~ 50/60 Hz power supply, 2 modules size 17.5 mm



01467
Device with 3 analogue signal inputs, 1 input 0-10 V or 4-20 mA, 1 input for NTC sensor, 1 input for brightness sensor 01530, 2 modules size 17.5 mm



01850.2
Actuator with change-over relay output 16 A 120-230 V~ + local control push button, 2 modules size 17.5 mm



01470.1
Module with 9 inputs and 8 preprogrammed outputs for residential or hotel applications, N/O relay outputs 16 A 120-230 V~ 50/60 Hz programmable with function for lights, roller shutters with slat orientation, local control, 6 modules size 17.5 mm



01471
Actuator with 4 change-over relay outputs 16 A 120-230 V~, programmable, control function for lights, roller shutters with slat orientation, fan coil, local control, 4 modules size 17.5 mm



01975
Actuator with 1 output 1-10 VDC 30 mA for LED control, 1 change-over relay output 120-230 V~ 2.5 A, 120-230 V~ 50/60 Hz, 3 modules of 17.5 mm



01976
Actuator with 1 output 1-10 VDC 30 mA for LED control, 1 relay output 12-24 V 10 A, 12-24 V~ 50/60 Hz or 12-24 VDC, 3 modules size 17.5 mm

Electronic power supply units



01876
230 V~ 50 Hz for adjustable RGB LED modules 12/24 VDC, adjustable con RGB dimmer and FADING-SHOW dimmer

System extension with EnOcean® wireless technology (868 MHz)



03955
Flat control with 4 push buttons with 868 MHz radio frequency transmitter, **EnOcean®** standard, energy harvesting power supply provided by the built-in electro-dynamic generator, to be completed with dedicated buttons - 2 modules. Depth: 3.5 mm



30502
Flat control with 4 push buttons with 868 MHz radio frequency transmitter, **EnOcean®** standard, energy harvesting power supply provided by the built-in electro-dynamic generator, to be completed with Linea buttons 31506 or 31506.2 - 2 modules



01796.2
Multi-function actuator with relay output NO 10 A 230 V~ programmable, switch function for local control, transferable local input as ON/OFF control for other **EnOcean®** actuators, power supply 230 V~ 50/60 Hz




System extension with EnOcean® wireless technology (868 MHz)



21507.1
Eikon Evo 2-module mounting frame, grey




21507.1.B
White



30507.G
Linea 2-module mounting frame, black



30507.B
White



19507.CL
Arké Classic 2-module mounting frame, grey



19507.CL.B
White



14507
Plana 2-module mounting frame, white

EIKON	LINEA	ARKÉ	PLANA
-------	-------	------	-------

Controls and actuators


System extension with EnOcean® wireless technology (868 MHz)



22507
Eikon Exé 2-module mounting frame, grey



22507.B
White



20507
Eikon and Plana 2-central-module or 2-module mounting frame, grey



20507.B
As above, white



20506
Pair of 1-module buttons for RF controls, customisable¹, grey



20506.B
As above, white



20506.N
As above, Next




31506.G
Pair of 1-module buttons for RF controls, customisable¹, black



31506.B
As above, white



31506.C
As above, canvas



20506.2
2-module button for RF controls, customisable¹, grey



20506.2.B
As above, white



20506.2.N
As above, Next



31506.2G
2-module button for RF controls, customisable¹, black



31506.2B
As above, white



31506.2C
As above, canvas



19507.RN
Arké Round 2-module mounting frame, grey



19507.RN.B
White



19507
Arké 2-central-module or 2-module mounting frame, grey



19507.B
As above, white



19506
Pair of 1-module buttons for RF controls, customisable¹, grey



19506.B
As above, white



19506.M
As above, Metal



14506
Pair of 1-module buttons for RF controls, customisable¹, white



14506.SL
As above, Silver



14506.2
2-module button for RF controls, customisable¹, white



14506.2.SL
As above, Silver

EIKON	LINEA	ARKÉ	PLANA
-------	-------	------	-------

Controls and actuators

System extension with EnOcean® wireless technology (868 MHz)



20508
EnOcean® Bus interface, grey - 2 modules.
Depth: 26.5 mm



20508.B
As above, white



20508.N
As above, Next



19508
EnOcean® Bus interface, grey - 2 modules. Depth: 26.2 mm



19508.B
As above, white



19508.M
As above, Metal



14508
EnOcean® Bus interface, white - 2 modules. Depth: 25.5 mm



14508.SL
As above, Silver

Sound system



20582
Audio input 2 RCA connectors, automatic volume adjustment, integrated line terminator, grey - 2 modules. Depth: 37 mm



20582.B
As above, white



20582.N
As above, Next



19582
Audio input 2 RCA connectors, automatic volume adjustment, integrated line terminator, grey - 2 modules. Depth: 36.7 mm



19582.B
As above, white



19582.M
As above, Metal



14582
Audio input 2 RCA connectors, automatic volume adjustment, integrated line terminator, white - 2 modules. Depth: 36 mm



14582.SL
As above, Silver



20583
Spring connector for speaker, grey. Depth: 19.4 mm



20583.B
As above, white



20583.N
As above, Next



30493.G
Spring connector for speaker, black. Depth: 22.7 mm



30493.B
As above, white



30493.C
As above, canvas



19583
Spring connector for speaker, grey. Depth: 18.9 mm



19583.B
As above, white



19583.M
As above, Metal



14583
Spring connector for speaker, white. Depth: 18.4 mm



14583.SL
As above, Silver

EIKON	LINEA	ARKÉ	PLANA
-------	-------	------	-------

Sound system

Bluetooth® interfaces



20589²
Bluetooth® interface, up to 8 mobile devices saved, grey - 2 modules
Depth: 36 mm



20589.B²
As above, white



20589.N²
As above, Next



30495.G²
Bluetooth® interface, up to 8 mobile devices saved, black - 2 modules
Depth: 37.3 mm



30495.B²
As above, white



30495.C²
As above, canvas



19589²
Bluetooth® interface, up to 8 mobile devices saved, grey - 2 modules
Depth: 36.7 mm



19589.B²
As above, white



19589.M²
As above, Metal



14589²
Bluetooth® interface, up to 8 mobile devices saved, white - 2 modules
Depth: 37 mm



14589.SL²
As above, Silver

Sound system

Stereo amplifiers



20590²
Stereo amplifier 4 + 4 W RMS, 2 outputs for 8 Ω speakers, Bluetooth® receiver, 1 LINE IN input, 12 VDC, grey - 2 modules.
Depth: 36 mm



20590.B²
As above, white



20590.N²
As above, Next



19590²
Stereo amplifier 4 + 4 W RMS, 2 outputs for 8 Ω speakers, Bluetooth® receiver, 1 LINE IN input, 12 VDC, grey - 2 modules.
Depth: 36.7 mm



19590.B²
As above, white



19590.M²
As above, Metal



14590²
Stereo amplifier 4 + 4 W RMS, 2 outputs for 8 Ω speakers, Bluetooth® receiver, 1 LINE IN input, 12 VDC, white - 2 modules. Depth: 36 mm



14590.SL²
As above, Silver


Microphones



20586
Microphone for selective or general call, voice activation for monitoring children, grey - 2 modules. Depth: 37 mm



20586.B
As above, white



20586.N
As above, Next



19586
Microphone for selective or general call, voice activation for monitoring children, grey - 2 modules. Depth: 37 mm



19586.B
As above, white



19586.M
As above, Metal



14586
Microphone for selective or general call, voice activation for monitoring children, white - 2 modules. Depth: 36 mm



14586.SL
As above, Silver

EIKON LINEA ARKÉ PLANA

Sound system

Amplifiers and tuners



01483
4 push buttons, 1 LINE OUT output, RGB LED visible in darkness with brightness control, to be completed with 1- or 2-module interchangeable half-button caps - 2 modules.
Depth: 37 mm
To be completed with Eikon, Arké, Plana cover plates.



01484
4 push buttons + stereo amplifier 1+1 W RMS 2 outputs for 8 Ω speakers, RGB LED visible in darkness with brightness control, to be completed with 1- or 2-module interchangeable half-button caps - 2 modules
Depth: 37 mm
To be completed with Eikon, Arké, Plana cover plates.




30484
4 push buttons + stereo amplifier 1+1 W RMS 2 outputs for 8 Ω speakers, RGB LED visible in darkness with brightness control, to be completed with 1- or 2-module interchangeable half-button caps - 2 modules
Depth: 37 mm
To be completed with Linea cover plates.



01901
Stereo amplifier with 2 outputs for 8 Ω 10 + 10 W speakers, power supply 110-230 V~ 50/ 60 Hz, integrated line terminator, 6 modules size 17.5 mm

Two interchangeable half-button caps - 1 module




20751.4
I volume and O volume symbols, grey



20751.4.B
As above, white



20751.4.N
As above, Next



20751.5
Track and function change symbols, grey



20751.5.B
As above, white



20751.5.N
As above, Next



31480.VG
I volume and O volume symbols, black



31480.VB
As above, white



31480.VC
As above, canvas



31480.TG
Track and function change symbols, black



31480.TB
As above, white



31480.TC
As above, canvas




19751.4
I volume and O volume symbols, grey
19751.AB.4
As above, antibacterial material



19751.4.B
As above, white




19751.4.M
As above, Metal



19751.5
Track and function change symbols, grey



19751.5.B
As above, white



19751.5.M
As above, Metal



14751.4
I volume and O volume symbols, white



14751.4.SL
As above, Silver



14751.5
Track and function change symbols, white



14751.5.SL
As above, Silver

Stand alone sound system

Speakers



21588
Passive speaker 8 Ω 10 W, grey - 8 modules. Depth: 48 mm
To be completed with Eikon Evo, Eikon, Arké or Plana cover plates.



21588.B
White




21588.N
Next




20587
Passive speaker 8 Ω 3 W, grey - 3 modules. Depth: 40 mm
To be completed with Eikon Evo, Eikon, Arké or Plana cover plates.



20587.B
White



20587.N
Next



30494.G
Passive speaker 8 Ω 3 W, black - 3 modules. Depth: 41 mm
To be completed with Linea cover plates.



30494.B
White



30494.C
Canvas



01906
Passive speaker IP55 8 Ω 30 W, installation on hollow walls and false ceilings. Depth: 70 mm



01907.1
Passive speaker 8 Ω 30 W, installation on hollow walls and false ceilings. Depth: 68 mm



01908
Orientable passive speaker 8 Ω 30 W, surface mounting

System components



01903
Tap-off for By-me Plus control devices, flush mounting (retrofit)



01904
Branch tap-off for speaker system devices, flush mounting (retrofit)



01902
Decoupler of Bus line/ speaker system for By-me Plus power supply, integrated line terminator, 2 modules of 17.5 mm



01831.1
Power supply unit, 12 VDC 1250 mA, 100-240 V~ 50/60 Hz, 1 module size 17.5 mm



01840.E.B
Cable for By-me Bus system sound system, 2x0.50 mm² with LSZH sheath, CPR Eca class, suitable for installation with Category I power cables (U0 = 400 V), blue - 100 m



01839
Removable terminal 2 screw pins for Bus system

Temperature control

Eikon Tactil thermostats



21514.F.70
Touch screen thermostat (heating and air conditioning), 3-speed and proportional FAN-COIL control, ON/OFF control (class I, contribution 1%) PWM, PID (class IV, contribution 2%), can be interfaced with actuator 01466.1 for modulating room thermostat (class V, contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, diamond white - 2 modules. Depth: 30.2 mm



21514.S.70
Touch screen thermostat (heating and air conditioning), configurable STAR control, ON/OFF control (class I, contribution 1%) PWM, PID (class IV, contribution 2%), can be interfaced with actuator 01466.1 for modulating room thermostat (class V, contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, diamond white - 2 modules. Depth: 30.2 mm



21514.H.70
Touch screen thermostat (heating and air conditioning), MAKE UP ROOM and DO NOT DISTURB control, ON/OFF control (class I, contribution 1%) PWM, PID (class IV, contribution 2%), can be interfaced with actuator 01466.1 for modulating room thermostat (class V, contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, diamond white - 2 modules. Depth: 30.2 mm



21514.F.76
Diamond black



21514.S.76
Diamond black



21514.H.76
Diamond black

Flush mounting dial thermostats



02971
Dial thermostat (heating and air conditioning), for 2- and 4-pipe systems, 3-speed and proportional fan-coil control, ON/OFF control (class I, contribution 1%), PID (class IV, contribution 2%), can be interfaced with actuator 01466.1 for modulating room thermostat (class V, contribution 3%), 1 input for sensor 20432, 19432, 14432 or 02965.1, grey - 2 modules. Depth: 28.5 mm
To be completed with Eikon, Arké, Plana cover plates.



02971.B
As above, white



02971.N
As above, Next



02971.M
As above, Metal



30471.G
Dial thermostat (heating and air conditioning), for 2- and 4-pipe systems, 3-speed and proportional fan-coil control, ON/OFF control (class I, contribution 1%), PID (class IV, contribution 2%), can be interfaced with actuator 01466.1 for modulating room thermostat (class V, contribution 3%), 1 input for wired temperature sensor 02965.1, black - 2 modules. Depth: 31.8 mm
To be completed with Linea cover plates.



30471.B
As above, white



30471.C
As above, canvas

EIKON

LINEA

ARKÉ

PLANA

Temperature control

Probes and sensors



20538
Temperature probe (heating/aircon), ON/OFF mode, PWM and PID, for 2- and 4-pipe systems, 3-speed and proportional fan-coil control, 1 input for NTC sensor, grey. Depth: 40 mm




20538.B
As above, white




20538.N
As above, Next



30478.G
Temperature probe (heating/aircon), ON/OFF mode, PWM and PID, for 2- and 4-pipe systems, 3-speed and proportional fan-coil control, 1 input for NTC sensor, black. Depth: 43.3 mm



30478.B
As above, white



30478.C
As above, canvas



19538
Temperature probe (heating/aircon), ON/OFF mode, PWM and PID, for 2- and 4-pipe systems, 3-speed and proportional fan-coil control, 1 input for NTC sensor, grey. Depth: 40 mm



19538.B
As above, white



19538.M
As above, Metal



14538
Temperature probe (heating/aircon), ON/OFF mode, PWM and PID, for 2- and 4-pipe systems, 3-speed and proportional fan-coil control, 1 input for NTC sensor, white. Depth: 39 mm



14538.SL
As above, Silver



20433
Humidity sensor, 1 output 0-10 V or 4-20 mA, 12/24V, grey - 2 modules. Depth: 37 mm



20433.B
As above, white



20433.N
As above, Next



30433.G
Humidity sensor, 1 output 0-10 V or 4-20 mA, 12/24V, black- 2 modules. Depth: 40.7 mm



30433.B
As above, white



30433.C
As above, canvas



19433
Humidity sensor, 1 output 0-10 V or 4-20 mA, 12/24V, grey - 2 modules. Depth: 37 mm



19433.B
As above, white



19433.M
As above, Metal



14433
Humidity sensor, 1 output 0-10 V or 4-20 mA, 12/24V, white - 2 modules. Depth: 36 mm



14433.SL
As above, Silver

Probes and sensors



01465
HVAC controller for heating systems, 120-230 V~ 50/60 Hz, 3 inputs for PT100, PT1000 and NTC probes, 1 mixer valve control output, 1 output 0-10 V or (0)4-20 mA, 1 change-over relay output 16 A 230 V~, 6 modules size 17.5 mm

EIKON

LINEA

ARKÉ

PLANA

Energy management

Actuators



20537
Actuator, relay output 16 A 230 V~ 50 Hz with integrated current sensor, grey - 2 modules. Depth: 37 mm



30474.G
Actuator, relay output 16 A 230 V~ 50 Hz with integrated current sensor, black - 2 modules. Depth: 38.8 mm



19537
Actuator, relay output 16 A 230 V~ 50 Hz with integrated current sensor, grey - 2 modules. Depth: 36.7 mm



14537
Actuator, relay output 16 A 230 V~ 50 Hz with integrated current sensor, white - 2 modules. Depth: 36 mm



20537.B
As above, white



20537.N
As above, Next



30474.B
As above, white



30474.C
As above, canvas



19537.B
As above, white



19537.M
As above, Metal



14537.SL
As above, Silver

Meters



01451
Power meter with integrated current sensor, detects up to 3680 W, flush mounting (retrofit)



01452
Pulse counter interface for detecting data from electricity, water, gas meters, with flush mounting (retrofit)



01450
Power meter, 3 inputs for toroidal sensor, 25 W-100 kW, 120-230 V 50/60 Hz, 230/400 V 50/60 Hz, 1 module size 17.5 mm. Supplied with toroidal current sensor 01457



01455
Load control module, 3 inputs for toroidal sensor, 25 W-100 kW, 120-230 V 50/60 Hz, 230/400 V 50/60 Hz, 1 module size 17.5 mm. Supplied with toroidal current sensor 01457



01456
Actuator with relay output 16 A 120-230 V~ 50/60 Hz with integrated current sensor, 1 input for toroidal residual current sensor, 1 module size 17.5 mm. Supplied without toroidal residual current sensor



01457
Toroidal current sensor for load control and energy metering, hole diameter 7.5 mm, cable length 40 cm



01458
Toroidal current sensor for load control and energy metering, hole diameter 19 mm, cable length 40 cm



01459
Toroidal current sensor for load control and energy metering, hole diameter 9 mm, cable length 40 cm



01546
Weather station, KNX standard, 12-32 VDC or 12-24 VAC

Remote assistance devices

Hands-free, radio push button and interface



03890
Remote assistance hands-free device for calling recorded numbers via LTE mobile network. The hands-free call is sent by pressing the "Alarm" push button or the push button on the bracelet/pendant accessory. The device can also receive incoming calls with automatic answering



03893
Radio push button for remote assistance hands-free calls, can be worn as a pendant or bracelet, IP65, power supply with non-replaceable 3V CR2032 lithium battery



03895
Radio interface for remote assistance hands-free calls, 1 wired voltage-free contact input to initiate a call, power supply with 3V CR123 lithium battery (supplied)


LINEA WITH XT PLATFORM

Controls and actuations

Basic controls



32021.G
XT control device for By-me Plus home automation system with 2 push buttons, also configurable as 1 rocker button, LED with status function and visible in darkness with brightness control, central LED matrix to customise symbols or animation, black - 1 front module



32021.B
White



32021.C
Canvas



32031.G
XT control device for By-me Plus home automation system with 2 push buttons, also configurable as 1 rocker button, LED with status function and visible in darkness with brightness control, central label to customise symbols, black - 1 front module

Advanced controls



32023.G
XT control device for By-me Plus home automation system with 2 push buttons, also configurable as 1 rocker button, proximity function, LED matrix with status function or for scenario animation and visible in darkness with brightness control, central LED matrix to customise symbols or animation, black- 1 front module



32023.B
White



32023.C
Canvas



32033.G
XT control device for By-me Plus home automation system with 2 push buttons customisable with labels, also configurable as 1 rocker button, proximity function, labels with status function and visible in darkness with brightness control, central label to customise symbols, black - 1 front module

Double advanced controls




32024.G
XT control device for By-me Plus home automation system with 4 push buttons, proximity function, LED with status function and visible in darkness with brightness control, black - 1 front module



32024.B
White



32024.C
Canvas



32034.G
XT control device for By-me Plus home automation system with 4 push buttons customisable with labels, proximity function, labels with status function and visible in darkness with brightness control - 1 front module


LINEA WITH XT PLATFORM

Controls, actuation and temperature control


Fixed buttons



32020.G
XT fixed button - 1 front module, black



32020.B
White



32020.C
Canvas

Electrical control device and sheet of labels



32002
XT electronic control device for By-me Plus home automation system with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, 1 roller shutter operated by 2 A cosφ 0.6 motor, to be installed on XT mounting frames, to be completed with By-me Plus XT front modules



32090.PG
Sheet of customisable labels for XT 1-module front controls

Thermostats



32041.G
XT thermostat for By-me Plus home automation system for room temperature control (heating and air conditioning), 2- and 4-pipe system management, 3-speed and proportional fan coil control, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator with proportional analogue outputs 01466.1 to make a class V modulating room thermostat (contribution 3%), boost function to activate a second source, proximity function, LED backlighting, black - 2 front modules



32041.B
White



32041.C
Canvas


LINEA WITH XT PLATFORM

Temperature control

Multisensor



32042.G
XT control device for By-me Plus home automation system, thermostat function for room temperature control (heating and air-conditioning), 2- and 4-pipe system management, 3-speed and proportional fan coil control, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, can be interfaced with actuator with proportional analogue outputs 01466.1 to create a class V modulating room thermostat (contribution 3%), humidistat function with ON/OFF control with respect to a set parameter, VOC (volatile organic compound) function with ON/OFF control or to call up 2 scenarios, 2 push button function with configuration as 1 rocker button with status identification LED, central LED matrix to customise symbols or animation, proximity function, white LED backlighting, black - 2 front modules



32042.B
White



32042.C
Canvas

Control devices with climate control symbols



32044.G
XT control device for By-me Plus home automation system with 4 push buttons with backlighting CLIMATE CONTROL symbols and visible in darkness with brightness control - 1 front module



32044.B
White



32044.C
Canvas

Accessories

Device power supply node



32001
XT device power supply node for By-me Plus home automation system, 29 VDC Bus power supply, to be installed on XT mounting frames, to be completed with By-me Plus XT front modules

LINEA WITH XT PLATFORM

Accessories

Mounting frames



32602.G
Electrified mounting frame with 2 flush mounting modules, 3 XT front modules, with screws, for ø 60 m mounting boxes, black

32603.G
As above, 3 flush mounting modules, 4 XT front modules, with screws, for 3-module mounting boxes

32604.G
As above, 4 flush mounting modules, 5 XT front modules, with screws, for 4-module mounting boxes



32602.B
Electrified mounting frame with 2 flush mounting modules, 3 XT front modules, with screws, for ø 60 m mounting boxes, white

32603.B
As above, 3 flush mounting modules, 4 XT front modules, with screws, for 3-module mounting boxes

32604.B
As above, 4 flush mounting modules, 5 XT front modules, with screws, for 4-module mounting boxes



32602.C
Electrified mounting frame with 2 flush mounting modules, 3 XT front modules, with screws, for ø 60 m mounting boxes, canvas

32603.C
As above, 3 flush mounting modules, 4 XT front modules, with screws, for 3-module mounting boxes

32604.C
As above, 4 flush mounting modules, 5 XT front modules, with screws, for 4-module mounting boxes



32613.G
Mixed electrified decorative mounting frame for 1 XT node, 1 XT front module, 1 or 2 Linea connector blocks up to 2 modules, with screws, for 3-module mounting boxes, complete with cover plate, black

32614.G
As above, for 1 node and 1 XT actuator, 2 XT front modules, 1 or 2 Linea connector blocks up to 2 modules, with screws, for 4-module mounting boxes



32613.B
Mixed electrified decorative mounting frame for 1 XT node, 1 XT front module, 1 or 2 Linea connector blocks up to 2 modules, with screws, for 3-module mounting boxes, complete with cover plate, white

32614.B
As above, for 1 node and 1 XT actuator, 2 XT front modules, 1 or 2 Linea connector blocks up to 2 modules, with screws, for 4-module mounting boxes



32613.C
Mixed electrified decorative mounting frame for 1 XT node, 1 XT front module, 1 or 2 Linea connector blocks up to 2 modules, with screws, for 3-module mounting boxes, complete with cover plate, canvas

32614.C
As above, for 1 node and 1 XT actuator, 2 XT front modules, 1 or 2 Linea connector blocks up to 2 modules, with screws, for 4-module mounting boxes

Supervision



▲01560
5" colour touch screen for control and home automation system control, KNX standard, complete with mounting frame for installation in 2-3 module boxes, black



▲01560.B
5" colour touch screen for control and home automation system control, KNX standard, complete with mounting frame for installation in 2-3 module boxes, white

Software and interfaces



Software kits for managing the Well-contact Plus system.
0K01590: Suite Basic software + Client Basic licence + hardware key



Software kits for managing the Well-contact Plus system.
0K01590.1: 1 personal computer + Suite Basic software + Client Basic licence + hardware key
0K01591: 1 personal computer + Suite Basic software + Client Top licence + hardware key



Software for managing the Well-contact Plus system.
01589: Well-contact Suite Light
01592: Well-contact Suite Client
01593: Well-contact Suite Office
01594: Well-contact Suite Client Office
01595: Supplementary software for interfacing with administration management software



01993
Hardware interface for Well-contact Plus touch screens. Touch screen configuration software is necessary



01597
Spare USB key for Well-contact Suite software

Input/output devices



01514
Interface with 2 channels, programmable as voltage-free contact inputs or as outputs for LEDs, KNX standard, dim. 39.1x40x12.3 mm



01515.1
Interface with 4 channels, programmable as voltage-free contact inputs or as outputs for LEDs, KNX standard, dim. 46x46x11.7 mm



01510
Device with 4 programmable digital inputs for NO, NC contacts, 120-230 V~, KNX standard, 2 modules of 17.5 mm



01522.1
Device with 4 inputs/outputs, 4 NO relay outputs 16 A 250 V~, programmable with control function for lights, roller shutters with slat orientation, push buttons for local control, 4 programmable digital inputs for potential-free contacts, KNX standard, 4 modules size 17.5 mm

Controls and actuations

Actuators



▲01521.1
Actuator with 12 NO relay outputs for fluorescent lamps 10 A 250 V~ 50/60 Hz, KNX standard, 12 modules of 17.5 mm



01523.1
Actuator with 4 NO relay outputs 16 A 250 V~, programmable with control function for lights, roller shutters with slat orientation, push buttons for local control, KNX standard, 4 modules size 17.5 mm



▲01525
Actuator for 8 roller shutters with relay output 6 A 230 V~ 50/60 Hz, KNX standard, 8 modules size 17.5 mm



▲01532
Actuator with 16 relay outputs NO 10 A 230 V~ 50/60 Hz, KNX Secure standard, installation on DIN rails (60715 TH35), occupies 12 modules size 17.5 mm



01535
Actuator for solenoid valves, 6 (six) 230 V~ 0.5 A outputs, push buttons for local control, KNX standard, 4 modules size 17.5 mm



01536
Actuator with 4 analogue 0-10V or (0)4-20 mA outputs, KNX standard, 4 modules size 17.5 mm

Controls and actuations

Dimmers



01550
Dimmer with 4 NO relay outputs
16 A 250 V~, 4 outputs 0/1-10 V,
push buttons for local control, KNX
standard, 8 modules size 17.5 mm



01538
Phase cutting dimmer 120-240 V~ 50/60 Hz, 2
outputs for incandescent lamps 40-300 W at 240
V~, 20-150 W at 120 V~, electronic transformers
40-200 VA, CFL lamps 10-200 W, LED lamps
10-200 W, push buttons for local control, protection
fuse, 4 modules size 17.5 mm

Interfaces and Gateways



▲ 01506
KNX IP router, KNX
Secure standard, 2
modules size 17.5 mm



01507
KNX IP By-me router,
KNX Secure standard, 2
modules size 17.5 mm



01547.1
KNX IP interface, 2
modules size 17.5 mm



01548
KNX IP router, KNX
Secure standard, 2
modules size 17.5 mm



01542
KNX DALI gateway,
1 channel for 64 lamps
which can be grouped in
16 groups, 4 modules size
17.5 mm



01544
KNX DALI gateway, 8
channels for 16 lamps
per channel, 6 modules
size 17.5 mm



01540.1
KNX type B USB
interface, 2 modules
size 17.5 mm

System accessories



01500.2
Power supply unit with Bus output
of 30 VDC 320 mA, auxiliary output
30 VDC, 120-240 V~ 50/60 Hz, with
decoupling coil, KNX standard,
4 modules of 17.5 mm



01501.2
Power supply unit with Bus output
30 VDC 640 mA, auxiliary output
30 VDC, power supply 120-240 V~
50/60 Hz, with decoupling coil, KNX
standard, 4 modules size 17.5 mm



01831.1
Power supply unit, 12
VDC 1250 mA, 100-
240 V~ 50/60 Hz, 1 module
size 17.5 mm



01504.2
Line coupler, KNX
standard, 2 modules
size 17.5 mm



16887
Safety transformer,
230/12-24 V~ (SELV),
24 VA, 3 modules size
17.5 mm

KNX cables



01890.E
Cable for KNX systems, 2x2x0.8
mm, with LSZH sheath, CPR Eca
class, compliant with KNX standard,
suitable for installation with Category
I power cables (U0 = 400 V), green
- 100 m



01890.C
Cable for KNX systems, 2x2x0.8
mm, with LSZH sheath, CPR Cca
s1b d1 a1 class, compliant with KNX
standard, suitable for installation with
Category I power cables (U0 = 400
V), green - 100 m

Eikon Tactil controls



21840
4 independently
programmable push
buttons for managing
single loads or scenarios,
KNX standard, for Eikon
Tactil - 2 modules.
Depth: 38 mm



21860
6 independently
programmable push
buttons for managing
single loads or scenarios,
KNX standard, for Eikon
Tactil - 3 modules.
Depth: 38 mm



▲ 21847.5
8 sheets of stickers with
symbols and lettering for
customising Eikon Tactil
controls



▲ 21847.6
4 sheets of stickers with
lightable symbols and lettering
for external/internal hotel room
or cabin functions to customise
Eikon Tactil controls



▲ 21847.7
4 sheets of stickers with
lightable symbols and lettering
for standard functions for
customising Eikon Tactil
controls



21847.P
Sheet of stickers with lightable
symbols and lettering for
customisable functions for
customising Eikon Tactil
controls

Controls and actuations

Eikon Exé Flat and Tondo controls



01580.AX
4 KNX push buttons, RGB LED visible in darkness with brightness
control - 2 modules. Depth: 21.5 mm

▲ 01583.AX
4 push buttons, KNX Secure standard, RGB LED visible in
darkness with brightness control - 2 modules Depth: 21.5 mm



01585.AX
6 KNX push buttons, RGB LED visible in darkness with brightness
control - 3 modules. Depth: 21.5 mm

▲ 01588.AX
6 push buttons, KNX Secure standard, RGB LED visible in darkness
with brightness control - 3 modules Depth: 21.5 mm

Eikon, Arké and Plana controls



01580
4 push buttons - 2 modules. Depth: 20 mm

01581
4 push buttons + relay actuator 16 A NO 120-240 V~ 50/60 Hz - 2
modules. Depth: 37 mm

01582
4 push buttons + actuator for 1 roller shutter with slat control, relay
output for motor cosφ 0.6 2 A 120-240 V~ 50/60 Hz - 2 modules.
Depth: 37 mm

▲ 01583
4 push buttons, KNX Secure standard, RGB LED visible in darkness
with brightness control - 2 modules. Depth: 20 mm



01585
6 push buttons - 3 modules. Depth: 20 mm

01586
6 push buttons + relay actuator 16 A NO 120-240 V~ 50/60 Hz - 3
modules. Depth: 37 mm

01587
6 push buttons + actuator for 1 roller shutter with slat control, relay
output for motor cosφ 0.6 2 A 120-240 V~ 50/60 Hz - 3 modules.
Depth: 37 mm

▲ 01588
6 push buttons, KNX standard, RGB LED visible in darkness with
brightness control - 3 modules. Depth: 20 mm

Linea controls



30580
4 push buttons - 2 modules.
Depth: 20.2 mm

30581
4 push buttons + relay actuator
16 A NO 120-240 V~ 50/60 Hz -
2 modules. Depth: 37.2 mm

30582
4 push buttons + actuator for
1 roller shutter with slat control,
relay output for motor cosφ 0.6
2 A 120-240 V~ 50/60 Hz - 2
modules
Depth: 37.2 mm



30585
6 push buttons - 3
modules.
Depth: 20.2 mm

30586
6 push buttons + relay actuator
16 A NO 120-240 V~ 50/60 Hz -
3 modules. Depth: 37.2 mm

30587
6 push buttons + actuator for 1
roller shutter with slat control, relay
output for motor cosφ 0.6 2 A
120-240 V~ 50/60 Hz - 3 modules
Depth: 37.2 mm



30583
4 push buttons, KNX Secure standard,
RGB LED visible in darkness with
brightness control - 2 modules. Depth:
20.2 mm



30588
6 push buttons, KNX Secure standard, RGB
LED visible in darkness with brightness
control - 3 modules. Depth: 20.2 mm

Idea controls



16840
4 push buttons, grey
- 2 modules.
Depth: 19.5 mm





16840.B
White

EIKONLINEAARKÉPLANA

Controls and actuations

Four interchangeable half-button caps for Idea controls - 1 module

 16841 Neutral, grey	 16841.B White	 16841.0 O symbol, grey	 16841.0.B White	 16841.1 I symbol, grey	 16841.1.B White	 16841.2 I O symbol, grey	 16841.2.B White
 16841.3 Arrow symbol, grey	 16841.3.B White	 16841.4 Control symbol, grey	 16841.4.B White	 16843 Fixed, neutral, grey	 16843.B White		
 16842 Neutral, grey	 16842.B White	 16842.0 O symbol, grey	 16842.0.B White	 16842.1 I symbol, grey	 16842.1.B White	 16842.2 I O symbol, grey	 16842.2.B White
 16842.3 Arrow symbol, grey	 16842.3.B White	 16842.4 Control symbol, grey	 16842.4.B White	 16844 Fixed, neutral, grey	 16844.B White		

Temperature control

Eikon, Arké and Plana thermostats



02972
Dial thermostat (heating and air conditioning), for 2- and 4-pipe systems, 3-speed and proportional fan-coil control, ON/OFF control (class I, contribution 1%), PID (class IV, contribution 2%), can be interfaced with actuator 01466.1 for modulating room thermostat (class V, contribution 3%), 1 input for sensor 20432, 19432, 14432 or 02965.1, grey - 2 modules. Depth: 28.5 mm



02972.B
As above, white



02972.N
As above, Next



02972.M
As above, Metal

Temperature control

Linea thermostats



30571.G
Dial thermostat (heating and air conditioning), for 2- and 4-pipe systems, 3-speed and proportional fan-coil control, ON/OFF control (class I, contribution 1%), PID (class IV, contribution 2%), can be interfaced with actuator 01466.1 for modulating room thermostat (class V, contribution 3%), 1 input for wired temperature sensor 02965.1, black - 2 modules. Depth: 31.8 mm



30571.B
As above, white



30571.C
As above, canvas

Idea thermostats



16915
Thermostat for ON/OFF control (class I, contribution 1%), 1 NO relay output 4 A 24 V-, 1 input for NTC temperature sensor 20432, 19432 or 14432, 1 programmable digital input, grey - 2 modules. Depth: 36.5 mm



16915.B
White

Eikon Tactil thermostats



21814.F.70
Touch screen thermostat (heating and air conditioning), 3-speed and proportional FAN-COIL control, ON/OFF control (class I, contribution 1%) PWM, PID (class IV, contribution 2%), can be interfaced with actuator 01466.1 for modulating room thermostat (class V, contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, diamond white - 2 modules. Depth: 30.2 mm



21814.F.76
Diamond black



21814.S.70
Touch screen thermostat (heating and air conditioning), configurable STAR control, ON/OFF control (class I, contribution 1%) PWM, PID (class IV, contribution 2%), can be interfaced with actuator 01466.1 for modulating room thermostat (class V, contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, diamond white - 2 modules. Depth: 30.2 mm



21814.S.76
Diamond black

EIKON	LINEA	ARKÉ	IDEA	PLANA
-------	-------	------	------	-------

Temperature control

Eikon Tactil thermostats



21814.H.70
Touch screen thermostat (heating and air conditioning), MAKE UP ROOM and DO NOT DISTURB control, ON/OFF control (class I, contribution 1%) PWM, PID (class IV, contribution 2%), can be interfaced with actuator 01466.1 for modulating room thermostat (class V, contribution 3%), 1 input for sensor 20432, 19432 or 14432 or wired sensor 02965.1, 1 programmable digital input, RGB LED backlighting, diamond white - 2 modules.
Depth: 30.2 mm



21814.H.76
Diamond black

Detectors



20850
Passive infrared motion detector, grey - 2 modules.
Depth: 26.5 mm



30575.G
Passive infrared motion detector, black - 2 modules.
Depth: 30.8 mm



19850
Passive infrared motion detector, grey - 2 modules.
Depth: 19.7 mm



16850
Passive infrared motion detector, grey - 2 modules.
Depth: 19.5 mm



14850
Passive infrared motion detector, white - 2 modules.
Depth: 19 mm



20850.B
As above, white



20850.N
As above, Next



30575.B
As above, white



19850.B
As above, white



19850.M
As above, Metal



16850.B
As above, White



14850.SL
As above, Silver



30575.C
As above, canvas

Presence and brightness sensors



01527
Detector with 360° infrared presence sensor for ON/OFF, constant control of illuminance, heating, air conditioning, ventilation according to brightness/movement, 1 - 1000 Lux, KNX standard, ceiling installation.
Dim. 80x80x45 mm



01527.S
Adaptor for ceiling installation



01529.1
Detector with 360° infrared presence sensor for ON/OFF lights according to brightness/movement, 1 - 1000 Lux, KNX standard, ceiling installation.
Dim. 91x91x45 mm



01529.1.S
Adaptor for ceiling installation



01530
Light sensor for dimmer 01528, KNX standard, ceiling installation. Dim. 52.3x54.3x19.3 mm



Access control

Eikon Tactil transponder card readers for outside the room



21457
Eikon Tactil transponder card reader, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24 V~ 50/60 Hz and 12-24 V D.C. (SELV) - 3 modules.
Supplied without transponder card.
Depth: 36.5 mm



21666.70
Electronic cover plate for 21457, diamond white - 3 modules




21666.71
Electronic cover plate for 21457, aqua - 3 modules



21666.73
Electronic cover plate for 21457, pearl grey - 3 modules



21666.76
Electronic cover plate for 21457, diamond black - 3 modules



21666.53
Electronic cover plate for 21457, grey quartzite - 3 modules



21666.31
Electronic cover plate for 21457, Italian walnut - 3 modules



21666.32
Electronic cover plate for 21457, white oak - 3 modules



21666.33
Electronic cover plate for 21457, wengé - 3 modules



21666.21
Electronic cover plate for 21457, cream - 3 modules



21666.22
Electronic cover plate for 21457, tobacco - 3 modules



21666.41
Electronic cover plate for 21457, glacier ice - 3 modules



0K21666.70.02
Electronic cover plate for 21457, with IP55 mounting frame, diamond white - 3 modules



0K21666.71.02
Electronic cover plate for 21457, with IP55 mounting frame, aqua - 3 modules



0K21666.73.02
Electronic cover plate for 21457, with IP55 mounting frame, pearl grey - 3 modules



0K21666.76.02
Electronic cover plate for 21457, with IP55 mounting frame, diamond black - 3 modules



21666.70.01
Electronic cover plate for 21457.1, diamond white



21666.71.01
Electronic cover plate for 21457.1, aqua



21666.76.01
Electronic cover plate for 21457.1, diamond black



21457.1
Eikon Tactil transponder card reader, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24 V~ 50/60 Hz and 12-24 V D.C. (SELV) - 3 modules.
Supplied without transponder card.
Depth: 36.5 mm

EIKON	LINEA	ARKÉ	IDEA	PLANA
-------	-------	------	------	-------

Access control

Eikon Tactil transponder card readers for outside the room



OK21666.70.03
Electronic cover plate for 21457.1, with IP55 mounting frame, diamond white - 3 modules

OK21666.71.03
Electronic cover plate for 21457.1, with IP55 mounting frame, aqua - 3 modules

OK21666.76.03
Electronic cover plate for 21457.1, with IP55 mounting frame, diamond black - 3 modules



21846
8 sheets with adhesive labels with lightable numbers for room numbering light to customise Eikon Tactil cover plates

Transponder card readers for outside the room



20457
Transponder card reader for outside the room, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24 V~ 50/60 Hz and 12-24 V D.C. (SELV), grey - 3 modules.
Supplied without transponder card.
Depth: 37 mm

20457.TR
As above, tropicalised



20457.B
As above, white
20457.TR.B
As above, tropicalised



20457.N
As above, Next
20457.TR.N
As above, tropicalised



30567.G
Transponder card reader for outside the room, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24 V~ 50/60 Hz and 12-24 VDC (SELV), black - 3 modules.
Supplied without transponder card.
Depth: 38.8 mm

30567.TR
As above, tropicalised



30567.B
As above, white
30567.TRB
As above, tropicalised



30567.C
As above, canvas
30567.TRC
As above, tropicalised



19457
Transponder card reader for outside the room, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24 V~ 50/60 Hz and 12-24 V D.C. (SELV), grey - 3 modules.
Supplied without transponder card.
Depth: 37 mm

19457.TR
As above, tropicalised



19457.B
As above, white
19457.TR.B
As above, tropicalised



19457.M
As above, Metal
19457.TR.M
As above, tropicalised



16927
Transponder card reader for outside the room, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24 V~ 50/60 Hz and 12-24 V D.C. (SELV), grey - 3 modules.
Supplied without transponder card.
Depth: 36.5 mm



16927.B
As above, white



14457
Transponder card reader for outside the room, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24 V~ 50/60 Hz and 12-24 VDC (SELV), white - 3 modules.
Supplied without transponder card.
Depth: 36 mm

14457.TR
As above, tropicalised



14457.SL
As above, white
14457.TR.SL
As above, tropicalised

EIKON	LINEA	ARKÉ	IDEA	PLANA
-------	-------	------	------	-------



01598
Programmable and customizable transponder card

Access control



20453
Transponder card reader, vertical pocket for inside the room, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24 V~ 50/60 Hz and 12-24 V D.C. (SELV), grey - 3 modules.
Depth: 37 mm



20453.B
As above, white



20453.N
As above, Next



30563.G
Transponder card reader, vertical pocket for inside the room, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24 V~ 50/60 Hz and 12-24 VDC (SELV), black - 3 modules.
Depth: 38.8 mm



30563.B
As above, white



30563.C
As above, canvas



19453
Transponder card reader, vertical pocket for inside the room, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24 V~ 50/60 Hz and 12-24 V D.C. (SELV), grey - 3 modules.
Depth: 37 mm



19453.B
As above, white



19453.M
As above, Metal



16923
Transponder card reader, vertical pocket for inside the room, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24 V~ 50/60 Hz and 12-24 V D.C. (SELV), grey - 3 modules.
Depth: 36.5 mm



16923.B
As above, White



14453
Transponder card reader, vertical pocket for inside the room, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24 V~ 50/60 Hz and 12-24 V D.C. (SELV), white - 3 modules.
Depth: 36.5 mm



14453.SL
As above, silver

EIKON	ARKÉ	IDEA	PLANA
-------	------	------	-------

Access control



20450
Transponder card reader/ programmer in 4-module tilted table mounting box, grey.
To be completed with Eikon 4-module cover plate.
Dim.: 148.6x79x9x88.8 mm



20450.B
As above, white



19450
Transponder card reader/ programmer in 4-module tilted table mounting box, grey.
To be completed with Arké 4-module cover plate.
Dim.: 148.6x82.6x9x90.3 mm




19450.B
As above, white



16920
Transponder card reader/ programmer in 3-module tilted table mounting box, grey.
To be completed with Idea Classica 3-module cover plate.
Dim.: 121.6x81.6x9x111 mm



16920.B
As above, white



14450
Transponder card reader/ programmer in 4-module tilted table mounting box, white.
To be completed with Plana 4-module cover plate.
Dim.: 142.5x78.4x9x89.2 mm

EIKON	LINEA	ARKÉ	IDEA	PLANA
-------	-------	------	------	-------

Controls and actuations



▲0K01410.01
Guest Room Management System (GRMS) home automation system kit containing 1 By-me home automation light gateway 01410, 1 Router By-me Plus KNX Secure IP 01507, 1 power supply unit 230 V~ 29 VDC 400 mA 01400



▲0K01410.02
Guest Room Management System (GRMS) home automation system kit containing 1 By-me home automation light gateway 01410, 1 Router By-me Plus KNX Secure IP 01506, 1 power supply unit 230 V~ 29 VDC 400 mA 01400

Interchangeable half-button caps for Eikon Exé Flat controls - 1 module

22751.01 Neutral, white	22751.03 Grey	22751.11 Nickel	22751.12 Bronze	22751.82 Gold	22751.88 Satin gold
22751.0.01 With no symbols, customisable², white	22751.0.03 Grey	22751.0.11 Nickel	22751.0.12 Bronze	22751.0.82 Gold	22751.0.88 Satin gold
22751.1.01 ON/OFF, white	22751.1.03 Grey	22751.1.11 Nickel	22751.1.12 Bronze	22751.1.82 Gold	22751.1.88 Satin gold
22751.2.01 Arrow, white	22751.2.03 Grey	22751.2.11 Nickel	22751.2.12 Bronze	22751.2.82 Gold	22751.2.88 Satin gold
22751.3.01 Control, white	22751.3.03 Grey	22751.3.11 Nickel	22751.3.12 Bronze	22751.3.82 Gold	22751.3.88 Satin gold

Two interchangeable buttons for Eikon Exé Tondo controls

22751.RN.01 Lighttable, white	22751.RN.03 Grey	22751.RN.11 Nickel	22751.RN.12 Bronze	22751.RN.82 Gold	22751.RN.88 Satin gold

EIKON	LINEA	ARKÉ	PLANA
-------	-------	------	-------

Controls and actuations

Interchangeable half-button caps for controls - 1 module

20751 Neutral, customisable¹, grey	31480.G Neutral, customisable¹, black	19751 Neutral, customisable¹, grey 19751.AB As above, antibacterial material	14751 Neutral, customisable¹, white
20751.B As above, white	31480.B As above, white	19751.B As above, white 19751.AB.B As above, antibacterial material	14751.SL Neutral, customisable¹, Silver
20751.N As above, Next	31480.C As above, canvas	19751.M As above, Metal	
20751.0 Fixed, grey	31480.ZG Fixed, black	19751.0 Fixed, grey 19751.AB.0 As above, antibacterial material	14751.0 Fixed, white
20751.0.B As above, white	31480.ZB As above, white	19751.0.B As above, white 19751.AB.0.B As above, antibacterial material	14751.0.SL As above, Silver
20751.0.N As above, Next	31480.ZC As above, canvas	19751.0.M As above, Metal	
20751.1 ON/OFF, grey	31480.YG ON/OFF, black	19751.1 ON/OFF, grey 19751.AB.1 As above, antibacterial material	14751.1 ON/OFF, white
20751.1.B As above, white	31480.YB As above, white	19751.1.B As above, white 19751.AB.1.B As above, antibacterial material	14751.1.SL As above, Silver
20751.1.N As above, Next	31480.YC As above, canvas	19751.1.M As above, Metal	

EIKON	LINEA	ARKÉ	PLANA
Controls and actuations			
Interchangeable half-button caps for controls - 1 module			

20751.2

Arrow, grey

20751.2.B

As above, white

20751.2.N

As above, Next

31480.FG

Arrow, black

31480.FB

As above, white

31480.FC

As above, canvas

19751.2

Arrow, grey

19751.2.B

As above, white

19751.AB.2

As above, antibacterial material

14751.2

Arrow, white

14751.2.SL

As above, Silver

20751.3

Control, grey

20751.3.N

As above, Next

31480.RG

Control, black

31480.RB

As above, white

31480.RC

As above, canvas

19751.3

Control, grey

19751.3.B

As above, white

19751.AB.3

As above, antibacterial material

14751.3

Control, white

14751.3.SL

As above, Silver

Interchangeable half-button caps for controls - 2 modules

20752

Neutral, customisable¹, grey

20752.B

As above, white

20752.N

As above, Next

31480.2G

Neutral, customisable¹, black

31480.2B

As above, white

31480.2C

As above, canvas

19752

Neutral, customisable¹, grey

19752.M

As above, Metal

14752

Neutral, customisable¹, white

14752.SL

As above, Silver

EIKON	LINEA	ARKÉ	PLANA
Controls and actuations			
Interchangeable half-button caps for controls - 2 modules			

20752.1

ON/OFF, grey

20752.1.B

As above, white

20752.1.N

As above, Next

31480.2YG

ON/OFF, black

31480.2YB

As above, white

31480.2YC

As above, canvas

19752.1

ON/OFF, grey

19752.1.M

As above, Metal

14752.1

ON/OFF, white

14752.1.SL

As above, Silver

20752.2

Arrow, grey

20752.2.N

As above, Next

31480.2FG

Arrow, black

31480.2FB

As above, white

31480.2FC

As above, canvas

19752.2

Arrow, grey

19752.2.M

As above, Metal

14752.2

Arrow, white

14752.2.SL

As above, Silver

20752.3

Control, grey

20752.3.N

As above, Next

31480.2RG

Control, black

31480.2RB

As above, white

31480.2RC

As above, canvas

19752.3

Control, grey

19752.3.M

As above, Metal

14752.3

Control, white

14752.3.SL

As above, Silver

EIKON	LINEA	ARKÉ	PLANA
-------	-------	------	-------

Controls and actuations

Accessories



00802.14
Orientable support,
grey - 2 modules
For Eikon and Arké devices.



00802
Orientable support,
white - 2 modules
For Eikon, Arké and Plana devices.



00802.20
Orientable support,
Silver - 2 modules
For Eikon and Plana devices.



00805.14
Adaptor for fixing flush mounting
orientable supports, grey
- 2 modules.
Depth: 36.5 mm
For Eikon and Arké devices.



00805
Adapter for fixing flush mounting
orientable supports, white
- 2 modules.
Depth: 36.5 mm
For Eikon, Arké and Plana devices.



00805.20
Adaptor for fixing flush mounting
orientable supports, Silver
- 2 modules.
Depth: 36.5 mm
For Eikon and Plana devices.



00800.14
Surface mounting fixing frame for
orientable supports, grey
For Eikon and Arké devices.



00800
Surface mounting fixing frame for
orientable supports, white
For Eikon, Arké and Plana devices.



00800.20
Surface mounting fixing frame for
orientable supports, Silver
For Eikon and Plana devices.

Temperature control

Probes and sensors



20432
Temperature sensor, 1 output, grey
Depth: 24.4 mm



20432.B
As above,
white




20432.N
As above,
Next



19432
Temperature sensor, 1 output, grey
Depth: 24.4 mm



19432.B
As above,
white



19432.M
As above,
Metal



14432
Temperature sensor, 1 output, white
Depth: 23.4 mm



14432.SL
As above,
Silver



02965.1
Wired temperature sensor,
from -40 to +120 °C - 3 m

EIKON	ARKÉ	IDEA	PLANA
-------	------	------	-------

Remote assistance devices

Hands-free, radio push button and interface



03890
Remote assistance hands-free device for calling recorded
numbers via LTE mobile network. The hands-free call is sent
by pressing the "Alarm" push button or the push button on
the bracelet/pendant accessory. The device can also receive
incoming calls with automatic answering



03893
Radio push button for remote assistance hands-free calls,
can be worn as a pendant or bracelet, IP65, power supply
with non-replaceable 3V CR2032 lithium battery



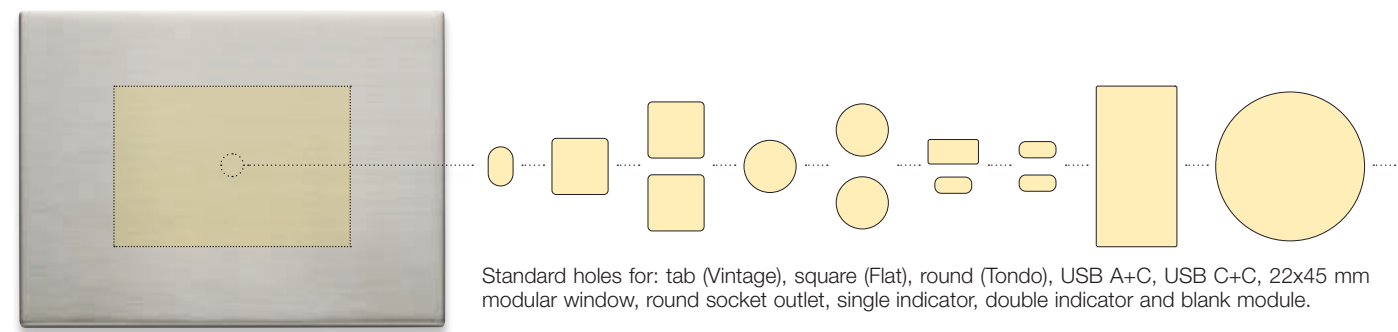
03895
Radio interface for remote assistance hands-free calls, 1
wired voltage-free contact input to initiate a call, power
supply with 3V CR123 lithium battery (supplied)

Cover plates with **customised holes**

Vimar’s customisation offering for its Eikon Exé cover plates has been extended with the standardisation of holes to install controls and devices. The cover plate can be defined, among the available finishes, by specifying the type of hole and its position from a list.



EIKON CONTROLS AND DEVICES CAN BE COMBINED THANKS TO DEDICATED HOLES.




Multi-window cover plates with **customised holes**

Eikon Exé cover plates can be supplied with customised holes for mounting different types of devices. The cover plates available for customisation are those with the standard modular design (2, 3, 4 and 7 modules), and British modular designs (3 and 5 modules) in the following finishes:



**This material is not available for Eikon Exé Tondo cover plates.*

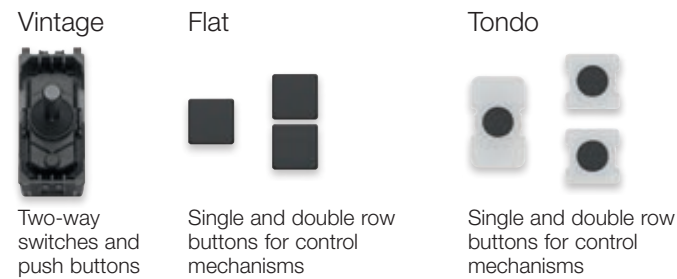
DEDICATED HOLES FOR VINTAGE, FLAT AND TONDO CONTROLS.



HOLES FOR CONTROLS AND 1-, 2- AND 3-MODULE DEVICES.

Installation of controls and 1-, 2- and 3-module devices requires the use of a single 22x45 mm modular hole or of 2 or 3 paired holes, respectively.

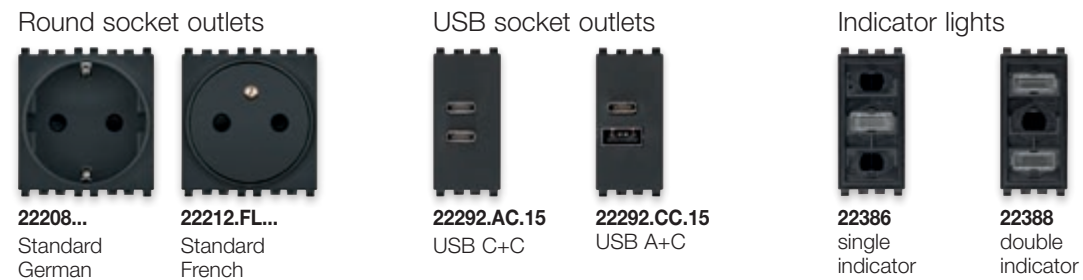DEDICATED HOLES FOR ROUND SOCKET OUTLETS, USB SOCKET OUTLETS AND INDICATOR UNITS.



The German and French standard socket outlets (22208..., 22212.FL...) can also be used for Eikon Exé 2-module standard cover plates (22642.RN). USB A+C and C+C socket outlets (22292.AC.15 and 22292.CC.15) and the indicators (22386 and 22388) are only to be used with cover plates with customised holes

Eikon - Cover plates and controls customisation

Indications for customisation

- all devices, buttons and cover plates are customized depending on conditions described below;
- Eikon Tactil**
all cover plates shown in the area highlighted in grey can be customised, with the exception of the **Pearl grey** cover plate (73);
- Eikon Evo**
the following finishings of cover plates are not customizable: **Crystal**: silver ice (72), pearl grey (73), opal brown (74), bronze mirror (75);
- Eikon Exé**
the following finishings of cover plates are not customizable: **Marbled stone-ware**: White Calacatta (51), Coffee brown (52), Black Marquina (53); **Mirrors**: Ice silver (75), Shiny bronze (76), Opal brown (77); **Glass**: Satin black (73) and **Exclusive metals**: Antique gold (85);
- Eikon Chrome**
the following finishings of cover plates are not customizable: **Bright**: matt titanium (C14);
- Wooden cover plate** customization: prices and quantities agreed with the commercial networks.
- if the required customisation is including in the **"Library of standard symbols and wording"**, indicate the item code + symbol/wording code, **if the customisation is not included in the table check its feasibility with the sales network**;
- for requests for large quantities of customised items not included in the **"Library of standard symbols and wording"** please contact the Vimar sales network.

Laser customization advantages

- indelible engraving that does not deteriorate over time;
- service available even for minimal quantities;
- possibility of ordering the same customization at different times with identical results.

The few limits of technology

- it is not possible to reproduce coloured images.


What to supply

- an image in EPS or DXF format of the subject to be reproduced, minimum line width and minimum distance between lines: 0.5 mm.

How to proceed


- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

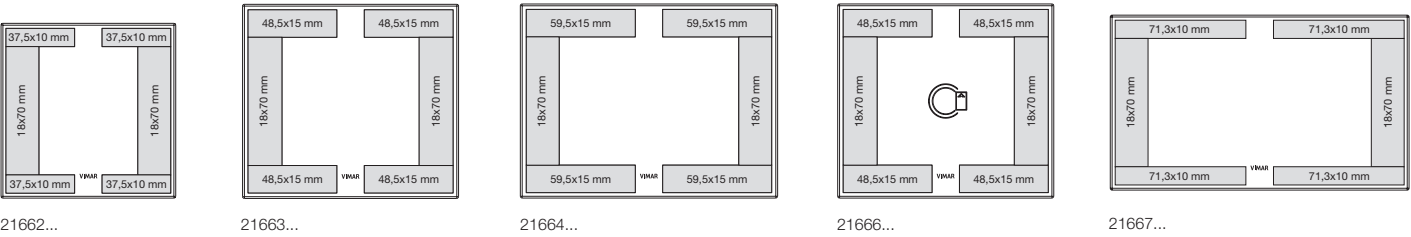Eikon Tactil cover plates: customisation positions (see area in grey)




Eikon Evo, Eikon Exé and Eikon Chrome cover plates: customisation positions

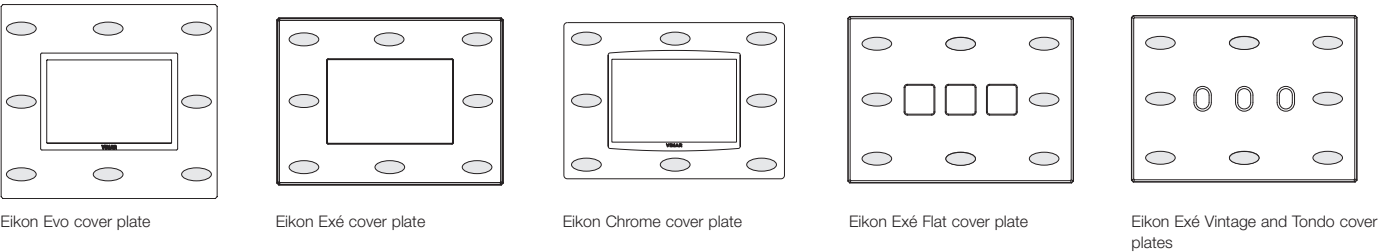(see area in grey)



Example of customised cover plate

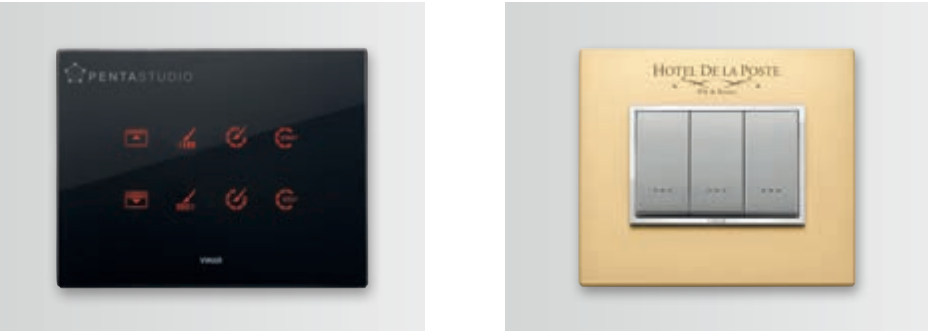

Eikon - Cover plates and controls customisation

Controls and buttons: positions and features

Type	Customisation position	Backlit customisation	Not backlit customisation
Conventional rocker controls 1 and 2 modules and interchangeable buttons 1, 2 and 3 modules		NO	positions 1 and 2
Buttons for conventional rocker controls 20031, 20032 and 20033		position 3 only in the 14x7 mm area	positions 1 and 2
Axial controls. 1 and 2 modules		NO	positions 1 and 2
Buttons for axial controls 20131.0, 20132.0 and 20133.0		position 2 with Mylar 14x7 mm stickers	positions 1 and 3
Pair of 1-module buttons for RF devices		NO	positions 1 and 2
2-module button for RF devices		NO	positions 1 and 2
Type	Customisation position	Backlit customisation	Not backlit customisation
Home automation controls. 1-module half-buttons		only in the 10x10 mm area	if the LED programming is "OFF" the whole button area can be customised
Home automation controls. 2-module half-buttons		only in the 10x10 mm area	if the LED programming is "OFF" the whole button area can be customised

Specifications for customising home automation controls with wording

To be backlit, customisation with wording not included in the **"Library of standard symbols and wording"**, must have no more than 3 text rows, each with maximum 8 capital letters, font height 1,7 mm and style as per the library. Depending on the length of the text, the wording must be positioned as shown in the figures to the side.

Text on 1 row



Text on 2 rows



Text on 3 rows

Example of customised controls and buttons




Rocker controls and customisable buttons



Buttons for axial controls with backlit customisation



Buttons for radiofrequency controls with customisation



2-module button for radiofrequency controls with customisation



Home automation controls with customisation not backlit



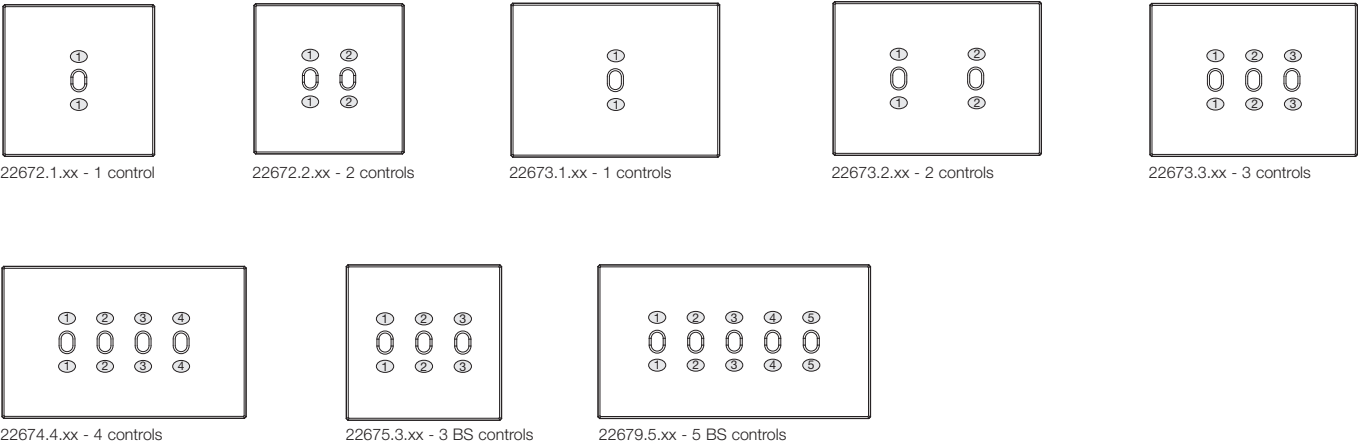
Home automation controls with backlit customisation (example with text)

CUSTOMISATION




Eikon - Cover plates and controls customisation


Vintage controls: possible positions to customize



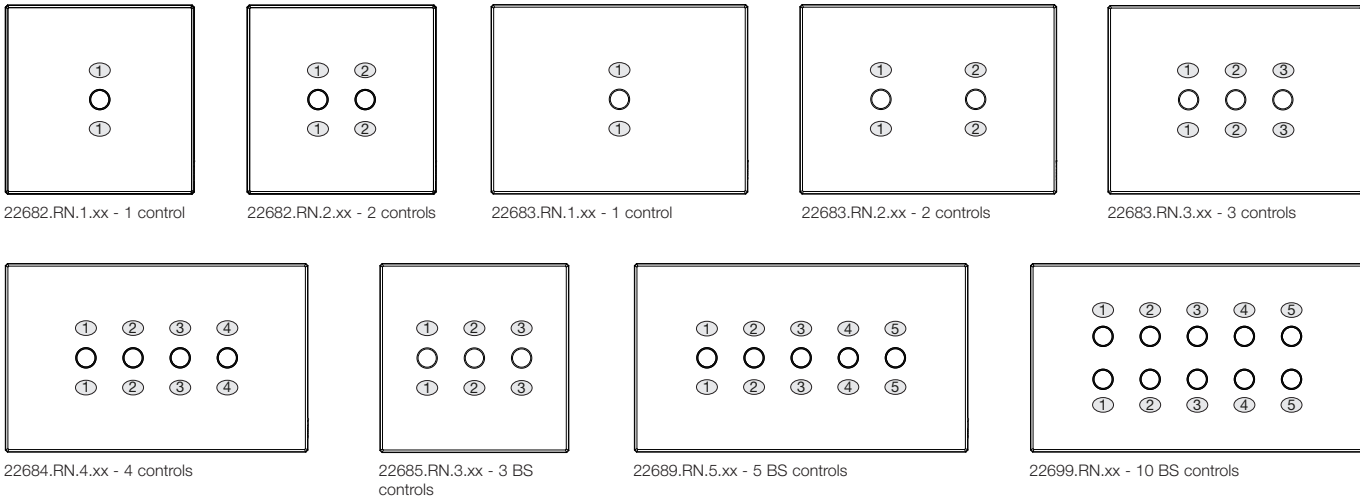Possible positions for customising Tondo controls.



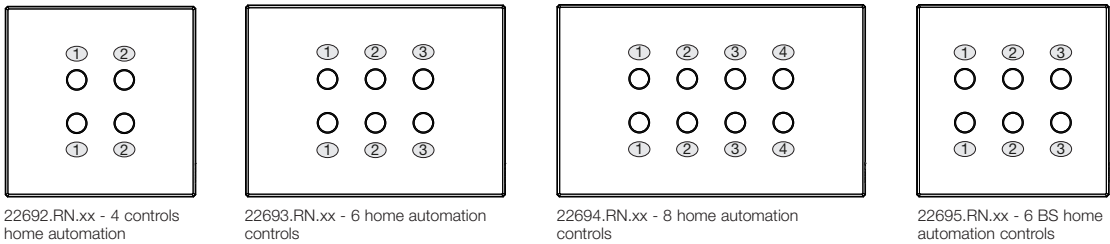Possible positions for customising Tondo home automation controls.




CUSTOMISATION




Eikon - Cover plates and controls customisation

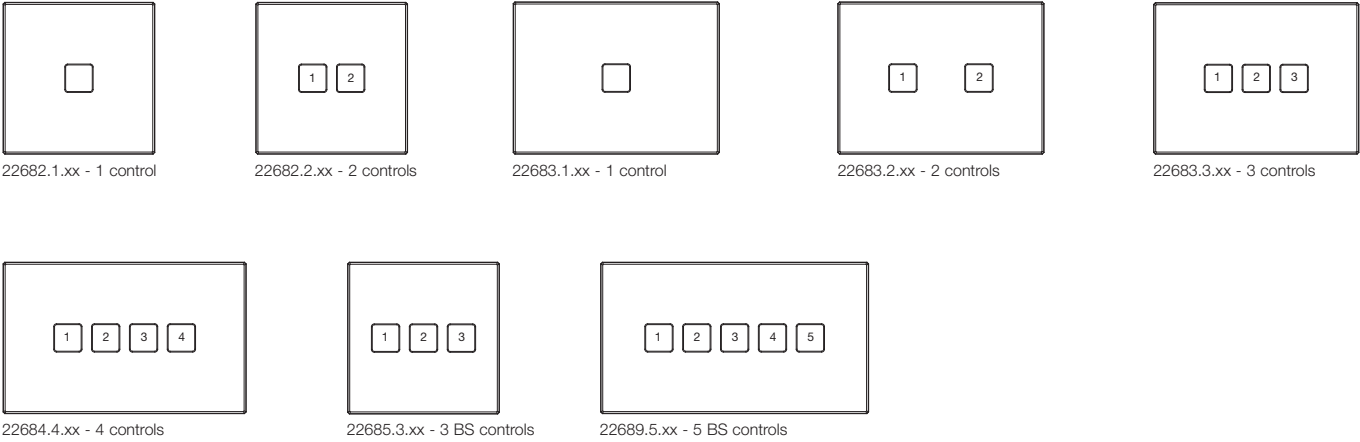Flat conventional controls: possible positions to customize



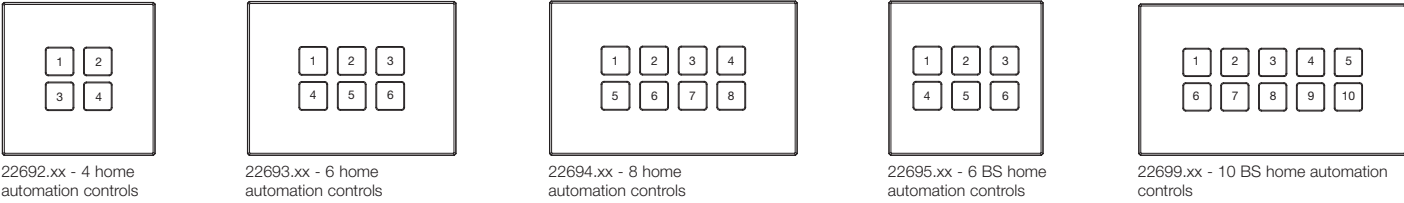
Flat home automation controls: possible positions to customize



Flat home automation controls: positions and features

Finishes	Customisation position	Backlit customisation	Not backlit customisation
01 Matt white, 03 Anthracite grey, 12 Brushed dark bronze 88 Satin gold		only in the 10x10 mm area	if the LED programming is "OFF" the whole button area can be customised
11 Brushed nickel, 82 Gold		Ask information to sales network	Ask information to sales network
Texts positions			
To be backlit, customisation with wording not included in the "Library of standard symbols and wording", must have no more than 3 text rows, each with maximum 8 capital letters, font height 1,7 mm and style as per the library. Depending on the length of the text, the wording must be positioned as shown in the figures to the side.	Text on 1 row	Text on 2 rows	Text on 3 rows

Example of customised Vintage and Flat controls



Eikon Exé Vintage: customised 3-gang conventional control



Eikon Exé Flat: customised 6-gang home automation controls with RGB backlighting



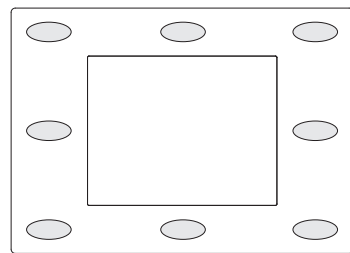
Eikon Exé Tondo with 3 customised controls



Cover plate and controls customisation

- How to customise cover plates and controls**
 - if the customisation requested is listed in the table **'Standard symbols and words library'**, indicate the article code + symbol/word code, if the customisation is not included in the table, contact the Vimar sales department for feasibility;
 - for requests for large quantities of customisations not included in the "Standard symbols and words library" please contact the Vimar sales department.
- The advantages of laser-engraved customisations**
 - precise, indelible and permanent reproduction and engraving;
 - service available even for minimum quantities;
 - possibility of re-ordering the same customisation at different times with identical results.
- Limits of reproduction**
 - colour subjects cannot be reproduced.
- What to provide**
 - a digital image of the subject in EPS or DXF format, with a minimum thickness of the line and gap between lines of 0.5 mm.
- What to do**
 - provide all the material to your local wholesaler or distributor who will forward it to Vimar.

Cover plates: customisation positions
(see area in grey)



Controls and buttons: position and characteristics



Type	Position for customisation	Customisation backlit	Customisation not backlit
Controls aligned and traditional rocker. 1 module		NO	position 1 and 2
Aligned controls with vertical light beam. 1 module		NO	position 1, 2 and 3
Axial controls. 1 module		NO	position 1 and 3
Buttons with diffuser for aligned and axial controls. 1 module		YES only position 2	position 1 and 3
Pair of buttons 1 module for controls in radio frequency		NO	position 1 and 2
2-module button for controls in radio frequency		NO	position 1 and 2
Home automation controls. 1-module half-button caps <i>Note. The customisation of the home automation system button 31480 is applied to the completely neutral surface.</i>		YES only in the 10x10 mm area	if the programming of the LED is always "OFF" it is possible to customise the whole button area
Home automation controls. 2-module half-button caps <i>Note. The customisation of the home automation system button 31480.2 is applied to the completely neutral surface.</i>		YES only in the 10x10 mm area	if the programming of the LED is always "OFF" it is possible to customise the whole button area

Specifications for customising home automation system control buttons with words			
To be backlit, customisation with words not included in the 'Standard symbols and words library' must have no more than 3 text rows, each with a maximum of 8 capital letters, font height 1.7 mm and style as per the library. Depending on the length of the text, the words must be positioned as shown in the figures to the side.	Text on 1 row	Text on 2 rows	Text on 3 rows

Example of customised cover plate




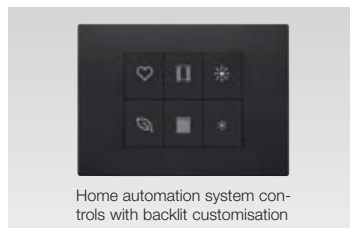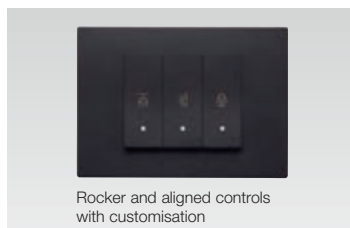Examples of buttons and controls with customisation



Customisation of Linea controls with XT platform

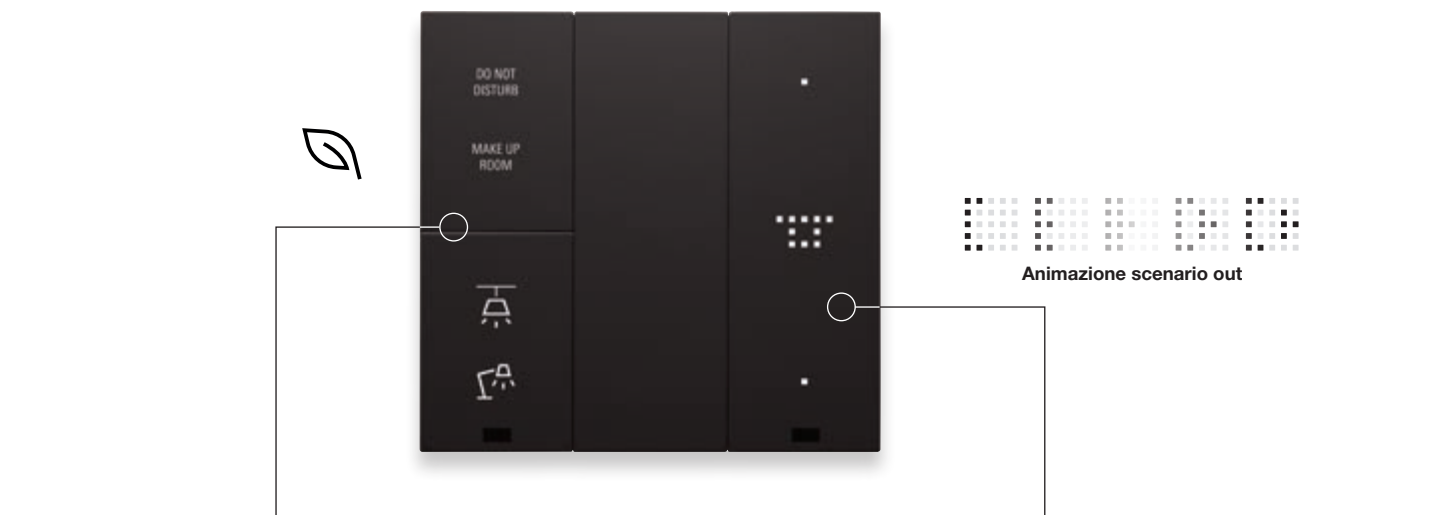Linea controls with XT platform can be customised in two ways: using dynamic LED icons which can be customised using the App or by applying a label of the chosen symbol directly onto the back of the button in black finish, after removing it from its control, whereas for controls in white and canvas finish, contact the sales network.



- Completely customisable symbols from a large library, via the application of a label onto the back of the button in black finish (art. code P32090.PG, each sheet contains 24 symbols to choose from).** Indicate the quantity and code of the symbol in your order (see the "Standard symbols and words library" on the following pages).
For white and canvas finishes, contact our sales network.
- Dynamic LED icons which can be customised using the app.** Possibility of smart backlighting: white at various brightness levels. No symbol is visible when the device is off.

Smart card customisation

The card can be customised upon request on the back. Send a digital image of the subject to reproduce in eps, tiff or jpg format.



Bluetooth network name customisation

The name of the Bluetooth network can be customised for the Bluetooth interface (30495) of the Sound system.


- What to provide**
 - annex a file with extension .txt to the order
 - the name of the .txt file must be created as follows:
e.g. **P30495_6.txt**
P30495: required product code preceded by the letter P;
'6' is the number of rows in the txt file = quantity of the required product code;
- Format of the .txt file**
 - use standard ASCII European characters;
 - name of the network to be customised, max 23 characters (including spaces);
 - the text on a new line identifies the end of the string to be customised;
 - the number of rows must correspond to the quantity of the required article code;
 - each row must indicate the requested customisation, even when repeated;

Example of txt file compilation (e.g. P30495_6.txt)	
B&Bs	room 1
B&Bs	room 2
B&Bs	room 3
B&Bs	room 4
B&Bs	room 5
B&Bs	room 6



Symbols and words of the dynamic LED icons.

Examples of symbols and words that identify the main functions of the controls and of the Linea thermostat with XT platform: from the control of lights to roller shutters, from climate control to home automation system scenario management.



Symbols and words of the dynamic LED icons that can be configured with the app for Linea controls with XT platform


Letters
A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

Icons
[Icons for various functions like lights, shutters, etc.]

State icons
Roller shutters: [Icons for open, >50%, <50%, closed]
Right curtain: [Icons for open, >50%, <50%, closed]
Left curtain: [Icons for open, >50%, <50%, closed]

Figures
1 2 3 4 5 6 7 8 9 0

Animated icons
Example of closing cycle with roller shutter icon and example of animation with going out scenario
Out: [Sequence of icons showing a roller shutter closing]
Example of opening cycle with roller shutter icon and example of animation with entry scenario
In: [Sequence of icons showing a roller shutter opening]



Symbols and words of the dynamic LED icons that can be configured with the app for Linea thermostat with XT platform

Thermostat
HEAT COOL HC ON OFF AUTO DRY FAN
BLOCK FLOOR OPEN [Probe error icon]


Fan coil
[Icons for fan coil settings]

Figures
Font 1: 1 2 3 4 5 6 7 8 9 0 [Font 1 symbols]
Font 2: 1 2 3 4 5 6 7 8 9 0 [Font 2 symbols]
Font 3: 1 2 3 4 5 6 7 8 9 0 [Font 3 symbols]




- Indications for customisation**
- all devices, buttons and cover plates are customized depending on conditions described below;
 - the following **cover plates cannot be customised**: Metal-Color: Matt graphite (.01 and .21); Metal-Elite: Gold (.07 and .27), Black chrome (.09), Black nickel (.10), Chrome (.28), Dark nickel (.29), Matt nickel (.30); Wood: larch (.43);
 - wooden cover plate customisation: prices and quantities to be agreed with the sales network;
 - if the required customisation is including in the 'Library of standard symbols and wording', indicate the item code + symbol/wording code, **if the customisation is not included in the table check its feasibility with the sales network**;
 - for requests for large quantities of customised items not included in the "Library of standard symbols and wording" please contact the Vimar sales network
- Laser customisation advantages**
- high-precise and indelible reproduction and laser engraving over time;
 - service available even for minimal quantities;
 - possibility of ordering the same customisation at different times with identical results.
- The few limits of technology**
- it is not possible to reproduce coloured images.
- What to supply**
- an image in EPS or DXF format of the subject to be reproduced, minimum line width and minimum distance between lines: 0.5 mm.
- How to proceed**
- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

Cover plates: customisation positions
(see area in grey)



Arké Classic cover plate

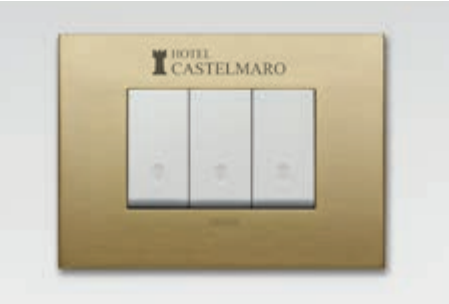Example of customised cover plate





Controls and buttons: positions and features

Type	Customisation position	Backlit customisation	Not backlit customisation
Conventional rocker controls 1 and 2 modules		NO	positions 1 and 2
Buttons for conventional rocker controls. 1, 2 and 3 modules		position 3 with Mylar 12x8 mm stickers	positions 1 and 2
Axial controls. 1 and 2 modules		NO	positions 1 and 3
Buttons for axial controls. 1 and 2 modules		position 2 with Mylar 12x8 mm stickers	positions 1 and 3
Pair of 1-module buttons for RF devices		NO	positions 1 and 2
2-module button for RF devices		NO	positions 1 and 2
Home automation controls. 1-module half-buttons		only in the 10x10 mm area	if the LED programming is "OFF" the whole button area can be customised
Home automation controls. 2-module half-buttons		only in the 10x10 mm area	if the LED programming is "OFF" the whole button area can be customised

Specifications for customising home automation controls with wording	Text on 1 row	Text on 2 rows	Text on 3 rows
To be backlit, customisation with wording not included in the "Library of standard symbols and wording", must have no more than 3 text rows, each with maximum 8 capital letters, font height 1.7 mm and style as per the library. Depending on the length of the text, the wording must be positioned as shown in the figures to the side.			

Example of customised controls and buttons



Rocker controls and buttons with backlit customisation



Axial controls and buttons with backlit customisation



Buttons for radiofrequency controls with customisation



Home automation controls with customisation not backlit



Home automation controls with backlit customisation (example with text)



Indications for customisation

- all devices, buttons and cover plates are customized depending on conditions described below;
- for **Plana Silver** only the following articles are customizable: **14021.G.SL, 14022.G.SL and 14023.G.SL**;
- the following **cover plates cannot be customised**: **Technopolymer**: iridescent brown (23), polished gold (24), matt gold (25), ash (31), fir (32), makoré (33); **Metal**: antique brass (76);
- wooden cover plate customisation: prices and quantities to be agreed with the sales network**;
- if the required customisation is including in the 'Library of standard symbols and wording', indicate the item code + symbol/wording code, **if the customisation is not included in the table check its feasibility with the sales network**;
- for requests for large quantities of customised items not included in the "Library of standard symbols and wording" please contact the Vimar sales network

Laser customisation advantages

- high-precise and indelible reproduction and laser engraving over time;
- service available even for minimal quantities;
- possibility of ordering the same customisation at different times with identical results.

The few limits of technology

- it is not possible to reproduce coloured images.

What to supply


- an image in EPS or DXF format of the subject to be reproduced, minimum line width and minimum distance between lines: 0.5 mm.

How to proceed

- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

Cover plates: customisation positions

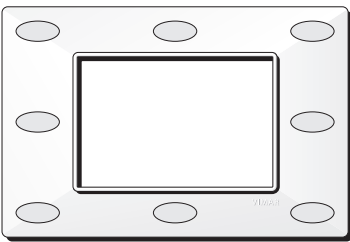(see area in grey)



Example of customised cover plate



Controls and buttons: positions and features

Type	Customisation position	Backlit customisation	Not backlit customisation
Conventional rocker controls and interchangeable buttons		position 3 ring backlit area	positions 1 and 2
Interchangeable buttons 14021.G, 14022.G and 14023.G		position 3 ø 10 mm disc backlit area	positions 1 and 2
Interchangeable buttons Plana Silver 14021.G.SL, 14022.G.SL and 14023.G.SL		position 1 in the 13x8,5 mm area	NO
Pair of 1-module buttons for RF devices		NO	positions 1 and 2
2-module button for RF devices		NO	positions 1 and 2
Home automation controls. 1-module half-buttons		NO only backlit LED	in the programming phase it is possible to decide LED status: "OFF" or "ON" or ON with different values of brightness
Home automation controls. 2-module half-buttons		NO only backlit LED	in the programming phase it is possible to decide LED status: "OFF" or "ON" or ON with different values of brightness

Example of customised controls and buttons



Controls and interchangeable buttons with ring and disc backlighting



Plana Silver backlighting controls and interchangeable buttons



1-module buttons for radiofrequency controls, not backlit



Home automation controls with not backlit customisation and LED "ON"

Indications for customisation

- all devices, buttons and cover plates are customized depending on conditions described below;
- if the required customisation is including in the 'Library of standard symbols and wording', indicate the item code + symbol/wording code, **if the customisation is not included in the table check its feasibility with the sales network.**
- the **visible in darkness** customization is possible only in symbol engraved buttons and with diffuser (e. g. 09021.G and 09021.G.CM).

The few limits of technology

- it is not possible to reproduce coloured images.

What to supply


- an image in EPS or DXF format of the subject to be reproduced, minimum line width and minimum distance between lines: 0.5 mm.

How to proceed

- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

Cover plates: customisation positions

(see area in grey)



Example of customised cover plate



Controls and buttons: positions and features

Type	Customisation position*	Backlit customisation	Not backlit customisation
1-module controls and interchangeable buttons		NO	NO
Lightable 1-module controls and interchangeable buttons 09021.N and 09021.N.CM		NO	positions 1 and 2
Lightable 1-module controls and interchangeable buttons 09021.G and 09021.G.CM		position 3	positions 1 and 2
2-module controls and interchangeable buttons		NO	NO
Lightable 2-module controls and interchangeable buttons 09022.N and 09022.N.CM		NO	positions 1, 2 and 3

* when position is not indicated, the customization is possible in the whole area of the button/control

Example of customised controls and buttons



Neve Up - White: backlighting controls and interchangeable buttons



Neve Up - Carbon matt: backlighting controls and interchangeable buttons

CUSTOMISATION



Eikon - Standard symbols and wordings

◆ symbols already on product catalogue

WITHOUT SYMBOL	S20.300												
LIGHTS													
													
													
ENVIRON-MENTS													
													
SCENARIOS													
HOTEL													
NAUTICAL													
ACCESSES													
ROLLER SHUTTERS WINDOWS AND CURTAINS													
													
													
CLIMATE CONTROL													
MUSIC AND AUDIO													
NUMBERS AND TEXT													
													
													

CUSTOMISATION



Linea - Standard symbols and wordings

◆ symbols already on product catalogue

WITHOUT SYMBOL	S30.300												
LIGHTS													
													

CUSTOMISATION

Arké - Library of standard symbols and wording

◆ symbols already on product catalogue

WITHOUT SYMBOL	S19.300													
LIGHTS	 S19.301	 S19.302	 S19.303	 S19.304	 S19.305	 S19.306	 S19.307	 S19.308	 S19.309	 S19.310	 S19.311	 S19.312	 S19.313	 S19.314
	 ♦S19.315	 S19.316	 S19.317	 S19.318	 S19.319	 S19.320	 S19.321	 S19.322	 S19.323	 S19.324	 S19.325	 S19.326	 S19.327	 S19.328
	 S19.329	 S19.330	 S19.331	 S19.332	 S19.333	 S19.334	 S19.335	 S19.336	 S19.337	 S19.338	 ♦S19.339	 ♦S19.340	 S19.341	 S19.342
	 ♦S19.343	 S19.344	 S19.345	 S19.346	 ♦S19.347	 ♦S19.348	 ♦S19.349	 ♦S19.350	 S19.351	 S19.352				
ENVIRON-MENTS	 S19.353	 S19.354	 S19.355	 S19.356	 S19.357	 S19.358	 S19.359	 S19.360	 S19.361	 S19.362	 S19.363	 S19.364	 S19.365	 S19.366
	 S19.367	 WC	 S19.369	 S19.370	 S19.371	 S19.372	 S19.373							
SCENARIOS	 S19.374	 S19.375	 S19.376	 S19.377	 S19.378	 S19.379	 S19.380	 S19.381	 S19.382	 S19.383	 S19.384	 S19.385	 S19.386	
	 S19.387	 S19.388	 S19.389											
HOTEL	 S19.390	 S19.391	 S19.392	 S19.393	 S19.394	 S19.395	 S19.396	 DO NOT DISTURB	 S19.397	 MAKE UP ROOM	 S19.399	 S19.400	 S19.401	 S19.402
NAUTICAL	 S19.403	 S19.404	 S19.405											
ACCESSES	 ♦S19.406	 S19.407	 ♦S19.408	 S19.409	 S19.410	 S19.411	 S19.412							
ROLLER SHUTTERS WINDOWS AND CURTAINS	 ♦S19.413	 ♦S19.414	 S19.415	 S19.416	 S19.417	 S19.418	 S19.419	 S19.420	 S19.421	 S19.422	 S19.423	 S19.424	 S19.425	 ♦S19.426
	 ♦S19.427	 S19.428	 S19.429	 S19.430	 S19.431	 S19.432	 S19.433	 S19.434	 S19.435	 S19.436	 S19.437	 S19.438	 S19.439	 S19.440
	 S19.441	 S19.442	 S19.443	 S19.444	 S19.445									
	 S19.446	 S19.447	 S19.448	 S19.449	 S19.450									
CLIMATE CONTROL	 S19.446	 S19.447	 S19.448	 S19.449	 S19.450					GARDEN	 S19.453	 S19.454		
MUSIC AND AUDIO	 S19.455	 S19.456	 S19.457	 S19.458	 S19.459	 S19.460	 S19.461							
NUMBERS AND TEXT	0 S19.462	1 S19.463	2 S19.464	3 S19.465	4 S19.466	5 S19.467	6 S19.468	7 S19.469	8 S19.470	9 S19.471	ESTERNO S19.472	EXTERNAL S19.473	GENERALE S19.474	
	GENERAL S19.475	BAGNO S19.476	TOILETTE S19.477	MODE S19.478	TEXT..	TEXT... TEXT...	TEXT... TEXT... TEXT...							

CUSTOMISATION

Plana - Library of standard symbols and wording

◆ symbols already on product catalogue

WITHOUT SYMBOL														
LIGHTS														
	S14.301	S14.302	S14.303	S14.304	S14.305	S14.306	S14.307	S14.308	S14.309	S14.310	S14.311	S14.312	S14.313	S14.314
														
	◆S14.315	S14.316	S14.317	S14.318	S14.319	S14.320	S14.321	S14.322	S14.323	S14.324	S14.325	S14.326	S14.327	S14.328
														
S14.329	S14.330	S14.331	S14.332	S14.333	S14.334	S14.335	S14.336	S14.337	S14.338	◆S14.339	◆S14.340	S14.341	S14.342	
														
◆S14.343	S14.344	S14.345	S14.346	◆S14.347	◆S14.348	◆S14.349	◆S14.350	S14.351	S14.352					
ENVIRON-MENTS														
	S14.353	S14.354	S14.355	S14.356	S14.357	S14.358	S14.359	S14.360	S14.361	S14.362	S14.363	S14.364	S14.365	S14.366
	WC													
S14.367	S14.368	S14.369	S14.370	S14.371	S14.372	S14.373								
SCENARIOS														
	S14.374	S14.375	S14.376	S14.377	S14.378	S14.379	S14.380	S14.381	S14.382	S14.383	S14.384	S14.385	S14.386	
														
S14.387	S14.388	S14.389												
HOTEL								do not disturb	make up room					save the planet
	S14.390	S14.391	S14.392	S14.393	S14.394	S14.395	S14.396	S14.397	S14.398	S14.399	S14.400	S14.401	S14.402	
NAUTICAL														
	S14.403	S14.404	S14.405											
ACCESSES														
	◆S14.406	S14.407	◆S14.408	S14.409	S14.410	S14.411	S14.412							
ROLLER SHUTTERS WINDOWS AND CURTAINS														
	◆S14.413	◆S14.414	S14.415	S14.416	S14.417	S14.418	S14.419	S14.420	S14.421	S14.422	S14.423	S14.424	S14.425	◆S14.426
														
	◆S14.427	S14.428	S14.429	S14.430	S14.431	S14.432	S14.433	S14.434	S14.435	S14.436	S14.437	S14.438	S14.439	S14.440
														
S14.441	S14.442	S14.443	S14.444	S14.445										
CLIMATE CONTROL										GARDEN				
	S14.446	S14.447	S14.448	S14.449	S14.450						S14.453	S14.454		
MUSIC AND AUDIO														
	S14.455	S14.456	S14.457	S14.458	S14.459	S14.460	S14.461							
NUMBERS AND TEXT	0	1	2	3	4	5	6	7	8	9	esterno	external	generale	
	S14.462	S14.463	S14.464	S14.465	S14.466	S14.467	S14.468	S14.469	S14.470	S14.471	S14.472	S14.473	S14.474	
	general	bagno	toilette	mode	text...	text...	text...	text...	text...	text...	text...	text...	text...	text...
	S14.475	S14.476	S14.477	S14.478										

CUSTOMISATION



Neve Up - Library of standard symbols and wording

◆ symbols already on product catalogue visible in darkness

WITHOUT SYMBOL														
	S14.301	S14.302	S14.303	S14.304	S14.305	S14.306	S14.307	S14.308	S14.309	S14.310	S14.311	S14.312	S14.313	S14.314
	◆S14.315	S14.316	S14.317	S14.318	S14.319	S14.320	S14.321	S14.322	S14.323	S14.324	S14.325	S14.326	S14.327	S14.328
LIGHTS											◆S14.339: light fixture icon	◆S14.340: light fixture icon	S14.341: light fixture icon with +	S14.342: light fixture icon with -
	S14.329	S14.330	S14.331	S14.332	S14.333	S14.334	S14.335	S14.336	S14.337	S14.338	◆S14.339	◆S14.340	S14.341	S14.342
					ON	OFF								
	◆S14.343	S14.344	S14.345	S14.346	◆S14.347	◆S14.348	◆S14.349	◆S14.350	S14.351	S14.352				
ENVIRON- MENTS														
	S14.353	S14.354	S14.355	S14.356	S14.357	S14.358	S14.359	S14.360	S14.361	S14.362	S14.363	S14.364	S14.365	S14.366
		WC												
	S14.367	S14.368	S14.369	S14.370	S14.371	S14.372	S14.373							
SCENARIOS														
	S14.374	S14.375	S14.376	S14.377	S14.378	S14.379	S14.380	S14.381	S14.382	S14.383	S14.384	S14.385	S14.386	
	S14.387	S14.388	S14.389											
HOTEL								do not disturb	make up room				save the planet	
	S14.390	S14.391	S14.392	S14.393	S14.394	S14.395	S14.396	S14.397	S14.398	S14.399	S14.400	S14.401	S14.402	
NAUTICAL														
	S14.403	S14.404	S14.405											
ACCESSES			◆S14.408: key icon											
	◆S14.406	S14.407	◆S14.408	S14.409	S14.410	S14.411	S14.412							
ROLLER SHUTTERS WINDOWS AND CURTAINS														◆S14.426: triangle icon
	◆S14.413	◆S14.414	S14.415	S14.416	S14.417	S14.418	S14.419	S14.420	S14.421	S14.422	S14.423	S14.424	S14.425	◆S14.426
	◆S14.427	S14.428	S14.429	S14.430	S14.431	S14.432	S14.433	S14.434	S14.435	S14.436	S14.437	S14.438	S14.439	S14.440
CLIMATE CONTROL														
	S14.441	S14.442	S14.443	S14.444	S14.445									
CLIMATE CONTROL														
	S14.446	S14.447	S14.448	S14.449	S14.450									
MUSIC AND AUDIO														
	S14.455	S14.456	S14.457	S14.458	S14.459	S14.460	S14.461							
NUMBERS AND TEXT	0	1	2	3	4	5	6	7	8	9	esterno	external	generale	
	S14.462	S14.463	S14.464	S14.465	S14.466	S14.467	S14.468	S14.469	S14.470	S14.471	S14.472	S14.473	S14.474	
	general	bagno	toilette	mode	text...	text...	text...	text...	text...	text...	text...	text...	text...	
	S14.475	S14.476	S14.477	S14.478										

CUSTOMISATION



Smart card and Bluetooth network

Smart card customization

The rear of the card can be customised on request, by providing a digital image of the subject in eps, tiff or jpg format.



Bluetooth network name customisation

The name of the Bluetooth network can be customised for articles in the sound system: Bluetooth interface (20589) and stereo amplifier for speakers (20590).

What to provide

- annex a file with extension .txt to the order
- the name of the .txt file must be created as follows:
e.g. **P20590_6.txt**
P20590: required product code preceded by the letter P; '6' is the number of rows in the txt file = quantity of the required product code;

Format of the .txt file

- use standard ASCII European characters;
- name of the network to be customised, max 23 characters (including spaces);
- the text on a new line identifies the end of the string to be customised;
- the number of rows must correspond to the quantity of the required article code;
- each row must indicate the requested customisation, even when repeated.

Example of txt file compilation
(e.g. P20590_6.txt)

B&B	room 1
B&B	room 2
B&B	room 3
B&B	room 4
B&B	room 5
B&B	room 6

ENCLOSURES AND BOXES



Accessories

LED signalling unit for Eikon, Linea*, Arké, Plana and Neve Up traditional controls

 5 V~ - 0,01 W ▲ 00936.5.A: amber ▲ 00936.5.G: green ▲ 00936.5.R: red ▲ 00936.5.B: blue ▲ 00936.5.W: white	12-24 V~ - 0,1 W 00935.A: amber 00935.G: green 00935.R: red 00935.B: blue 00935.W: white	120 V~ 50/60 Hz - 0,2 W 00936.120.A: amber 00936.120.G: green 00936.120.R: red 00936.120.B: blue 00936.120.W: white	250 V~ 50/60 Hz - 0,35 W 00936.250.A: amber 00936.250.G: green 00936.250.R: red 00936.250.B: blue 00936.250.W: white
--	--	---	--

*Only for Linea traditional rocker controls

LED signalling unit for Eikon, Arké axial controls

 5 V~ - 0,01 W ▲ 00937.5.A: amber ▲ 00937.5.G: green ▲ 00937.5.R: red ▲ 00937.5.B: blue ▲ 00937.5.W: white	12-24 V~ - 0,1 W 00937.A: amber 00937.G: green 00937.R: red 00937.B: blue 00937.W: white	110-250 V~ 50/60 Hz - 0,3 W 00938.A: amber 00938.G: green 00938.R: red 00938.B: blue 00938.W: white
--	--	---

LED signalling unit for Linea aligned and axial controls

 5 V~ - 0,01 W ▲ 00946.G: green ▲ 00946.R: red ▲ 00946.W: white	12-24 V~ - 0,1 W 00941.G: green 00941.R: red 00941.W: white 00942.W: with night signalling, white	110-250 V~ 50/60 Hz - 0,4 W 00943.G: green 00943.R: red 00943.W: white 00944.W: with night signalling, white	For Quid 220-240 V~ 50/60 Hz 00945.G: green
--	---	--	---

E10 10x21 mm lamps

LED:
00940
230 V~ 0,7 W, white

E10 10x28 mm lamps

Incandescent:
14771
24 V~ 3 W, white¹
14777
230 V~ 3 W, white¹

Pre-wired signalling units

 00930 250 V~ 0,3 W, red suitable for British standard socket outlets	 00931 110-250 V~ 0,5 W, amber
--	--

ENCLOSURES AND BOXES



Accessories

Transparent cover for mounting frames

 21602.C For 2-module frame, 71 mm fixing centres	 21613.C For 3-module frame	 21614.C For 4-module frame
---	---	---

 21617.C For 7-module frame	 21618.C For 8 (4+4)-module frame
---	---

Transparent covers for Linea supports

 30602.C For 2-module frame, 71 mm fixing centres	 30613.C For 3-module frame
 30614.C For 4-module frame	 30617.C For 7-module frame

Adaptors for DIN rail (60715 TH35) installation

 V51921 1-module support	 V51922 2-module support	 V51923 3-module support
--	--	--

¹ The indicated colour is that of emitted light

ENCLOSURES AND BOXES



Flush mounting boxes


Flush mounting boxes for masonry



V71001
Round ø 60 mm
(GW 650 °C),
light blue



V71001.AU
Round ø 60 mm
(GW 960 °C),
black




V71001, V71001.AU



V71303
(GW 650 °C), light blue
- 3 modules



V71303.AU
(GW 960 °C), black
- 3 modules




V71303, V71303.AU



V71304
(GW 650 °C), light blue
- 4 modules



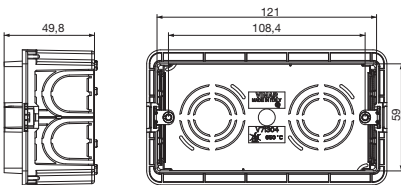
V71304.AU
(GW 960 °C), black
- 4 modules



V71304, V71304.AU



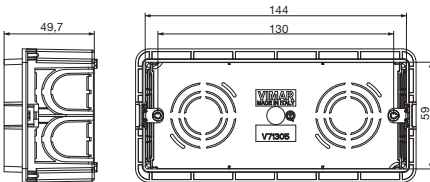
V71305
(GW 650 °C), light blue
- 5 modules




V71305




Dividing screen to realize modular and electrically separated compartments



Knockouts on all sides to accommodate differently sized conduits




Precise back to back positioning, thanks to marking and stopping pins



Knockouts fixed to the box in two points only

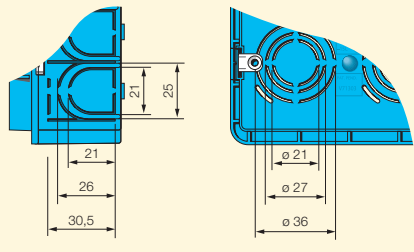Cable entry dimensions



ENCLOSURES AND BOXES



Flush mounting boxes

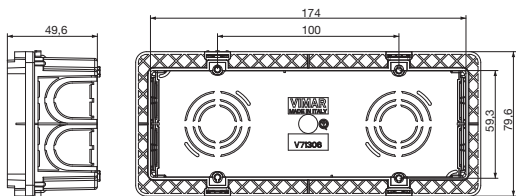
Flush mounting boxes for masonry



V71306
(GW 650 °C), light blue
- 6/7 modules




V71306.AU
(GW 960 °C), black
- 6/7 modules



V71306, V71306.AU




09996
(GW 650 °C), light blue
- 6 (3+3) modules



09996



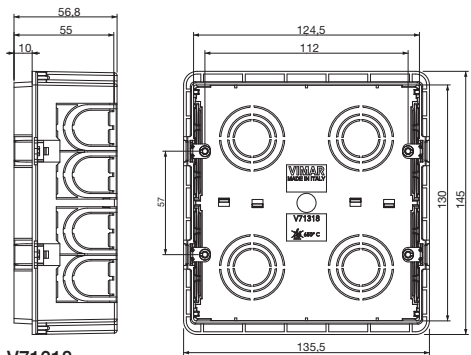
V71318
(GW 650 °C), light blue
- 8 modules



V71318



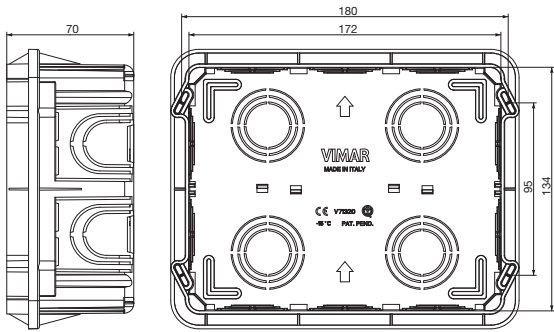V71320
(GW 650 °C), light blue
- 12/14 modules



V71320

ENCLOSURES AND BOXES

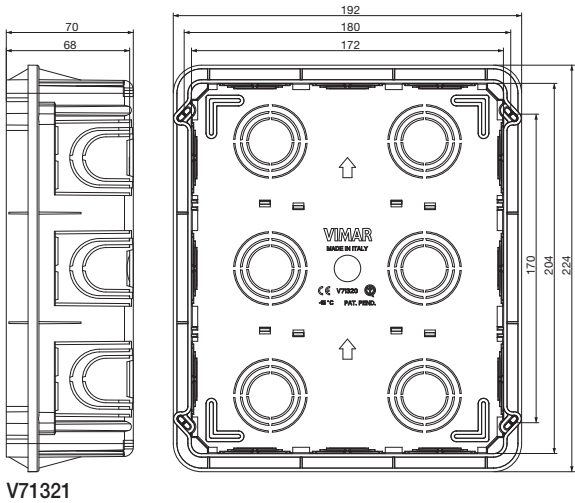


Flush mounting boxes

Flush mounting boxes for masonry



V71321
(GW 650 °C), light blue
- 18/21 modules



V71321

Antimortar protective covers for flush mounting masonry boxes



V71011
Cover for V71001 and
V71001.AU, yellow



V71323
Cover for V71303 and
V71303.AU, yellow



V71324
Cover for V71304 and
V71304.AU, yellow



V71326
Cover for V71306 and
V71306.AU, yellow

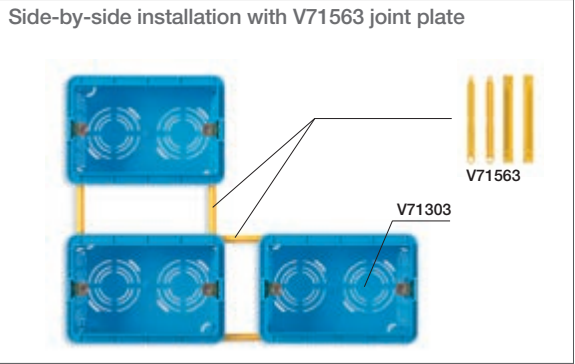


V71328
Cover for V71318 and
V71718, yellow

Accessories for flush mounting masonry boxes



V71563
Coupling joints for both horizontal and
vertical compositions in flush-mounting
boxes V71303, V71304, V71305,
V71306. Length 58,2 mm, yellow



ENCLOSURES AND BOXES



Flush mounting boxes

Flush mounting boxes for hollow walls



V71701
Round ø 60 mm (GW 850 °C),
light blue, suitable only for
mounting frames without claws



V71703
(GW 850 °C), light blue
- 3 modules




V71704
(GW 850 °C), light blue
- 4 modules




V71706
(GW 850 °C), light blue
- 6/7 modules




V71718
(GW 850 °C), light blue
- 8 modules




V71720
Multifunction (GW 850 °C), light blue.
Casing for ordinary use (GP)
- 12/14 modules




V71701

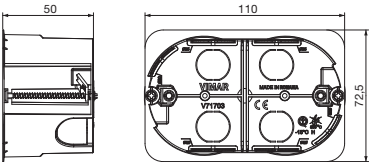


V71703

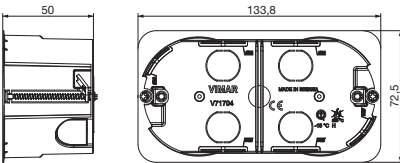


V71704

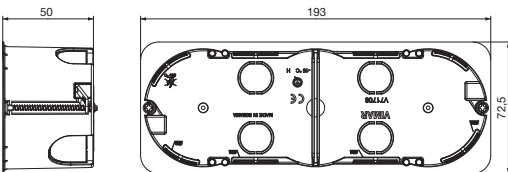

V71706

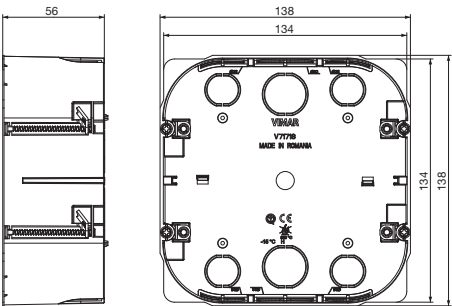

V71718

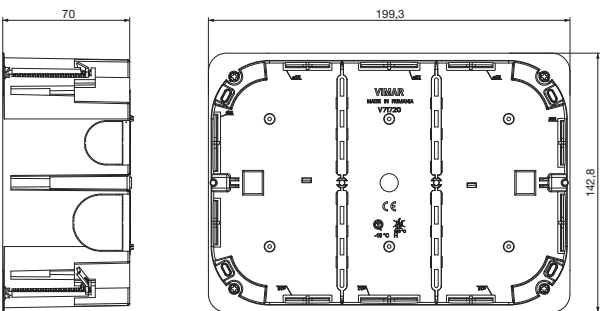

V71720

ENCLOSURES AND BOXES



Flush mounting boxes

Multifunction accessories for hollow walls flush mounting boxes



V71571
Support for installing boxes V71701 on light walls inside the wall, yellow:
•centring template;
•coupling joint for mounting boxes in horizontal and vertical banks



V71573
Support for installing boxes V71703 on light walls inside the wall, yellow:
•centring template;
•coupling joint for mounting boxes in horizontal and vertical banks



V71574
Support for installing boxes V71704 on light walls inside the wall, yellow:
•centring template;
•coupling joint for mounting boxes in horizontal and vertical banks



1. and 2. Use the **V71573** accessory as a template for a precise drilling.
3. Remove with a cutter or scissors the central grid. The accessory can also be used as a tie.
4. When box positioned, fix it to the hollow wall with screws for plasterboard.
5. The result is a flush profile.

Accessories for flush mounting masonry and hollow wall boxes



V71550
Dividing screen for boxes V71303..., V71304..., V71305..., V71306..., V71703, V71704, V71706, yellow



V71551
Horizontal dividing screen for boxes V71320, V71321, V71620, V71720, 09920..., 09921..., yellow. Allows to realize electrically separated compartments inside the box



V71552
Horizontal dividing screen for boxes V71318 and V71718, yellow. Allows to realize electrically separated compartments inside the box

Covers for flush mounting masonry and hollow wall boxes



02645
Round, ø 76 mm, with claws for ø 55-70 mm boxes, urea resin, white



02646
Round, ø 94 mm with claws for ø 75-85 mm boxes, urea resin, white



02647
Square, 82x82 mm, with claws for ø 55-70 mm boxes, urea resin, white



02648
Square, 101x101 mm with claws for ø 75-85 mm boxes, urea resin, white



02653
Rectangular, with screws for V71303... boxes, urea resin, white. Fixing centres at 83,5 mm



V71630
Rectangular, with screws for V71320 and V71720 boxes, white

ENCLOSURES AND BOXES




Flush mounting boxes

Flush-to-wall covers for flush mounting masonry and hollow wall boxes




V71632
Flush-to-wall cover for 2-module boxes, white

Fixing method




Masonry walls.
The box mounting frame is fastened using **claws**, while the cover snaps into the mounting frame without leaving any screws visible.




Hollow walls.
The box mounting frame is fastened using **screws**, while the cover snaps into the mounting frame without leaving any screws visible.

Flush-to-wall covers for flush mounting masonry and hollow wall boxes



V71633
Flush-to-wall cover for 3-module boxes, white




V71634
Flush-to-wall cover for 4-module boxes, white




V71631
Cover for V71318 and V71718 boxes, snap fixing to V71328 antimortar cover (provided), white

Flush-to-wall cover: installation on flush mounting boxes

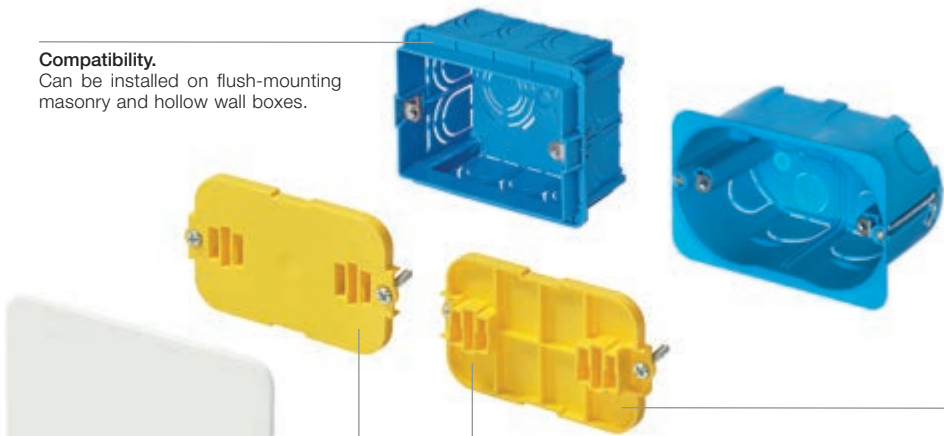Compatibility.
Can be installed on flush-mounting masonry and hollow wall boxes.





Reversible mounting frame.
The mounting frame can be installed on both sides, depending on the box installation depth.





Cover.
The cover is installed on the mounting frame using a snap-on system, which ensures that the installation is solid, with optimal aesthetic performance as there are no screws.

Maximum aesthetic performance.
As the cover protrudes very little, can be painted and has a smooth surface, it is invisible even when installed in full view.

Installation with standard box depth



Installation with increased box depth



ENCLOSURES AND BOXES



Surface mounting boxes


Surface mounting boxes



09971.A
Square, for 1- or 2-reduced-module
Idea, RAL 9001 ivory. Idea series:
suitable for Classica cover plate only




09971.01
Square, for 1- or 2-reduced-module
Idea, white. Idea series: suitable for
Classica cover plate only



09971...



09972.01
Square, for 1- or 2-reduced-module
Idea, white




09972...



09975.A
Rectangular, for 3-module,
RAL 9001 ivory. Idea: suitable
only for Classica cover plates



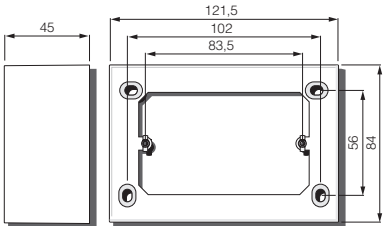09975.01
Rectangular, for 3-module,
white. Idea: suitable only for
Classica cover plates




09975...



09976.04
Rectangular, for 3-module,
Idea white. Idea: suitable only
for Classica cover plates



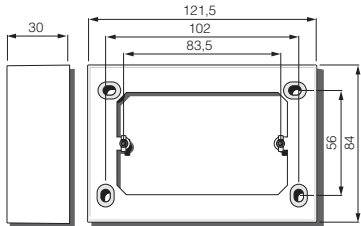09976.14
Rectangular, for 3-module,
Idea grey. Idea: suitable only
for Classica cover plates




09976...



09983
Rectangular, for 3-module,
grey



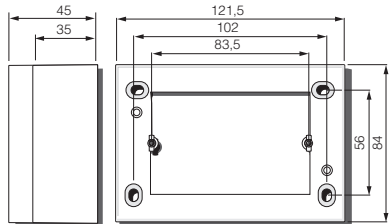09983.01
Rectangular, for 3-module,
white



09983...

ENCLOSURES AND BOXES

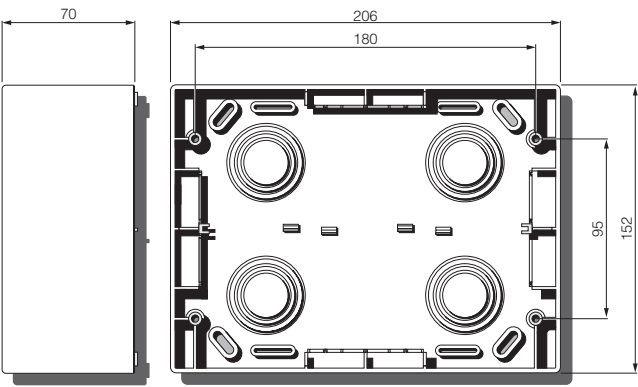


Surface mounting boxes

Surface mounting boxes




09920.01
Rectangular, for 12-(6+6)-module,
white



09920...



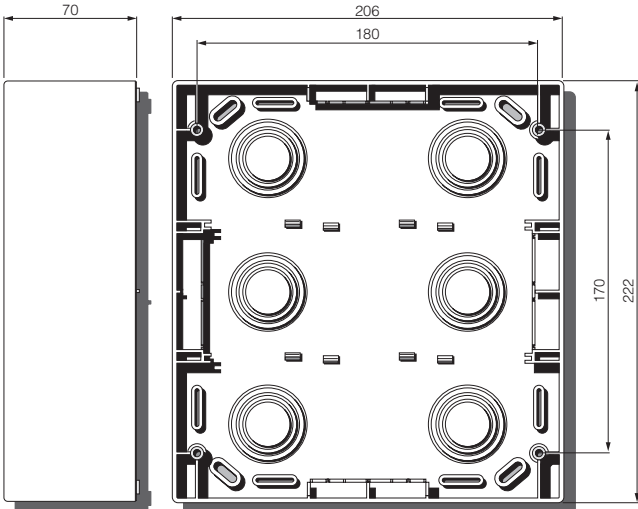09921.01
Rectangular, for 18-(6+6+6)-module,
white



09921.01

ENCLOSURES AND BOXES



Isoset: IP40 surface mounting boxes


Isoset IP40 boxes



14801
1-module




14802
2-module,
horizontal and vertical
device fixing



14801, 14802




14803
3-module



14803



14804
4-module




14804



14812
4-module (2+2),
horizontal and vertical device
fixing




In the same box it is possible the horizontal and vertical device fixing.



14812



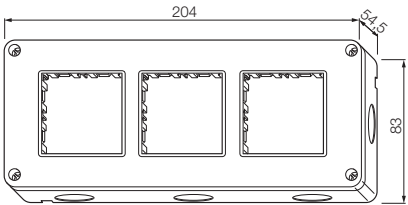
14813
6-module (2+2+2),
horizontal and vertical device
fixing



14813



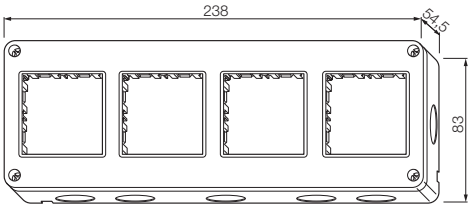
14814
8-module (2+2+2+2),
horizontal and vertical device
fixing



14814



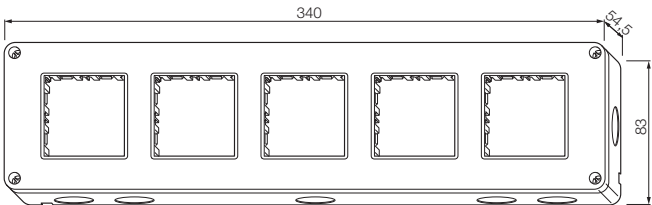14815
10-module (2+2+2+2+2),
horizontal and vertical device
fixing



14815

ENCLOSURES AND BOXES

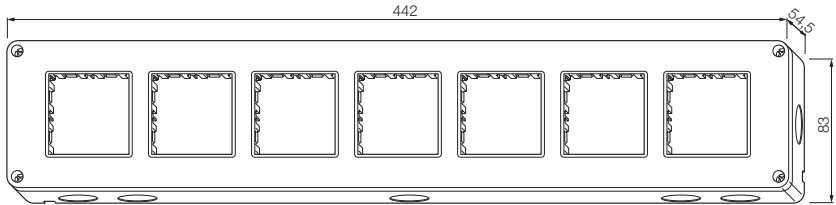


Isoset: IP40 surface mounting boxes

Isoset IP40 boxes




14817
14-module (2+2+2+2+2+2),
horizontal and vertical device
fixing



14817



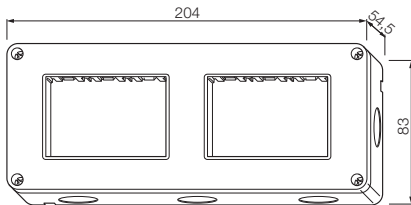
14827
6-module (3+3 in horizontal)



14827




14832
8-module (4+4 in vertical)



14832



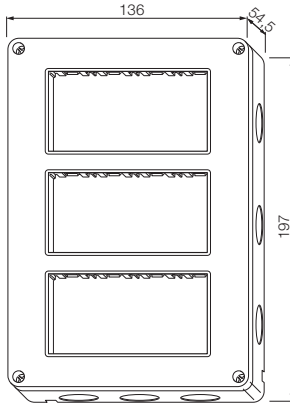
14833
12-module (4+4+4 in vertical)



14833



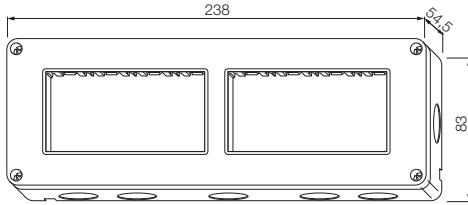
14837
8-module (4+4 in horizontal)



14837



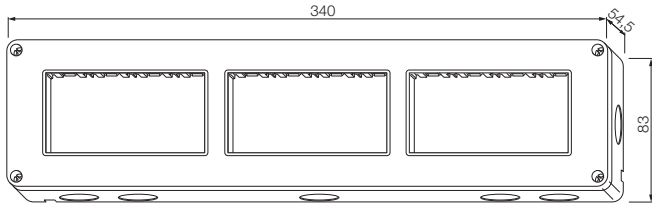
14838
12-module (4+4+4 in horizontal)



14838



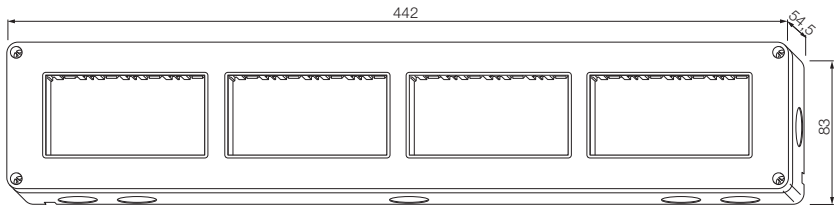14839
16-module (4+4+4+4 in horizontal)








14839

ENCLOSURES AND BOXES

Isoset: IP55 surface mounting boxes



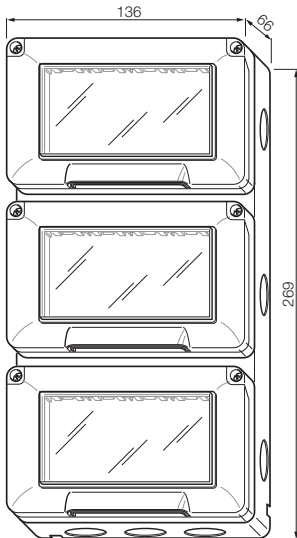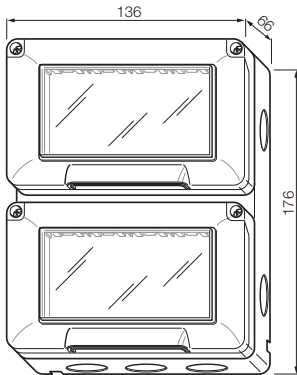Isoset IP55 boxes







ENCLOSURES AND BOXES

Isoset: IP55 surface mounting covers



Isoset IP55 covers



IP55 covers



IP44 protected cover



ENCLOSURES AND BOXES

Neve Up surface mounting enclosures



IP40 enclosures




▲ 09802
2 modules




▲ 09803
3 modules




▲ 09804
4 modules



▲ 09802



▲ 09803



▲ 09804

IP55 enclosures




▲ 09902
2 modules




▲ 09903
3 modules




▲ 09904
4 modules



▲ 09902



▲ 09903



▲ 09904

ENCLOSURES AND BOXES

Neve Up flush mounting covers




IP55 covers



▲ 09911.01
with claws, for ø 60 mm
boxes, white - 2 modules



▲ 09911.04
with claws, for ø 60 mm
boxes, black - 2 modules




▲ 09911..



▲ 09912.01
with screws, for mounting
boxes with 60 mm distance
between centres, white
- 2 modules



▲ 09912.04
with screws, for mounting
boxes with 60 mm distance
between centres, black
- 2 modules




▲ 09912..



09913.01
with screws, for mounting
boxes 3 modules, white -
3 modules




09913.04
with screws, for mounting
boxes 3 modules, black -
3 modules




09913..



09914.01
with screws, for mounting
boxes 4 modules, white -
4 modules



09914.04
with screws, for mounting
boxes 4 modules, black -
4 modules



09914..

ENCLOSURES AND BOXES




Table mounting boxes

Eikon - Table mounting boxes to be completed with frame and cover plate



20784
4-module, grey

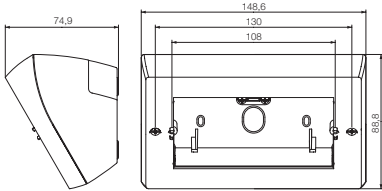20784.B
4-module, white




20784...



20787
7-module, grey

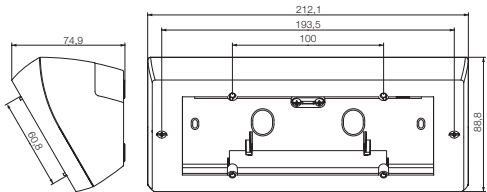20787.B
7-module, white




20787...



20788
8-module (4+4), with frame to be completed with cover plate, grey

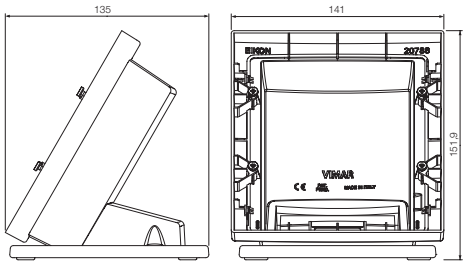20788.B
8-module (4+4), with frame to be completed with cover plate, white



20788...

Linea - Tilted table mounting boxes to be completed with mounting frame and cover plate

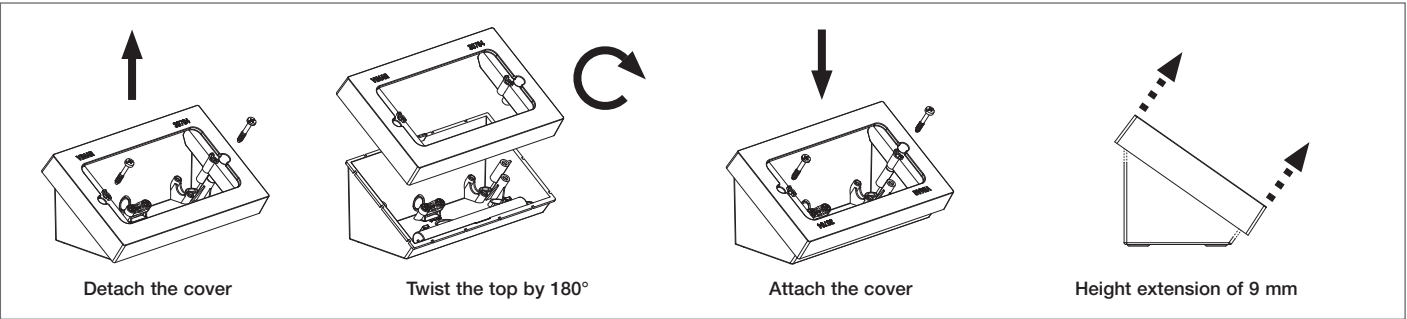


30784.G
Tilted table mounting box, with variable height, for the installation of 4 modules. In the lowered version, connector blocks with a maximum depth of 32 mm can be installed; if you turn the cover the maximum depth extends to 44 mm. The socket outlet with USB, 30210.USB, cannot be installed.



30784.B
Tilted table mounting box, with variable height, for the installation of 4 modules. In the lowered version, connector blocks with a maximum depth of 32 mm can be installed; if you turn the cover the maximum depth extends to 44 mm. The socket outlet with USB, 30210.USB, cannot be installed.

Method of installation of devices with a depth of between 32 and 44 mm



ENCLOSURES AND BOXES




Table mounting boxes

Arké - Table mounting boxes to be completed with frame and cover plate



19784
4-module, grey

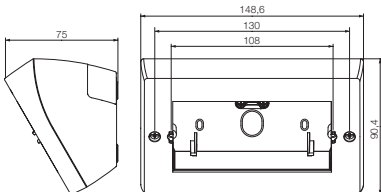19784.B
4-module, white




19784...



19787
7-module, grey

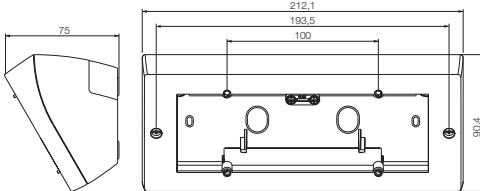19787.B
7-module, white




19787...



19788
8-module (4+4), with frame to be completed with cover plate, grey

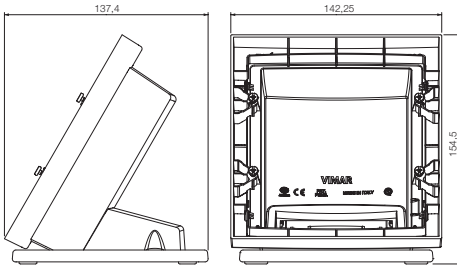19788.B
8-module (4+4), with frame to be completed with cover plate, white



19788...

ENCLOSURES AND BOXES



Table mounting boxes

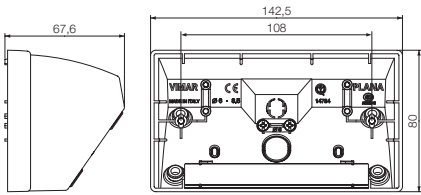
Plana - Table mounting boxes to be completed with frame and cover plate



14784
4-module,
white




Δ 14784.SL
4-module,
Silver




14784...



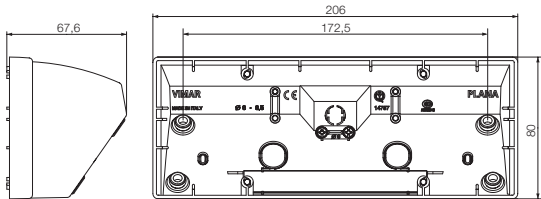
14787
7-module,
white



14787...

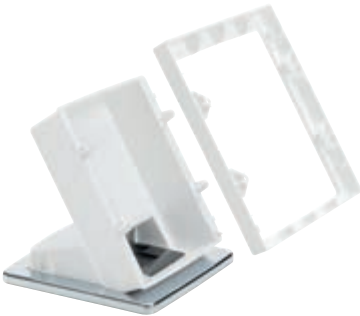

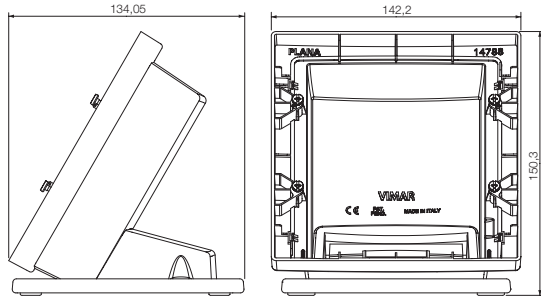14788
8-module (4+4), with
frame to be completed
with cover plate,
white



14788...

ENCLOSURES AND BOXES



Floor mounting turrets

Floor mount turret



V54303
Floor mount turret for Plana, Arké,
Eikon and Neve Up devices, for installa-
tion in V54903 box.
Supplied with specific support for installation
on floating floors



V54903
Flush box for floor
mount turret - 3 modules
To complete with turret V54303



V54412
Floor mounting retractable turret with
hollow cover for Eikon, Arké and Plana
devices for installation on floating floors.
Supplied with 2 mounting frames with
6 modules. Installation in screed with
dedicated mounting box V54912



V54412.01
Floor mounting retractable turret with
stainless steel cover for Eikon, Arké and
Plana devices for installation on floating
floors. Supplied with 2 mounting frames
with 6 modules. Installation in screed
with dedicated mounting box V54912



V54912
Flush mounting box for screed, for
12-module floor mounting turrets



V54420
Floor mounting retractable turret with
hollow cover for Eikon, Arké and Plana
devices for installation on floating floors.
Supplied with 2 mounting frames with
6 modules. Installation in screed with
dedicated mounting box V54920



V54420.01
Floor mounting retractable turret with
stainless steel cover for Eikon, Arké and
Plana devices for installation on floating
floors. Supplied with 2 mounting frames
with 6 modules. Installation in screed
with dedicated mounting box V54920



V54920
Flush mounting box for screed, for
12-module floor mounting turrets

Energia Positiva. Insieme

