

EN wiha Wiha tools for electricians



Wiha - our goal: your success

• Your guarantee for quality





wha

- Reliable and dependable
 German family-owned company with more than 80 years of experience.
- Your advantage Customised problem-solving for professionals.
- Cutting-edge technology
 Award-winning innovations valued by
 professionals throughout the world.

What makes your work easier? Tools that increase your efficiency, reduce costs and preserve your health. This is why Wiha develops, designs and manufactures products that meet the highest functionality, durability and ergonomic demands.

Founded over 80 years ago as a small family-owned business for standard parts and screws, Wiha has grown to become a global company with factories all over Europe, Asia and the United States and are still owner-operated by the Hahn family.

Wiha offers the professional a wide range of high-quality premium tools, characterized by their use of the latest manufacturing technologies, application-oriented innovations, ergonomic superiority, top quality, absolute reliability and long service life. In short, tools that make your work noticeably easier - tools that work for you.

Learn more about Wiha on our website: www.wiha.com

Maximum power transmission, comfortable to use and without loss.

To work safer, more efficiently and with less strain on the body.

Certified safety – from our own safety testing procedure according to IEC standards.

Voltage testing: All Wiha VDE-tools, which have special markings, are individually tested at 10,000 V AC and are approved for 1,000 V AC and 1,500 V DC.

Cold shock test: Cooling down to -25° C. The skinning material must retain its toughness, so that it doesn't break when subjected to shock and knocks.

Test of electrical skinning properties: 24 hours storage in water, then 3 minutes test at 10,000 V AC. There must neither be flashover nor disruptive discharge.

Test of the adhesion of the skinning material coating: 168 hours storage at 70° C, then test of adhesion at 500 N.

Pressure tests: Test at 20 N pressure load, 70° C temperature and 5,000 V AC test voltage. No disruptive discharge may occur.

Test of combustion behaviour: The tools are subjected to a flame for 10 seconds. The skinning material must then extinguish and not continue to burn.

Safety note

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms

insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit

cover or block off adjacent live components

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.



As an internationally recognized institute, the VDE is responsible for the testing and certification of electrotechnical products. Wiha provides the professional with a broad range of VDE products, developed and continuously optimized specifically for electricians, which also provide applicationoriented solutions for everyday use.

The Wiha quality-management system according to ISO 9001:2015 ensures that only first-class products are manufactured – and that you can work with products of excellent quality. To ensure maximum safety for the user, the entire Wiha VDE range must undergo the most stringent inspections and individual tests. All Wiha VDE-tools hold multiple certifications: The VDE-GSmark stands for safety with regard to any risk, from electrical right up to radiological. Products labelled with a double triangle and a voltage range are suitable for work with live parts.

The international standard IEC 60900 defines the construction, safety as well as single, series, andrandom testing of insulated tools. But with Wiha you don't just work safer, but also healthier and moreefficiently. Specially developed ergonomic geometries ensure comfortable handling that protects body from strain. The result: easier work, less signs of fatigue, more efficiency.



SHOWTIME STARS FOR ALL APPLICATIONS

STARS FOR ELECTRICIANS




1000

STARS FOR MECHANICS

wiha Tools that work for you

Content

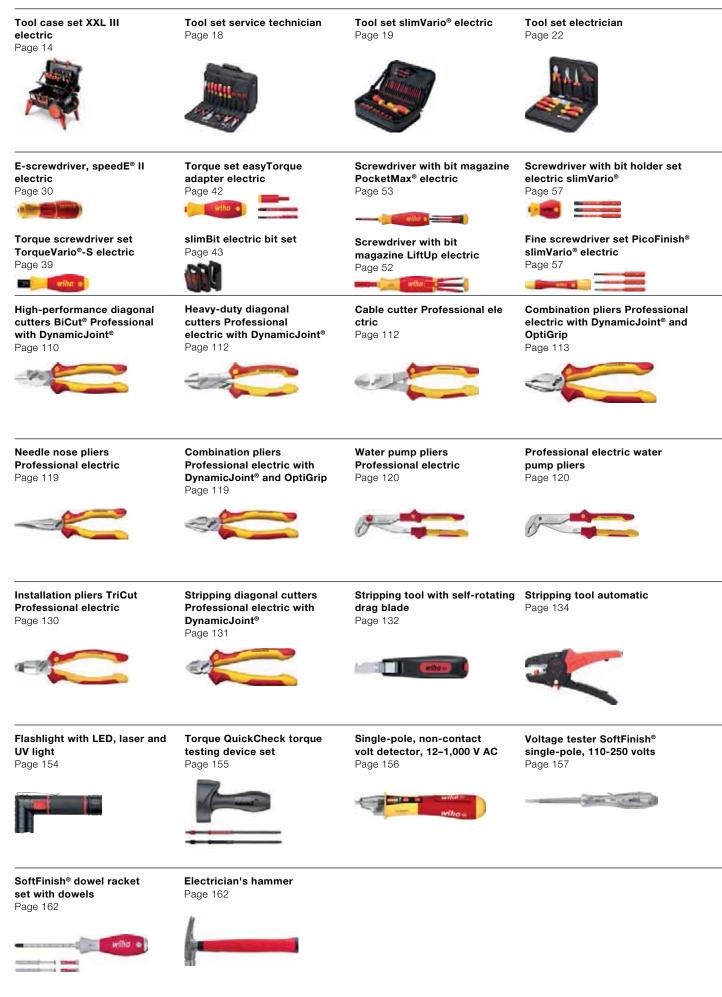

8 **wiha**

Range of Applications

Stripping/ insulating / crimping

Surveying / marking / measuring / checking

Tool set electrician Page 23	Ratchet wrench set insulated 1/2" Page 24	Single open-end spanner set, insulated 6-32 mm Page 25	Range of Applications From page 10
	ALL DE LE DE		
Torque screwdriver with T-handle TorqueVario®-S T electric	Screwdriver with bit magazine magnetic Page 77	L-key set in ErgoStar holder Page 94	Fastening / jamming From page 26
Page 48	- 10		11011 page 20
Screwdriver SoftFinish® electric slimFix Page 66	Screwdriver with bit magazine LiftUp 25 magnetic Page 77	BitBuddy [®] TY bit set, 29 mm Page 81	
i sta i		artha 1	
Precision mechanic's diagonal cutters Classic Page 114	Craftsman's cutters Page 114	Hacksaw electric Page 114	Trimming / cutting From page 106
Long flat-nose pliers Professional electric Page 120	Pliers wrench Professional electric Page 121	Circlip pliers Classic with MagicTips® Page 125	Supplying / holding
			From page 116
Automatic crimp tool Page 136	Automatic crimp tool Page 136	Stripping and crimping tool set 4-pcs. Page 138	Stripping/ insulating / crimping
		1	From page 126
Electrician's Longlife® folding ruler, 2 m Page 157	Electrician's spirit level Page 157		Surveying / marking / measuring / checking
🏭 wiha= 🖾	°C		From page 150
			Striking / chiselling From page 158

Increases your efficiency

A wide range of tools – so the right one is always to hand when you need it.

Protect your health

The patented and multiple award-winning Wiha SoftFinish® handle size concept prevents occupational illnesses as work is kind to hands and muscles. Recommended by German doctors and therapists from the AGR! (Healthy back association)

Offers you full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Increases your safety

Wiha slim tools ensure full and fully-insulated access to low-lying screws.



The range. Cases that really deliver.

The professional often has reservations about conventional tool boxes: too inaccessible, little storage space, not robust enough. Deficiencies that Wiha has taken to heart – and eliminated – in the development of its case sets. Wiha cases therefore combine many good qualities: Thanks to its extra large wheels it is very easy to conveniently pull the case along on rugged terrain or stairs. The durable PP-plastic with reinforced plastic elements ensures a longlifespan. Gas-filled shock absorbers hold the cover in all positions and reduce the risk of injury when closing. Tool trays ensure quick and easy access to the tool, the case itself provides a lot of extra storage space for small items and machines. And, last but not least, you can easily access the right tool, whenever it is needed.

"A case with all major Wiha tools and innovations - like Christmas for the electrician!" Max Buhl





Your entire workshop - now you can take it with you!



Whether next door or at the most remote site: It's greatif the tool you need is quickly at hand. Compact, handyand robust, the Wiha toolbox set ensures access tothe tools you require, at any time and in any situation. Specially compiled according to varying requirementsand applications, the Wiha toolbox sets have one thingin common: All include high-quality tools in provenWiha quality, guaranteeing easy and efficient working. Ergonomic in design, durable in material and processing, and safe thanks to rigorous and extensive safety test procedures, Wiha tools prove to be a practical and indispensable companion for the electrician, especially in their toolbox set.

Protects your health

On stairs and rough terrain the trolley moves comfortably and smoothly thanks to its large wheels.

• Simplifies your work

When the legs are folded out, the case serves as a stable and slip-proof step for working on higher locations.

- Increases the quality of your work Exact sawing of material at the construction site thanks to a V-shaped incision with a scale in the lid of the case.
- Protects your health Elevated positon for removing tools from the case due to the extendable legs.
- Increases your flexibility Ample space for additional tools and lots of storage for small parts and machines.







Protects your health: On stairs and rough terrain the trolley moves comfortably and smoothly thanks to its large wheels. Simplifies your work: When the legs are folded out, the case serves as a stable and slip-proof step for working on higher locations. Increases the quality of your work: Exact sawing of material at the construction site thanks to a V-shaped incision with a scale in the lid of the case. Protects your health: Elevated positon for removing tools from the case due to the extendable legs. Protects your health: Ergonomic handle design makes work easier and prevents occupational illnesses. Increases your flexibility: Ample space for additional tools and lots of storage for small parts and machines. Increases your efficiency: A comprehensive tool assortment, always having the right tool at hand when needed. Increases your safety: Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Protects your health: Wiha pliers require less force and reduce pressure on wrists.



Order-No.	feed of the second s
44128	1
Fastening / .	
3	Tool set slimVario [®] electric mixed, 32 pcs. incl. multifunctional bag (43465)
⋺⋺╬╬⊜	 slimBit electric bit Slotted 2.0 mm x 75 mm (43115) / 3.5 mm x 75 mm (41159) / 5.5 mm x 75 mm (34581) / 6.5 mm x 75 mm (34582) / slimBit electric bit Philips PH0 x 75 mm (43116) / PH1 x 75 mm (34583) / PH2 x 75 mm (34584) / slimBit electric l PlusMinus/Pozidriv SL/PZ1 x 75 mm (34589) / SL/PZ2 x 75 mm (34590) / slimBit electric bit Pozidriv PZ1 x 75 mm (34588) / SL/PZ2 x 75 mm (34590) / slimBit electric bit Pozidriv PZ1 x 75 mm (34589) / SL/PZ2 x 75 mm (34590) / slimBit electric bit Pozidriv PZ1 x 75 mm (34586) / slimBit electric bit Hex 3.0 mm x 75 mm (34590) / slimBit electric bit 75 mm (37225) / 5.0 mm x 75 mm (3728) / PZ2 x 75 mm (34586) / slimBit electric bit Hex 3.0 mm x 75 mm (37147) / 4.0 mm x 75 mm (37225) / 5.0 mm x 75 mm (3728) / SlimBit electric bit TORX* T10 x 75 mm (35507) / T15 x 75 mm (35508) / T20 x 75 mm (35509) / T25 x 75 mm (36071) / Insulated nut driver insert 1/4" hexagon head 5.0 mm (43089) / 5.5 mm (43090) / 6.0 mm (43091) / 7.0 mm (43092) / 8.0 m (43093) / 10.0 mm (43095) / 11.0 mm (43096) / 13.0 mm (43098) / slimVario* electric adapter for 1/4" nut driver (43139) / Extension slimVario* electric for slimBits 6.0 mm (43292) / Screwdriver with bit holder SoftFinish* slimVario* electric / Torque screwdriver TorqueVario*-S electric variably adjustable torque limit / Screwdriver with bit holder SoftFinish* electric slimVario Stubby / multifunctional bag
Ð 🏶 🏶	XLSelector Y bit set, 25 mm Phillips, Pozidriv, TORX [®] , 32-pcs., 1/4" C6,3 (41832) 1 x Y-Bit 25 mm Phillips 1/4" PH1 / 4 x Y-Bit 25 mm Phillips 1/4" PH2 / 1 x Y-Bit 25 mm Phillips 1/4" PH3 / 2 x Y-Bit 25 mm Pozidriv 1/4" PZ1 / 4 x Y-Bit 25 mm Pozidriv 1/4" PZ2 / 2 x Y-Bit 25 mm Pozidriv 1/4" PZ3 / 2 x Y-Bit 25 mm TORX [®] 1/4" T1 x Y-Bit 25 mm TORX [®] 1/4" T15 / 3 x Y-Bit 25 mm TORX [®] 1/4" T20 / 3 x Y-Bit 25 mm TORX [®] 1/4" T25 / 3 x Y-Bit 25 mm TOR 1/4" T30 / 2 x Y-Bit 25 mm TORX [®] 1/4" T40 / 1 x Bit holder magnetic 58 mm 1/4" / 1 x XLSelector
000	Universal key with double joint with triangular heads, square heads and double bit 7-9-5 - 8-3 - 5 (44001)
•	L-key set in ErgoStar holder hexagonal ball Magicring [®] 10-pcs. in flourescent colour (41979) 1 x 1.5 mm / 1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm / 1 x 8.0 mm / 1 x 10.0 mm / ⁻ ErgoStar holder
Э	Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 12.0 mm x 200 mm (03231)
Э	Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 5.5 mm x 125 mm (35391) / 6.5 mm x 150 mm (35392)
Ð	Screwdriver SoftFinish® electric slimFix Phillips PH1 x 80 mm (35393) / PH2 x 100 mm (35394)
₿	Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv SL/PZ1 x 80 mm (36329) / SL/PZ2 x 100 mm (36330)
Supplying / I	nolding
	Pliers wrench Classic 250 mm, 10" (40923)
•	Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)
nsulating / o	crimping
	Stripping tool automatic up to 16 mm ² in blister pack 200 mm, 8" (42062)
	Automatic crimp tool for wire-end sleeves hex crimping 210 mm (41246)
Stripping/ in	sulating / crimping
	Crimping tools for insulated cable eyes and contacts 220 mm, 0.5 - 6 (33841)
	Installation pliers TriCut Professional electric 170 mm, 7" (38552)
	Stripping tool with self-rotating drag blade for round cables 165 mm (44618)
rimming / c	utting
1	Cable cutter Professional electric with switchable opening spring 180 mm, 7" (43660)
	Professional BiCut [®] high-performance diagonal cutters with DynamicJoint [®] Switchable 200 mm, 8" (38191)
	Professional electric diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43335)
	Hacksaw electric insulated with three saw blades 150 mm 280 mm (43125)
Surveying / I	marking / measuring / checking
	Single-pole, non-contact volt detector, 12–1,000 V AC Includes two AAA batteries (43797)
	Flashlight with LED, laser and UV light in blister pack, including 3 AAA batteries 100 - 310 lm (41286)
	Electrician's Longlife® folding ruler, 2 m metric, 10 segments 15 mm (42068)
	Electrician's spirit level 40 cm 400 mm (42074)
Striking / ch	
	Electrician's hammer with 300 g hammer head in blister pack 283 mm (42071)
Ð	SoftFinish® dowel racket set with dowels with 6 mm round blade pack, 5-pcs. (41289) 1 x Dowel racket / 2 x 30 mm dowel / 2 x 40 mm dowel
Various	
	SoftFinish® bottle opener Perfect for workshop and kitchen. (04703)





Meets your requirements: Case: robust, large, stable and secure with lid brake. **Lowers your costs:** The right tool protects you from damaging materials and avoids subsequent work. **Increases your safety:** Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. **Increases your safety:** Gas-filled shock absorbers hold the lid in all positions and reduce the risk of injury when closing. **Protects your health:** Wiha pliers require less force and reduce pressure on wrists. Ergonomic handle design makes work easier and prevents occupational illnesses. **Protects your health:** Carry belt enables the simple transport of the tool case and keeps hands free for other materials. **Increases your efficiency:** A comprehensive tool assortment, always having the right tool at hand when needed. **Increases your efficiency:** The design and function of the tool trays guarantee quick and easy access to tools. **Increases your flexibility:** Ample space for additional tools and lots of storage for small parts and machines.



93	0	07	101
70	U	υı	υ.

Order-No.	
40523	1
	/ Jamming
0	Screwdriver SoftFinish® electric Hex nut driver 5.5 mm x 125 mm (00856) / 7.0 mm x 125 mm (00858) / 8.0 mm x 125 mm (00859) 10.0 mm x 125 mm (00861)
Ə	Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 4.0 mm x 100 mm (35390) / 5.5 mm x 125 mm (35391) 6.5 mm x 150 mm (35392)
Ð	Screwdriver SoftFinish® electric slimFix PlusMinus/Phillips SL/PH1 x 80 mm (35502) / SL/PH2 x 100 mm (35503)
*	Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv SL/PZ1 x 80 mm (36329) / SL/PZ2 x 100 mm (36330)
Ð	Screwdriver SoftFinish® electric slimFix Phillips PH1 x 80 mm (35393) / PH2 x 100 mm (35394)
*	Screwdriver SoftFinish [®] electric slimFix Pozidriv PZ1 x 1 mm (35395) / PZ2 x 100 mm (35396)
\ominus	Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 12.0 mm x 200 mm (03231)
	Switch cabinet key cross shape 7.0 mm- 9- 5 - 8- 3 - 5 (36114)
⊖⊕⊛⊙	Screwdriver with bit magazine LiftUp electric Phillips, PlusMinus/Pozidriv, slotted with 6 slimBits (38611) 1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.5 mm / 1 x PH1 / 1 x PH2 / 1 x SL/PZ2
۲	L-key set in Compact holder Hexagonal ball end matt chrome-plated 10-pcs. (01418) 1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm / Compact holder
⋺⊕₩≋	Bit set XLSelector Standard 25 mm assorted 32-pcs. 1/4" C6,3 (29417) 1 x 4.5 mm / 1 x 5.5 mm / 1 x 6.5 mm / 2 x PH1 / 4 x PH2 / 1 x PH3 / 2 x PZ1 / 5 x PZ2 / 1 x PZ3 / 2 x T10 / 2 x T15 / 2 x T20 / 3 T25 / 2 x T30 / 1 x T40 / 1 x Bit holder magnetic 58 mm 1/4" / 1 x XLSelector
Trimming /	cutting
K	Professional BiCut [®] high-performance diagonal cutters with DynamicJoint [®] Switchable 200 mm, 8" (38191)
	Precision mechanic's diagonal cutters Classic with opening spring 125 mm, 5" (36189)
K	Professional electric diagonal cutters with DynamicJoint [®] 180 mm, 7" (43340)
Supplying	/ holding
	Water pump pliers Professional electric with push button adjustment 250 mm (37450)
8	Needle nose pliers Professional electric with cutting edge curved shape, approx. 40° 200 mm, 8" (26729)
	Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge 180 mm, 7" (26708)
•	Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)
Stripping/	insulating / crimping
ζ	Installation pliers TriCut Professional electric 170 mm, 7" (38552)
	Automatic stripping tool up to 6 mm ² 190 mm, 7 1/2" (44617)
	Stripping tool with self-rotating drag blade for round cables 165 mm (44618)
	Crimping tools for wire-end sleeves 220 mm, 0.14 - 16 (33844)
Surveying	/ marking / measuring / checking
	Single-pole, non-contact volt detector, 90–1,000 VAC Includes two AAA batteries (43798)
Э	Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip 3.0 mm (34745)
-	Folding ruler Longlife 2 m metric, 10 segments 15 mm (27057)
	Control cabinet spirit level 20 cm (36859)





Meets your requirements: Carefully selected tool ranges for the most common applications. **Increases your safety:** Wiha slim blades ensure unlimited, protected access to deep-set screws. **Increases your safety:** Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. **Increases your efficiency:** Compact and space-saving tool bag can be removed from the complete set and used separately.

assorte	ed 31-pcs. incl. bag	93000
Order-N	No.	(==)
43879		1
Fasten	ing / Jamming	
\ominus	Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 5.5 mm x 125 mm (35391)	
Ð	Screwdriver SoftFinish® electric slimFix Phillips PH1 x 80 mm (35393) / PH2 x 100 mm (35394)	
\$	Screwdriver SoftFinish® electric slimFix Pozidriv PZ1 x 1 mm (35395) / PZ2 x 100 mm (35396)	
θ	PicoFinish® fine screwdriver Slotted 1.5 mm x 40 mm (42384) / 2.0 mm x 40 mm (42388) / 2.5 mm x 50 mm (4239 50 mm (42394)	1) / 3.0 mm x
Ð	PicoFinish® fine screwdriver Phillips PH00 x 40 mm (42402) / PH0 x 50 mm (42401)	
	○⊕ Switch cabinet key cross shape 7.0 mm- 9- 5 - 8- 3 - 5 (36114)	
۲	L-key set in Compact holder Hexagonal ball end matt chrome-plated 10-pcs. (01418) 1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm / Compact holder	
Trimmi	ing / cutting	
X	Professional electric diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43335)	
	Electronic needle nose pliers narrow, short head straight form 135 mm, 5 1/3" (26801)	
K	Electronic diagonal cutters wide, pointed head and wire trapping spring without bevelled edge 130 mm, 5 1/8" (268	325)
Supply	/ing / holding	
•	Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)	
Strippi	ing/ insulating / crimping	
	Automatic stripping tool up to 6 mm ² 190 mm, 7 1/2" (44617)	
	Stripping tool with self-rotating drag blade for round cables 165 mm (44618)	
Survey	/ing / marking / measuring / checking	
\ominus	Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip 3.0 mm (34745)	
Storage	e	
	Toolbag (mechanics/electricians)	







Simplifies your work: All tools securely arranged in a robust, orderly bag. Increases your efficiency: Space saved thanks to extensive interchangeable bit system and nut driver inserts. Protects your material: Fully insulated nut driver reduces the risk of short circuits. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws.



	2 pcs. incl. multifunctional bag	7209NK2002
Order-No.		£
43465		1
Fastenin	g / Jamming	
\ominus	slimBit electric bit Slotted 2.0 mm x 75 mm (43115) / 3.5 mm x 75 mm (41159) / 5.5 mm x 75 mm (34581) / (34582)	6.5 mm x 75 mm
Ð	slimBit electric bit Phillips PH0 x 75 mm (43116) / PH1 x 75 mm (34583) / PH2 x 75 mm (34584)	
۲	slimBit electric bit PlusMinus/Pozidriv SL/PZ1 x 75 mm (34589) / SL/PZ2 x 75 mm (34590)	
*	slimBit electric bit Pozidriv PZ1 x 75 mm (34585) / PZ2 x 75 mm (34586)	
	slimBit electric bit Hex 3.0 mm x 75 mm (37147) / 4.0 mm x 75 mm (37225) / 5.0 mm x 75 mm (37226)	
۲	slimBit electric bit TORX® T10 x 75 mm (35507) / T15 x 75 mm (35508) / T20 x 75 mm (35509) / T25 x 75 m	m (36071)
0	Insulated nut driver insert 1/4" hexagon head 5.0 mm (43089) / 5.5 mm (43090) / 6.0 mm (43091) / 7.0 mm (43093) / 10.0 mm (43095) / 11.0 mm (43096) / 13.0 mm (43098)	(43092) / 8.0 mm
	slimVario® electric adapter for 1/4" nut driver (43139)	
0	Extension slimVario [®] electric for slimBits 6.0 mm (43292)	
	Screwdriver with bit holder SoftFinish® slimVario® electric	
	Torque screwdriver TorqueVario®-S electric variably adjustable torque limit	
	Screwdriver with bit holder SoftFinish® electric slimVario Stubby	
Storage		
	multifunctional bag	
Manufacture	acc. to IEC 60900.	

Tool set electrician







Simplifies your work: Robust, orderly bag offers a great deal of space to store Wiha tools. Increases your efficiency: Opened bag acts as a workbench stand to remove tools easily.

Increases your efficiency: Compact and space-saving tool range. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Empty	7	7209NRW
Order-No.	留	
43474	1	

pouch	iver, diagonal cutters, 7-pcs. in	9300018	
Order-No.			
33969		1	
Fastenin	g / Jamming		
\ominus		SoftFinish® electric Slotted 3.5 mm x 100 mm 5 mm x 125 mm (00824) / 5.5 mm x 125 mm	
Ð	Screwdriver SoftFinish [®] electric (00847) / PH2 x 100 mm (0084		
Trimming	g / cutting		
X	Professional electric diagonal cr 160 mm, 6 1/2" (43335)	utters with DynamicJoint®	
Storage			
	Tool kit		
••••••••••••••••••••••••••••••••••			



Tool set electrician

Tool set electrician





Increases your efficiency: Compact and space-saving tool range. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.



Increases your efficiency: Compact and space-saving tool range. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws.

screwdriver, heavy-duty diagonal cutters, 6-pcs

incl. tool	folder	Z99000206
Order-No.		
26755		1
Fastening	J / Jamming	
\ominus	Screwdriver SoftFinish® electric Slotted 3 (00822) / 5.5 mm x 125 mm (00826)	.5 mm x 100 mm
Ð	Screwdriver SoftFinish® electric Phillips P (00848)	H2 x 100 mm
Supplying	g / holding	
•	Needle nose pliers Professional electric w straight shape 200 mm, 8" (26727)	vith cutting edge
Trimming	/ cutting	
X	Professional electric diagonal cutters with 160 mm, 6 1/2" (43335)	n DynamicJoint®
Storage		
	Tool kit	

incl. too	iver, heavy-duty diagonal cutters, 8-pcs. I pouch	9300031
Order-No).	
38020		1
Fastenin	ng / Jamming	
θ	Screwdriver SoftFinish® electric slimFix Slc 100 mm (35446) / 4.0 mm x 100 mm (353 125 mm (35391)	
Ð	Screwdriver SoftFinish® electric slimFix Ph 100 mm (35394)	illips PH2 x
*	Screwdriver SoftFinish® electric slimFix Po 100 mm (35396)	zidriv PZ2 x
۲	Screwdriver SoftFinish® electric slimFix Plu SL/PZ2 x 100 mm (36330)	usMinus/Pozidriv
Supplyir	ng / holding	
X	Heavy-duty diagonal cutters Professional e DynamicJoint [®] with switchable opening sp 1/2" (40921)	
Storage		
	Tool kit	



Tool set electrician





Meets your requirements: Carefully selected tool ranges for the most common applications. **Increases your efficiency:** Compact and space-saving tool range. **Protects your health:** With the patented SoftFinish* handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your safety:** Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC.

Mixed, 13-	pcs. incl. tool pouch	9300025
Order-No.	<u></u>	
36389	1	
Fastening	/ Jamming	
\ominus	Screwdriver SoftFinish® electric slimFix Slotted 3. 100 mm (35446) / 4.5 mm x 125 mm (35501) / 5 125 mm (35391)	
*	Screwdriver SoftFinish® electric slimFix Pozidriv P 1 mm (35395) / PZ2 x 100 mm (35396)	Z1 x
Trimming <i>i</i>	[/] cutting	
<u>۲</u>	Cable cutter Professional electric with switchable opening spring 210 mm, 8 1/4"	(43662)
Supplying	/ holding	
•	Needle nose pliers Professional electric with cutti straight shape 200 mm, 8" (26727)	ng edge
X	Heavy-duty diagonal cutters Professional electric DynamicJoint [®] with switchable opening spring 18 (41274)	
Stripping/	insulating / crimping	
	Automatic stripping tool up to 6 mm ² 190 mm, 7 (44617)	1/2"
	Stripping tool with self-rotating drag blade for rou cables 165 mm (44618)	Ind
Surveying	/ marking / measuring / checking	
\ominus	Voltage tester SoftFinish® single-pole, 110-250 vo Slotted transparent, with push-on clip 3.0 mm (34	
	Folding ruler LongLife Plus 2 m metric, 10 segme 15 mm (27059)	nts
Storage		
	Tool kit	



Meets your requirements: Carefully selected tool ranges for the most common applications. Increases your efficiency: Compact and space-saving tool range. Protects your health: With the patented SoftFinish* handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Increases your safety: Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC.

	1	5. A.
Order-No.		
41241		1
Fastening		
θ	Screwdriver SoftFinish® electric slimFix Slotte 100 mm (35446) / 5.5 mm x 125 mm (35391	
Ð	Screwdriver SoftFinish® electric slimFix Phillip 80 mm (35393) / PH2 x 100 mm (35394)	os PH1 x
⊖€€€€⊙	Screwdriver with bit magazine magnetic asso bits, 1/4" (32901) 1 x 6.5 mm / 1 x PH1 / 1 x PH2 / 1 x PH3 / T15 / 1 x T20 / 1 x T25	
⊕ \\$ ®	Bit set FlipSelector Standard 25 mm Phillips, TORX®, 14-pcs., 1/4" C6,3 (39040) 2 x PH2 / 1 x PZ1 / 2 x PZ2 / 1 x PZ3 / 1 x T / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 / 1 x magnetic 58 mm 1/4" / 1 x FlipSelector	Г10 / 1 x T15
Trimming /	cutting	
X	Professional electric diagonal cutters with Dy 160 mm, 6 1/2" (43335)	namicJoint®
Supplying	/ holding	
	Combination pliers Professional electric with DynamicJoint [®] and OptiGrip with extra long of 180 mm, 7" (26708)	cutting edge
Stripping/	insulating / crimping	
	Automatic stripping tool up to 6 mm ² 190 m (44617)	ım, 7 1/2"
Surveying	/ marking / measuring / checking	
θ	Voltage tester SoftFinish® single-pole, 110-2 Slotted transparent, with push-on clip 3.0 m	
	Folding ruler Longlife 2 m metric, 10 segmer (27057)	its 15 mm
Storage		
	Tool kit	





Simplifies your work: Free hands and no damage to work trousers thanks to pouch attached to belt. Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Increases your safety: Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Protects your health: With the patented SoftFinish* handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: All main tools quickly available, always at hand.

mixed,1	8-pcs. incl. belt pouch	93005000
Order-No).	
44574		1
Strippin	g/ insulating / crimping	
X	Installation pliers TriCut Professional electric 170 mm, 7" (38552)	
Supplyir	ng / holding	
•	Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)	
Trimmin	g / cutting	
X	Professional electric diagonal cutters with DynamicJoint [®] 140 mm, 5 1/2" (43326)	
Surveyir	ng / marking / measuring / checking	
	Electrician's Longlife [®] folding ruler, 2 m metric, 10 segments 15 mm (42068)	
	Flashlight with LED, laser and UV light in blister pack, including 3 AAA batteries 100 - 310 lm (41286)	
\ominus	Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip 3.0 mm (34745)	
	measure tape 5 m	
Fastenir	ng / Jamming	
\ominus	PicoFinish® electric fine screwdriver Slotted 1.5 mm x 50 mm (42374) / 2.5 mm x 65 mm (42376) / 3.5 mm x 100 4.0 mm x 100 mm (35390) / 5.5 mm x 125 mm (35391)	mm (35446) /
Ð	PicoFinish® electric fine screwdriver Phillips PH00 x 50 mm (42379) / PH0 x 65 mm (42378)	
*	Screwdriver SoftFinish® electric slimFix Pozidriv PZ1 x 1 mm (35395)	
٠	Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv SL/PZ2 x 100 mm (36330)	
۲	Screwdriver SoftFinish® electric slimFix TORX® T10 x 100 mm (36536)	
Storage		
	Tool Belt Pouch	







Increases your efficiency: Various usage options for all fastening procedures and application areas. Increases your flexibility: $\label{eq:adjustable} \mbox{Adjustable right or left rotation through switching lever.} \ \mbox{Protects your}$ material: Fully insulated tool reduces the risk of short circuits. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Improved access: Deep-set screws can be reached easily.

Increases your efficiency: Various usage options for all fastening
procedures and application areas. Increases your flexibility:
Adjustable right or left rotation through switching lever. Protects your
material: Fully insulated tool reduces the risk of short circuits. Offers
you full protection: Each tool individually tested at 10,000 V AC and
approved for 1,000 V AC. Improved access: Deep-set screws can be
reached easily.

21-pcs. ir	ncl. case	7208NK2001
Order-No.		6
43024		1
Fastening	g / Jamming	
	T-handle insulated for nut driver (430	63)
	Ratchet wrench insulated for nut driv (43053)	ers Switchable 1/2"
0	Insulated extension 1/2" for nut drive 250 mm (43056)	r inserts, insulated
0	Insulated extension 1/2" for nut drive 125 mm (43055) / 10.0 mm (43077) / 12.0 mm (43079) / 13.0 mm (43080) 17.0 mm (43082) / 19.0 mm (43083) 24.0 mm (43085) / 27.0 mm (43086)	/ 11.0 mm (43078) / / 14.0 mm (43081) / / 22.0 mm (43084) /
۲	Insulated nut driver insert 1/2" hexag (43100) / 5.0 mm (43101) / 6.0 mm (- (43103) / 10.0 mm (43104)	
Storage		
	case	
Manufacturec	according to EN/IEC 60900	

Manufactured according to EN/IEC 60900. DIN EN IEC 60900

21-pcs. incl. case 7207NK2001 Order-No. 43023 1 Fastening / Jamming T-handle insulated for nut driver (43062) Ratchet wrench insulated for nut drivers Switchable 3/8" (43052) Insulated extension 3/8" for nut driver inserts, insulated 125 mm (43057) Insulated extension 3/8" for nut driver inserts, insulated 250 mm (43058) Insulated nut driver insert 3/8" hexagon head 8.0 mm (43065) / 10.0 mm (43066) / 11.0 mm (43067) / 12.0 mm (43068) / 13.0 mm (43069) / 14.0 mm (43070) / 16.0 mm 0 (43071) / 17.0 mm (43072) / 18.0 mm (43073) / 19.0 mm (43074) / 21.0 mm (43075) / 22.0 mm (43076) Insulated nut driver insert 3/8" hexagon head 4.0 mm (43105) / 5.0 mm (43106) / 6.0 mm (43107) / 8.0 mm (43108) Storage case

DIN EN IEC 60900



Single open-end spanner set, insulated 6-32 mm







Increases your efficiency: Various usage options for all fastening procedures and application areas. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your flexibility:** Adjustable right or left rotation through switching lever. **Protects your material:** Fully insulated tool reduces the risk of short circuits.

Protects your material: Fully insulated tool reduces the risk of short circuits. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

21-pcs. ir	n case	7209NK2001
Order-No.		
43025		1
Fastening	J / Jamming	
	Ratchet wrench insulated for nut drivers (43054)	s 1/4" switchable
0	Insulated extension 1/4" for nut driver ir 75 mm (43059) / 150 mm (43060)	nserts, insulated
0	Insulated nut driver insert 1/4" hexagon (43088) / 5.0 mm (43089) / 5.5 mm (430 (43091) / 7.0 mm (43092) / 8.0 mm (430 (43094) / 10.0 mm (43095) / 11.0 mm (43097) / 13.0 mm (43098) / 14.0 mm (43097)	090) / 6.0 mm 093) / 9.0 mm 43096) / 12.0 mm
۲	Insulated nut driver insert 1/4" internal h (43109) / 4.0 mm (43110) / 5.0 mm (43 (43112) / 8.0 mm (43113)	•
Storage		
	case	

21-pcs. ind	cl. case	5590NT20
Order-No.		
43022		1
Fastening	/ Jamming	
 Single, insulated open-end spanner 6.0 mm, 90 mm (43026) / 7.0 mm, 90 mm (43027) / 8.0 mm, 100 mm (43028) / 9.0 mm, 100 mm (43029) / 10.0 mm, 110 mm (43030) / 11.0 mm, 110 mm (43031) / 12.0 mm, 130 mi (43032) / 13.0 mm, 135 mm (43033) / 14.0 mm, 145 mi (43034) / 15.0 mm, 150 mm (43035) / 16.0 mm, 160 mi (43036) / 17.0 mm, 160 mm (43037) / 18.0 mm, 175 mi (43038) / 19.0 mm, 175 mm (43039) / 22.0 mm, 195 mi (43040) / 24.0 mm, 225 mm (43041) / 27.0 mm, 250 mi (43042) / 30.0 mm, 290 mm (43043) / 32.0 mm, 310 mi (43044) 		
0	Adjustable spanner electric Adjustable betv 250 mm (43061)	veen 0-30 mm
Storage		
	case	
DIN EN IEC 60	900	



Increases your efficiency

Wiha screwdrivers offer an optimal balance between power and control thanks to their unique handle size concept.

G.

Saves money

By using the correct torque value, torque tools protect against material damage and reworking.

Protect your health

The patented and multiple award-winning Wiha SoftFinish® handle size concept prevents occupational illnesses as work is kind to hands and muscles. Recommended by German doctors and therapists from the AGR! (Healthy back association)

Offers you full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Increases your safety

Wiha slim tools ensure full and fully-insulated access to lowlying screws.




Fastening / jamming


We have the know-how at the tip of our fingers.

The ergonomic quality of a tool is never quite so apparent as when fastening and clamping. Underthe motto "A grasp on turning" Wiha presents an innovative handle size concept which breaks newground in terms of individual user comfort. Many commonly available screwdrivers are not designed to meet the needs of users. This results in disadvantages in guiding the tool as well as in transmitting force while fastening. In contrast, the- Wiha SoftFinish® concept works with four different handle sizes: Thus, each handle has a perfectlycorrelated ratio of guidance, speed and torque for any task. The Wiha slimTECHNOLOGY offers additional comfort, permitting unrestricted access to eachscrew with 33 % slimmer blades. The speedE® II e-screwdriver proves itself to be the ideal tool for virtually every screw-fastening task. Whether handling delicate fastenings, long screws or an extremely large number of screws, professionals can do their job faster while working with the e-screwdriver.

"The speedE[®] II is my most trusted partner in my daily work. Especially at the end of a long workday, it not only saves energy but also time, as I can work significantly faster with it. In addition, it has two power transmission levels* and due to the different colours of the bits. I immediately know which one to use without damaging the material. Thanks to the speedE[®] II, working error-free and gently is no longer the exception but the rule." Simon Furrer, WorldSkills 2017 World Champion in Abu Dhabi, Industrial Control Category

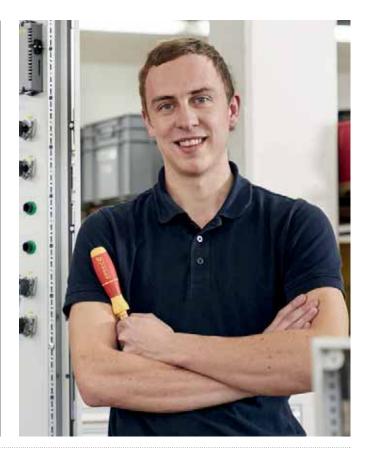

Fast has never been this unique.

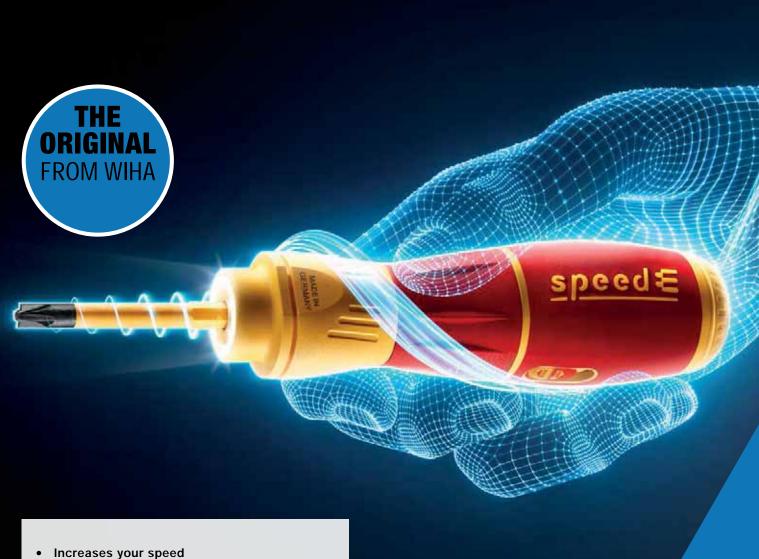

- Work completed 3 times as fast thanks to the electric drive.
- Protect your health Gentle on hands and muscles. Recommended by doctors and therapists at the German Campaign for Healthier Backs!
- Offers you full protection slimBits tested at 10,000 V AC and approved for 1,000 V AC.
- **Protects your material** Electric screw fastening with protective function to prevent damage to materials.





J anming / jamming

Several fastenings per day, hundreds of fastenings per week. Professional craftspeople invest a great amount of time and energy in recurring fastening tasks. The resulting pain in wrists is the body's natural reaction. Thanks to the electric drive of the e-screwdriver speedE[®] II, joints and tendons are protected, especially during continuous use. In addition, the required time is reduced to one-third. An extra highlight of the speedE[®] II is the integrated material function. Sensitive fastenings, for example, plastic socket covers, must not be tightened too hard or the material will be damaged. In such cases, the speedE II automatically switches off at 0.4 Nm and gives the user full control to carefully carry out the final fastening by hand. If there are fastening tasks that require more force, the second generation speedE[®] offers the option of increasing the electric force to 1.0 Nm via a sliding switch. The colour of the slimBits serves as an aid for adjusting the correct force level to the respective application. The red slimBits with the smaller profiles are used in the red slide position, while the yellow Power SlimBits with the larger profiles indicate that in this case, the more powerful yellow slide position can be used. However, if more force is required, the speedE® can be manually used up to 12 Nm without incurring any damage. During the fastening, the integrated LED light provides permanent illumination for an optimal view of

the screw. This way, in poorly lit work environments the powerful LED can be used as a flashlight by tapping on the ring switch. The enlarged ring switch and smooth rotation ensure even easier handling. Thanks to the combination of facilitated handling and the ergonomic SoftFinish® handle design, the e-screwdriver speedE® II is recommended by doctors and therapists from the German Campaign for Healthier Backs. The set contains both a red and yellow slimBit, a USB battery charger, as well as two standard 18500 batteries, which ensures continuous working.











RIN FA

E-screwdriver, starter set speedE[®] I electric



Increases your speed: Work completed 3 times as fast thanks to the electric drive. Protects your material: Electric screw fastening with protective function to prevent damage to materials. Offers you full protection: slimBits tested at 10,000 V AC and approved for 1,000 V AC. Increases your efficiency: 100% compatible with the Wiha Electric Vario family. Makes handling easier: Unique ring switch allows operation in all working positions. Simplifies your work: Maximum illumination of the working area thanks to the LED ring light. Protects your health: Gentle on hands and muscles. Recommended by doctors and therapists at the German Campaign for Healthier Backs! Meets your requirements: Quality and robustness made in Germany.



Order-No. Image: Control of the second	017101
44318 1	91T101
,	
Fastening / Jamming	
Bit Power slimBit electric - SL/PZ2	
slimBit electric bit Slotted 3.5 mm x 75 mm (41159)	
E-screwdriver handle speedE [®] II	
Various	
Charger for battery type 18500 Li-Ion with USB	
Battery set, 18500 Li-ion 2 units in box (41914)	



Increases your speed: Work twice as fast thanks to three-step process. Protects your material: Electric screw fastening with protection function to prevent damage to materials (max. 0.4 Nm). Increases your control: Fixing by hand with a deft touch. Offers you full protection: slimBits tested at 10,000 V AC and approved for 1,000 V AC. Protects your health: Gentle on hands and muscles. Recommended by doctors and therapists at the German Campaign for Healthier Backs!




4-pcs. i	incl. slimBit, battery and USB charger	590T401
Order-N	0.	
44351		1
Fasteni	ng / Jamming	
*	slimBit electric bit PlusMinus/Pozidriv SL/PZ (34589)	1 x 75 mm
	E-screwdriver handle speedE®	
Various	;	
	Charger for battery type 18500 Li-Ion with U	SB
	18500 Li-Ion battery	





Simplifies your work: Offers room for a Wiha e-screwdriver as well as 4 slimBits. Simplifies your work: Eyelet at the bottom of the pouch allows storage of the e-screwdriver with inserted bit. Makes handling easier: Simple to hook on to work trousers thanks to the high quality clip holder.

for e-screwdriver speedE® 72			7209NEX
Order-No.			
44367	1		







E-screwdriver, speedE[®] II electric

- 3x faster than manual fastening.
- Made in Germany.
- Safe working up to 1,000 V AC.
- Manual torque fastening up to 12 Nm.
- Powerful ring LED light.
- Replaceable standard battery.
- Kind to hands and muscles.
- Fully compatible with the Wiha slimBit system.
- Thanks to the integrated material protection function, the electric assistance stops automatically at 0.4 Nm.

Battery set, 18500 Li-ion

2 units in box

Order-No.

41914

Power plug

Power plug



==

6

		1	_	
1				P
		80		
1		82		
	ti ×	5°		



599001	EU	599006
	Order-No.	
	44363	1
	speedE power plug EU	

Charger for 18500 Li-ion batteries



599002
Ê
1

_1			
۳.	38		
0 Y			1161
			US —

UK		599007
Order-No.		
44364		1
	speedE power plug UK	



Power slimBit electric bit set





Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your safety:** Wiha slimBits ensure good, protected access to deep-set screws.


	Phillips, Pozidriv 7-pcs. incl. SlimBit box	SB2831B903
Order-No.		Ĥ
43160		1
.	2.0 mm / 2.5 mm	
₽	PH0 / PH1	
*	PZ0 / PZ1	
	slimBit box	
	IL 150 (0000	

Tested according to IEC 60900.

slimBit electric bit set

Mixed 7-pcs. incl. slimBit box SB28		SB2831B904
Order-No		(==)
44366		1
\rightarrow	1 x 2.5 mm	
Ð	1 x PH1	
\}	1 x PZ1	
€	1 x SL/PZ1	
۲	1 x T9 / 1 x T10	
	1 x slimBit box	

Tested according to IEC 60900.



Increases your safety: Wiha Power slimBits ensure good, protected

access to deep-set screws. Makes handling easier: Compact slimBit

box with easy access and an optimal view of profiles. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved

Tested according to IEC 60900.

for 1,000 V AC.

Mixed 7-pcs. incl. slimBit box SB283		SB2831PB900	
Order-No.			
44106			1
)	Bit Power slimBit elec	tric - Slotted 5.5	
₽	Bit Power slimBit elec	tric - PH2	
*	Bit Power slimBit elec	tric - SL/PZ2	
۲		Bit electric - T15 / Bit Power slimBit electric / Bit Power slimBit electric - T25	
	slimBit box		

Tested according to IEC 60900.

SLIM

There are moments when you need to control your power.



Power is good. Controlled power is better. The certified Wiha VDE torque screwdriver systems TorqueVario[®]-S and TorqueVario[®]-S TR and the insulated torque keys combine precision with safety. When reaching the desired torque, a click signal can be clearly felt and heard. With a release accuracy of +/-6% of the set scale value, Wiha VDE screwdrivers meet the accuracy requirements of EN ISO 6789. With two directions of rotation, this insulated torque key is ideal for powerful, yet controlled tightening. Uncompromising safety is ensured in production and testing according to IEC 60900, VDE/GS certification and testing of single parts at 10,000 V AC.

- Increases your efficiency Using the correct torque prevents from rework and damaged material.
- Lowers your costs The correct torque protects you from warranty claims.
- Offers you full protection Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.
- Increases your safety Wiha slimBits grant unhindered, fully insulated access to deeplying screws.









Meets your requirements: Variably adjustable torque covers a wide range of applications. **Simplifies your work:** All tools securely arranged in a robust, orderly bag. **Increases your efficiency:** The correct torque protects material from damage and means no follow-up work. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Lowers your costs:** The correct torque protects you from warranty claims. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your safety:** Wiha slimBits ensure good, protected access to deep-set screws.

0,8-5,0	Nm mixed, variably adjustable torque limit, 19 pcs. incl. folding bag	2872T18
Order-No).	
36791		1
0	1 x Torque screwdriver TorqueVario®-S electric variably adjustable torque limit	
	1 x Setting tool for torque screwdriver with long handle	
0	1 x Adapter TorqueVario-S electric for slimBits	
.)	1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm / 1 x 6.5 mm	
₽	1 x PH1 / 1 x PH2	
*	1 x PZ1 / 1 x PZ2	
Ð	1 x SL/PZ1 / 1 x SL/PZ2	
	1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25	
	1 x Folding bag	
DIN EN ISC	6789	

Manufactured acc. to IEC 60900.









Meets your requirements: Variably adjustable torque covers a wide range of applications. **Simplifies your work:** All tools securely arranged in a robust, orderly bag. **Increases your efficiency:** The correct torque protects material from damage and means no follow-up work. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Lowers your costs:** The correct torque protects your from warranty claims. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your safety:** Wiha slimBits ensure good, protected access to deep-set screws.

0,8-5,0 I	Nm mixed, variably adjustable torque limit, 14 pcs. incl. folding bag	2872T13
Order-No).	₩
40674		1
0	1 x Torque screwdriver TorqueVario®-S electric variably adjustable torque limit	
	1 x Setting tool for torque screwdriver with long handle	
0	1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits	
0	Adapter TorqueVario-S electric for slimBits	
–	1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm	
Ð	1 x PH1 / 1 x PH2	
*	1 x PZ1 / 1 x PZ2	
*	1 x SL/PZ1 / 1 x SL/PZ2	
	1 x Folding bag	
DIN EN ISO	6789.	





2822

Meets your requirements: Variably adjustable torque covers a wide range of applications. **Increases your efficiency:** The correct torque protects material from damage and means no follow-up work. **Lowers your costs:** The correct torque protects you from warranty claims. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

for nut drivers, adjustable torque limit

Order-No.	•1"	Nm	j.	÷	'mm'	=	(m)
43126	1/4"	5 - 25	38	36	288	200	1
44163	3/8"	5 - 25	38	36	290	200	1

TorqueVario®-S electric nut driver insert 1/4" set





Simplifies your work: All tools securely arranged in a robust, orderly bag. **Increases your flexibility:** Nut driver inserts can be used with speedE[®], slimVario[®] and TorqueVario[®]-S tools thanks to the enclosed adapters. **Protects your material:** Fully insulated nut driver reduces the risk of short circuits. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

	11-pcs., incl. adapters and folding bag	7209NK2003
Order-No).	
43466		1
	1 x slimVario [®] electric adapter for 1/4" nut driver / 1 x Adapter TorqueVario-S electric for 1/4" nut driver	
0	1 x 5.0 mm / 1 x 5.5 mm / 1 x 6.0 mm / 1 x 7.0 mm / 1 x 8.0 mm / 1 x 10.0 mm / 1 x 11.0 mm / 1 x 13.0 mm	
	1 x Folding bag	





Fastening / jamming

Meets your requirements: Variably adjustable torque covers a wide range of applications. Increases your efficiency: The correct torque protects material from damage and means no follow-up work. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Lowers your costs: The correct torque protects you from warranty claims. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

adjustable torque limit 5-pcs.		XX2872S3
Order-No.		
38074		1
0	1 x Torque screwdriver TorqueVario [®] -S elecadjustable torque limit	ctric variably
	1 x Setting tool for torque screwdriver with	long handle
0	1 x Adapter TorqueVario-S electric for slim	Bits
*	1 x SL/PZ1 / 1 x SL/PZ2	
DIN EN ISO 6	789.	

Increases your efficiency: The correct torque protects material from

protection: Each tool individually tested at 10,000 V AC and approved

for 1,000 V AC. Increases your safety: Wiha slimBits ensure good,

damage and means no follow-up work. Lowers your costs: The

correct torque protects you from warranty claims. Offers you full

protected access to deep-set screws.

0,8-5,0 Nm PlusMinus/Pozidriv variably

variably adjustable torque limit						
Order-No.	Nm	+/- %	C	=	÷	
26625	0.5 - 2	6 %	3.8	131	30	1
6626	0.8 - 5	6 %	3.8	138	36	1
6627	2 - 7	6 %	3.8	142	41	1

Manufactured acc. to IEC 60900. DIN EN ISO 6789.

Manufactured acc. to IEC 60900.

Setting tool



for torque screwdriver with long handle 2859					
Order-No.		mm	Ĥ		
26864	90	146	1		

Increases your efficiency

Fast, easy checking of your torque tool thanks to mobile, compact shape.

Increases your safety

Checking your torque tool regularly guarantees safe, precise work with the correct torque.

Saves time

LED traffic light system displays results in a way which is quick and easy to understand.












Increases your efficiency: Fast, easy checking of your torque tool thanks to mobile, compact shape. Increases your safety: Checking your torque tool regularly guarantees safe, precise work with the correct torque. Saves time: LED traffic light system displays results in a way which is quick and easy to understand.



4 pcs. with adapter blades, batteries, and box 2909 Order-No. Nn Machine 2909 42086 2.8 2 x 1

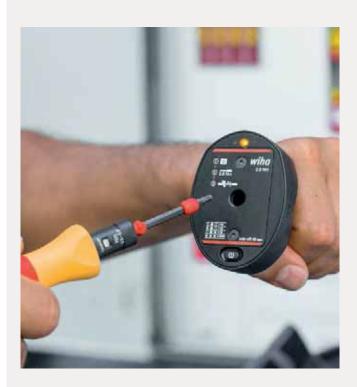

INFOBOX: Torque QuickCheck





Wiha Torque QuickCheck

- The Wiha torque screwdriver can quickly and easily test torque screwdrivers to check the precision of the configured torque value before each use.
- Checking tools regularly ensures reliable, precise work.
- The device offers user-friendly operation, clear test readings and easy to understand LED traffic light signals.
- Thanks to a compact, handy shape, it is the ideal companion when out on jobs.
- Suitable for all Torque Vario[®]-S and iTorque[®] torque screwdrivers whose torque range included 2.8 Nm.



Increases your efficiency: The correct torque protects material from damage and means no follow-up work. Lowers your costs: The correct torque protects you from warranty claims. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

0,8 Nm with slimVario® holder and SL/PZ

	slimBits, 4-pcs.			
Order-No.	SBD			
41476	Х	5		
	1 x 0.8 Nm			
€	1 x SL/PZ1 / 1 x SL/PZ2			
	1 x Screwdriver with bit h electric	older SoftFinish® slimVario®		
	acc. to IEC 60900			

Manufactured acc. to IEC 60900.

2,0 Nm with slimVario® holder and SL/PZ

slimBits,		29701200S4
Order-No.	SB	
41477	x	5
	1 x 2.0 Nm	
*	1 x SL/PZ1 / 1 x	SL/PZ2
	1 x Screwdriver electric	with bit holder SoftFinish® slimVario®

Manufactured acc. to IEC 60900.

2,8 Nm with slimVario® holder and SL/PZ

slimBits,		29701280S4
Order-No.	SB .	
41478	X	5
0	1 x 2.8 Nm	
\circledast	1 x SL/PZ1 / 1 x	
	1 x Screwdriver v electric	vith bit holder SoftFinish® slimVario®
	acc. to IEC 60000	

Manufactured acc. to IEC 60900.

damage and means no follow-up work. Increases your efficiency: Fully compatible with the Wiha slimBit system. Lowers your costs: The correct torque protects you from warranty claims. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Lowers your costs: Torque tool extension for LiftUp and slimVario[®] screwdriver sets.

Increases your efficiency: The correct torque protects material from

for slimBits and slimVario [®] holder, 5-pcs. 2970185					
Order-No.	SB	1			
41479	х	5	5		
	1 x 0.8 Nm / 1 x 2	.0 Nm			
0	1 x 2.5 Nm / 1 x 2	.8 Nm / 1 x 4.0 Nm			

Manufactured acc. to IEC 60900.



Increases your efficiency: Fully compatible with the Wiha slimBit system. Increases your efficiency: The correct torque protects material from damage and means no follow-up work. Lowers your costs: The correct torque protects you from warranty claims. Lowers your costs: Torque tool extension for LiftUp and slimVario® screwdriver sets. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

for slimBits and slimVario [®] holder in blister						
Order-No.	Nm	+/- 1%	mm	÷		
41341	0.8	10 %	59	5.5	5	
41342	2.0	10 %	59	5.5	5	
41343	2.5	10 %	59	5.5	5	
41344	2.8	10 %	59	5.5	5	
41345	4.0	10 %	59	5.5	5	
Manufactured acc. to IEC 60900.						









Makes handling easier: Convenient safe storage of 12 slimBits - easily taken directly from the belt. Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws.

TORX[®], TORX PLUS[®], 15-pcs. Incl. slimBit boxes and belt holder

and belt	t holder	SB2831B950	
Order-No).	A	
43161		1	
۲	1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T	10 / 1 x T15	
۲	1 x 6IP / 1 x 7IP / 1 x 8IP / 1 x 9IP / 1	x 10IP / 1 x 15IP	
	2 x slimBit box		
	1 x Belt holster for slimBit box		
	•••••••	••••••	

Tested according to IEC 60900.

Slotted, Phillips, Pozidriv, PlusMinus/Pozidriv,

Order-No.	5-pcs. Incl. slimBit boxes and belt holder	3
	=	
43162		1
_	1 x 3.5 mm / 1 x 5.5 mm	
Ð	1 x PH1 / 1 x PH2	
*	1 x PZ1 / 1 x PZ2	
₩	1 x SL/PZ1 / 1 x SL/PZ2	
۲	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25	
	2 x slimBit box	
	1 x Belt holster for slimBit box	

Tested according to IEC 60900.

INFOBOX: slimBit box

slimBit box





- . Compact slimBit box with easy access and an optimal view of profiles.
- Suitable for storing Wiha slimBits. Ideal for mobile use. ٠
- Wiha slimBits ensure unrestricted and fully insulated access to low-lying screws.
- Each tool individually tested at 10,000 V AC and approved ٠ for 1,000 V AC.







Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws.

Slotted, 7-pcs. incl. SlimBit box		SB2831B001
Order-No		
43152		1
-	1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.5 m 5.5 mm / 1 x 6.5 mm	,
	1 x slimBit box	
T		

Tested according to IEC 60900.

TORX [®] , 7-pcs. incl. SlimBit box		SB2831B501
Order-No.		
43153	1	
۲	1 x T8 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1	= .
	1 x slimBit box	
Tested according to IEC 60900.		

TORX [®] , 7-pcs. incl. SlimBit box		SB2831B502
Order-No).	雔
43154		1
۲	1 x T6 / 1 x T7 / 1 x T8 / 1 x	
	1 x slimBit box	

Tested according to IEC 60900.

	LUS [®] , 7-pcs. incl. SlimBit box	SB2831B601
Order-No		
43155		1
۲	1 x 6IP / 1 x 7IP / 1 x 8IP / 1 x 9IP / 1	x 10IP / 1 x 15IP
	1 x slimBit box	
	II. 1 IEO (0000	

Tested according to IEC 60900.

Hex, 7-pcs. incl. SlimBit box SB2831B		
Order-No.		
43156		1
۲	1 x 2.0 mm / 1 x 2.5 mm / 1 > 5.0 mm / 1 x 6.0 mm	x 3.0 mm / 1 x 4.0 mm / 1 x
	1 x slimBit box	

Tested according to IEC 60900.

Slotted, Pozidriv 7-pcs. incl. SlimBit box SB2831B900		
Order-No).	
43157		1
	1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm	n / 1 x 6.5 mm
*	1 x PZ1 / 1 x PZ2	
	1 x slimBit box	

Tested according to IEC 60900.

Slotted, PlusMinus/Pozidriv 7-pcs. incl. SlimBit

box	SB2831B901
Order-No.	Ĥ
43158	1
.)	1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm / 1 x 6.5 mm
*	1 x SL/PZ1 / 1 x SL/PZ2
	1 x slimBit box

Tested according to IEC 60900.

Slotted, Phillips 7-pcs. incl. SlimBit box		SB2831B902
Order-No		Ĥ
43159		1
\rightarrow	1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mr	n / 1 x 6.5 mm
₽	1 x PH1 / 1 x PH2	
	1 x slimBit box	
Tested acco	rding to IEC 60900	

ted according to IEC 60900.

Slotted, Phillips, Pozidriv 7-pcs. incl. SlimBit box		SB2831B903
Order-No	0.	#
43160		1
	1 x 2.0 mm / 1 x 2.5 mm	
Ð	1 x PH0 / 1 x PH1	
*	1 x PZ0 / 1 x PZ1	
	1 x slimBit box	
T		

Tested according to IEC 60900.

-pcs. incl. slimBit box	SB2831B904	
).		
	1	
1 x 2.5 mm		
1 x PH1		
1 x PZ1		
1 x SL/PZ1		
1 x T9 / 1 x T10		
1 x slimBit box		
	1 x 2.5 mm 1 x PH1 1 x PZ1 1 x SL/PZ1 1 x T9 / 1 x T10	

Tested according to IEC 60900.








Increases your safety: Wiha Power slimBits ensure good, protected access to deep-set screws. Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Mixed 7-pcs. incl. slimBit box SB2		SB2831PB900
Order-No.	6	84
44106		1
	1 x Bit Power slimBit electric - Slotted 5.5	•
Ð	1 x Bit Power slimBit electric - PH2	
€	1 x Bit Power slimBit electric - SL/PZ2	
۲	1 x Bit Power slimBit electric - T15 / 1 x Bit electric - T20 / 1 x Bit Power slimBit elect	
	1 x slimBit box	

Tested according to IEC 60900.

Slotted, hex, 7-pcs. incl. slimBit box SB2831PB9				
Order-No.	<u></u>			
44107				
	1 x Bit Power slimBit electric - Slotted 6.5			
۲	1 x Bit Power slimBit electric - Innensechskan Bit Power slimBit electric - Innensechskant 3 / Power slimBit electric - Innensechskant 4 / 1 x slimBit electric - Innensechskant 5 / 1 x Bit Po electric - Innensechskant 6	1 x Bit K Bit Power		
	1 x slimBit box			
		-		

Tested according to IEC 60900.



Makes handling easier: Compact slimBit box with easy access and

an optimal view of profiles. Makes handling easier: Convenient safe

storage of 12 slimBits - easily taken directly from the belt.

slimBit box

slimBit box



Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles.

empty	SB2831B991
Order-No.	Ĥ
43163	1
1 x slimBit box, empty	

45



	•
21000 V 21EC 60900	SLIM TECHNOLOGY
7120 00000	

Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Saves space: Extensive interchangeable bit system saves you space. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Slotted						283110
Order-No.	(mm	Θ	max Nm		
43114	1.5•	75	0.4	0.2	5	
43115	2.0•	75	0.4	0.4	5	
34578	2.5•	75	0.4	0.4	5	
34579	3.0•	75	0.5	0.6	5	
41159	3.5	75	0.6	1.4	5	
34580	4.0	75	0.8	2.5	5	
34581	5.5	75	1.0	3.8	5	
34582	6.5	75	1.2	5.5	5	

 no slim version Manufactured acc. to IEC 60900.

Slotted with	•				283110
Order-No.	(mm	Θ	max, Nm	Ê
44385	3.5	75	0.6	1.4	5

Phillips				283111	
Order-No.	4	mm	max Nm	Ĥ	
43116	PH0•	75	0.9	5	
34583	PH1	75	3.8	5	
34584	PH2	75	5.5	5	
no slim version					

Manufactured acc. to IEC 60900.

Pozidriv				283112
Order-No.		'nm	max Nm	甾
43117	PZ0•	75	0.9	5
34585	PZ1	75	3.8	5
34586	PZ2	75	5.5	5

 no slim version Manufactured acc. to IEC 60900.

PlusMinus	•	283113		
Order-No.	Œ	mm	max Nm	甾
34587	SL/PH1	75	3.8	5
34588	SL/PH2	75	5.5	5

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

Order-No.	()	'nm	max Nm	Ĥ
34589	SL/PZ1	75	3.8	5
34590	SL/PZ2	75	5.5	5

Manufactured acc. to IEC 60900.

TORX®				283115
Order-No.	۲	'nm	max. Nm	(==)
43140	T5•	75	0.4	5
43141	Т6•	75	0.6	5
43142	T7•	75	0.9	5
35506	T8•	75	1.3	5
41160	T9•	75	2.5	5
35507	T10•	75	3.8	5
35508	T15	75	5.0	5
35509	T20	75	5.5	5
36071	T25	75	5.5	5

Manufactured acc. to IEC 60900.

TORX PLUS®						
Order-No.	۲	•• mm	max. Nm			
43143	5IP•	75	0.5	5		
43144	6IP•	75	0.8	5		
43145	71P•	75	1.3	5		
43146	8IP•	75	2.0	5		
43147	9IP•	75	3.0	5		
43148	10IP•	75		5		
43149	15IP	75	5.5	5		
	20IP	75	5.5	5		
43151	25IP	75	5.5	5		
•no slim versio						

Manufactured acc. to IEC 60900.

Hex				283118
Order-No.		'nm	max. Nm	Ê
37222	1.5•	75	0.9	5
37223	2.0•	75	1.8	5
37224	2.5	75	3.8	5
37147	3.0	75	5.5	5
37225	4.0	75	5.5	5
37226	5.0	75	5.5	5
37227	6.0	75	5.5	5

•no slim version Manufactured acc. to IEC 60900.

Internal se	-				283117
Order-No.			mm	max Nm	É
35510	#1	2.3	75	5.5	5
35511	#2	2.8	75	5.5	5
		-			









Insulated nut driver insert



Increases your efficiency: Fully compatible with the Wiha slimBit system. Increases your efficiency: Solve every fastening task with the Wiha slimBit range. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

for slimBi						28799
Order-No.	C	•	mm	⊐=		
35870	6.0	3.8	170	13	10	

Manufactured acc. to IEC 60900.



Increases your efficiency: Adapter allows users to fasten with a nut driver and TorqueVario®-S electric. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

for 1/4" nu					28799
Order-No.		€1 mm	mm	⇒	Ĥ
43128	1/4"	3.8	178	12	10

Manufactured acc. to IEC 60900.

AC and approved for 1,000 V AC. Protects your material: Fully insulated tool reduces the risk of short circuits.

1/4" hexa	gon head	7209NS	
Order-No.	C	mm	#
43088	4.0	42	1
43089	5.0	42	1
43090	5.5	42	1
43091	6.0	42	1
43092	7.0	42	1
43093	8.0	42	1
43094	9.0	42	1
43095	10.0	42	1
43096	11.0	42	1
43097	12.0	42	1
43098	13.0	42	1
43099	14.0	42	1

Offers you full protection: Each tool individually tested at 10,000 V

И	Π	n	a	(wina)	4
Tools	that w	ork fe	or you		

• #

Torque screwdriver with T-handle TorqueVario*-S T electric

Interchangeable electric blade





Meets your requirements: Variably adjustable torque covers a wide range of applications. Increases your efficiency: The correct torque protects material from damage and means no follow-up work. Makes handling easier: Effortless and comfortable transmission of high torques thanks to T-handle with ComfortGrip. Lowers your costs: The correct torque protects you from warranty claims. Offers you full protection: Torque blades tested at 10,000 V AC and approved for 1,000 V AC.

5-14 Nm variably adjustable torque limit 2933						2700	
Order-No.	Nm	74 %	C	.d.	-ì		
43177	5 - 14	6 %	6.0	56	120	1	



Increases your efficiency: Extensive interchangeable blade system saves you space. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your safety: Wiha slim interchangeable blades ensure unlimited and fully-insulated access to low-lying screws.

TORX[®] for torque screwdriver with T-handle electric

Order-No.	۲	mm		max Nm	Ĥ	
38931	T15	136	35	5.5	10	
38932	T20	136	35	10.0	10	
38933	T25	136	35	15.0	10	
38934	T27	136	35	15.0	10	
38935	Т30	136	35	20.0	10	
38936	T40	136	35	20.0	10	

Manufactured acc. to IEC 60900.

Hex for torque screwdriver with T-handle electric 283793

Order-No.	\bigcirc	'nm		Nm	Ê	
38918	3.0	136	35	5.5	10	
38919	4.0	136	35	15.0	10	
38920	5.0	136	35	20.0	10	
38921	6.0	136	35	20.0	10	

Manufactured acc. to IEC 60900.

Interchangeable electric blade

INFOBOX:

Torque T-handle TorqueVario[®]-S T electric





Torque T-handle TorqueVario®-S T electric

- For controlled fastening in a large range of applications.
- Torque value is continuously adjustable thanks to the adjusting tool.
- More fastening power thanks to T-handle design.
- Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.
- Certified individual item testing directly after on-site production.







283795

Increases your efficiency: Extensive interchangeable blade system saves you space. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Hex nut driver for torque screwdriver with

T-handle				283794
Order-No.	C	mm	Nm	笛
38925	7.0	136	5.0	10
38926	8.0	136	10.0	10
38927	9.0	136	14.0	10
38928	10.0	136	17.0	10
38929	13.0	136	20.0	10
38930	17.0	136	20.0	10
				-



Setting too	bl			
•		with T-handle	wiha	2899
Order-No.		mm		
28691	90	146	10	

All bits in the handle, always and everywhere.



Why make things complicated, when they can be compact? The practical Wiha LiftUp electric magazine bit holder accommodates up to six common insulated slimBits - and is therefore the ideal portable companion for every electrician. The bit magazine is unlocked at the touch of a button on the two rockers, and the slimBits can easily be removed and re-inserted. A reliably locked magazine prevents anything from being lost when on the move. The rotating cap is used to make working easier: Additional axial force can be exerted by pressing strongly with the hand against the cap, while rotating around the longitudinal axis with the other hand. Uncompromising safety is ensured in production and testing according to IEC 60900, VDE/GS certifi cation and individual part testing at 10,000 V AC. The Wiha magazine bit holder LiftUp electric is available in three content variants (SL/PH or SL/ PH/PlusMinus PZ).

- Increases your efficiency Wiha LiftUp electric, saves 75 % volume and 50 % less weight for 100 % efficiency.
- Protect your health No risk of injury, all blades stowed safely inside the handle.
- Offers you full protection Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.
- Increases your safety
 Wiha slimBits grant unhindered, fully insulated access to deep lying screws.



Screwdriver with bit magazine LiftUp electric





Increases your efficiency: Wiha LiftUp electric saves 75% volume and 50% less weight for 100 % efficiency. **Protects your health:** No risk of injury, all blades stowed safely inside the handle. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your safety:** Wiha slimBits ensure good, protected access to deep-set screws.

sSlotted,	Phillips with 6 slimBits pack	SB283109020
Order-No.	SB	#
38612	X	5
	1 x 2.5 mm / 1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.5 mm	
₽	1 x PH1 / 1 x PH2	
Manufactured	acc. to IEC 60900.	

Phillips, PlusMinus/Pozidriv, slotted with 6 slimBits in blister pack		SB283109021
Order-N	No.	
38613		5
)	1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.5 mm	
₽	1 x PH1 / 1 x PH2	
*	1 x SL/PZ2	
Manufact	ured acc. to IEC 60900.	

TORX® with 6 slimBits		SB283109022			
Order-No.	SB .	Ĥ			
41158	X	5			
	1 x T8 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20	/ 1 x T25			

Manufactured acc. to IEC 60900.

Slotted, Pozidriv, PlusMinus/Pozidriv with 6 slimBits SB2831090			
SB			
X	5		
1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm			
1 x PZ1 / 1 x PZ2			
1 x SL/PZ2			
	x 1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm 1 x PZ1 / 1 x PZ2		





mixed wit	nixed with 4 slimBits SB283109040			
Order-No.	387	台		
45296	x	1		
	3.5 mm			
Ð	PH1 x 75 mm / PH2 x 75 mm			
*	SL/PZ2			
Tested accord	ing to IEC 60900.			

d according to IEC 60900







Simplifies your work: All tools securely arranged in a robust, orderly bag. Increases your efficiency: Extensive interchangeable blade system saves you space. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws.

Mixed, 19-pcs. incl. folding bag		2831T18
Order-No).	
41231		1
0	1 x Screwdriver with bit holder SoftFinish® electric slimVario	
0	1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits	
	1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm	
₽	1 x PH1 / 1 x PH2	
*	1 x PZ1 / 1 x PZ2	
*	1 x SL/PZ1 / 1 x SL/PZ2	
۲	1 x T9 / 1 x T10 / 1 x T15 / 1 x T20	
•	1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm	
	1 x Folding bag	









Simplifies your work: All tools securely arranged in a robust, orderly bag. Increases your efficiency: Extensive interchangeable blade system saves you space. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws.

Order-No		
41232		1
0	1 x Screwdriver with bit holder SoftFinish® electric slimVario	
0	1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits	
-	1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm	
₽	1 x PH1 / 1 x PH2	
\}	1 x PZ1 / 1 x PZ2	
	1 x Folding bag	

Order-No	0.	
41233		1
0	1 x Screwdriver with bit holder SoftFinish® electric slimVario	
0	1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits	
-	1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm	
*	1 x PZ1 / 1 x PZ2	
*	1 x SL/PZ1 / 1 x SL/PZ2	
	1 x Folding bag	







Simplifies your work: All tools securely arranged in a robust, orderly bag. Protects your material: Fully insulated nut driver reduces the risk of short circuits. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws.

mixed,	I, 14-pcs. incl. folding bag	7209NK2004
Order-N	No.	
43467	· 1	
0	1 x SoftFinish [®] electric screwdriver handle	
0	1 x Extension slimVario [®] electric for slimBits	
	1 x slimVario [®] electric adapter for 1/4" nut driver	
	1 x 3.5 mm / 1 x 5.5 mm	
0	1 x 5.0 mm / 1 x 5.5 mm / 1 x 6.0 mm / 1 x 7.0 mm / 1 x 8.0 mm / 1 x 10.0 mm / 1 x 11.0 mm / 1 x 13.0 mm	
	1 x Folding bag	





Simplifies your work: Compact handle – maximum power. Increases your efficiency: Fully compatible with the Wiha slimBit system. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Increases your safety: Protected work in constricted spaces.

Stubby 4 pieces with slimBits		ts SB28310101		
Order-No.	-			
41230		5		
0	Screwdriver with b	bit holder SoftFinish® electric slimVario		
)	3.5 mm			
Ð	PH2			
€	SL/PZ2			
Manufactured acc. to IEC 60900.				



Increases your efficiency: Fully compatible with the Wiha slimBit system. Increases your efficiency: Careful workmanship and controlled power transmission thanks to the slim handle with soft grip. Increases your efficiency: Particularly suitable for use with slimBit profiles. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws.

4-pcs. with slimBits		SB28310401
Order-No		
43167		5
	Fine screwdriver PicoFinis	h [®] slimVario [®] electric
\ominus	2.0 mm	
Ð	PH0	
*	PZO	

Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws.

4-pcs. with slimBits		SB28310301	
Order-No.			
43449		5	
0	Screwdriver with bit holder SoftFinish® el- for slimBits	ectric slimVario	
7	5.5 mm		
\Re	SL/PZ1 x 75 mm / SL/PZ2 x 75 mm		

Manufactured acc. to IEC 60900.

INFOBOX: slimTECHNOLOGY





Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).







Makes handling easier: Convenient safe storage of 12 slimBits – easily taken directly from the belt. **Makes handling easier:** Compact slimBit box with easy access and an optimal view of profiles. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your safety:** Wiha slimBits ensure good, protected access to deep-set screws.

TORX[®], TORX PLUS[®], 15-pcs. Incl. slimBit boxes

and belt holder SB		SB2831B950
Order-No		
43161		1
۲	1 x 6IP / 1 x 7IP / 1 x 8IP / 1 x 9IP / 1 x	10IP / 1 x 15IP
۲	1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T1	0 / 1 x T15
-	2 x slimBit box	
	1 x Belt holster for slimBit box	

Tested according to IEC 60900.

Slotted, Phillips, Pozidriv, PlusMinus/Pozidriv,

TORX [®] 1	5-pcs. Incl. slimBit boxes and belt holder	SB2831B951
Order-No.		
43162		1
)	1 x 3.5 mm / 1 x 5.5 mm	
Ð	1 x PH1 / 1 x PH2	
*	1 x PZ1 / 1 x PZ2	
*	1 x SL/PZ1 / 1 x SL/PZ2	
۲	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25	
	2 x slimBit box	
	1 x Belt holster for slimBit box	

TORX®, TORX PLUS®, 15-pcs. Incl. slimBit boxes

and belt	t holder	SB2831B950
Order-No	D.	All
43161		1
۲	1 x 6IP / 1 x 7IP / 1 x 8IP / 1 x 9IP / 1 x 1	0IP / 1 x 15IP
۲	1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10	
	2 x slimBit box	
	1 x Belt holster for slimBit box	
Tostod acco	ording to IEC 60000	

Tested according to IEC 60900.

Slotted, Phillips, Pozidriv, PlusMinus/Pozidriv,

TORX [®] 1	5-pcs. Incl. slimBit boxes and belt holder	SB2831B951
Order-No	. (-
43162		1
\rightarrow	1 x 3.5 mm / 1 x 5.5 mm	
₽	1 x PH1 / 1 x PH2	
*	1 x PZ1 / 1 x PZ2	
*	1 x SL/PZ1 / 1 x SL/PZ2	
۲	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25	
	2 x slimBit box	
	1 x Belt holster for slimBit box	

Tested according to IEC 60900.

Tested according to IEC 60900.







Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws.

		SB2831B001
Order-N	0.	
43152		1
	1 x 2.0 mm / 1 x 2.5 mm / 1 x 3. 5.5 mm / 1 x 6.5 mm	5 mm / 1 x 4.0 mm / 1 x
	1 x slimBit box	
T		

Tested according to IEC 60900.

		SB2831B501
Order-N	0.	
43153		1
۲	1 x T8 / 1 x T9 / 1 x T10 / 1 x T15	
	1 x slimBit box	
	ording to IEC 60900.	

TORX [®] , 7-pcs. incl. SlimBit box		SB2831B502
Order-No		Ĥ
43154		1
۲	1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 /	
	1 x slimBit box	
Tested according to IEC 60900.		

TORX F	PLUS [®] , 7-pcs. incl. SlimBit box	SB2831B601
Order-N	lo.	
43155		1
۲	1 x 6IP / 1 x 7IP / 1 x 8IP / 1 x 9IP / 1 x	10IP / 1 x 15IP
	1 x slimBit box	
Tested acc	cording to IEC 60900.	

Hex, 7-pcs. incl. SlimBit box SB2831B801 Order-No. 43156 1 1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm 1 x slimBit box

Tested according to IEC 60900.

Slotted, P	ozidriv 7-pcs. incl. SlimBit box	SB2831B900
Order-No.		
43157		1
-	1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm	/ 1 x 6.5 mm
*	1 x PZ1 / 1 x PZ2	
	1 x slimBit box	
Toctod accord	ing to IEC 60000	

Tested according to IEC 60900.

Slotted, PlusMinus/Pozidriv 7-pcs. incl. SlimBit

box	• SB2831B901
Order-No.	#
43158	1
.)	1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm / 1 x 6.5 mm
*	1 x SL/PZ1 / 1 x SL/PZ2
	1 x slimBit box

Tested according to IEC 60900.

		SB2831B902
Order-No		
43159		1
	1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm	
₽	1 x PH1 / 1 x PH2	
	1 x slimBit box	
	rding to IEC 60900.	

Slotted, Phillips, Pozidriv 7-pcs. incl. SlimBit box		SB2831B903
Order-No		
43160		1
)	1 x 2.0 mm / 1 x 2.5 mm	
₽	1 x PH0 / 1 x PH1	
*	1 x PZ0 / 1 x PZ1	
	1 x slimBit box	

Tested according to IEC 60900.

	ocs. incl. slimBit box	SB2831B904
Order-No.		(m)
44366		1
.)	1 x 2.5 mm	
Ð	1 x PH1	
*	1 x PZ1	
*	1 x SL/PZ1	
۲	1 x T9 / 1 x T10	
	1 x slimBit box	

Tested according to IEC 60900.










Increases your safety: Wiha Power slimBits ensure good, protected access to deep-set screws. **Makes handling easier**: Compact slimBit box with easy access and an optimal view of profiles. **Offers you full protection**: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Mixed 7-pcs. incl. slimBit box SB2831PB		
Order-No.		
44106		1
	1 x Bit Power slimBit electric - Slotted 5.5)
₽	1 x Bit Power slimBit electric - PH2	
*	1 x Bit Power slimBit electric - SL/PZ2	
۲	1 x Bit Power slimBit electric - T15 / 1 x E electric - T20 / 1 x Bit Power slimBit el	
	1 x slimBit box	

Tested according to IEC 60900.

Slotted, hex, 7-pcs. incl. slimBit box SB2831		
Order-No.		Ĥ
44107		1
)	1 x Bit Power slimBit electric - Slotted 6.	5
۲	1 x Bit Power slimBit electric - Innensech Bit Power slimBit electric - Innensechska Power slimBit electric - Innensechskant 4 slimBit electric - Innensechskant 5 / 1 x f electric - Innensechskant 6	nt 3 / 1 x Bit 4 / 1 x Bit Power
	1 x slimBit box	

Tested according to IEC 60900.



empty, 2-pcs. with belt clip	SB2831B992
Order-No.	
43164	1
2 x slimBit box	
1 x Belt holster for slimBit box	

slimBit box



Makes handling easier: Compact slimBit box with easy access and an optimal view of profiles.

empty	SB2831B991
Order-No.	
43163	1
1 x slimBit box, empty	



SLIM

Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Saves space: Extensive interchangeable bit system saves you space. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Slotted					283110
Order-No.	(e	mm	max. Nm	Ê
43114	1.5•	0.4	75	0.2	5
43115	2.0•	0.4	75	0.4	5
34578	2.5•	0.4	75	0.4	5
34579	3.0•	0.5	75	0.6	5
41159	3.5	0.6	75	1.4	5
34580	4.0	0.8	75	2.5	5
34581	5.5	1.0	75	3.8	5
34582	6.5	1.2	75	5.5	5
44385	3.5	0.6	75	1.4	5

•no slim version

Manufactured acc. to IEC 60900.

Phillips				283111
Order-No.	4	mm	max Nm	
43116	PH0•	75	0.9	5
34583	PH1	75	3.8	5
34584	PH2	75	5.5	5

•no slim version

Manufactured acc. to IEC 60900.

Pozidriv

Order-No.		mm	max Nm	Ĥ
43117	PZ0•	75	0.9	5
34585	PZ1	75	3.8	5
34586	PZ2	75	5.5	5

•no slim version

Manufactured acc. to IEC 60900.

PlusMinus/Phillips

PlusMinus/Phillips 28				
Order-No.	Œ	mm	max Nm	笛
34587	SL/PH1	75	3.8	5
34588	SL/PH2	75	5.5	5
Manufactured	acc. to IEC 609	20		

ctured acc. to IEC 60900

PlusMinus/Pozidriv

Order-No.	æ	mm	max Nm		
34589	SL/PZ1	75	3.8	5	
34590	SL/PZ2	75	5.5	5	
Manufactured acc. to IEC 60900					

Manufactured acc. to IEC 60900.

TORX® 283115 Order-No. max Nm ۲ 'nm 43140 T5• 75 0.4 5 5 43141 Τ6• 75 0.6 Τ7• 75 5 43142 0.9 T8• 35506 75 5 1.3 41160 Т9• 75 2.5 5 35507 T10• 75 3.8 5 T15 75 5 35508 5.0 35509 T20 75 5.5 5 36071 T25 75 5.5 5

•no slim version Manufactured acc. to IEC 60900.

TORX PLUS®

Order-No.	۲	mm	max Nm	巤
43143	5IP•	75	0.5	5
43144	6IP•	75	0.8	5
43145	71P•	75	1.3	5
43146	8IP•		2.0	5
10117	9IP•	75	3.0	5
43148	10IP•	75	4.5	5
43149	15IP	75	5.5	5
43150	20IP	75	5.5	5
43151	25IP	75	5.5	5
	•••••	•••••••••••		

 no slim version Manufactured acc. to IEC 60900.

Hex 283118 Order-No. 'nm max. Nm \bigcirc 37222 1.5• 75 0.9 5 37223 2.0• 75 1.8 5 2.5 5 37224 75 3.8 37147 3.0 75 5.5 5 37225 4.0 75 5.5 5 37226 5.0 75 5.5 5 5 37227 6.0 75 5.5

•no slim version Manufactured acc. to IEC 60900.

283112

283114

Internal square 24					
Order-No.			mm	Nm	
35510	#1	2.3	75	5.5	5
35511	#2	2.8	75	5.5	5

Manufactured acc. to IEC 60900.

283116




slimVario[®] electric adapter


Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Improved access:** Deep-set screws can be reached easily.

Increases your efficiency: Adapter allows nut driver to be fastened with speedE[®] and slimVario[®] handles. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

for slimBits					
Order-No.	C	mm			
43292	6.0	69.5	6		

for 1/4" n			2831
Order-No.		*mm*	甾
43139	1/4"	59	6

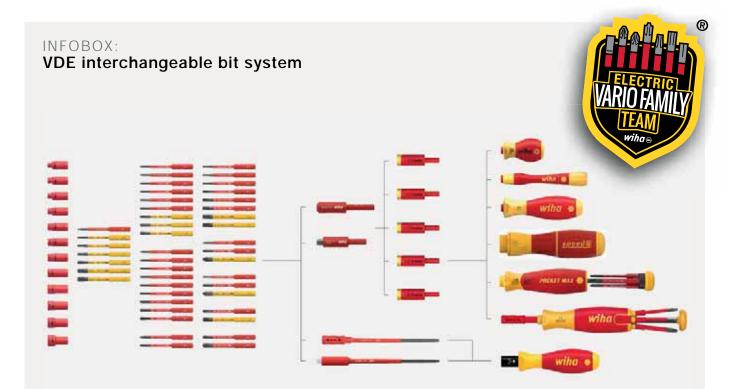



Can be used with these slimBits

1,5 / 2,0 / 2,5 / 3,0 / 3,5 / 4,0 / 5,5 / 6,5

3,5

PH0 / PH1 / PH2

PZ0 / PZ1 / PZ2

SL/PZ1 / SL/PZ2

T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25

IP5 / IP6 / IP7 / IP8 / IP9 / IP10 / IP15 / IP20 / IP25

1,5/2/2,5/3/4/5/6


Robertson 1 / 2


VDE interchangeable bit system

- Compact VDE bit sets: holder + slimBit (length 75 mm).
- Wiha slimBits ensure good, protected access to deep-set screws.
- slimBits tested at 10,000 V AC and approved for 1,000 V AC.
- Space saved thanks to extensive interchangeable bit system and nut driver inserts.

VDE torque system

• Controlled tightening of electrical screw connections.

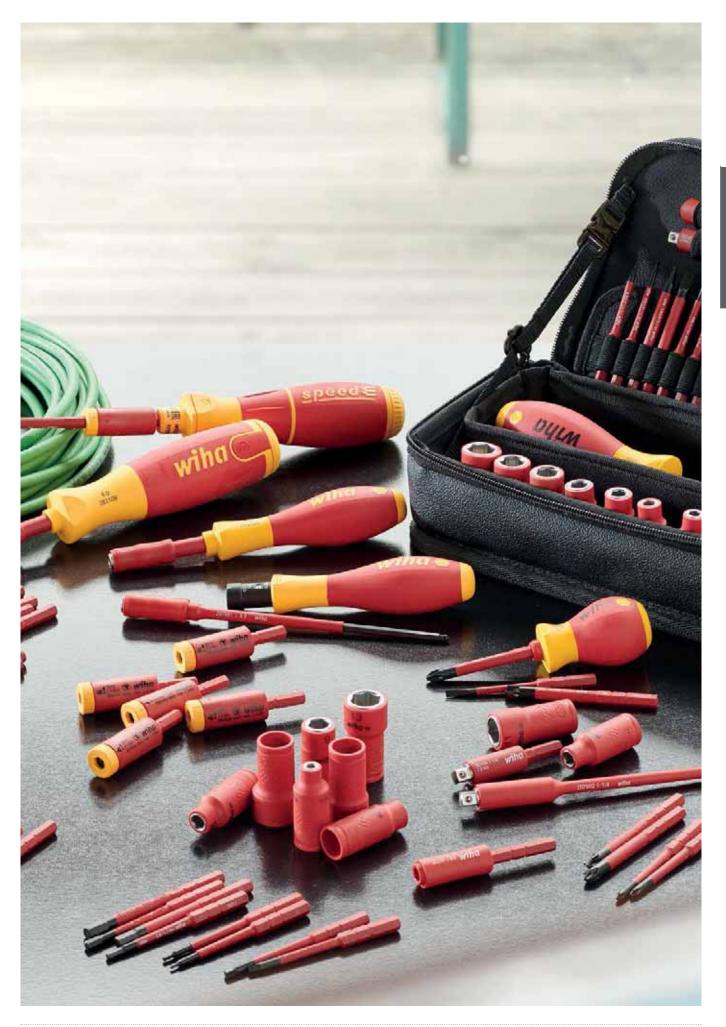

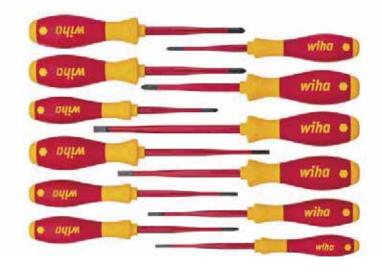



Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. **Protects your health:** With the patented SoftFinish* handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your safety:** Wiha slim blades ensure unlimited, protected access to deep-set screws.

	d 12-pcs.	3201K12
Order-No	D.	Ĥ
41003		1
.)	3.5 mm x 100 mm / 4.0 mm x 100 mm / 5.5 mm x 125 mm / 6.5 mm x 150 mm	
Ð	PH1 x 80 mm / PH2 x 100 mm	
*	PZ1 x 1 mm / PZ2 x 100 mm	
*	SL/PZ2 x 100 mm	
	T15 x 100 mm / T20 x 100 mm / T25 x 125 mm	
No slim ver	sion	

Manufactured acc. to IEC 60900.

INFOBOX: Handle size concept



Wiha SoftFinish® handle sizes

- Every Wiha handle optimally balances guidance, speed and torque for the respective fastening task.
- Quick-turning Motor skills are consistently taken into consideration.
- Maximum power transmission: comfortable and loss-free transmission of physical strength, even during intensive fastening.
- The power-turning and quick-turning zones (length) vary significantly over the four handle sizes in various forms.
- The Wiha SoftFinish screwdrivers enable work that is kind on the hands and muscles and is therefore recommended by doctors and therapists from the AGR.







Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. **Protects your health:** With the patented SoftFinish[®] handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your safety:** Wiha slim blades ensure unlimited, protected access to deep-set screws.

Slotted,	, Phillips 6-pcs . 3201K6
Order-No	D. 🔛
35389	1
	3.5 mm x 100 mm / 4.0 mm x 100 mm / 5.5 mm x 125 mm / 6.5 mm x 150 mm
Ð	PH1 x 80 mm / PH2 x 100 mm
N 4 6 t	

Manufactured acc. to IEC 60900.

Order-N	No.	
38362		1
)	3.5 mm x 100 mm / 4.0 mm x 100 mm / 5.5 mm x 125 mm	
₽	PH1 x 80 mm / PH2 x 100 mm	
*	SL/PZ2 x 100 mm	

	, Pozidriv 6-pcs 3201ZK6
Order-N	
36455	1
	3.5 mm x 100 mm / 4.0 mm x 100 mm / 5.5 mm x 125 mm / 6.5 mm x 150 mm
*	PZ1 x 1 mm / PZ2 x 100 mm
Manufactu	

Manufactured acc. to IEC 60900.

TORX®	6-pcs.	3251K6
Order-N	0.	₩
36558		1
۲	T8 x 60 mm / T9 x 60 mm / T10 x 100 mm / T15 x 100 mm / T20 x 100 mm / T25 x 125 mm	
T8 + T9 no	o slim version	





Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws.

Slotted							3201
Order-No.			\ominus	mm	÷	==	
35446	3.5	100	0.6	204	23	10	
35390	4.0	100	0.8	211	30	10	
35501	4.5	125	1.0	236	30	10	
35391	5.5	125	1.0	243	36	10	
35392	6.5	150	1.2	268	36	10	
Manufactured a							

Order-No.	*		mm	÷	==	
41141	T10H	100	204	23	10	
	T15H	100	211	30	10	
	T20H	100	211	30	10	
41144	T25H	125	243	36	10	
41145	T27H	125	243	36	10	
41146	T30H	125	243	36	10	
41147	T40H	150	268	36	10	

Phillips 3211 Order-No. Ŧ mm ÷ (m) ----35393 PH1 191 30 10 80 35394 PH2 100 10 218 36

Manufactured acc. to IEC 60900.

Pozidriv 3241 Order-No. ÷ ÷ --mm = 35395 PZ1 1 191 30 10 35396 218 36 10 P72 100

Manufactured acc. to IEC 60900.

PlusMinus/Phillips

Order-No.	æ	=	'mm'	÷		
35502	SL/PH1	80	191	30	10	
35503	SL/PH2	100	218	36	10	
Manufactured	acc. to IEC 609	900.				

PlusMinus/Pozidriv

PlusMinus/Pozidriv							
Order-No.	æ		mm	÷			
36329	SL/PZ1	80	191	30	10		
36330	SL/PZ2	100	218	36	10		

Manufactured acc. to IEC 60900.

TORX®						3251
Order-No.	۲		mm	÷	==	
36536	T10	100	204	23	10	
36537	T15	100	211	30	10	
36538	T20	100	211	30	10	
36539	T25	125	243	36	10	
36540	T27	125	243	36	10	
36541	Т30	125	243	36	10	
36542	T40	150	268	36	10	
	•••••	•	•••••••••••••••••••••••••••••••••••••••			

Manufactured acc. to IEC 60900.

3271

Internal square								
Order-No.			mm					
35504	#1	2.3	211	10				
35505	#2	2.8	243	10				





Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Slotted, F	hillips 7-pcs. 320NK7
Order-No.	
00834	1
⋺	2.5 mm x 75 mm / 4.0 mm x 100 mm / 5.5 mm x 125 mm / 6.5 mm x 150 mm
Ð	PH1 x 80 mm / PH2 x 100 mm
>	Voltage tester SoftFinish [®] single-pole, 110-250 volts Slotted transparent, with push-on clip
Manufactured	acc. to IEC 60900.

	Pozidriv 6-pcs	320NZK6SO
Order-No.		Ĥ
25477		1
⋺	2.5 mm x 75 mm / 3.5 mm x 10 / 5.5 mm x 125 mm	
*	PZ1 x 80 mm / PZ2 x 100 mm	
Manufactured	acc. to IEC 60900.	

 Slotted, Phillips 6-pcs.
 320NK6

 Order-No.
 Image: Constant of the system of t

Screwdriver SoftFinish® electric





Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Slotted							320N
Order-No.	-		Θ	mm	÷		
00819	2.0	60	0.4	164	23	10	
00820	2.5	75	0.4	179	23	10	
00821	3.0	100	0.5	204	23	10	
00822	3.5	100	0.6	204	23	10	
00823	4.0	100	0.8	211	30	10	
00824	4.5	125	1.0	236	30	10	
00825	4.5	175	1.0	286	30	5	
31863	4.5	200	1.0	311	30	5	
00826	5.5	125	1.0	243	36	10	
00827	5.5	175	1.0	293	36	5	
00828	6.0	150	1.2	268	36	10	
00829	6.5	150	1.2	268	36	10	
00830	8.0	175	1.2	299	41	10	
00831	8.0	175	1.6	299	41	10	
00832	10.0	200	1.6	324	41	5	
Manufactured a	ico to IEC 6				••••••		

Manufactured	acc.	to	IEC	60900.

Phillips						321N
Order-No.	4		mm	÷		
00846	PH0	60	164	23	10	
00847	PH1	80	191	30	10	
00848	PH2	100	218	36	10	
00849	PH3	150	268	41	10	
00850	PH4	200	318	41	5	

Manufactured acc. to IEC 60900.

Pozidriv						324
Order-No.			mm	÷	==	
00877	PZ0	60	164	23	10	
00878	PZ1	80	191	30	10	
00879	PZ2	100	218	36	10	
00880	PZ3	150	324	41	5	

Manufactured acc. to IEC 60900.

PlusMinus/Phillips								
Order-No.	æ		mm	÷				
30716	SL/PH1	80	191	30	10			
30715	SL/PH2	100	218	36	10			
	acc. to IEC 609							

PlusMinus/Pozidriv							
Order-No.	CR.		mm	÷			
30700	SL/PZ1	80	191	30	10		
30701	SL/PZ2	100	218	36	10		
	acc. to IEC 609		210		10		

TORX®						325
Order-No.		==	mm	÷	==	
03760	Τ5	60	164	23	10	
03761	Τ6	60	164	23	10	
03762	Τ7	60	164	23	10	
00881	Т8	60	164	23	10	
00882	Τ9	60	164	23	10	

Manufactured acc. to IEC 60900.

Нех						323N
Order-No.	\bigcirc		mm	÷	==	
30361	2.5	75	179	23	10	
30362	3.0	75	179	23	10	
30363	4.0	75	186	30	10	
30364	5.0	75	186	30	10	
30365	6.0	100	218	36	10	
30366	8.0	100	218	36	10	

Manufactured acc. to IEC 60900.

Internal square									
Order-No. 🔳		=	'nm	÷	(m)				
32396 #1	2.3	100	211	30	10				
32397 #2	2.8	150	268	36	10				



Screwdriver set SoftFinish® electric



Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Hexagon	nut driver 5-pcs. 322K5
Order-No.	<u></u>
29466	1
0	5.5 mm x 125 mm / 7.0 mm x 125 mm / 8.0 mm x 125 mm / 10.0 mm x 125 mm / 13.0 mm x 125 mm

Manufactured acc. to IEC 60900.

Screwdriver set SoftFinish® electric





Order-No.	C		mm	÷		==	
00853	4.0	125	236	30	10.2	10	
00855	5.0	125	236	30	11.2	10	
00856	5.5	125	236	30	11.2	10	
00857	6.0	125	236	30	12.2	10	
00858	7.0	125	243	36	14.5	10	
00859	8.0	125	243	36	15.2	10	
00860	9.0	125	243	36	16	10	
00861	10.0	125	243	36	17.2	10	
00864	13.0	125	243	41	22.2	5	
00862	11.0	125	243	41	19.2	5	
00865	14.0	125	243	41	23.2	5	
00863	12.0	125	243	41	20.2	5	
00866	15.0	125	243	41	25.2	5	
00867	16.0	125	243	41	25.2	5	
00868	17.0	125	243	41	27.2	5	

Manufactured acc. to IEC 60900.

INFOBOX: Combination profiles



PlusMinus.

- The special PlusMinus/Pozidriv profile is ideal for PlusMinus terminal screws.
- The combination profile reduces slipping out and guarantees a higher torque transmission.

Fine screwdriver set PicoFinish® electric



wiha 🧔



DYE CS 1000 V IEC 60900

Simplifies your work: With a practical plastic holder to hang up or stand on a surface. Makes handling easier: Extra-long rotating cap ensures optimum feed. Increases your efficiency: Screwdriver handle size concept for optimal balance between precision and control. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your efficiency: Careful workmanship and controlled power transmission thanks to the slim handle with soft grip.

	Phillips, 7 pcs. incl. holder	2270PK601
Order-No		
42989		1
)	1 x 1.5 mm x 50 mm / 1 x 2.0 mm x 50 x 65 mm / 1 x 3.0 mm x 65 mm	mm / 1 x 2.5 mm
Ŧ	1 x PH00 x 50 mm / 1 x PH0 x 65 mm	
	1 x holder	

Makes handling easier: Extra-long rotating cap ensures optimum feed. **Increases your efficiency:** Screwdriver handle size concept for optimal balance between precision and control. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your efficiency:** Careful workmanship and controlled power transmission thanks to the slim handle with soft grip.

Slotted							2270P
Order-No.				• mm	÷	==	
42374	1.5	50	2	152	18	10	
42375	2.0	50	2	152	18	10	
42376	2.5	65	2.5	167	18	10	
42377	3.0	65	3	167	18	10	
42471	3.5	65	3.5	167	18	10	
			0.0				

Manufactured acc. to IEC 60900.

Phillips							2271P
Order-No.	4			••	÷		
42379	PH00	50	2	152	18	10	
42378	PH0	65	3	167	18	10	
42380	PH1	65	4	167	18	10	

Manufactured acc. to IEC 60900.

INFOBOX: PicoFinish electric



Wiha PicoFinish electric: The VDE-GS tested precision screwdriver.

- The smooth-running turn-cap enables fast turning.
- Imprint with the screw symbol and sizes eases recognition.



Nut driver with T-handle electric







Simplifies your work: More power when fastening thanks to the leverage from the T-handle design **Increases your efficiency:** Handle size concept for an optimum balance between torque and control **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Hex						334N
Order-No.	\odot		mm	-ì	÷ í	
27928	4.0	150	176	80	26 1	0
27929	5.0	150	182	100	32 1	0
27930	6.0	150	182	100	32 1	0
27931	8.0	150	182	100	32 1	0
		•				

Simplifies your work: More power when fastening thanks to the

leverage from the T-handle design **Increases your efficiency:** Handle size concept for an optimum balance between torque and control

Offers you full protection: Each tool individually tested at 10,000 V

Manufactured acc. to IEC 60900.

AC and approved for 1,000 V AC.

Hex						336N
Order-No.	C		mm	-)	÷ 🗎	
27932	8.0	200	232	100	32 10	
27933	10.0	230	262	100	32 10	
27934	13.0	230	262	100	32 10	
27935	17.0	230	268	120	38 10	

Manufactured acc. to IEC 60900.

Screw extractor set



Increases your efficiency: Thread-conserving removal of the screw without damage.

Order-No.		
03988	1	
H	1 x 2.3 / 1 x 2.8 / 1 x 3.4 / 1 x 4.5 / 1 x 5.7 / 1 x 9.0 / 1 x 11	6.8 / 1 x
۲	1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.0 mm / 1 x 4.0 m 5.0 mm / 1 x 6.0 mm / 1 x 8.0 mm / 1 x 10.0 mm	mm / 1 x n
	1 x Box	

I O O O V IEC 60900

Single, insulated open-end spanner

spaces.

		5590N
C	mm	#
6.0	90	1
7.0	90	1
8.0	100	1
9.0	100	1
10.0	110	1
11.0	110	1
12.0	130	1
13.0	135	1
14.0	145	1
15.0	150	1
16.0	160	1
17.0	160	1
18.0	175	1
19.0	175	1
22.0	195	1
24.0	225	1
27.0	250	1
30.0	290	1
32.0	310	1
	6.0 7.0 8.0 9.0 10.0 11.0 12.0 13.0 14.0 15.0 16.0 17.0 18.0 19.0 22.0 24.0 27.0 30.0	6.0 90 7.0 90 8.0 100 9.0 100 10.0 110 11.0 110 12.0 130 13.0 135 14.0 145 15.0 150 16.0 160 17.0 160 18.0 175 19.0 175 22.0 195 24.0 225 27.0 250 30.0 290

Offers you full protection: Each tool individually tested at 10,000 V $\,$ AC and approved for 1,000 V AC. Improved access: Through the 15° position of jaws, light work is made of fastening even in restricted

wiha 🛛

wiha

Meets your requirements: Continuously adjustable spanner width for a large application field. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

	le between 0	5590NA	
Order-No.	C	*mm*	Ĥ
43061	0 - 30	250	1



Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Improved access: Deep-set screws can be reached easily.

			24618T
Order-No.	۲	*mm*	
43063	1/2"	200	1
43062	3/8"	200	1

Adjustable spanner electric

Ratchet wrench insulated for nut drivers

Insulated nut driver insert

AC and approved for 1,000 V AC.



Increases your flexibility: Adjustable right or left rotation through switching lever. Protects your health: Reduction of the risk of injury by increasing the hand working space. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Switchable			7207NRW
Order-No.		mm	
43053	1/2"	250	1
43052	3/8"	200	1
43054	1/4"	145	1

Insulated nut driver insert



3/8" hex	-	7207NS	
Order-No		** mm	甾
43065	8.0	45	1

Offers you full protection: Each tool individually tested at 10,000 V

43065	8.0	45	1
43066	10.0	45	1
43067	11.0	45	1
43068	12.0	45	1
	13.0	45	1
43070	14.0	45	1
43071	16.0	45	1
43072	17.0	45	1
43073	18.0	45	1
43074	19.0	47	1
43075	21.0	47	1
43076	22.0	47	1

☆1000 V IEC 60900

Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

1/2" hexagon head			7208NS
Order-No.	C	mm	
43077	10.0	55	1
43078	11.0	55	1
43079	12.0	55	1
43080	13.0	55	1
43081	14.0	55	1
43082	17.0	55	1
43083	19.0	55	1
43084	22.0	55	1
43085	24.0	55	1
43086	27.0	55	1
43087	32.0	55	1





☆1000 V IEC 60900

Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Protects your material: Fully insulated tool reduces the risk of short circuits.

1/4" hexa	gon head	7209NS	
Order-No.	C	•mm•	
43088	4.0	42	1
43089	5.0	42	1
43090	5.5	42	1
43091	6.0	42	1
43092	7.0	42	1
43093	8.0	42	1
43094	9.0	42	1
43095	10.0	42	1
43096	11.0	42	1
43097	12.0	42	1
43098	13.0	42	1
43099	14.0	42	1

Insulated nut driver insert

Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

1/2" hexa		d	7208NHS
Order-No.	\bigcirc	** mm*	(m)
43100	4.0	120	1
43101	5.0	120	1
43102	6.0	120	1
43103	8.0	120	1
43104	10.0	120	1

Insulated nut driver insert

Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

3/8" hexa	-	7207NHS	
Order-No.	\bigcirc	*mm*	
43105	4.0	75	1
43106	5.0	75	1
43107	6.0	75	1
43108	8.0	75	1

Insulated nut driver insert

A1000 V IEC 60900

Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

1/4" internal hexagon			7209NHS
Order-No.	\bigcirc	*mm*	#
43109	3.0	65	1
43110	4.0	65	1
43111	5.0	65	1
43112	6.0	65	1
43113	8.0	65	1
			•••••••••••••••••••••••••••••••••••••••

Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Improved access: Deep-set screws can be reached easily.

1/2" for nut driver inserts, insulated			7208NEX
Order-No.		mm	
43055	1/2"	125	1
43056	1/2"	250	1

3/8" for nut driver inserts, insulated			7207NEX
Order-No.		*mm*	
43057	3/8"	125	1
43058	3/8"	250	1

1/4" for nut driver inserts, insulated			7209NEX
Order-No.		mm	
43059	1/4"	75	1
43060	1/4"	150	1

Insulated square adapter



Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your efficiency: Adapter allows 1/4" nut driver fastening with the 3/8" torque key.

3/8" for 1/4	4" nut driv	283799	
Order-No.		mm	
44355	1/4"	100	1











Insulated extension



Makes handling easier: Can be used as a slim pin or as a powerful T-handle thanks to the double joint. Increases your efficiency: 8 key profiles combined in a compact and light tool.

with triangular heads, square heads and double bit

bit	-	-		24682
Order-No.		0	C	Ê
44001	7-9	3 - 5	5 - 8	1

Switch cabinet key cross shape



Increases your efficiency: All keys and profiles integrated into one compact, lightweight tool.

						24667	
Order-No.			0	<u> </u>	$\overline{\mathbf{T}}$		
	<u> </u>		~	<u> </u>			
36114	5 - 8	9	3 - 5	70	PH2	5	
00111	0 0	,	0 0	7.0	1 1 1 2	0	





530

Simplifies your work: Striking cap integrated into the handle allows you to strike and lift with the screwdriver. Makes handling easier: Easy loosening of tight screws thanks to hex bolster for spanners. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Screwdriver handle size concept for optimal balance between precision and control.

Slotted wit	h one-p	iece he	xago	nal bl	ade a	nd sol	id
Ordor No	_		200	-	1754		-

Order-No.	(\ominus	€i mm	\bigcirc	'nm	÷	==
03223	3.5•	75	0.6	4		186	30	10
03224	4.5•	90	0.8	4		201	30	10
03225	5.5•	100	1.0	5	8	213	36	10
03226		125		-		238	00	10
03228	8 .0•	150	1.2	8	13	271	41	5
03230	1010	175		0	13	296	41	5
03231	12.0•	200	2.0	10	16	321	41	5
03232	14.0•	250	2.5	10	16	371	41	5
* Additional dir								

* Additional dimension. Non-DIN size.

Phillips with one-piece hexagonal blade and solid

steel cap								531
Order-No.	4	 -	€i mm	\bigcirc	mm	÷	(
03237	PH1	80	5	8	186	30	10	
03238	PH2	100	6	10	213	36	10	
03239	PH3	150	8	13	268	41	10	

Pozidriv with one-piece hexagonal blade and

solid stee								532
Order-No.			€i mm	\bigcirc	'nm	÷		
03245	PZ1	80	5	8	186	30	10	
03246	PZ2	100	6	10	213	36	10	
03247	PZ3	150	8	13	268	41	10	

INFOBOX: Solid steel cap and hexagon head



	1
64 (A)	A

- The solid steel cap at the end of the screwdriver handle enables targeted hammering, e.g. to loosen jammed screws
- The direct connection of the solid steel cap to the blade means that the impact energy is transmitted without any loss
- Blade includes a hexagon bolster for using a set of spanners for additional torque.

Screwdriver SoftFinish®



Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs.





Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs.

Slotted wit	h rour	nd blad	e for l	ow-lyi	ng screv	vs		302
Order-No.	(\ominus		mm	÷	==	
00689	3.0	150	0.5	3	254	23	10	
00690	3.0	200	0.5	3	304	23	10	
32383	3.0	300	0.5	3	404	23	5	
00691	3.5	100	0.6	3.5	204	23	10	
26931	3.5	200	0.6	3.5	304	23	10	
00692	4.0	100	0.8	4	211	30	10	
00694	4.0	150	0.8	4	261	30	10	
00695	4.0	200	0.8	4	311	30	10	
00696	4.0	300	0.8	4	411	30	5	
00697	4.5	125	0.8	4.5	236	30	10	
27753	4.5	80	0.8	4.5	191	30	10	
00698	5.5	125	1.0	5.5	236	30	10	
00700	5.5	150	1.0	5.5	261	30	10	
00701	5.5	200	1.0	5.5	311	30	10	
00702	5.5	300	1.0	5.5	411	30	5	
32384	6.0	300	1.0	6	418	36	5	
00684	2.0	65	0.4	2	169	23	10	
00685	2.5	75	0.4	2.5	179	23	10	
00686	3.0	80	0.5	3	184	23	10	
00687	3.0	100	0.5	3	204	23	10	

Slotted wi	th roun	d blad	е					3022
Order-No.	(Θ	•	'nm	÷		
27754	6.0	100	1.0	5.5	218	36	10	
27755	6.0	150	1.0	5.5	268	36	10	
00704	6.5	100	1.2	6	218	36	10	
00703	6.5	150	1.2	6	268	36	10	
00706	6.5	200	1.2	6	318	36	10	
00708	8.0	150	1.2	7	274	41	10	
00707	8.0	175	1.2	7	299	41	5	
00709	8.0	175	1.6	7	299	41	5	
32399	8.0	300	1.2	7	424	41	5	
00711	10.0	200	1.6	8	324	41	5	
32400	10.0	300	1.6	8	424	41	5	
00712	12.0	250	2.0	8	374	41	5	
00713	14.0	250	2.5	11	374	41	5	

Screwdriver with bit magazine magnetic





Simplifies your work: Larger handle – maximum power. Increases your efficiency: 90% less volume, 80% less weight – 100% efficiency. Increases your flexibility: Standard bits are also suitable for machine operation. Protects your health: No risk of injury, *all bits stowed safely inside the handle.

assorted	with 12 bits, 1/4" in blister pack	SB380302020
Order-No.	SB	
38605	X	5
7	1 x 4.5 mm / 1 x 6.5 mm	
Ð	1 x PH1 / 1 x PH2 / 1 x PH3	
*	1 x PZ1 / 1 x PZ2 / 1 x PZ3	
۲	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30	

assorted	with 12 bits, 1/4"	SB380302021
Order-No.	SB .	Ê
38606	X	5
.)	1 x 5.5 mm	
Ð	1 x PH2	
*	1 x PZ1 / 1 x PZ2 / 1 x PZ3	
۲	1 x T15 / 1 x T20 / 1 x T25 / ⁻	
۲	1 x 3.0 mm / 1 x 4.0 mm / 1 >	

Increases your efficiency: Good access to confined spaces due to extremely short screwdriver handle. **Saves space:** Six tools in one.

Phillips sl	SB380101		
Order-No.	SB .		
33738	Х		5
.)	1 x 4.5 mm /	1 x 6.5 mm	
Ð	1 x PH1 / 1 x	x PH2 / 1 x PH3	

Pozidriv, Phillips with 6 bits, Stubby, 1/4" in blister pack SB380102 Order-No. SB

	SB .	
33741	x	5
	I x PH1 / 1 x PH2 / 1 x PH3	
	I x PZ1 / 1 x PZ2 / 1 x PZ3	

TORX [®] with 6 bits, Stubby, 1/4"			SB380103
Order-No.	SB		
33744	Х	5	
۲	1 x T10 / 1 x	T15 / 1 x T20 / 1 x T25 / 1 x T30 /	1 x T40

Slotted, Pozidriv with 6 bits, Stubby, 1/4" SB380104			
Order-No.	SB		
33746	x	5	
.)	1 x 4.5 mm / 1 x 6.5 mm		
*	1 x PZ1 / 1 x PZ2 / 1 x PZ3		

Screwdriver with bit magazine PocketMax[®] magnetic



Increases your efficiency: Your daily companion – always have the relevant profiles with you. Increases your flexibility: Standard bits are also suitable for machine operation. Saves space: Compact and light tool, fits into any pants pockets. Protects your health: No risk of injury, *all bits stowed safely inside the handle.

Mixed with 8 bits, 1/4"		SB3803050
Order-No).	
45292		1
\rightarrow	4.5 mm / 6.5 mm	
Ð	PH1 / PH2	
*	PZ1 / PZ2	
۲	T15 / T20	

Three. For all your jobs.





Which machine? Which application? Which bit? The revolutionary Wiha bit concept puts an end to any confusion and presents three bit types which can cover all areas of use. Only the screw shape is crucial for selecting the bit. The Y bit is ideal for fastening wood screws with an angle no greater than 90° between the thread and screw head. The T bit is used for metal screws at a 90° angle. If you need to fasten both screw types, then the TY bit is the right choice since this universal bit is suitable for all type of fastenings.

Increases your efficiency


The specialist with 120x greater lifespan* thanks to optimised bits. * Compared to Wiha standard bits.

Lowers your costs

Bit quick and easy to find thanks to marking – even in dark environments when a UV light is used.

Saves time

No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan.









Increases your efficiency: The all-rounder with 120x greater lifespan* thanks to patented bit technology, suitable for all screws. (*compared to Wiha standard bit) Lowers your costs: Bit quick and easy to find thanks to red marking – even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Saves time: Automatic opening at the push of a button and simple bit change directly in the holder.

Pozidriv 8-pcs. 1/4" E6,3		SB7946TY202
Order-No.		
42099		6
\	1 x TY-Bit 49 mm Pozidriv 1/4" PZ1 / 5 Pozidriv 1/4" PZ2 / 1 x TY-Bit 49 mm F	X I I Bit Io IIIII
	1 x BitBuddy [®]	
* compored t	a Wilha atondard hit	

۰	compared	to	Wiha	standard	bit
---	----------	----	------	----------	-----

Phillips, Pozidriv, TORX [®] , 8-pcs., 1/4" E6,3 SB794		
Order-No.		(m)
42116		6
Ð	1 x TY-Bit 49 mm Phillips 1/4" PH2	
*	1 x TY-Bit 49 mm Pozidriv 1/4" PZ1 / 1 x Pozidriv 1/4" PZ2 / 1 x TY-Bit 49 mm Poz	I I BR IV IIIII
۲	1 x TY-Bit 49 mm TORX® 1/4" T15 / 1 x T TORX® 1/4" T20 / 1 x TY-Bit 49 mm TOR	I BR IO IIIII
	1 x BitBuddy [®]	
* compared to	Wiba standard bit	

compared to Wiha standard bit

TORX [®] 8-pcs. 1/4" E6,3 SB7			
Order-No.	甾		
42115	6		
۲	1 x TY-Bit 49 mm TORX [®] 1/4" T10 / 1 x TY-Bit 49 mm TORX [®] 1/4" T15 / 2 x TY-Bit 49 mm TORX [®] 1/4" T20 / 1 x TY-Bit 49 mm TORX [®] 1/4" T25 / 1 x TY-Bit 49 mm TORX [®] 1/4" T30 / 1 x TY-Bit 49 mm TORX [®] 1/4" T40		
	1 x BitBuddy®		
* compared to Wiha standard bit			

Phillips, F	Pozidriv, TORX [◎] , 8-pcs., 1/4" E6,3	SB7946TY904
Order-No.		(m)
42117		6
₽	1 x TY-Bit 49 mm Phillips 1/4" PH2	
*	1 x TY-Bit 49 mm Pozidriv 1/4" PZ1 / 1 : Pozidriv 1/4" PZ2	
۲	1 x TY-Bit 49 mm TORX® 1/4" T10 / 1 x TORX® 1/4" T15 / 1 x TY-Bit 49 mm TOF TY-Bit 49 mm TORX® 1/4" T25	TY-Bit 49 mm
	1 x BitBuddy®	
* compared to	Wiha standard bit	

Hexagon 8-pcs. 1/4" E6,3		SB7946TY303
Order-No		
42114		6
۲	2 x TY-Bit 49 mm Hex 1/4" SW3 / 2 x 1/4" SW4 / 2 x TY-Bit 49 mm Hex 1/4" 49 mm Hex 1/4" SW6	TY-Bit 49 mm Hex
	1 x BitBuddy [®]	
	to Wiha standard bit	•

	, TORX [®] 8-pcs. 1/4" E6,3	SB7946TY905
Order-No		甾
42118		6
\	1 x TY-Bit 49 mm Pozidriv 1/4" PZ2 / ⁻ Pozidriv 1/4" PZ3	
۲	1 x TY-Bit 49 mm TORX* 1/4" T15 / 1 TORX* 1/4" T20 / 1 x TY-Bit 49 mm T(TY-Bit 49 mm TORX* 1/4" T30 / 1 x T 1/4" T40	x TY-Bit 49 mm ORX® 1/4" T25 / 1 x
	1 x BitBuddy [®]	

* compared to Wiha standard bit







Increases your efficiency: The all-rounder with 120x greater lifespan* thanks to patented bit technology, suitable for all screws. (*compared to Wiha standard bit) **Lowers your costs:** Bit quick and easy to find thanks to red marking – even in dark environments by using an UV light. **Saves time:** Automatic opening at the push of a button and simple bit change directly in the holder. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan.

Pozidriv 9-pcs. 1/4" C6,3 SB79			
Order-No.			
42098		6	
*	1 x TY-Bit 29 mm Pozidriv 1/4" PZ1 / 5 x Pozidriv 1/4" PZ2 / 1 x TY-Bit 29 mm Poz		
0	1 x Bit holder magnetic 60 mm 1/4"extra	strong magnet in	
	1 x BitBuddy [®]		
* compared to Wiha standard bit			

Phillips, Pozidriv, TORX®, 9-pcs., 1/4" C6,3		SB7945TY903	
Order-No.			
42137		6	
₽	1 x TY-Bit 29 mm Phillips 1/4" PH2		
*	1 x TY-Bit 29 mm Pozidriv 1/4" PZ1 / 1 x Pozidriv 1/4" PZ2 / TY-Bit 29 mm Pozidri		
۲	1 x TY-Bit 29 mm TORX® 1/4" T15 / 1 x TORX® 1/4" T20 / 1 x TY-Bit 29 mm TOF	I BRED IIII	
0	1 x Bit holder magnetic 60 mm 1/4"extra box	strong magnet in	
	1 x BitBuddy®		
* compared t	o Wiha standard bit		

Hexagon	9-pcs. 1/4" C6,3	SB7945TY303
Order-No.		
42135		6
۲	2 x TY-Bit 29 mm Hex 1/4" SW3 / 2 x TY 1/4" SW4 / 2 x TY-Bit 29 mm Hex 1/4" S 29 mm Hex 1/4" SW6	
0	1 x Bit holder magnetic 60 mm 1/4"extra box	strong magnet in
	1 x BitBuddy®	
* compared to	Wiha standard bit	

Phillips, Pozidriv, TORX®, 9-pcs., 1/4" C6,3		SB7945TY904
Order-No.		
42138		6
₽	1 x TY-Bit 29 mm Phillips 1/4" PH2	
*	1 x TY-Bit 29 mm Pozidriv 1/4" PZ1 / 1 x Pozidriv 1/4" PZ2	TY-Bit 29 mm
۲	1 x TY-Bit 29 mm TORX® 1/4" T10 / 1 x T TORX® 1/4" T15 / 1 x TY-Bit 29 mm TORX TY-Bit 29 mm TORX® 1/4" T25	
0	1 x Bit holder magnetic 60 mm 1/4"extra box	strong magnet in
	1 x BitBuddy®	
* compared to	o Wiha standard bit	

TORX[®] 9-pcs. 1/4" C6,3 SB7945TY505 Order-No. (m) 42136 6 1 x TY-Bit 29 mm TORX[®] 1/4" T10 / 1 x TY-Bit 29 mm TORX® 1/4" T15 / 1 x TY-Bit 29 mm TORX® 1/4" T20 / 1 x ۲ TY-Bit 29 mm TORX® 1/4" T25 / 1 x TY-Bit 29 mm TORX® 1/4" T30 / 1 x TY-Bit 29 mm TORX® 1/4" T40 1 x Bit holder magnetic 60 mm 1/4"extra strong magnet in 0 box 1 x BitBuddy® * compared to Wiha standard bit

Pozidriv	v, TORX [®] 9-pcs. 1/4" C6,3	SB7945TY905
Order-No).	
42139		6
*	1 x TY-Bit 29 mm Pozidriv 1/4" PZ2 / 1 Pozidriv 1/4" PZ3	x TY-Bit 29 mm
۲	1 x TY-Bit 29 mm TORX [®] 1/4" T15 / 1 : TORX [®] 1/4" T20 / 1 x TY-Bit 29 mm TC TY-Bit 29 mm TORX [®] 1/4" T30 / 1 x TY 1/4" T40	DRX [®] 1/4" T25 / 1 x
0	1 x Bit holder magnetic 60 mm 1/4"ext box	ra strong magnet in
	1 x BitBuddy [®]	
* compared	I to Wiha standard bit	

Fastening / jamming

XLSelector T bit set, 50 mm

XLSelector T bit set, 25 mm





Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for T-shaped screws(*compared to Wiha standard bit) Lowers your costs: Bit quick and easy to find thanks to blue marking - even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan.

Phillips,	TORX [®] , hex 14-pcs. 1/4" E6,3	SB7948T950
Order-No.		
41831		6
₽	1 x T-Bit 50 mm Phillips 1/4" PH1 / 1 x T-B Phillips 1/4" PH2 / 1 x T-Bit 50 mm Phillips	
۲	1 x T-Bit 50 mm TORX® 1/4" T15 / 1 x T-Bi 1/4" T20 / 1 x T-Bit 50 mm TORX® 1/4" T2? mm TORX® 1/4" T30 / 1 x T-Bit 50 mm TOF	5 / 1 x T-Bit 50
۲	1 x T-Bit 50 mm Hexagon 1/4" SW3 / 1 x T Hexagon 1/4" SW4 / 1 x T-Bit 50 mm Hexa / 1 x T-Bit 50 mm Hexagon 1/4" SW6	
0	1 x Bit holder magnetic 58 mm 1/4"	
	1 x XLSelector	

* compared to Wiha standard bit





Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for T-shaped screws(*compared to Wiha standard bit) Lowers your costs: Bit quick and easy to find thanks to blue marking - even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan.

Phillips	, TORX [®] , hex 32-pcs. 1/4" C6,3	SB7948T999
Order-No	0.	
41830		6
₽	2 x T-Bit 25 mm Phillips 1/4" PH1 / 4 x Phillips 1/4"PH2 / 2 x T-Bit 25 mm Philli	
۲	2 x T-Bit 25 mm TORX [®] 1/4" T10 / 2 x T TORX [®] 1/4" T15 / 4 x T-Bit 25 mm TOR T-Bit 25 mm TORX [®] 1/4" T25 / 2 x T-Bit 1/4" T30 / 2 x T-Bit 25 mm TORX [®] 1/4"	X® 1/4" T20 / 2 x 25 mm TORX®
۲	2 x T-Bit 25 mm Hexagon 1/4" SW3 / 2 : Hexagon 1/4" SW4 / 2 x T-Bit 25 mm He / 2 x T-Bit 25 mm Hexagon 1/4" SW6	
0	1 x Bit holder magnetic 58 mm 1/4"	
	1 x XLSelector	
* compared	d to Wiha standard bit	

ompared to Wiha standard bit







Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for T-shaped screws(*compared to Wiha standard bit) Lowers your costs: Bit quick and easy to find thanks to blue marking - even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Saves time: Simple and rapid bit removal thanks to clear organisation and automatic opening at the push of a button.

Hexagon	14-pcs. 1/4" C6,3	SB7947T303
Order-No.		
41825		6
۲	3 x T-Bit 25 mm Hexagon 1/4" SW3 / 3 x Hexagon 1/4" SW4 / 3 x T-Bit 25 mm Hex / 3 x T-Bit 25 mm Hexagon 1/4" SW6	
0	1 x Bit holder magnetic 60 mm 1/4"extra s box	strong magnet in
	1 x FlipSelector	
* compared to	Wiha standard bit	

ozidriv, TORX®, 14-pcs., 1/4" C6,3	SB7947T906
	Ť
	6
•	
1 x T-Bit 25 mm Pozidriv 1/4" PZ2	
TORX [®] 1/4" T15 / 1 x T-Bit 25 mm TORX [®] 1	/4" T20 / 1 x
1 x Bit holder magnetic 60 mm 1/4"extra str box	ong magnet in
1 x FlipSelector	•
	1 x T-Bit 25 mm TORX [®] 1/4" T10 / 1 x T-Bit TORX [®] 1/4" T15 / 1 x T-Bit 25 mm TORX [®] 1 T-Bit 25 mm TORX [®] 1/4" T25 / 1 x T-Bit 25 1/4" T30 / 1 x T-Bit 25 mm TORX [®] 1/4" T40 1 x Bit holder magnetic 60 mm 1/4"extra str box

compared to Wiha standard bit

assorted	14-pcs. 1/4" C6,3	SB7947T999
Order-No.	í	-
41826		6
Ð	1 x T-Bit 25 mm Phillips 1/4" PH1 / 1 x T-B Phillips 1/4"PH2 / 1 x T-Bit 25 mm Phillips 1	
*	1 x T-Bit 25 mm Pozidriv 1/4" PZ2	
۲	1 x T-Bit 25 mm TORX [®] 1/4" T15 / 1 x T-Bit TORX [®] 1/4" T20 / 1 x T-Bit 25 mm TORX [®] 1 T-Bit 25 mm TORX [®] 1/4" T30 / 1 x T-Bit 25 1/4" T40	/4" T25 / 1 x
۲	1 x T-Bit 25 mm Hexagon 1/4" SW4 / 1 x T-f Hexagon 1/4" SW5 / 1 x T-Bit 25 mm Hexag	
0	1 x Bit holder magnetic 60 mm 1/4"extra stro box	ong magnet in
	1 x FlipSelector	

* compared to Wiha standard bit

XLSelector Y bit set, 50 mm

XLSelector Y bit set, 25 mm



Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for Y-shaped screws(*compared to Wiha standard bit) **Lowers your costs:** Bit quick and easy to find thanks to yellow marking – even in dark environments by using an UV light. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan.



UV IMPACT Perfect

Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for Y-shaped screws(*compared to Wiha standard bit) Lowers your costs: Bit quick and easy to find thanks to yellow marking – even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan.

Phillips, F	Pozidriv, TORX [®] , 14-pcs., 1/4" E6,3	SB7948Y950
Order-No.		
41834		6
Ð	2 x Y-Bit 50 mm Pozidriv 1/4" PH2	
*	1 x Y-Bit 50 mm Pozidriv 1/4" PZ1 / 2 Pozidriv 1/4" PZ2 / 1 x Y-Bit 50 mm F	
۲	1 x Y-Bit 50 mm TORX [®] 1/4" T10 / 1 TORX [®] 1/4" T15 / 1 x Y-Bit 50 mm TO Y-Bit 50 mm TORX [®] 1/4" T25 / 1 x Y- 1/4" T30 / 1 x Y-Bit 50 mm TORX [®] 1/	DRX® 1/4" T20 / 1 x Bit 50 mm TORX®
0	1 x Bit holder magnetic 58 mm 1/4"	
	1 x XLSelector	
* compared to	Wiha standard bit	

	32-pcs. 1/4" C6,3	SB7948Y505
Order-No).	
41833		6
۲	3 x Y-Bit 25 mm TORX® 1/4" T10 / 6 x TORX® 1/4" T15 / 6 x Y-Bit 25 mm TO Y-Bit 25 mm TORX® 1/4" T25 / 6 x Y-E 1/4" T30 / 3 x Y-Bit 25 mm TORX® 1/4	IRX® 1/4" T20 / 6 x Bit 25 mm TORX® 4" T40
0	1 x Bit holder magnetic 58 mm 1/4"	
	1 x XLSelector	
* compared	to Wiha standard bit	

Phillips, P	ozidriv, TORX [®] , 32-pcs., 1/4" C6,3	SB7948Y904	
Order-No.			
41832		6	
Ð	1 x Y-Bit 25 mm Phillips 1/4" PH1 / 4 x Y-I Phillips 1/4" PH2 / 1 x Y-Bit 25 mm Phillip		
*	2 x Y-Bit 25 mm Pozidriv 1/4" PZ1 / 4 x Y- Pozidriv 1/4" PZ2 / 2 x Y-Bit 25 mm Pozidri	Bit Lo iiiii	
۲	2 x Y-Bit 25 mm TORX® 1/4" T10 / 3 x Y-E TORX® 1/4" T15 / 3 x Y-Bit 25 mm TORX® Y-Bit 25 mm TORX® 1/4" T25 / 3 x Y-Bit 2 1/4" T30 / 2 x Y-Bit 25 mm TORX® 1/4" T4	5 / 3 x Y-Bit 25 mm TORX® 1/4" T20 / 3 x DRX® 1/4" T25 / 3 x Y-Bit 25 mm TORX®	
0	1 x Bit holder magnetic 58 mm 1/4"		
	1 x XLSelector		

* compared to Wiha standard bit







旨

6

SB7947Y904

Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for Y-shaped screws(*compared to Wiha standard bit) **Lowers your costs:** Bit quick and easy to find thanks to yellow marking – even in dark environments by using an UV light. **Saves time:** Simple and rapid bit removal thanks to clear organisation and automatic opening at the push of a button. **Saves time:** No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan.

Order-No.

41827

Ð

۲

0

Pozidriv	14-pcs. 1/4" C6,3	SB7947Y202
Order-No		÷
41829		6
*	2 x Y-Bit 25 mm Pozidriv 1/4" PZ1 / 8 x Y-Bit Pozidriv 1/4" PZ2 / 2 x Y-Bit 25 mm Pozidriv	20
0	1 x Bit holder magnetic 60 mm 1/4"extra stro box	ong magnet in
	1 x FlipSelector	
* compared	to Wiha standard bit	

TORX [®] 14	-pcs. 1/4" C6,3	SB7947Y505
Order-No.		(m)
41828		6
۲	2 x Y-Bit 25 mm TORX [®] 1/4" T10 / 2 x Y TORX [®] 1/4" T15 / 3 x Y-Bit 25 mm TORX Y-Bit 25 mm TORX [®] 1/4" T25 / 2 x Y-Bit 1/4" T30 / 1 x Y-Bit 25 mm TORX [®] 1/4"	(* 1/4" T20 / 2 x 25 mm TORX*
0	1 x Bit holder magnetic 60 mm 1/4"extra box	strong magnet in
	1 x FlipSelector	
* compared to	Wiha standard bit	

* compared to Wiha standard bit

box

1 x FlipSelector

Phillips, Pozidriv, TORX®, 14-pcs., 1/4" C6,3

1 x Y-Bit 25 mm Phillips 1/4" PH2

1 x Y-Bit 25 mm Pozidriv 1/4" PZ1 / 2 x Y-Bit 25 mm

Pozidriv 1/4" PZ2 / 1 x Y-Bit 25 mm Pozidriv 1/4" PZ3 1 x Y-Bit 25 mm TORX[®] 1/4" T10 / 1 x Y-Bit 25 mm TORX[®] 1/4" T15 / 1 x Y-Bit 25 mm TORX[®] 1/4" T20 / 1 x

Y-Bit 25 mm TORX® 1/4" T25 / 1 x Y-Bit 25 mm TORX®

1 x Bit holder magnetic 60 mm 1/4"extra strong magnet in

1/4" T30 / 1 x Y-Bit 25 mm TORX® 1/4" T40

Bit set XLSelector Standard 25 mm

assorted 32-pcs. 1/4" C6,3

Order-No.

29417

 \rightarrow

₽ *****

۲

0

Bit set FlipSelector Standard 25 mm



Meets your requirements: Robust and precise bits for general fastening in trade and industry. Increases your efficiency: All standard 25 mm bits organised in a compact, space-saving design. Saves time: Simple and quick recognition of profile sizes thanks to contrasting laser marking.



32-pcs. 1/4" C6,3	7948005	Mixed, 15	-pcs. 1/4" C6,3 with belt clip	SB7947999
	#	Order-No.	SB	
	5	39083	Х	5
1 x 4.5 mm / 1 x 5.5 mm / 1 x 6.5 n	nm	.)	1 x 5.5 mm	
2 x PH1 / 4 x PH2 / 1 x PH3		₽	1 x PH2	
2 x PZ1 / 5 x PZ2 / 1 x PZ3		*	1 x PZ1 / 1 x PZ2 / 1 x PZ3	
2 x T10 / 2 x T15 / 2 x T20 / 3 x T2		۲	1 x T15 / 1 x T20 / 1 x T25 / 1 x T	Г30
1 x Bit holder magnetic 58 mm 1/4"		۲	1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0	
1 x XLSelector		0	1 x Bit holder magnetic 58 mm 1/	
			1 x Belt clip	
			1 x FlipSelector	

assorted 32-pcs. 1/4" C6,3 7948927 Order-No. = 29416 5 1 x 0 / 1 x 1 / 1 x 2 / 1 x 3 / 1 x 4 A • 1 x 4 / 1 x 6 / 1 x 8 / 1 x 10 1 x TR2,0 / 1 x TR2,5 / 1 x TR3,0 / 1 x TR4,0 / 1 x TR5,0 \odot / 1 x TR6,0 £ 1 x 6 / 1 x 8 / 1 x 10 1 x T8H / 1 x T9H / 1 x T10H / 1 x T15H / 1 x T20H / 1 x ۲ T25H / 1 x T27H / 1 x T30H / 1 x T40H Ì) 1 x #1 / 1 x #2 / 1 x #3 1 x CentroFix quick change holder, magnetic, form E 6.3 1 x XLSelector

Slotted, Phillips, Pozidriv, 13-pcs., 1/4" with belt

clip			947005
Order-No.	SB	==	
39049	x	5	
.)	1 x 5.5 mm		
Ð	1 x PH1 / 3 x PH2 / 1 x PH3		
*	1 x PZ1 / 4 x PZ2 / 1 x PZ3		
0	1 x Bit holder magnetic 58 mm 1/4"		
	1 x Belt clip		
	1 x FlipSelector		

Phillips, Pozidriv, TORX®, 15-pcs., 1/4" with belt

clip		SB7947904
Order-No.	SB .	
39060	X	5
Ð	2 x PH2	
*	1 x PZ1 / 2 x PZ2	
۲		′ 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
0	1 x Bit holder mag	
	1 x Belt clip	
	1 x FlipSelector	

Pozidriv	ı, TORX [®] 14-pcs. 1/4" C6,3	7947905
Order-No		益
39041		10
*	1 x PZ1 / 2 x PZ2 / 1 x PZ3	
۲	1 x T10 / 1 x T15 / 2 x T20 / 2 x T25 / ⁻	1 x T30 / 1 x T40
0	1 x Bit holder magnetic 58 mm 1/4"	
	1 x FlipSelector	



TORX®, 15	5-pcs., 1/4" C6,3 with	belt clip SB7947505
Order-No.	SB	A state of the
39056	х	5
۲	1 x T7 / 1 x T8 / 1 x T25 / 1 x T30 / 1 x T	T9 / 1 x T10 / 2 x T15 / 2 x T20 / 2 x 40
0	1 x Bit holder magne	tic 58 mm 1/4"
	1 x FlipSelector	
	1 x Belt clip	

TORX[®] Tamper Resistant (with drill hole), 15-pcs., 1/4" C6,3 with belt clip

Order-No.	SB	
39057	Х	5
۲	1 x T7H / 1 x T8H / T20H / 2 x T25H / 1	1 x T9H / 1 x T10H / 2 x T15H / 2 x
0	1 x Bit holder magn	
	1 x FlipSelector	
	1 x Belt clip	

1 x 1.5 mm / 1 x 2.0 mm / 1 x 2.5 mm / 2 x 3.0 mm / 2 x

4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm / 1 x 8.0 mm

1 x Bit holder magnetic 58 mm 1/4"

SB7947505TR

SB7947902

(==)

5

High-performance offset screwdriver with quick release holder 1/4"



Increases your efficiency: Unlimited access to hard-to-reach screws thanks to the 105°-angled tool head. **Increases your safety:** Variably settable stabiliser arm.

1/4" in blister pack 24							24628
Order-No.		\bigcirc	mm	max. Nm	SB	==	
32310	1/4"	1/4"	165	57.0	х	1	

Bit holder CentroFix mechanically lockable



Simplifies your work: Ideal for all applications due to the non-magnetic locking mechanism . Increases your efficiency: Extremely secure and tight zero-play hold of bits.

1/4" in bo						7148
Order-No.	0		mm	SB		
32477	1/4"	1/4"	60	х	10	

Bit holder CentroFix Super Slim mechanically lockable



Increases your efficiency: Unlimited access to deep-set screws thanks to extreme slimline design. **Saves time:** Automatic bit locking mechanism upon insertion.

1/4" in bo						7148CS
Order-No.	0		mm	SB		
39134	1/4"	1/4"	66	х	10	

Bit holder magnetic, clamping with retaining ring



Simplifies your work: Unrestricted access to low-lying screws thanks to bit holder lengths of up to 250mm. Increases your efficiency: Unlimited access to deep-set screws thanks to extreme slimline design.

1/4"					7143
Order-No.	0		mm	==	
01913	1/4"	1/4"	72	2	
36092	1/4"	1/4"	100	5	
34306	1/4"	1/4"	150	5	
36093	1/4"	1/4"	200	5	
36094	1/4"	1/4"	250	5	

Bit set FlipSelector Standard 25 mm

Hex, 15-pcs., 1/4" C6,3 with belt clip

SB .

Х

1 x Belt clip 1 x FlipSelector

Order-No.

39059

۲

0



Meets your requirements: Robust and precise bits for general fastening in trade and industry. **Saves time:** Simple and quick recognition of profile sizes thanks to contrasting laser marking.

SIT (for Assy[®] and Pias screws), 14-pcs., 1/4"

C6,3	7947995	
Order-No.		
39045	10	
۲	2 x SIT 10 / 4 x SIT 20 / 3 x SIT 25 / 2 x SIT 30 / 1 x SIT 40	
0	1 x Bit holder magnetic 58 mm 1/4"	
	1 x FlipSelector	





Meets your requirements: Robust and precise bits for general fastening in trade and industry. **Increases your efficiency:** Best rotation characteristics for stable fastening processes. **Saves time:** Simple and quick recognition of profile sizes thanks to contrasting laser marking.

Slotted 1/4" E6,3					L
Order-No.	0	mm	8	í ∺	
33961	2.5	70	0.4	5	
01790	3.0	50	0.5	5	
33962	3.0	70	0.5	5	
01792	3.5	50	0.6	5	
33963	3.5	70	0.6	5	
01791	4.0	50	0.5	5	
01794	4.0	50	0.8	5	
33964	4.0	70	0.8	5	
01793	4.5	50	0.6	5	
01795	5.5	50	0.8	5	
01796	5.5	50	1.0	5	
33965	5.5	70	1.0	5	
01798	6.5	50	1.2	5	
33966	6.5	70	1.2	5	
01799	8.0	50	1.2	5	
01800	8.0	50	1.6	5	

Phillips 1/	/4" E6,3		7041Z
Order-No.	Æ	mm	
31960	PH00	50	5
31961	PH00	70	5
31962	PH00	90	5
32105	PH0	50	5
35456	PH0	70	5
35457	PH0	90	5
33703	PH1	50	5
01803	PH1	70	5
04126	PH1	90	5
23213	PH1	110	5
23219	PH1	127	5
22509	PH1	150	5
33704	PH2	50	5
01805	PH2	70	5
04009	PH2	90	5
05800	PH2	110	5
06888	PH2	127	5
22510	PH2	150	5
33705	PH3	50	5
04010	PH3	70	5
04127	PH3	90	5
23215	PH3	110	5
23217	PH3	127	5
22511	PH3	150	5

Pozidriv 1	Pozidriv 1/4" E6,3 7042Z			
Order-No.		••	Ĥ	
31957	PZ0	50	5	
31958	PZ0	70	5	
31959	PZ0	90	5	
33706	PZ1	50	5	
01808	PZ1	70	5	
01809	PZ1	90	5	
23221	PZ1	110	5	
23225	PZ1	127	5	
23227	PZ1	150	5	
33707	PZ2	50	5	
01811	PZ2	70	5	
01812	PZ2	90	5	
05799	PZ2	110	5	
06889	PZ2	127	5	
23228	PZ2	150	5	
33708	PZ3	50	5	
04059	PZ3	70	5	
04176	PZ3	90	5	
23223	PZ3	110	5	
23226	PZ3	127	5	
22512	PZ3	150	5	

•	7049PHM	
æ	*mm*	(iii)
SL/PH1	50	5
SL/PH1	70	5
SL/PH1	90	5
SL/PH2	50	5
SL/PH2	70	5
SL/PH2	90	5
	SL/PH1 SL/PH1 SL/PH1 SL/PH2 SL/PH2 SL/PH2 SL/PH2	SL/PH1 70 SL/PH1 90 SL/PH2 50 SL/PH2 70

PlusMinus/Pozidriv 1/4" E6,3

		•	
Order-No.	(#	*mm*	
32494	SL/PZ1	50	5
32495	SL/PZ1	70	5
32688	SL/PZ1	90	5
	SL/PZ2	50	5
	SL/PZ2	70	5
32689	SL/PZ2	90	5

7049PZM



TORX [®] ba	ll end 1/	′4" E6,3	7045BE
Order-No.	۲	** mm	
32410	T10	50	5
32416	T10	70	5
32417	T15	50	5
32418	T15	70	5
	T20	50	5
32419	T20	70	5
32412	T25	50	5
32421	T25	70	5
32413	T27	50	5
32414	Т30	50	5
32423	T30	70	5
32415	T40	50	5

	TORX® MagicSpring® 1/4" E6,3			
	mm			
T10	50	5		
T15	50	5		
T20	50	5		
T25	50	5		
Т30	50	5		
T40	50	5		
	T10 T15 T20 T25 T30 T40	T20 50 T25 50		

TORX® Ta	TORX® Tamper Resistant (with hole) 1/4" E6,3 7045ZH				
Order-No.		* *			
21045	T7H	50	5		
21047	T8H	50	5		
20218	T9H	50	5		
20219	T10H	50	5		
39188	T10H	90	5		
24867	T15H	50	5		
39189	T15H	90	5		
20220	T20H	50	5		
39190	T20H	90	5		
20221	T25H	50	5		
39191	T25H	90	5		
20222	T27H	50	5		
39192	T27H	90	5		
20223	Т30Н	50	5		
39193	Т30Н	90	5		
20224	T40H	50	5		
39194	T40H	90	5		

	- E0,3		7045Z
Order-No.		mm	
39184	T1	50	5
39185	T2	50	5
39186	Т3	50	5
39187	Τ4	50	5
32299	Τ5	50	5
32302	Т6	50	5
33709	T6	70	5
33717	T6	90	5
	T6	150	5
38370	T7	50	5
32303	T7	70	5
33710	T7	90	5
33718 38371	T7	150	5
32304	T8	50	5
	T8	70	5
33711			
33719	T8	90	5
36327	T8	150	5
32305	T9	50	5
33712	T9	70	5
33720	Т9	90	5
38372	Т9	150	5
32306	T10	50	5
33713	T10	70	5
33721	T10	90	5
33725	T10	110	5
33726	T10	150	5
32307	T15	50	5
33714	T15	70	5
33722	T15	90	5
33727	T15	110	5
33728	T15	150	5
32308	T20	50	5
33715	T20	70	5
33723	T20	90	5
33729	T20	110	5
33730	T20	150	5
32309	T25	50	5
33716	T25	70	5
33724	T25	90	5
33731	T25	110	5
33732	T25	150	5
33920	T27	50	5
33921	T27	70	5
33922	T27	90	5
33923	Т30	50	5
33924	T30	70	5
33925	T30	90	5
33926	T30	110	5
33927	T30	150	5
	T40	50	5
33928	T40		5
33929 33930		70	
	T40 T40	90	5
33931		110	5
33932	140	150	5

TORX[®] 1/4" E6,3

7045Z

TORX PLU	JS® 1/4" E6,3		7046Z
Order-No.	۲	mm	
28481	5IP	50	5
26000	6IP	50	5
26002	7IP	50	5
23195	8IP	50	5
23197	91P	50	5
23199	10IP	50	5
23201	15IP	50	5
23203	20IP	50	5
23205	25IP	50	5
23207	27IP	50	5
23209	30IP	50	5
23211	40IP	50	5

'nm

Torq-Set® 1/4" E6,3

Order-No.

Order-No.		mm	ίθ.
05301	1.5	50	5
05302	2.0	50	5
34554	2.0	70	5
39178	2.0	90	5
05303	2.5	50	5
34555	2.5	70	5
39179	2.5	90	5
04194	3.0	50	5
34556	3.0	70	5
39180	3.0	90	5
04195	4.0	50	5
34557	4.0	70	5
39181	4.0	90	5
04196	5.0	50	5
34558	5.0	70	5
39182	5.0	90	5
04197	6.0	50	5
34559	6.0	70	5
39183	6.0	90	5
04198	8.0	50	5
34560	8.0	70	5

7043Z

Hexagon 1/4" E6,3

7049ZOTTS


==

Hexagonal ball end MagicRing® 1/4" E6,3 7047ZR			
Order-No.	\bigcirc	mm	
25739	3.0	50	5
25740	4.0	50	5
25741	5.0	50	5
25742	6.0	50	5

MagicRing® hex 1/4" E6,3 7043ZR			
Order-No.		*m*	
23145	3.0	50	5
23147	4.0	50	5
23149	5.0	50	5
23151	6.0	50	5


Internal square 1/4" E6,3			7048	
		mm	(mm)	
#1	2.3	50	5	
#3	3.3	90	5	
#1	2.3	90	5	
#2	2.8	50	5	
#2	2.8	90	5	
#3	3.3	50	5	
	#1 #3 #1 #2 #2	Image: Constraint of the second sec	Image: Constraint of the second sec	Image: Constraint of the state of



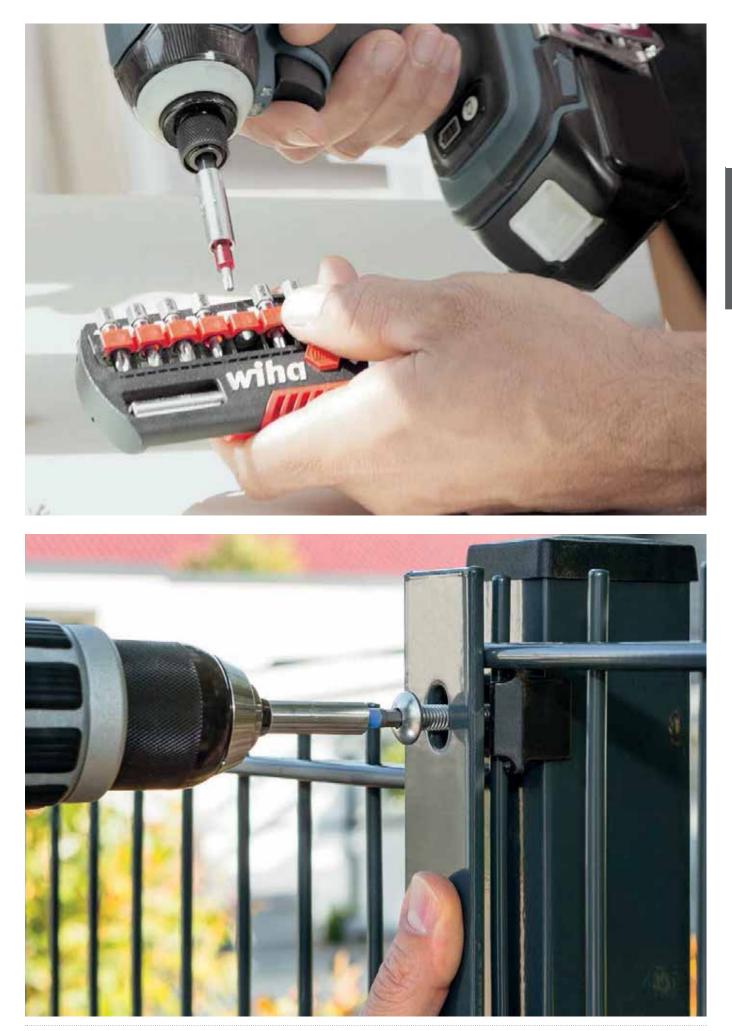



Perfect order when fast work is required.

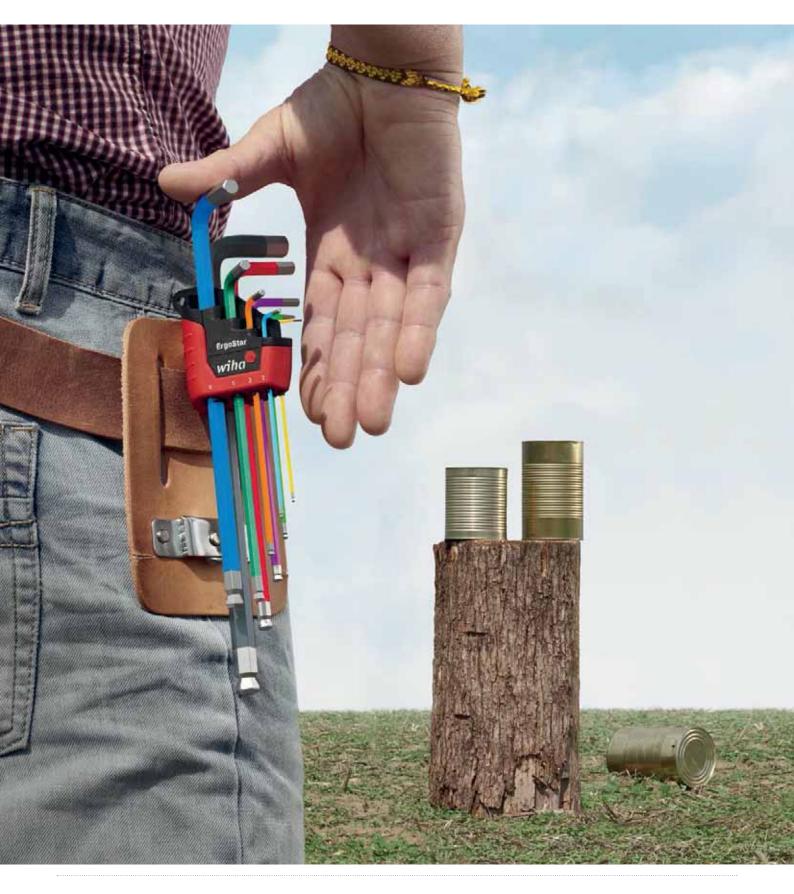

Perfect order and easy handling - the ErgoStar L-key holder provides both: Rotating a single L-key in the holder means that all other keys rotate at the same angle! Keys sitting next to each other no longer need to be disentangled. Instead, all keys are ready for removal with one turn - as fast and easy as never before. The keys of the ErgoStar also help to make work significantly easier: The Wiha L-key set, made of fully hardened chrome vanadium steel, includes an innovation that will convince everyone. A spring steel ring holds hexagon screws reliably.

• Simplifies your work

The ball end facilitates access to screws and allows you to work at an angle of up to 25°.

- Increases your efficiency Wiha MagicRing[®] retaining function holds all screws firmly in place – without any magnets.
- Makes handling easier
 Always the correct key when you need it.

Saves time

Ensures order: removing and targeted insertion in the holder is child's play.







Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. Lowers your costs: Reduces the risk of forgetting and leaving keys inside a machine and causing damage. Makes handling easier: Always the right key in the right place with the ErgoStar holder. Saves time: Ensures order: removal and targeted insertion in the holder is child's play. Increases your efficiency: The colored L-keys are quick and easy to find. Thanks to their luminescent paint, they can even be retrieved in the dark with the Wiha flashlight with UV light function. This means it takes less time to find lost L-keys, while the risk of machine damage due to tools left inside machines is minimized. The hexagonal ball end of the L-keys enables users to fasten and unfasten effortlessly at an angle of up to 25°. Increases your efficiency: The required key width can be quickly found thanks to colour coding. Increases your efficiency: Wiha MagicRing® holding feature holds all hex screws in place without a magnet.



Focus Open 2021 Silver

hexagonal ball Magicring® 10-pcs. in flourescent colour in blister pack		
Order-No.	SB	Ĥ
43850	X	5
	ErgoStar holder	
۲	1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm	

INFOBOX: Tools in fluorescent





colour

- Coloured bits and ErgoStar with coloured L-keys light up under a UV light.
- Ensuring misplaced tools are quickly and easily found again.
- The Wiha flashlight with a UV light makes the perfect complement to coloured fluorescent tools.

INFOBOX: ErgoStar




	-
E MARKAGE	204.0

The right L-key after just one turn.

- One turn of any L-key and all L-keys are ready for removal.
- Solid stopping point for fixing L-keys in the holder.
- Innovative clamping ensures L-keys are held firmly in both a closed and open position.
- Compact design saves space on the work bench or in the toolbox.




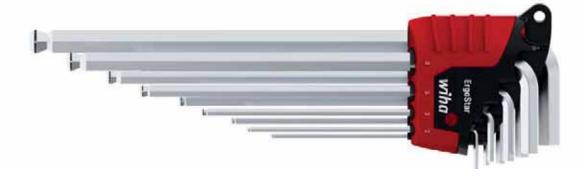

Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. Makes handling easier: Always the correct key when you need it. Saves time: Ensures order: removal and targeted insertion in the holder is child's play. Increases your efficiency: Wiha MagicRing[®] holding feature holds all hex screws in place without a magnet. Lowers your costs: Highly durable thanks to high-quality, chrome-plated L-key surface to prevent corrosion.

Hexagona	Hexagonal ball end MagicRing [®] , 10-pcs., matt chrome-plated in blister pack SB369RH90			
Order-No.	SB.	#		
43851	X	5		
۲	1 x 1.5 mm / 1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm / 1 x 8.0 mm / 1 x 10.0 mm			
1 x ErgoStar holder				

MagicRing[®] from size 3 mm. Based on ISO 2936L.

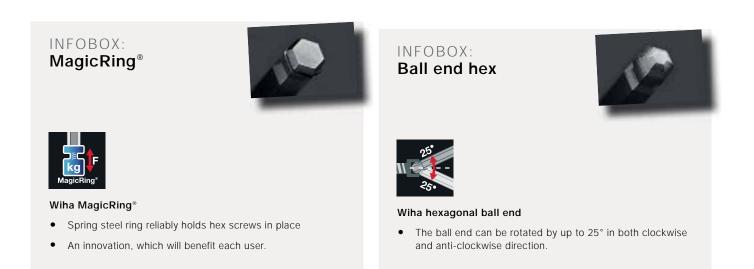

L-key set in Compact holder

L-key set in ErgoStar holder



Saves space: All standard keys organised in a compact, space-saving design. Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. Lowers your costs: Highly durable thanks to high-quality, chrome-plated L-key surface to prevent corrosion.

Hexagonal ball end, 10-pcs., matt chrome-plated SB369H			9H9
Order-No.	SB	Ĥ	
02292	Х	5	
	4.0 mm / 1 x 5.0 10.0 mm	2.0 mm / 1 x 2.5 mm / 1 x 3.0 mm / 1 mm / 1 x 6.0 mm / 1 x 8.0 mm / 1 x	
	1 x Compact hold		

Based on ISO 2936L





Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. Makes handling easier: Always the correct key when you need it. Saves time: Ensures order: removal and targeted insertion in the holder is child's play.

TORX® ball end, 14-pcs., black oxidised SB366BEHZ1		k oxidised SB366BEHZ1301
Order-No.	SB	Ê
43847	X	5
۲		T7 / 1 x T8 / 1 x T9 / 1 x T10 / 1 x 25 / 1 x T27 / 1 x T30 / 1 x T40 / 1 x
	1 x ErgoStar holder	
TORX [®] ball end starting from size T9		

TORX[®] ball end starting from size T9

INFOBOX: TORX[®] ball end





Wiha TORX® ball end

- With optimised TORX[®] ball end geometry
- Increased strength thanks to the special cold forming on a . system developed by Wiha especially for this purpose.
- ٠ Allows fastening and unfastening at angles up to 25°.
- Simple insertion of the tool/bit and fastening/ unfastening, ٠ especially in hard-to-reach positions.
- Broad product range: As an L-key, as a bit and as a ٠ SoftFinish® screwdriver.



L-key set in ErgoStar holder





Makes handling easier: Always the correct key when you need it. Saves time: Ensures order: removal and targeted insertion in the holder is child's play. Increases your efficiency: Wiha MagicSpring* holding feature holds all Torx* screws in place without a magnet.

TORX® MagicSpring®, 14-pcs. in blister pack, black oxidised

black oxidised		SB366RHZ1301
Order-No.	SB	
43848	Х	5
۲		T7 / 1 x T8 / 1 x T9 / 1 x T10 / 1 x 25 / 1 x T27 / 1 x T30 / 1 x T40 / 1 x
	1 x ErgoStar holder	

Fastening / jamming

INFOBOX: MagicSpring®





Wiha TORX® MagicSpring®

- TORX[®] and TORX PLUS[®] screws are held securely in place.
- An innovation, which will benefit each user.



Tight fastening – easy opening.



Tightening and installation work requires many different profiles. Wiha precisely offers the required equipment and presents every user with a wide range of tools. The various nut driver and bit sets, as well as ring ratchet open-ended spanner sets, fastenings of all types can be easily tightened and opened. The extensive equipment range extends from a SoftFinish® screwdriver, various bits and bit holders, up to ratchet wrenches, extensions, and universal joints. The range is complemented by various ring ratchet open spanners. When it comes to flexibility and efficiency, the ratchet wrenches from Wiha are particularly distinguished by a variably selectable rotational direction as well as fine gearing with 72 gear teeth.

- Increases your efficiency Fastening without interruption thanks to a finely toothed ratchet wrench.
- Increases your flexibility Variably adjustable right or left rotation through switching lever.
- Meets your requirements Precise fitting, robust, and easy to clean.
- Increases your efficiency All main tools quickly available, always at hand.









Increases your flexibility: Variably adjustable right or left rotation through switching lever. Increases your efficiency: Fastening without interruption thanks to a finely toothed ratchet wrench. Simplifies your work: All tools securely arranged in a robust and clearly laid out L Boxx. Increases your efficiency: The combination of all standard nut driver sizes and various bits in a sorting system based on the L Boxx, accommodates all work activities and easy mobility. Meets your requirements: Precise fitting, robust, and easy to clean.

60 pcs. incl. L Boxx

60 pcs. i	ncl. L Boxx	33397
Order-No		(
44685		1
	Ratchet wrench for nut drivers 1/4" switchable 1/4" x 128 mm (44666) / 1/2" x 257 mm (44709)	
0	Nut driver insert 1/4" hexagon head 4.0 mm (44669) / 5.0 mm (44670) / 5.5 mm (44671) / 6.0 mm (44672) 8.0 mm (44674) / 9.0 mm (44675) / 10.0 mm (44676) / 11.0 mm (44678) / 12.0 mm (44679) / 13.0 mm (44	
0	Nut driver insert 1/2" double hex 10.0 mm (44715) / 11.0 mm (44716) / 12.0 mm (44717) / 13.0 mm (4471 15.0 mm (44720) / 16.0 mm (44721) / 17.0 mm (44722) / 18.0 mm (44723) / 19.0 mm (44724) / 21.0 mm / 24.0 mm (44729) / 27.0 mm (44732) / 30.0 mm (44735) / 32.0 mm (44737) / 34.0 mm (44738)	, , , ,
	Extension 1/4" for nut driver inserts 75 mm (44667) / 150 mm (44668)	
	Extension 1/2" for nut driver inserts 150 mm (44711) / 250 mm (44712)	
80	Universal joint with ball Internal square, square head 1/4" (44682) / 1/2" (44739)	
0	Screwdriver with bit holder SoftFinish® magnetic 1/4" 112 mm (32160)	
0	Bit holder CentroFix Force mechanically lockable 1/4", magnetic in box 60 mm (39133)	
.)	Bit Standard 25 mm Slotted 1/4" C6,3 4.5 mm (01623) / 5.5 mm (01624) / 6.5 mm (01626)	
Ð	Bit Standard 25 mm Phillips 1/4" C6,3 PH1 (01657) / PH2 (01658)	
*	Bit Standard 25 mm Pozidriv 1/4" C6,3 PZ1 (01688) / PZ2 (01689) / PZ3 (01690)	
۲	Bit Standard 25 mm TORX® 1/4" C6,3 T10 (01716) / T15 (01717) / T20 (01718) / T25 (01719) / T27 (01720 (01722)	0) / T30 (01721) / T40
۲	Bit Standard 25 mm Hexagon 1/4" C6,3 3.0 mm (01705) / 4.0 mm (01706) / 5.0 mm (01707) / 6.0 mm (01	708)
	Tool shaft with ball Square, Internal hexagon 1/4" C6,3 (01933)	
	L-BOXX	







Increases your flexibility: Variably adjustable right or left rotation through switching lever. Increases your efficiency: Fastening without interruption thanks to a finely toothed ratchet wrench. Simplifies your work: All tools securely arranged in a robust, orderly bag. Makes handling easier: Simple to hook on to work trousers thanks to the high quality clip holder. Increases your efficiency: All main tools quickly available, always at hand. Meets your requirements: Precise fitting, robust, and easy to clean.



40 pcs. i	ncl. multifunctional bag with belt clip	33394
Order-No.		Ĥ
44684		1
	Ratchet wrench for nut drivers 1/4" switchable 128 mm (44666)	
0	Nut driver insert 1/4" hexagon head 4.0 mm (44669) / 4.5 mm (44677) / 5.0 mm (44670) / 5.5 mm (44671) / 7.0 mm (44673) / 8.0 mm (44674) / 9.0 mm (44675) / 10.0 mm (44676) / 11.0 mm (44678) / 12.0 mm (4467 14.0 mm (44681)	()
	Extension 1/4" for nut driver inserts 75 mm (44667) / 150 mm (44668)	
EO	Universal joint with ball Internal square, square head 1/4" (44682)	
0	Screwdriver with bit holder SoftFinish® magnetic 1/4" 112 mm (32160)	
0	Bit holder CentroFix Force mechanically lockable 1/4", magnetic in box 60 mm (39133)	
→	Bit Standard 25 mm Slotted 1/4" C6,3 4.5 mm (01623) / 5.5 mm (01624) / 6.5 mm (01626)	
₽	Bit Standard 25 mm Phillips 1/4" C6,3 PH1 (01657) / PH2 (01658)	
*	Bit Standard 25 mm Pozidriv 1/4" C6,3 PZ1 (01688) / PZ2 (01689) / PZ3 (01690)	
۲	Bit Standard 25 mm TORX® 1/4" C6,3 T10 (01716) / T15 (01717) / T20 (01718) / T25 (01719) / T27 (01720) (01722)	/ T30 (01721) / T40
۲	Bit Standard 25 mm Hexagon 1/4" C6,3 3.0 mm (01705) / 4.0 mm (01706) / 5.0 mm (01707) / 6.0 mm (017	08)
	Tool shaft with ball Square, Internal hexagon 1/4" C6,3 (01933)	
	Tool Belt Pouch	

Ring ratchet open-ended spanner set

Ring ratchet open-ended spanner set







Increases your efficiency: Fastening without interruption thanks to a finely toothed ring ratchet. **Increases your flexibility:** Variably adjustable right or left rotation through switching lever. **Simplifies your work:** With a convenient holder for clearly arranged storage and easy withdrawal. **Increases your efficiency:** Improved accessibility in confined spaces thanks to 15° jaw positioning and double hex ring ratchet.

13 pcs. switchable, with holder		303190
Order-No	Э.	
44661		1
	Ring ratchet open-end spanner Switcha (44641) / 9 mm x 9 mm (44642) / 10 mr (44644) / 11 mm x 11 mm (44645) / 12 (44646) / 13 mm x 13 mm (44647) / 14 (44648) / 15 mm x 15 mm (44789) / 16 (44649) / 17 mm x 17 mm (44650) / 18 (44651) / 19 mm x 19 mm (44652)	m x 10 mm mm x 12 mm mm x 14 mm mm x 16 mm
	holder	

Based on DIN 3124



Increases your efficiency: Fastening without interruption thanks to a finely toothed ring ratchet. **Simplifies your work:** With a convenient holder for clearly arranged storage and easy withdrawal. **Increases your efficiency:** Improved accessibility in confined spaces thanks to 15° jaw positioning and double hex ring ratchet.

13 pcs. with holder		30391
Order-No.	. 🔛	
44665	1	
	Ring ratchet open-end spanner 8 mm x 8 mm (446 9 mm x 9 mm (44639) / 10 mm x 10 mm (44640) / x 11 mm (44643) / 12 mm x 12 mm (44653) / 13 m 13 mm (44654) / 14 mm x 14 mm (44655) / 15 mm 15 mm (44656) / 16 mm x 16 mm (44657) / 17 mm 17 mm (44658) / 18 mm x 18 mm (44659) / 19 mm 19 mm (44660)	11 mm nm x n x n x
	holder	



Double open-end spanner set

wither wither

Ring ratchet open-ended spanner set



HOLDER OFFSET

Simplifies your work: With a convenient holder for clearly arranged storage and easy withdrawal. **Increases your efficiency:** Improved accessibility in confined spaces thanks to 15° jaw positioning.



Increases your efficiency: Fastening without interruption thanks to a finely toothed ratchet wrench. **Simplifies your work:** With a convenient holder for clearly arranged storage and easy withdrawal. **Increases your efficiency:** Improved accessibility in confined spaces thanks to 15° jaw positioning and double hex ring ratchet.

13 pcs. with holder	
Order-No.	#
44753	1
	Double open-end spanner set 6 mm x 7 mm (44741) / 8 mm x 9 mm (44742) / 10 mm x 11 mm (44743) / 12 mm x 13 mm (44744) / 14 mm x 15 mm (44745) / 16 mm x 17 mm (44746) / 18 mm x 19 mm (44747) / 20 mm x 22 mm (44748) / 21 mm x 23 mm (44749) / 24 mm x 27 mm (44750) / 25 mm x 28 mm (44849) / 30 mm x 32 mm (44752)
	holder

Based on DIN 3124

8 pcs. with holder		
Order-No.		
45244		1
	8 mm x 8 mm / 10 mm x 10 mm / 12 mm x 12 mm / 13 mm x 13 mm / 15 mm x 15 mm / 17 mm x 17 mm / 19 mm x 19 mm	






Increases your efficiency: Fastening without interruption thanks to a finely toothed ring ratchet. **Simplifies your work:** With a convenient holder for clearly arranged storage and easy withdrawal. **Increases your efficiency:** Improved accessibility in confined spaces thanks to 15° jaw positioning and double hex ring ratchet.

Order-No. 44664 1 9 mm x 9 mm / 10 mm x 10 mm / 11 mm x 11 mm / 12 mm x 12 mm / 13 mm x 13 mm / 14 mm x 14 mm / 15 mm x 15 mm	8 pcs. with holder		
9 mm x 9 mm / 10 mm x 10 mm / 11 mm x 11 mm / 12 mm x 12 mm / 13 mm x 13 mm / 14 mm x 14 mm / 15 mm x 15 mm			
9 mm x 9 mm / 10 mm x 10 mm / 11 mm x 11 mm / 12 mm x 12 mm / 13 mm x 13 mm / 14 mm x 14 mm / 15 mm x 15 mm	11001	1	
	9 1 1	: 11 mm / n x 14 mm /	
holder	h		



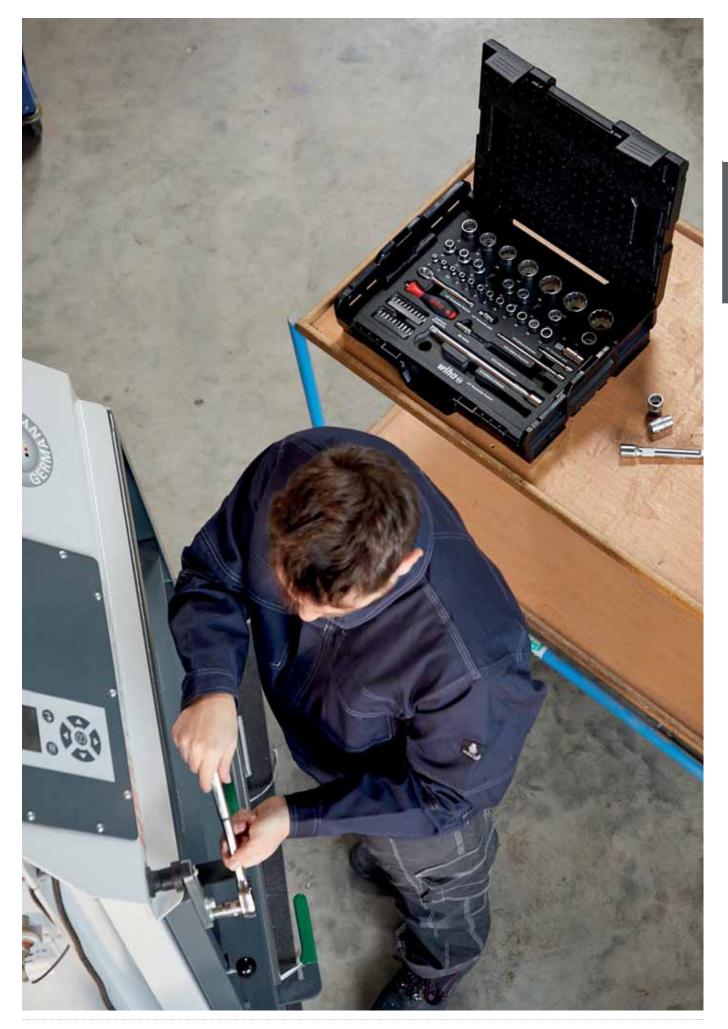



Protect your health

Special DynamicJoint[®] design reduces effort required for cutting.

Protect your health

Wiha pliers are kind to the muscles and ergonomic to work with, permanently reducing wrist strain.

Offers you full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.



Trimming / cutting A cut above the rest with Wiha.

A precise cut at the right time – no problem for Wiha diagonal cutters, heavy-duty diagonal cutters, cable cutters, cable shears and combination pliers. With the perfect combination of high-quality materials and ergonomic comfort, Wiha VDE-tools withstand the toughest demands. Production is in accordance to the state-of-the-art quality management guidelines. A special heat treatment and inductive hardening of the parts under high stress ensure a long lifespan. The precise interaction of the joints and the exacting quality workmanship of the blades and gripping surfaces ensure the highest level of functionality. All Wiha products have been designed according to the latest findings in ergonomics. Ergonomic handles and well thought-out soft and hard zone distribution makes for workthat protects the hands from strain and is comfortable.

"With BiCut[®], I always have sufficient power when cutting - and without aching fingers." Timo Schweitzer





Double your power at the push of a button.





Trimming / cutting

Precise and safe work – at double the power: no problem for the Wiha BiCut[®] Professional electric diagonal cutters. If there is not enough power when cutting, or if cutting is laborious, a simple push of a button is all that is required and the cutting power is doubled. Another push of the button, and the power is halved again – easy! This significantly reduces the risk of cramp or slippage when applying too much force. The extra-wide back for the handle, with perfectly distributed soft and hard zones, ensures the optimum ergonomics. The new Wiha BiCut[®] has already been awarded with the "reddot award 2014winner" for outstanding design quality.

- Increases your efficiency Two pliers in one - 200 % power at the touch of a button, available at any time.
- Protect your health Requires less force and reduces pressure on the wrists.
- Offers you full protection Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.










Increases your efficiency: Two pliers in one - 200 % power at the touch of a button, available at any time. **Protects your health:** Requires less force and reduces pressure on the wrists. **Lowers your costs:** Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.



red<mark>dot</mark> award 2014 winner

Switchable					Z 18 0 06
Order-No.	mm	÷ •	*	Ømm	
38191	200	8"	21	3	5

Manufactured acc. to IEC 60900.

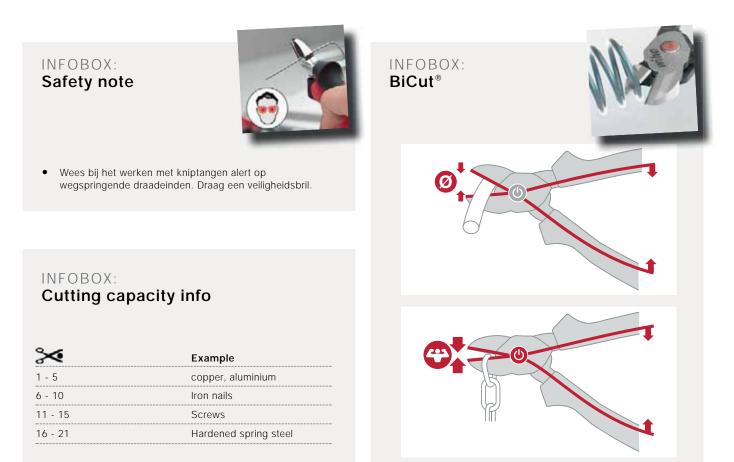





Simplifies your work: The angled head allows you to work in hard-to-reach places such as installation sockets. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Saves money: Now you only need one tool for three tasks: cutting to length, stripping and skinning. Increases your efficiency: Three tools in one. Saves 60% volume and 50% less weight for 100% efficiency. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.



Order-No.	mm	• _ •	×	Ømm	#
38552	170	7"	13	1.6	5

Manufactured acc. to IEC 60900.

INFOBOX: DynamicJoint®





Wiha DynamicJoint $^{\ensuremath{\oplus}}$ – A new dimension in strength and durability

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.

Z 14 1 06



▲1000 V ▲1000 V

Protects your health: Special DynamicJoint[®] design reduces effort required for cutting. Lowers your costs: Durable thanks to highquality, chrome-plated plier surface to prevent corrosion. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.





Simplifies your work: Up to 40% more cutting force thanks to optimised leverage. Protects your health: Special DynamicJoint[®] design reduces effort required for cutting. Protects your health: Reduces strain from continuous work thanks to opening spring. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

						Z 12 1 06
Order-No.	mm	•	\sim	Ømm	==	
43326	140	5 1/2"	15	1.6	5	
43335	160	6 1/2"	16	2	5	
43340	180	7"	17	2.3	5	
Manufacturada						

Manufactured acc. to IEC 60900.

with switchable opening spring Z 16 3 06 Order-No. + 30 Ømm 싙 mm ш 40921 160 6 1/2" 17 2 5 7" 2.5 41274 5 180 18 41279 200 8" 19 2.8 5

Manufactured acc. to IEC 60900.

Cable cutter Professional electric













with switchable opening spring

- Up to 40% more cutting force thanks to optimised leverage.
- Opening spring with on/off function for fatigue-free work.
- Opening spring can be activated with just one hand.

Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Protects your health: Reduces strain from continuous work thanks to opening spring. Increases your efficiency: Clean work thanks to cable cutting without crushing. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with switchable opening spring Z 50 3 0						
Order-No.	mm	•	*	mm²	í	
43660	180	7"	4	50	5	
43662	210	8 1/4"	5	60	5	

Manufactured acc. to IEC 60900.





Trimming / cutting

Z 05 0 06

(mm)

5 5

Increases your efficiency: Extra-long plier head for inserting low-lying components. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

*

16

17

Ømm

1.2

1.6

reduces effort required for cutting. Lowers your costs: Durable thanks Offers you full protection: Each tool individually tested at 10,000 V

-

6 1/2"

8"

with extra long cutting edge 1.4 140 NI 14 A.

AC and approved for 1,000 V AC.

OptiGrip

Order-No.	'nm	•	\sim	Ømm		
26705	160	6 1/2"	15	1.6	5	
26708	180	7"	16	1.8	5	
26711	200	8"	17	2	5	

Manufactured acc. to IEC 60900.

Combination pliers Professional electric with DynamicJoint® and OptiGrip

Simplifies your work: Up to 40% more cutting force thanks to optimised leverage. Increases your efficiency: A secure, non-slip grip in all standard work situations. Protects your health: Special DynamicJoint® design reduces effort required for cutting. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Offers you full protection: Each tool individually

with cutting edge straight shape

mm

160

200

Manufactured acc. to IEC 60900.

Order-No.

26720

26727

Increases your efficiency: Extra-long plier head for inserting low-lying components. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with extra I		Z 02 0 06				
Order-No.	'nm	÷	*	Ømm		
26714	200	8"	18	2.3	5	
26717	225	9"	19	2.5	5	

tested at 10,000 V AC and approved for 1,000 V AC.

Manufactured acc. to IEC 60900.

utting edge curved shape, approx. 40° Z 05 1 06 No. 3 Ømm (==) mm 6 1/2 1.2 5 160 16 17 5 200 8" 1.6

Manufactured acc. to IEC 60900.



xtra long cutting edge Z 02 0 06							
۱o.	mm	÷	*	Ømm			Order-N
	200	8"	18	2.3	5		26728
	225	9"	19	2.5	5		26729



Needle nose pliers Professional electric



Increases your efficiency: A secure, non-slip grip in all standard work

situations. Protects your health: Special DynamicJoint® design

to high-quality, chrome-plated plier surface to prevent corrosion.

Combination pliers Professional electric with DynamicJoint® and



Z 01 0 06

160

6 1/2"

37403

Precision mechanic's diagonal cutters Classic

Meets your requirements: For almost flush cutting of soft and semihard wires. Protects your health: Reduced risk of injury thanks to smooth burr-free finished results, for example with cable ties.

With opening springZ 44 3 01						
Order-No.	mm	• •	*	Ømm		
36189	125	5"	7	0.8	5	

Simplifies your work: Large blade notch and micro-toothed cutting


edge prevent the cable from slipping out of the shears. Increases your efficiency: Shears for electricians with stripping, skinning, crimping & cutting-to-length functions in a single tool. Makes handling easier: The combination between a sturdy blade and an ergonomic handle with extra large handle holes enable users to make a flawless cut into cables up to 50 mm². Increases your safety: Protective cover with retaining clip for safe carrying.

with crimp function in blister pack Z 71 7 06					
Order-No.	mm	mm²	<u> </u>		
41923	160	50	5		

Hacksaw electric

Increases your efficiency: The fine-toothed saw blade allows a clean cut, for example on plastic pipes and metal cable ducts. Makes handling easier: Using the plastic screw, the saw blade can be changed quickly and easily. Makes handling easier: The ergonomic handle is suitable for both right- and left-handed users* Lowers your costs: Durable and sturdy thanks to bimetallic saw blade. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

insulated with three saw blades 150 mm 24					
Order-No.		mm			
43125	150	280	1		



3

5

Meets your requirements: For the smooth and flush cutting of

plastics. Protects your health: Reduced risk of injury thanks to

H	
- Alle	25° 37403
artho =	

Plastic diagonal cutters Classic









and the second se

Increases your efficiency

Wiha gripping pliers enable safe, non-slip gripping in all work situations.

Protect your health

DynamicJoint[®]: Special DynamicJoint[®] design reduces effort required for cutting.

Offers you full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.



Supplying / holding Supplying – completely relaxed.

In the supplying and holding working procedures, Wiha pliers prove to be clever helpers for relaxed and efficient work. For instance, the OptiGrip of the combination and high-leverage combination pliers ensure optimal and secure holding using an innovative gripping surface: The unique 'triplepoint support' protects the work piece from twisting or slipping. The circlip pliers from the Classic Series with their MagicTips[®] precision tips made of high-performance steel offer considerable additional safety and stability. Their special latching function is especially useful against in preventing the circlips jumping off.

"You only have to lose a circlip, and then you realize the benefits of Wiha pliers!" Frank Scheck









Increases your efficiency: Wiha needle nose pliers with extra-long plier head for inserting low-lying components. **Protects your health:** Special DynamicJoint[®] design reduces effort required for cutting. **Lowers your costs:** Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your safety:** Wiha combination pliers enable safe, non-slip gripping in all work situations.

Combi	ination pliers, needle nose pliers, diagonal cutters 3-pcs.	Z99000106
Order-N	No.	1
26852	. 1	1
Trimm	ning / cutting	
X	Professional electric diagonal cutters with DynamicJoint [®] 160 mm, 6 1/2" (43335)	••••••
Supply	ying / holding	
	Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge 180 mm, 7" (26708	3)
•	Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)	

Manufactured acc. to IEC 60900.








Wiha DynamicJoint * – A new dimension in strength and durability

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.



- A firm hold: The "triple-point support" protects the workpiece from twisting or slipping.
- Highly effective: Optimum grip even with large jaw opening and at the same time significantly less force needed.
- A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.







Needle nose pliers Professional electric



Increases your efficiency: Extra-long plier head for inserting low-lying components. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with cutting edge straight shape							
Order-No.	mm	• •	\approx	Ømm	SB		
26720	160	6 1/2"	16	1.2	-	5	
26727	200	8"	17	1.6	-	5	

Manufactured acc. to IEC 60900.

Combination pliers Professional electric with DynamicJoint® and OptiGrip



Increases your efficiency: A secure, non-slip grip in all standard work situations. Protects your health: Special DynamicJoint® design reduces effort required for cutting. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.


A1000 V

with extra l	Z 01 0 06						
Order-No.	mm	←	\sim	Ømm	SB	-	
26705	160	6 1/2"	15	1.6	-	5	
26708	180	7"	16	1.8	-	5	
26711	200	8"	17	2	-	5	

Manufactured acc. to IEC 60900.

Needle nose pliers Professional electric







Increases your efficiency: Extra-long plier head for inserting low-lying components. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with cutting edge curved shape, approx. 40°								
Order-No.	mm	←	*	Ømm	SB			
26728	160	6 1/2"	16	1.2	-	5		
26729	200	8"	17	1.6	-	5		

Manufactured acc. to IEC 60900.

Combination pliers Professional electric with DynamicJoint[®] and OptiGrip





Simplifies your work: Up to 40% more cutting force thanks to optimised leverage. Increases your efficiency: A secure, non-slip grip in all standard work situations. Protects your health: Special DynamicJoint[®] design reduces effort required for cutting. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with extra			Z 02 0 06				
Order-No.	mm	← →	*	Ømm	SB		
26714	200	8"	18	2.3	-	5	
26717	225	9"	19	2.5	-	5	

Manufactured acc. to IEC 60900.



Long flat-nose pliers Professional electric

Professional electric water pump pliers









Increases your efficiency: Extra-long plier head for inserting low-lying components. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your efficiency:** A secure, non-slip grip in all standard work situations.

				Z 07 0 06
Order-No.	mm	• • •	SB	
26732	160	6 1/2"	-	5

Manufactured acc. to IEC 60900.

4

Meets your requirements: Permanently stable through box joint with double guidance. **Lowers your costs:** Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

box type						Z 21 0 06
Order-No.	'nm	•	0:	0:		
33520	250	10"	2"	50 mm	5	

Long round-nose pliers Professional electric



Increases your efficiency: Extra-long plier head for inserting low-lying components.

Water pump pliers Professional electric





Meets your requirements: Permanently stable through box joint with double guidance. **Increases your efficiency:** Fast and simple adjustment of pliers with push button. **Lowers your costs:** Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

			2 09 0 06
Order-No.	'nm	←	Ĥ
26735	160	6 1/2"	5
		-	

with push		Z 22 0 06						
Order-No.	mm	← →	0:	0:	SB			
37450	250	10"	2"	50	-	5		
Manufactured a	Manufactured acc. to IEC 60900.							

Manufactured acc. to IEC 60900.





Simplifies your work: Self-locking at AF 17 and above. Simplifies your work: Also suitable for left-handed users as operated without side push button. Protects your health: Compaction and bending tasks take minimum effort thanks to manual force increased tenfold. Lowers your costs: Minimises wear and prevents damage to sensitive surfaces thanks to smooth, parallel jaws and backlash-free handling. Saves space: Replaces a set of metric and imperial open-ended spanners. Saves time: Safe, rapid setting directly on the work piece with no need to press any buttons. Saves time: Ratchet function allows users to fasten screws instantly with a simple glide. Improved access: Slender design thanks to button-free setting enables it to be used in confined working environments, minimising the risk of damage. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

				Z 25 0 06
Order-No.	mm	• •	0:	Ĥ
44314	250	10"	46 mm	5
		••••••		

Manufactured acc. to IEC 60900.

INFOBOX: Plier wrench






- Required width setting directly on the work piece with no need to press any buttons
- Ratchet principle allows users to fasten screws rapidly with a simple glide.
- Thanks to its slim design and button-free setting, it is ideal for use in tight spaces.
- Smooth, parallel-acting jaws prevent damage on sensitive surfaces.



For those situations where a good grip is essential.

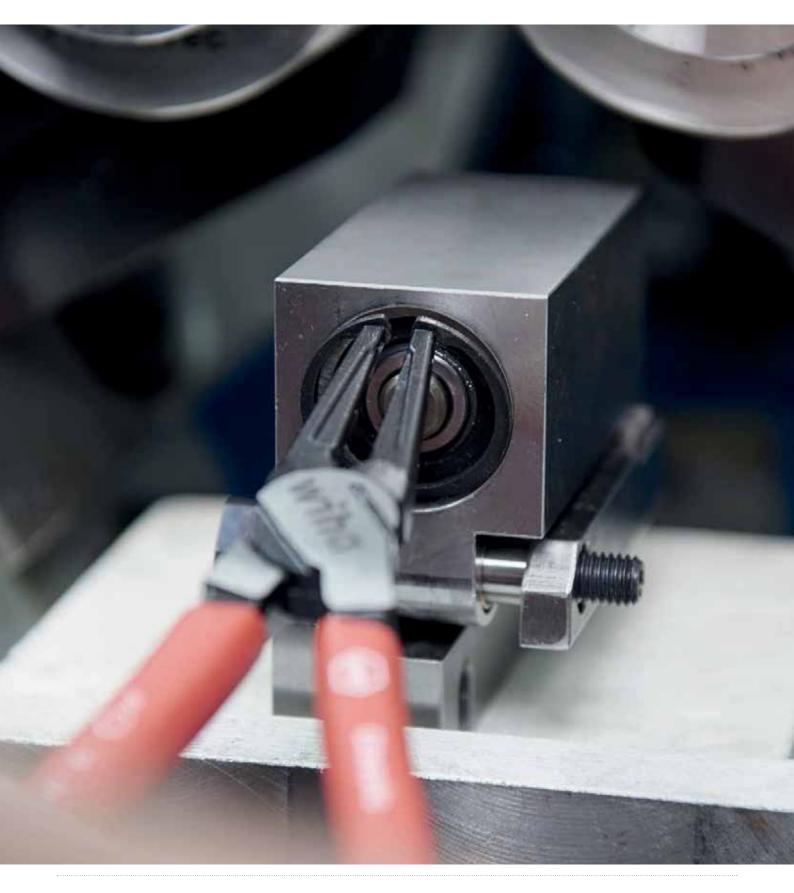



They make our circlip pliers for the Classic series head and shoulders above the rest: MagicTips[®], the precision tips made of high-performance steel. Additionally hardened, they offer a high level of resistance to wear and therefore ensure a long shelf-life. The special latching feature is as unique as it is useful, and prevents jumping of the circlips and therefore any reworking in the motor or working space caused by lost circlips. And thanks to the non-slip pliers handle, precise work is also guaranteed in unfavourable situations. Hard as nails, durable, safe, accurate: These qualities make Wiha MagicTips[®] circlip pliers useful and indispensable helpers during day-to-day work.

- Lowers your costs Prevents damage caused by lost circlips in the work area.
- Saves time Safe and sturdy grip on circlips.









Lowers your costs: Prevents damage caused by lost circlips in the work area. Saves time: Safe and sturdy grip on circlips.

Circlip	o pliers 4-pcs.	Z99000701
Order-N	No.	
34708		1
C	J 1, 140 mm / J 2, 180 mm	
U	A 1, 140 mm / A 2, 185 mm	
with cafot	ty latching function MagicTing®	

with safety latching function MagicTips

INFOBOX: MagicTips®





Wiha MagicTips® – Top of their class.

- Maximum grip: The special latching function preventing jumping away of the safety rings makes the Wiha circlip pliers truly unique.
- Hard as steel: Additional hardening of tips means high wear resistance and therefore excellent durability.
- Precise: Precision tips of high performance steel for maximum grip and high stability.







Lowers your costs: Prevents damage caused by lost circlips in the work area. Saves time: Safe and sturdy grip on circlips.

for inner	Z 33 4 01					
Order-No.		mm	•	C		
34688	JΟ	140	5 1/2"	8 - 13	5	
34689	J 1	140	5 1/2"	12 - 25	5	
34690	J 2•	180	7"	19 - 60	5	
34691	J 3•	220	9"	40 - 100	5	
34692	J 4•	305	12"	85 - 140	5	

with safety latching function MagicTips® DIN ISO 5256

Circlip pliers Classic with MagicTips®

Lowers your costs: Prevents damage caused by lost circlips in the work area. Saves time: Safe and sturdy grip on circlips.

for outer rings (shafts), straight

	mm	•	0	
A 0	140	5 1/2"	3 - 10	5
A 1	140	5 1/2"	10 - 25	5
A 2•	185	7"	19 - 60	5
A 3•	240	9"	40 - 100	5
A 4•	300	12"	85 - 140	5
	A 0 A 1 A 2• A 3• A 4•	mm A 0 140 A 1 140 A 2• 185 A 3• 240 A 4• 300	A 0 140 5 1/2" A 1 140 5 1/2" A 2• 185 7" A 3• 240 9" A 4• 300 12"	A 0 140 5 1/2" 3 - 10 A 1 140 5 1/2" 10 - 25 A 2• 185 7" 19 - 60 A 3• 240 9" 40 - 100

with safety latching function MagicTips[®]
 DIN ISO 5256

Circlip pliers Classic with MagicTips®






wiha 🐵 125

Lowers your costs: Prevents damage caused by lost circlips in the work area. Saves time: Safe and sturdy grip on circlips.

	for inner rings (holes) with angled shape									
Order-No.		mm	•	$^{\circ}$	==					
34693	J 01	140	5 1/2"	8 - 13	5					
34694	J 11	140	5 1/2"		5					
34695	J 21•	180	7"	19 - 60	5					
34696	J 31•	220	9"	40 - 100	5					
34697	J 41•	305	12"	85 - 140	5					

•with safety latching function MagicTips® DIN ISO 5256



	for outer rings (shafts), angled									
Order-No		mm	•	Ö	==					
34703	A 01	140	0 17 2	3 - 10	5					
34704	A 11	140	5 1/2"	10 - 25	5					
34705	A 21•	185	7"	19 - 60	5					
34706	A 31•	240	9"	40 - 100	5					
34707	A 41•	300	12"	85 - 140	5					

•with safety latching function MagicTips® DIN ISO 5256

Supplying / holding

Z 34 4 01





Protect your health

Wiha pliers are kind to the muscles and ergonomic to work with, permanently reducing wrist strain.

Lowers your costs

Thanks to the integration and combination of several operations in one tool, this removes the need for several tools.

Offers you full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.



Stripping/ insulating / crimping For tidy cable ends.

Wiha crimping tools guarantee clean, precise crimping of components. Wiha offers a range of crimp tools for wire-end sleeves, male blade connectors, as well as cable eyes and contacts. Special highlights of the crimp tool include the automatic square crimping capacity and a rotating crimp head. The 360° rotation offers 45° locking positions, with which side as well as frontal access is possible. This way, crimping wire-end sleeves on difficult to access cables is easily accomplished. The automatic crimp tools from Wiha are excellently suited for processing wire-end sleeves with and without insulating collar. Due to the large crimping range from 0.08 – 16 mm² only one tool is required for working on wire-end sleeves with larger and smaller diameters. At the same high quality level as the automatic crimp tools, the crimp tools for cable eyes, contacts and male blade connectors also guarantee absolute crimping process safety coupled with comfortable work thanks to their impact-reducing plastic handles. The "electrical engineering accessories" product range offers the ideal solutions to complement the crimp tools, including superior quality innovatively packaged wire-end sleeves and connectors.

"Due to the large crimping range of the automatic crimping pliers I always have the right tool for practically all wire-end sleeves at my disposal. Even with wire-end sleeves with small diameters, the crimping process is problem-free thanks to the feed aid." Ralf Flaig



Three functions – one tool.





Less tools means less weight, better handling and more efficient work. The Wiha Professional electric TriCut installation pliers combine three tools in one, ideal for the three operations cutting-to-length, stripping and skinning. And it does all this while saving you energy: Due to an ergonomically shaped, specifically angled plier head forged from high-quality steel. The low-wear, inlaid joint with heavy-duty riveting makes the pliers particularly robust and durable, and production and testing according to IEC 60900, VDE/ GS certification and individual piece testing at 10,000 V AC ensures uncompromising safety.

Skinning

Stripping Insulation

Cutting

• Simplifies your work

The angled shape of the head allows work to be performed in hard-to-reach spaces such as installation boxes.

- Increases your efficiency Three tools in one. Saves 60% volume and 50% less weight for 100% efficiency.
- Lowers your costs Now you only need one tool for three tasks: cutting to length, stripping and skinning.
- Offers you full protection Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.







Simplifies your work: The angled head allows you to work in hard-to-reach places such as installation sockets. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Saves money: Now you only need one tool for three tasks: cutting to length, stripping and skinning. Increases your efficiency: Three tools in one. Saves 60% volume and 50% less weight for 100% efficiency. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.



						Z 14 1 06
Order-No.	mm	· ·	\sim	Ømm	mm²	Ê
38552	170	7"	13	1.6	1.5 - 2.5	5


Manufactured acc. to IEC 60900.

INFOBOX: Cutting capacity info

≫<	Example
1 - 5	copper, aluminium
6 - 10	Iron nails
11 - 15	Screws
16 - 21	Hardened spring steel



Stripping pliers Professional electric



Pressent Aktiv





Saves money: Two tools in one for cutting to length and skinning. Protects your health: Special DynamicJoint[®] design reduces effort required for cutting. Lowers your costs: Durable thanks to highquality, chrome-plated plier surface to prevent corrosion. Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.



							Z 14 0 06
Order-No.	mm	←	*	Ømm	mm²		
26745	160	6 1/2"		1.6	1.5 - 2.5	5	

Manufactured acc. to IEC 60900.

					∠ ⊃:	0000
Order-No.	'nm	← +	Ømm	mm²		
26847	160	6 1/2"	0 - 5	0 - 10	5	

7 55 0 00



Stripping multi-tool

Stripping tool with self-rotating drag blade





Simplifies your work: Cable routing ensures safe and easy stripping. Simplifies your work: Enables stripping in hard-to-reach places such as installation sockets. **Increases your efficiency:** 4 in 1: round stripper, longitudinal stripper, hook knife and stripping station in one tool. Simplifies your work: Perfect handling thanks to ergonomic handle shape. Saves time: Automatic setting from round to longitudinal cutting. Saves time: Quick exchange of the drag blade thanks to readily available replacement blade in the handle. Increases your efficiency: Stripping of all standard cross-sections through continuous setting.

for round cable								Z 74 0 06
Order-No.	mm	₩	mm²	AWG	Ømm	SB		
44242	125	5"	0.5 - 6	20 - 10	8 - 13	х	1	

 for round cables
 Z 72 0 06

 Order-No.
 Imm
 Imm
 Ømm
 Imm
 Imm

 44619
 165
 6 1/2"
 4 - 28
 x
 1

Stripping tool with self-rotating drag blade





Stripping tool

Increases your efficiency: Stripping of all standard cross-sections through continuous setting. **Simplifies your work:** Automatic setting from round to longitudinal cutting. **Saves time:** Quick exchange of the drag blade thanks to readily available replacement blade in the handle.

Simplifies your work: Enables stripping in hard-to-reach places such as installation sockets. **Simplifies your work:** Perfect handling thanks to ergonomic handle shape. **Increases your efficiency:** Stripping of all standard cross-sections through continuous setting.

for round cables Z7							
Order-No.	mm	÷ •	Ømm	SB			
44240	130	5 1/8"	4 - 28	Х	1		

for round cable Z 73 C								
Order-No.	mm	• • •	Ømm	SB	-			
44620	140	5 1/2"	6 - 13	х	1			







Simplifies your work: Unrestricted access to hard-to-reach work areas thanks to extremely slim handle shape. Saves money: Two tools in one for cutting to length and skinning. Increases your efficiency: Damage-free stripping thanks to automatic adjustment to cable diameter.

up to 6 mm ²								Z 57 5 06
Order-No.	mm	←	mm²	AWG	Ømm	SB		
44617	190	7 1/2"	0.2 - 6	24 - 10	2	x	1	

Stripping and assembly tool



Simplifies your work: Improved accessibility in confined working situations such as in installation boxes due to narrow design. Saves time: Stripping of coaxial cable in only one work step with fixed dimensions and length stop. Saves space: Compact tool with all functions for the processing and assembly of coaxial cables with F-connector.

for coaxial cable with F-connector Z							
Order-No.	'nm	←	Ømm	0	SB	-	
44241	125	5"	6 - 8	11.0 mm	х	1	

Stripping tool automatic

Spare blade and gripping jaw set





Increases your efficiency: Automatic stripping pliers for a wide range of cables between 0.03 and 16 mm². **Protects your health:** Damper enclosed for large cable cross-sections to reduce recoil and protect wrists. **Lowers your costs:** Long-lasting and robust thanks to metal blade insert. **Saves time:** Blades quickly exchanged by immediately available replacement blades in the handle.

up to 16 m	up to 16 mm ² in blister pack							
Order-No.	mm	←	mm²	AWG	SB			
42062	200	8"	0.03 - 16	32 - 5	х	1		









for automatic stripping tool (42062)	Z57000106K
Order-No.	
42162	2

Cable stripping knife



Offers you full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

straight cutting edge for round cables in blister

pack				24680
Order-No.	'nm	← →	SB	Ê
38798	200	8"	Х	1

Manufactured acc. to IEC 60900.

Cable stripping knife





24470

 $\ensuremath{\textbf{Lowers}}$ your costs: No damage to wire insulation through sliding shoe on tip.

hooked blade with sliding shoe for round cable, in blistor pack

in blister pa	ICK			4	240/8
Order-No.	mm	← ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	SB		
36053	200	8"	х	1	
Manufactured ac					



INFOBOX:

Stripping tool,

automatic up to 16mm²

- These pliers can handle a wide range of cables, thus combining two pairs of pliers in one.
- The supplied damper can be used to lessen recoil caused by larger cable gauges, such as those greater than 6 mm², thus helping to protect wrists.
- Precise cutting to length thanks to adjustable longitudinal stop.
- Integrated hand protection along the cutting edge guards against injury.



Crimping tools





Increases your safety: Safe working through automatic pressing adjustment.

for wire-end sleeves						Z 62 0 06
Order-No.	mm	mm²	AWG	SB		
40342	220	0.14 - 16	26 - 5	х	1	

Crimping tools





Increases your safety: Safe working through automatic pressing adjustment.

for non-insulated male blade connectors Z 62 0 06						
Order-No.	'nm	mm²	AWG			
33842	220	0.25 - 6	24 - 10	1		

Crimping tools





Increases your safety: Safe working through automatic pressing adjustment.

for insulated terminals and connectors Z 62 0 06						
Order-No.	'nm	mm ²	AWG			
33841	220	0.5 - 6	20 - 10	1		

For use with pin-shaped cable eyes with insulating sleeve according to DIN 46231, ring-shaped cable eyes with insulating sleeve according to DIN 46237, pin bushing with insulating sleeve according to DIN 46245 Part 1-3.

Crimping tools





Increases your safety: Safe working through automatic pressing adjustment.

for non-insulated cable eye with closed sleeve Z 62 0 06						
Order-No.	mm	mm²	AWG			
33843	220	0.1 - 16	26 - 6	1		



Automatic crimp tool



Increases your efficiency: Automatic adjustment of wire-end sleeve size with suitable crimping force for a large coverage area of 0.08-16mm². **Makes handling easier:** Thanks to hexagonal crimping, small wire-end sleeves no longer get caught. **Lowers your costs:** An integrated lever enables users to interrupt the crimping process at any time to protect the pliers. **Increases your safety:** Safe work through feed aid prevents crimping the plastic cover of wire-end sleeves.

Automatic crimp tool



Makes handling easier: 360° rotatable crimping die open on ,both' sides for optimal accessibility. **Increases your efficiency:** Automatic adjustment to the wire-end sleeve size with suitable crimping force for a large application area of 0.08 - 16 mm². **Lowers your costs:** An emergency lever enables users to manually interrupt the crimping process at any time to protect the pliers.

for wire-end sleeves hex crimping Z 62 0 06						
Order-No.	mm	mm²	AWG	SB		
41246	210	0.08 - 16	28 - 5	х	1	

For wire-end sleeves square crimping with rotating crimping head

rotating crit					2	_ 02 0 00
Order-No.	mm	mm²	AWG	SB		
45223	193	0.08 - 16	28 - 5	х	1	

INFOBOX: Automatic crimp tool





Hex crimping for wire-end sleeves

- Process-safe hexagonal crimping prevents smaller wire-end sleeves from snagging.
- These crimping pliers can handle all standard applications with a crimping range between 0.08 and 16 mm².
- Suitable for both single wire-end sleeves and twin wire-end sleeves thanks to automatic crimping.

INFOBOX: Automatic crimp tool



7 62 0 06

For wire-end sleeves square crimping with rotating crimping head

- Large application area of 0.08 16 mm² (Twin: 2 x 10 mm²) and automatic adjustment to the wire-end sleeve size.
- A 360° revolving crimp head offers 45° locking positions for secure crimping in any position (front, side, and diagonal).
- High power transmission through a toggle mechanism.
- Soft handles with anti-slip protection for ergonomic and safe work.





Meets your requirements: Safe pressing in marked trapezoidal/ semi-circular profiles. **Lowers your costs:** Durable thanks to highquality, chrome-plated plier surface to prevent corrosion. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Crimping pliers Professional electric





Meets your requirements: Safe pressing in marked trapezoidal/ semi-circular profiles. **Lowers your costs:** Durable thanks to highquality, chrome-plated plier surface to prevent corrosion. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

				Z 60 0 06	
Order-No.	mm	•	mm²		Ord
35861	145	5 3/4"	0.25 - 2.5	5	358

				Z 60 0 06
Order-No.	mm	• • •	mm²	
35862	180	7"	0.25 - 16	5





Increases your efficiency: Comprehensive assortment of wire end ferrules and cable connectors in a clear and mobile assortment box. **Increases the quality of your work:** Gas-tight connections thanks to perfect combination of professional tools and high quality connectors.

with cabl	e connectors 2,600 pcs. colour code DIN in assortment box	93001013
Order-No.		Ĥ
43984		1
•	1 x Automatic crimp tool for wire-end sleeves hex crimping	
	1 x Stripping tool automatic up to 16 mm ² in blister pack	
•	1 x Crimping tools for insulated cable eyes and contacts	
	400 x 0.5 mm² / 400 x 0.75 mm² / 400 x 1 mm² / 300 x 1.5 mm² / 200 x 2.5 mm² / 100 x 4 mm² / 50 x 6 mm² / 5 16 mm²	0 x 10 mm² / 50 x
0⊏	50 x 0.5 - 1 mm² / 50 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm² / 50 x 1.5 - 2.5 mm² / 50 x 4 - 6 mm² / 50 x 4 - 6 mm²	
œ0	50 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm² / 50 x 4 - 6 mm²	
EC)	50 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm²	
€€□	50 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm²	
	1 x Box	

	1
x Automatic crimp tool for wire-end sleeves hex crimping	
x Stripping tool automatic up to 16 mm ² in blister pack	
x Crimping tools for insulated cable eyes and contacts	
00 x 0.5 mm² / 400 x 0.75 mm² / 400 x 1 mm² / 300 x 1.5 mm² / 200 x 2.5 mm² / 100 x 4 mm² / 50 x 6 mm² / 50 x 6 mm²	x 10 mm² / 50 x
0 x 0.5 - 1 mm² / 50 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm² / 50 x 1.5 - 2.5 mm² / 50 x 4 - 6 mm² / 50 x 4 - 6 mm²	
0 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm² / 50 x 4 - 6 mm²	
0 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm²	
0 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm²	
x Box	
()	x Stripping tool automatic up to 16 mm ² in blister pack x Crimping tools for insulated cable eyes and contacts 00 x 0.5 mm ² / 400 x 0.75 mm ² / 400 x 1 mm ² / 300 x 1.5 mm ² / 200 x 2.5 mm ² / 100 x 4 mm ² / 50 x 6 mm ² / 50 x 5 mm ² 0 x 0.5 - 1 mm ² / 50 x 0.5 - 1 mm ² / 50 x 1.5 - 2.5 mm ² / 50 x 1.5 - 2.5 mm ² / 50 x 4 - 6 mm ² / 50 x 4 - 6 mm ² 0 x 0.5 - 1 mm ² / 50 x 1.5 - 2.5 mm ² / 50 x 4 - 6 mm ² 0 x 0.5 - 1 mm ² / 50 x 1.5 - 2.5 mm ² 0 x 0.5 - 1 mm ² / 50 x 1.5 - 2.5 mm ²



Stripping and crimping tool set 5-pcs.





Simplifies your work: Easy removal and safe storage thanks to the pocket box with latching twist cap. Increases your efficiency: Ideal for mobile use thanks to compact, stackable pocket box. Increases the quality of your work: Gas-tight connections thanks to perfect combination of professional tools and high quality connectors. Increases the quality of your work: Skin and crimp tool coupled with matching wire-end sleeves and connectors for high-quality crimping.



16-pcs. for assortment box connector elements	93001911R
Order-No.	

43995		1
	8 x Assortment box, small	
	8 x Assortment box, large	
		•

Spare part: Insert boxes for the connection elements assortment box 43982 and 43984

with wire end ferrules 500 pcs. colour code DIN


in L-Box	x Mini	93001003
Order-No		1
43987		1
Insulatin	g / crimping	
•	1 x Automatic crimp tool for wire-end sleeves crimping	s hex
	1 x Stripping tool automatic up to 16 mm ² in	blister pack
	Wire end sleeves with plastic collar set 0.5–2 units, DIN colour code, in dispenser (43904) 50 x 0.5 mm ² / 100 x 0.75 mm ² / 100 x 1 mr 1.5 mm ² / 50 x 2.5 mm ²	
	Wire end sleeves with plastic collar set 4–16 units, DIN colour code, in dispenser (43903) 50 x 4 mm ² / 20 x 6 mm ² / 20 x 10 mm ² / 10	
Storage		
	1 x L Boxx Mini	

With wire end sleeves, 500 units, colour code 1 (FR). in L Boxx Mini

(FR), in L Boxx Mini	93001001
Order-No.	
43985	1
Insulating / crimping	
 1 x Automatic crimp tool for wire-end sl crimping 	leeves hex
1 x Stripping tool automatic up to 16 m	m² in blister pack
Wire end sleeves with plastic collar set units, colour code 1 (FR), in dispenser (50 x 0.5 mm ² / 100 x 0.75 mm ² / 100 x 1.5 mm ² / 50 x 2.5 mm ²	43900)
Wire end sleeves with plastic collar set units, colour code 1 (FR) in dispenser (4 50 x 4 mm² / 20 x 6 mm² / 20 x 10 mm	13899)
Storage	
1 x L Boxx Mini	







Simplifies your work: Easy removal and safe storage thanks to the pocket box with latching twist cap. Increases your efficiency: Ideal for mobile use thanks to compact, stackable pocket box. Increases your safety: Cable breakages prevented thanks to protected individual wires. Increases your safety: High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your process reliability: Consistently high processing quality for permanent safe contact. Increases your efficiency: Makes handling easier:

Order-No).	
44007		1
	8 x Wire end sleeves with plastic collar set 0.5–2.5 mm ² , 400 units, DIN colour code, in dispenser (43904) mm ² / 100 x 1 mm ² / 100 x 1,5 mm ² / 50 x 2,5 mm ²) 50 x 0,5 mm² / 100 x 0,75
	8 x Wire end sleeves with plastic collar set 4–16 mm ² , 100 units, DIN colour code, in dispenser (43903) 50 20 x 10 mm ² / 10 x 16 mm ²	0 x 4 mm² / 20 x 6 mm² /
	80 x 0.5 mm² / 80 x 0.75 mm² / 60 x 1 mm² / 60 x 1.5 mm² / 50 x 2.5 mm² / 30 x 4 mm² / 20 x 6 mm² / 2	20 x 10 mm ²

code 1 (FR), 0.5 - 10 mm ² in polyester bag and 0.5 - 16 mm ² in organiser box	COOOAVH
).	Ê
	1
8 x Wire end sleeves with plastic collar set 0.5–2.5 mm ² , 400 units, colour code 1 (FR), in dispenser (0,75 mm ² / 100 x 1 mm ² / 100 x 1,5 mm ² / 50 x 2,5 mm ²	(43900) 50 x 0,5 mm² / 100 x
8 x Wire end sleeves with plastic collar set 4–16 mm ² , 100 units, colour code 1 (FR) in dispenser (43899) 50 x 4 mn 20 x 10 mm ² / 10 x 16 mm ²	
80 x 0.5 mm² / 80 x 0.75 mm² / 60 x 1 mm² / 60 x 1.5 mm² / 50 x 2.5 mm² / 30 x 4 mm² / 20 x 6 mm	m² / 20 x 10 mm²
	8 x Wire end sleeves with plastic collar set 0.5–2.5 mm ² , 400 units, colour code 1 (FR), in dispenser 0,75 mm ² / 100 x 1 mm ² / 100 x 1,5 mm ² / 50 x 2,5 mm ² 8 x Wire end sleeves with plastic collar set 4–16 mm ² , 100 units, colour code 1 (FR) in dispenser (43: 20 x 10 mm ² / 10 x 16 mm ²



Wire end sleeves with plastic collar set

Twin wire end sleeves with plastic collar set





Simplifies your work: Easy removal and safe storage thanks to the pocket box with latching twist cap. Increases your safety: Cable breakages prevented thanks to protected individual wires. Increases your safety: High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your efficiency: Ideal for mobile use thanks to compact, stackable pocket box. Increases your process reliability: Consistently high processing quality for permanent safe contact.

0.5-2.5 mm², 400 units, DIN colour code, in

dispenser		C000C400
Order-No.		
43904		1
	50 x 0.5 mm² / 100 x 0.75 mm² / 100 x 1 n 1.5 mm² / 50 x 2.5 mm²	100 x / 100 x

0.5-2.5 mm², 400 units, colour code 1 (FR), in

dispenser	C000A400	
Order-No.	甾	
43900	1	
	50 x 0.5 mm² / 100 x 0.75 mm² / 100 x 1 mm² / 100 x 1.5 mm² / 50 x 2.5 mm²	

4-16 mm², 100 units, DIN colour code, in

dispenser	· C000C100
Order-No.	
43903	1
	50 x 4 mm² / 20 x 6 mm² / 20 x 10 mm² / 10 x 16 mm²

4–16 mm², 100 units, colour code 1 (FR) in

dispenser	-	C000A100
Order-No.		
43899		1
	$50 \times 4 \text{ mm}^2$ / 20 x 6 mm² / 20 x 10 mm²	/ 10 x 16 mm ²

Simplifies your work: Easy removal and safe storage thanks to the pocket box with latching twist cap. Increases your safety: Cable breakages prevented thanks to protected individual wires. Increases your safety: High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your efficiency: Ideal for mobile use thanks to compact, stackable pocket box. Increases your process reliability: Consistently high processing quality for permanent safe contact.


2 x 0.75 - 2 x 2.5 mm², 200 units, DIN colour

code, in d	ispenser	C001C200
Order-No.		
43907		1
-0	50 x 2 x 0.75 / 50 x 2 x 1 / 50 x 2 x 1.5 / 5	

2 x 0.75 - 2 x 2.5 mm², 200 units, colour code 1

(FR), in dis	penser	C001A200
Order-No.		
43905		1
	50 x 2 x 0.75 / 50 x 2 x 1 / 50 x 2 x 1.	





Increases your safety: Cable breakages prevented thanks to protected individual wires. Increases your safety: High thermal resistance up to 105 °C. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your process reliability: Consistently high processing quality for permanent safe contact.

100 units,	colour	code	1	(FR)	/ DIN
------------	--------	------	---	------	-------

100 units,	colour c	ode 1 (FR)	/ DIN								C000,
Order-No.	-	mm²	AWG	D1	D2	L1	L2	S1	S2	1+1	6
43911	white	0.5	20	1	2.6	14	8	0.15	0.25	100	1
43996	grey	0.75	18	1.2	2.8	14	8	0.15	0.25	100	1
43913	red	1	18	1.4	3	14	8	0.15	0.25	100	1
43914	black	1.5	16	1.7	3.5	14	8	0.15	0.25	100	1
43927	blue	2.5	14	2.2	4.2	14	8	0.15	0.25	100	1
43928	grey	4	12	2.8	4.8	17	10	0.2	0.3	100	1
43932	yellow	6	10	3.5	6.3	20	12	0.2	0.3	100	1
43933	red	10	8	4.5	7.6	22	12	0.2	0.4	50	1
43934	blue	16	6	5.8	8.8	24	12	0.2	0.4	50	1

C000A

100 units, colour code 1 (FR)

Order-No.	<€	mm²	AWG	D1	D2	L1	L2	S1	S2	1	Ê
43908	brown•	0.14	26	0.7	1.6	12	6	0.15	0.25	100	1
43909	purple•	0.25	24	0.75	1.8	12	6	0.15	0.25	100	1
43910	pink•	0.34	22	0.8	2	12	6	0.15	0.25	100	1
43911	white	0.5	20	1	2.6	14	8	0.15	0.25	100	1
43912	blue	0.75	18	1.2	2.8	14	8	0.15	0.25	100	1
43913	red	1	18	1.4	3	14	8	0.15	0.25	100	1
43914	black	1.5	16	1.7	3.5	14	8	0.15	0.25	100	1
43915	grey	2.5	14	2.2	4.2	14	8	0.15	0.25	100	1
43916	orange	4	12	2.8	4.8	17	10	0.2	0.3	100	1
43917	green	6	10	3.5	6.3	20	12	0.2	0.3	100	1
43918	brown	10	8	4.5	7.6	22	12	0.2	0.4	50	1
43919	ivory	16	6	5.8	8.8	24	12	0.2	0.4	50	1

•Extension size for DIN dimensions




		Colour code DIN						Colour code 1 (FR)				
mm ²	mm	1		<€		Order-No.	<€		Order-No			
0,14	6	100	40					brown	43908			
0,25	6	100	40					purple	43909			
0,34	6	100	40					light pink	43910			
0,50	8	100	40		white	43911	-	white	43911			
0,75	8	100	40		grey	43996		blue	43912			
1,00	8	100	60		red	43913		red	43913			
1,50	8	100	60		black	43914		black	43914			
2,50	8	100	50		blue	43927		grey	43915			
4,00	10	100	30		grey	43928		orange	43916			
6,00	12	100	20		yellow	43932	-9	green	73917			
10,00	12	50	20		red	43933	-6	brown	43918			
16,00	12	50	20	-	blue	43934		ivory	43919			
Addition	al dimen	sion. Noi	n-DIN siz	:e.								


INFOBOX:

Wire end ferrules with plastic collar









Increases your process reliability: Consistently high processing quality for permanent safe contact. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your safety: Cable breakages prevented thanks to protected individual wires. Increases your safety: High thermal resistance up to 105 °C.

		ode 1 (FR)											C001A
Order-No.	<c< th=""><th>mm²</th><th>AWG</th><th>D1</th><th>D2</th><th>D3</th><th>L1</th><th>L2</th><th>S1</th><th>S2</th><th>1</th><th></th><th></th></c<>	mm ²	AWG	D1	D2	D3	L1	L2	S1	S2	1		
43935	white		2 x 20	1.4	2.5	4.7	15	8	0.15	0.25	100	1	
43951	grey	2 x 0.75		1.7	2.8	5	15	8	0.15	0.25	100	1	
43937	red	2 x 1	2 x 18	1.95	3.4	5.4	15	8	0.15	0.3	100	1	
43938	black	2 x 1.5	2 x 16	2.2	3.6	6.6	16	8	0.15	0.3	100	1	
43947	blue	2 x 2.5	2 x 14	2.8	4.2	7.8	18.5	10	0.2	0.3	100	1	
43948	grey	2 x 4	2 x 12	3.7	4.9	8.8	23	12	0.2	0.4	50	1	
43952	yellow	2 x 6	2 x 10	4.8	6.9	10	26	14	0.2	0.4	50	1	
43953	red	2 x 10	2 x 8	6.4	7.2	13	26	14	0.2	0.4	25	1	
	· · · · · • • · · · · · · · · · · · · ·		····· · ······	•••••••	•••••••			•••••••	••••••••••••••••			·····	

100 units, colour code 1 (FR) & DIN

Order-No.	<c< th=""><th>mm²</th><th>AWG</th><th>D1</th><th>D2</th><th>D3</th><th>L1</th><th>L2</th><th>S1</th><th>S2</th><th>1</th><th></th></c<>	mm²	AWG	D1	D2	D3	L1	L2	S1	S2	1	
43935	white		2 x 20	1.4	2.5	4.7	15	8	0.15	0.25	100	1
43936	blue	2 x 0.75	2 x 18	1.7	2.8	5	15	8	0.15	0.25	100	1
43937	red	2 x 1	2 x 18	1.95	3.4	5.4	15	8	0.15	0.3	100	1
43938	black	2 x 1.5	2 x 16	2.2	3.6	6.6	16	8	0.15	0.3	100	1
43939	grey	2 x 2.5	2 x 14	2.8	4.2	7.8	18.5	10	0.2	0.3	100	1
43940	orange	2 x 4	2 x 12	3.7	4.9	8.8	23	12	0.2	0.4	50	1
43941	green	2 x 6	2 x 10	4.8	6.9	10	26	14	0.2	0.4	50	1
43942	brown	2 x 10	2 x 8	6.4	7.2	13	26	14	0.2	0.4	25	1

C001A


INFOBOX: Twin wire end ferrules with plastic collar

				Co	Colour code DIN			our code	1 (FR)
mm²	mm	Ŧ	6			BestNr.	æ		BestNr
2 x 0,50	8	100	30	-	white	43935	-	white	43935
2 x 0,75	8	100	20	-	grey	43951	-(blue	43936
2 x 1,00	8	100	20		red	43937		red	43937
2 x 1,50	8	100	30		black	43938		black	43938
2 x 2,50	10	100	20		blue	43947		grey	43939
2 x 4,00	12	50	20		grey	43948		orange	43940
2 x 6,00	14	50	15	-	yellow	43952		green	43941
2 x 10,00	14	25	20		red	43953		brown	43942










Increases your process reliability: Consistently high processing quality for permanent safe contact. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your safety: High thermal resistance up to 105 °C.

	as per DI	V								C
Order-No.	<€	mm ²	AWG	Q	D1	D2	L1	В	1 I	
43954	red	0.5 - 1 mm²	22 - 16	M4	4.1	4.3	18	8	100	1
43956	red	0.5 - 1 mm²	22 - 16	M5	4.1	5.3	19	10	100	1
43958	red	0.5 - 1 mm²	22 - 16	M6	4.1	6.5	21	11	100	1
43955	blue	1.5 - 2.5 mm²	16 - 14	M4	4.5	4.3	18	8	100	1
13957	blue	1.5 - 2.5 mm²	16 - 14	M5	4.5	5.3	20	10	100	1
43959	blue	1.5 - 2.5 mm²	16 - 14	M6	4.5	6.5	22	11	100	1
13960	yellow	4 - 6 mm²	12 - 10	M6	6.5	6.5	23	11	50	1
13961	yellow	4 - 6 mm²	12 - 10	M8	6.5	8.4	26	14	50	1

Crimp-type cable socket, fork-shaped, insulated

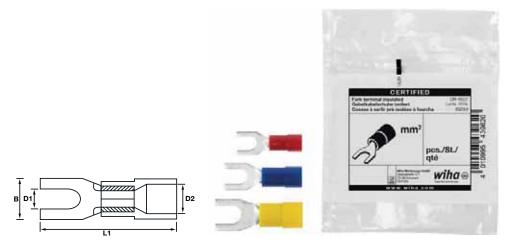

Increases your process reliability: Consistently high processing quality for permanent safe contact. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your safety: High thermal resistance up to 105 °C.


C040

100 units as per DIN

Order-No.	<⊡	mm²	AWG	Ø	D1	D2	Ľi	В	1	甾
43962	red	0.5 - 1 mm²	22 - 16	M4	4.1	4.3	18	8	100	1
43963	blue	1.5 - 2.5 mm²	16 - 14	M4	4.5	4.3	18	8	100	1
43964	yellow	4 - 6 mm²	12 - 10	M5	6.5	5.3	22	10	50	1







Increases your process reliability: Consistently high processing quality for permanent safe contact. **Makes handling easier:** Quick, easy cable insertion thanks to funnel sleeve. **Increases your safety:** High thermal resistance up to 105 °C. **Saves time:** No further insulation required after pressing.

100 units	as per DIN							C101
Order-No.	<⊡	mm²	AWG	D1	D2	L1	1	甾
43965	red	0.5 - 1 mm ²	22 - 16	4.1	1.6	26	100	1
43966	blue	1.5 - 2.5 mm²	16 - 14	4.5	2.3	26	100	1
43967	yellow	4 - 6 mm²	12 - 10	6.5	3.6	28	50	1

Female blade connectors, insulated




Increases your process reliability: Consistently high processing quality for permanent safe contact. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your safety: High thermal resistance up to 105 °C.

100 units	as per DIN	I							C141
Order-No.	<c< th=""><th>mm²</th><th>AWG</th><th>άp</th><th>D1</th><th>L1</th><th>L2</th><th>11</th><th></th></c<>	mm²	AWG	άp	D1	L1	L2	11	
43968	red	0.5 - 1 mm²	22 - 16	6.3 x 0.8 mm	3.5	21	7.8	100	1
43969	blue	1.5 - 2.5 mm²	16 - 14	6.3 x 0.8 mm	4.3	21	7.8	100	1
43970	yellow	4 - 6 mm²	12 - 10	6.3 x 0.8 mm	6.2	23.8	7.8	50	1








Increases your process reliability: Consistently high processing quality for permanent safe contact. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your safety: High thermal resistance up to 105 °C. Saves time: No further insulation required after pressing.

100 units as per DIN

	100 units as per DIN								
Order-No.	<€	mm²	AWG	Ċ⊳	D1	L1	L2	1	
43971	red	0.5 - 1 mm²	22 - 16	6.3 x 0.8 mm	3.5	21.5	6.8	100	1
43972	blue	1.5 - 2.5 mm²	16 - 14	6.3 x 0.8 mm	4.3	21.8	6.8	100	1
43973	yellow	4 - 6 mm²		6.3 x 0.8 mm	5.8	25	6.8	50	1

Male blade connectors, insulated






Increases your process reliability: Consistently high processing quality for permanent safe contact. Makes handling easier: Quick, easy cable insertion thanks to funnel sleeve. Increases your safety: High thermal resistance up to 105 °C.

100 units	100 units as per DIN C161									
Order-No.	<c< th=""><th>mm²</th><th>AWG</th><th>ά</th><th>D1</th><th>L1</th><th>11</th><th></th></c<>	mm²	AWG	ά	D1	L1	11			
43974	red	0.5 - 1 mm²	22 - 16	6.3 x 0.8 mm	3.5	21.5	100	1		
43975	blue	1.5 - 2.5 mm²	16 - 14	6.3 x 0.8 mm	4.3	21.3	100	1		
43976	yellow	4 - 6 mm²	12 - 10	6.3 x 0.8 mm	6.2	24	50	1		



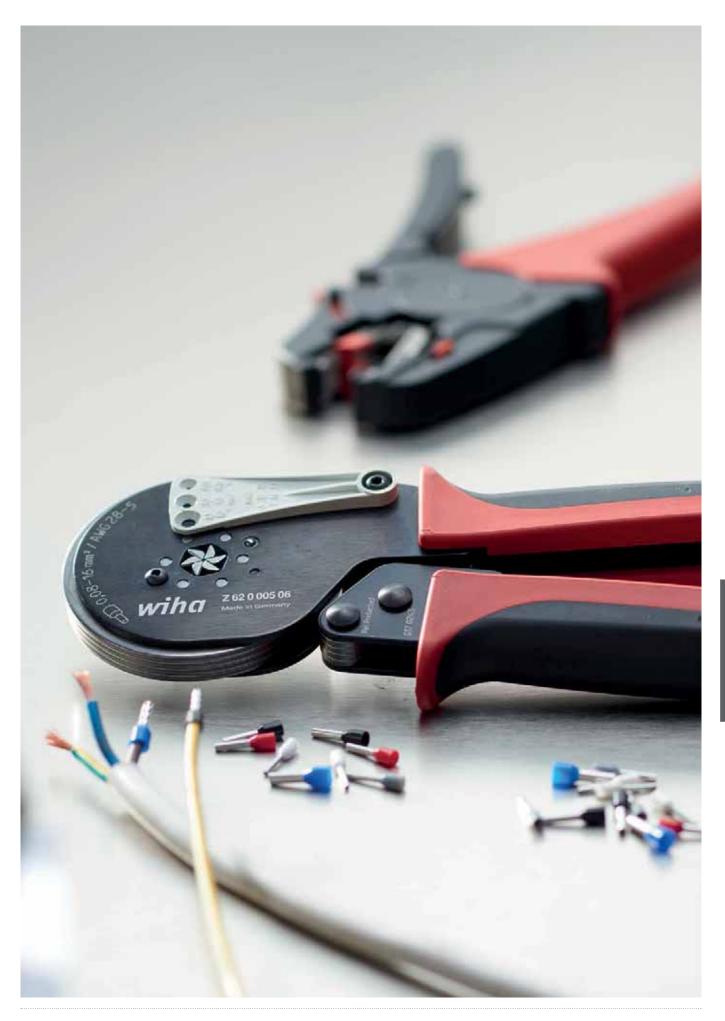



Simplifies your work

Torch with integrated laser makes it easier to fix positions more precisely and project measurements for ceiling installations, for example. Perfect light positioning thanks to lamp head swivelling in an L shape.

71mm

Simplifies your work

Comfortable measurement in different work positions thanks to the ingeniously positioned scales, even when viewed from above.



Surveying/marking/measuring/checking This is what we call precision work made to measure.

Wiha measurement and testing devices prove to be dependable helpers during electrical installation work. The multi-functional torch impresses in three ways thanks to its integrated laser, UV light and LED light with two lighting levels. With variable distance marks, the Wiha electrician's spirit level can reach across up to four flush boxes. Thanks to its ingeniously positioned scale, it allows users to make measurements effortlessly from different work positions. Users are guaranteed to see bubbles perfectly, even from a sharp angle. The Wiha electrician's folding ruler provides a scale for up to three flush boxes and edge distance marking at 150 mm. It can also be used to route cables into hard-to-reach installation locations. With its florescent coating, the folding ruler is also quick and easy to find in the dark with a UV light.

"The Wiha spirit level is a big hit! I can see the bubbles perfectly even when taking measurements above my head. I can also mark out measurements without needing to take a break." Ralf Kästle









Even the most experienced professional tradesmen find it difficult to work efficiently in poorly lit work environments. The Wiha multi-functional torch sheds light on things in three ways: It features an integrated laser, UV light and LED light with two lighting levels. It is thus a compact, universal work tool which replaces several instruments in a single device. The integrated laser offers a great advantage, providing detailed positioning and easy transmission of measurements for tasks such as ceiling installations. This torch is even more practical for portable use thanks to the retaining clip, magnetic positioning and swivelling lamp head used to point the light in the required direction. Compact, light and multi-functional, the Wiha torch ensures optimum illumination for perfect vision and positioning.

• Simplifies your work

Retaining clip and magnetic positioner on the lid allows you to keep hands free for other tasks.

• Simplifies your work

Integrated laser makes it easier to fix position more precisely and project measurements for ceiling installations, for example. Perfect light positioning thanks to lamp head swivelling in an L shape.

• Increases your efficiency

Very strong LED lamp – two light intensities to adjust to light conditions as required. Includes laser and UV light.

 Increases your safety
 Power-on time of 2 seconds prevents the laser being activated by accident.





Flashlight with LED, laser and UV light





Simplifies your work: Retaining clip and magnetic positioner on the lid allows you to keep hands free for other tasks. Simplifies your work: Integrated laser makes it easier to fix position more precisely and project measurements for ceiling installations, for example. Perfect light positioning thanks to lamp head swivelling in an L shape. Increases your efficiency: Very strong LED lamp – two light intensities to adjust to light conditions as required. Includes laser and UV light. Increases your safety: Power-on time of 2 seconds prevents the laser being activated by accident.

in blister	in blister pack, including 3 AAA batteries								
Order-No.	LED	*	UV	A	SB				
41286	100 - 310 lm	Class 2	390 - 400 nm	3x AAA batteries	Х	5			







Universal work tool with integrated laser, UV light and LED light.

- Optimum positioning and variable light direction thanks to the magnetic base and swivel head.
- The installation position can be projected directly from the middle of a table when fitting lights to the ceiling.
- The integrated UV light is ideal for finding misplaced coloured fluorescent Wiha tools and for technical inspections.









2909

Increases your efficiency: Fast, easy checking of your torque tool thanks to mobile, compact shape. **Increases your safety:** Checking your torque tool regularly guarantees safe, precise work with the correct torque. **Saves time:** LED traffic light system displays results in a way which is quick and easy to understand.



4 pcs. with adapter blades, batteries, and box

-	-	· · · · · · · · · · · · · · · · · · ·		
Order-No.	Nm	+/- %	SB	É
42086	2.8	2	X	1

INFOBOX: Torque QuickCheck





Wiha Torque QuickCheck

- The Wiha torque screwdriver can quickly and easily test torque screwdrivers to check the precision of the configured torque value before each use.
- Checking tools regularly ensures reliable, precise work.
- The device offers user-friendly operation, clear test readings and easy to understand LED traffic light signals.
- Thanks to a compact, handy shape, it is the ideal companion when out on jobs.
- Suitable for all Torque Vario[®]-S and iTorque[®] torque screwdrivers whose torque range included 2.8 Nm.



Voltage and continuity tester eMobility 12 - 1,000 V AC, CAT IV



Simplifies your work: Illuminated LC display, LED scale and signal sound for easy to read measurement results. Simplifies your work: Quick one-hand testing on power sockets due to the 19 mm contact distance. Increases your flexibility: Two-pin voltage tester covers a large voltage range from 12 - 1,000 V AC, as well as 12 - 1,500 V DC.

incl. 2x AAA	25515				
Order-No.	mm		V AC min-max	V DC min-max	
44319	282	2x AAA batteries	12 - 1000	12 - 1500	10

Single-pole, non-contact volt detector, 12-1,000 V AC



Saves time: Rapid voltage test thanks to contactless measuring. Increases your efficiency: Compatible for use in all sockets worldwide thanks to measurement tip suited to international usage. Increases your efficiency: Integrated powerful LED flashlight. Increases your flexibility: The voltage tester covers a large voltage range from 12 - 1,000 V AC.

Includes two AAA batteries

	••••				
Order-No.		÷	'nm	V AC min-max	
43797	2x AAA batteries	28.5	150	12 - 1000	10

INFOBOX:

Single pole voltage tester, 12 - 1,000 V AC



25513



- Rapid voltage test thanks to contactless measuring.
- Internationally adjustable measuring tip for all outlets, globally applicable.
- Green illuminated LED indicates readiness.
- Complies with safety standards EN 61010-1 / IEC 61326 and measuring category CAT IV 1,000 VAC.
- Extensive voltage range from 12 1,000 V AC.
- The strength of the alternating electrical field is signalled by an acoustic and five-level LED scale.
- Integrated high-luminescence LED flashlight.

Single-pole, non-contact voltage tester volt detector, explosion protected 12-1,000 VAC



Increases your efficiency: Integrated powerful LED flashlight. Saves time: Rapid voltage test thanks to contactless measuring. Increases your flexibility: The voltage tester covers a large voltage range from 12 - 1,000 V AC. Increases your efficiency: Compatible for use in all sockets worldwide thanks to measurement tip suited to international usage.

incl. 2x A	25513				
Order-No.		÷	mm	V AC min-max	
44309	2x AAA batteries	28.5	150	12 - 1000	10

Single-pole, non-contact volt detector, 90–1,000 VAC



Saves time: Rapid voltage test thanks to contactless measuring. Increases your efficiency: Compatible for use in all sockets worldwide thanks to measurement tip suited to international usage.

	wo AAA batteries				25514
Order-No.		÷	'nm	V AC min-max	
43798	2x AAA batteries	28.5	150	90 - 1000	10

INFOBOX: Single pole voltage tester, 90 - 1,000 V AC



- Rapid voltage test thanks to contactless measuring.
- Internationally adjustable measuring tip for all outlets, globally applicable.
- Green illuminated LED indicates readiness.
- Complies with safety standards EN 61010-1 / IEC 61326 and measuring category CAT IV 1,000 VAC.
- Voltage range from 90 1,000 V AC.
- The voltage is visually indicated by an illuminated LED.



Voltage tester SoftFinish® single-pole, 110-250 volts

Increases your efficiency: Stable and as robust as a fully-fledged screwdriver. **Offers you full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.



Simplifies your work: Integrated with cable retractor for cables between 3-7mm. Increases your efficiency: Ruler with integrated distance marks for up to 3 flush boxes. Lowers your costs: Ruler quick and easy to find – even in dark environments with a UV light. Offers you full protection: Tool tested at 10,000 V AC and suitable for 1.000 V AC.

Slotted tran	nsparer	nt, with pu	ish-on (clip			25511
Order-No.	\ominus		\ominus	mm	÷	==	
34745	3.0	60	0.5	140	19	10	

Measuring tape 5 m



Meets your requirements: The auto-lock system keeps the measuring tape firmly fixed in every position. Simplifies your work: Measurement comfort thanks to the ergonomic shape and anti-slip material. Makes handling easier: A strong magnet at the end of the hook guarantees adhesion to all metal surfaces. Saves time: Quick and easy reading of the measurement value thanks to a robust, high-contrast steel measuring tape.

With belt clip

Electrician's spirit level

Order-No.	mm	1 mm	1 mm		
33251	70	80	5000 x 19	1	



Simplifies your work: Comfortable measurement in different work positions thanks to the ingeniously positioned scales, even when viewed from above. Increases your efficiency: Both bubbles can be seen easily even from an acute angle. Saves space: Perfectly portable Saves time: Variable distance marks for up to 4 flush boxes.

40 cm				246
Order-No.	'nm	- g -	SB	<pre>file</pre>
42074	400	330	х	1

metric, 10				4102008
Order-No.	: Luutu	<⊡	- g -	Ê
42068	15	orange	135	10

Folding ruler LongLife Plus Composite 2 m

Electrician's Longlife® folding ruler, 2 m



metric, 10	-			4102005
Order-No.	t luutu	<c< td=""><td>- a -</td><td></td></c<>	- a -	
37067	15	red / black	124	10



Increases your efficiency

Electrician's hammer offers perfect balance thanks to optimum weight distribution for effective handling.

06 mm PH2-100

Saves time

Dowel racket allows you to make dowel holes with the strike of a hammer anywhere at any time, even near power sockets.

Increases your work quality

The flat surface on the hammer handle ensures cables and dowels are fitted into position without causing any damage.



Striking Optimum power transmission.

Specially tailored for use by electricians: Wiha impact tools. With optimally uniform weight distribution, the Wiha electric hammer strikes a perfect balance and is also eminently suitable for use in confined working environments. Its flat claws allow you to remove nails and nail clamps easily. The flat surface on the hammer handle ensures cables and dowels are fitted into position without causing any damage to the cable duct or plasterboard. Wiha's scaled impact screwdriver blade ensures that the portable dowel racket makes a perfectly dimensioned dowel hole to the required depth anywhere at any time and without making a mess, unlike power tools. The galvanic separation between the blade and solid steel cap ensures that the user is always protected, even if they accidentally hit a live wire.

"Fits nicely into the hand and can be used in a variety of ways. It's now a permanent fixture in my toolbox!" Andreas Ebener







Thanks to its optimum balance, the electrician's hammer is perfectly sized in the hand while also providing a secure hold when hammering thanks to the ergonomically shaped hammer handle. With its U-shaped impact surface, the Wiha electrician's hammer delivers the optimum solution to working in corners and confined spaces. You can quickly and easily remove nails and nail clamps from walls with the flat claws on the hammer head. The flat surface on the hammer handle means cables and dowels are positioned effectively without causing any damage to the wall.

- Simplifies your work Flat claws allow you to remove nails and nail clamps easily.
- Increases your efficiency Perfect balance thanks to optimum weight distribution for effective handling.
- Improved access

Perfectly suited for use in confined working environments thanks to the combination of a square and round head shape.

• Increases your work quality The flat surface on the hammer handle ensures cables and dowels are fitted into position without causing any damage.



162 Wiha 🗠

SoftFinish® dowel racket set with dowels

Simplifies your work: Dirt- and dust-free work compared to when machines are used. Increases your efficiency: Scaled impact screwdriver blade provides more detailed depth measurement. Perfectly dimensioned dowel hole thanks to blade adjusted to required size. Protects your health: Dowel hole can be made anywhere using a hammer at any time, even near power sockets. Increases your safety: Galvanic separation in the handle prevents a discharge between the striking cap and the blade. Saves time: Hammer dowel holes anywhere at any time without worrying how near you are to wall sockets.

Simplifies your work: Flat claws allow you to remove nails and nail clamps easily. Increases your efficiency: Perfect balance thanks to optimum weight distribution for effective handling. Improved access: Perfectly suited for use in confined working environments thanks to the combination of a square and round head shape. Increases the quality of your work: The flat surface on the hammer handle ensures cables and dowels are fitted into position without causing any damage.

	n round blade pack,	5-pcs. SB534S5
Order-No.	SB .	
41289	Х	1
	1 x Dowel racket	-
	2 x 30 mm dowel / 2	x 40 mm dowel


with 300 g	•		•			846
Order-No.	i÷—	'nm	- g -	SB .		
42071	23.9	283	500	Х	4	

INFOBOX: SoftFinish[®] dowel racket set with dowels



- Makes it easier to insert dowels and saves valuable working time
- Ensures dirt- and dust-free work compared to machines.
- Galvanic separation between the blade and solid steel cap protects against electric shock.
- Perfect for portable use since you can make dowel holes anywhere at any time at the strike of a hammer.

INFOBOX:





- With its optimally uniform weight distribution, this hammer ensures perfect balance, delivering impact and fatigue-free work.
- Its flat claws make it easier to remove fastening components such as nail clamps, even from difficult-toaccess spots.
- Optimum access into corners and confined spaces thanks to U-shaped striking surface.
- The flat hammer handle lower surface acts as a soft-faced hammer, ensuring components such as cables and dowels are fixed into position without causing damage.









Electrician's hammer

Soft-faced hammer set "Safety"



Meets your requirements: Hammer components in a practical Wiha safety set with replaceable hammer heads of various degrees of hardness for all applications. Simplifies your work: Makes work easier, optimum impact effect and less effort needed. Lowers your costs: Each hammer component is available individually as a spare part.

with asso	rted hammer faces, 9-pcs. in box	832B801
Order-No.	#	
44008	1	
	1 x Soft-faced hammer "Safety" medium soft/ha hickory wooden handle, round hammer face	rd with
	1 x Face soft round for soft-faced hammer "safe	ty"
	1 x Face medium-soft round for soft-faced hamn ,safety ,	ner
	2 x Face medium-hard round for soft-faced ham "safety"	mer
	1 x Face hard round for soft-faced hammer "safe	ety"
	1 x Face very hard round for soft-faced hammer	"safety"
۲	1 x L-keys Hexagonal ball end matt chrome-plate	ed
	1 x Metal Box	

GS tested.

Wiha Order number register

	-
Order no.	Page
00	
00684	76
00685	76
00686	76
00687	76
00689	76
00690	76
00691	76
00692	76
00694	76
00695	76
00696	76
00697	76
00698	76
00098	
	76
00701	76
00702	76
00703	76
00704	76
00706	76
00707	76
00708	76
00709	76
00711	76
00712	76
00713	76
00819	68
00820	68
00821	68
00822	68
00823	68
00824	68
00825	68
00826	68
00827	68
00828	68
00829	68
00830	68
00831	68
00832	68
00833	67
00834	67
00846	68
00847	68
00848	68
00849	68
00850	68
00853	69
00855	69
00856	69
00857	69
00858	69
00859	69
00860	69
00861	69
00862	69
00863	69
00864	69
00865	69
00866	69

Order	no	Page
00867		69
00868		69
00877		68
00878		68
00879		68
00880		68
00881		68
00882		68
01		
01790		88
01791		88
01792		88
01793		88
01794		88
01795		88
01796		88
01798		88
01799		88
01800 01803		88 88
01805		88
01808		88
01809		88
01811		88
01812		88
01913		87
02		
02292		96
03		
03223		75
03224		75
03225		75
03226		75
03228		75
03230		75
03231		75
03232		75
03237		75
03238		75
03239 03245		75
03245		75 75
03240		75
03760		68
03761		68
03762		68
03988		71
04		
04009		88
04010		88
04059		88
04126		88
04127		88
04176		88
04194		90
04195		90
04196		90
04197		90
04198		90

Order no.	Page	Order no.	Page
05		25	-
05301	90	25477	67
05302	90	25739	90
05303	90	25740	90
05799	88	25741	90
05800	88	25742	90
06		26	
6637	90	26000	90
06638	90	26002	90
6639	90	26625	39
06888	88	26626	39
06889	88	26627	39
20		26705	113, 119
20218	89	26708	113, 119
20219	89	26711	113, 119
20220	89	26714	113, 119
20221	89	26717	113, 119
0222	89	26720	113, 119
0223	89	26727	113, 119
0224	89	26728	113, 119
21		26729	113, 119
21045	89	26732	120
21047	89	26735	120
22		26745	131
22509	88	26755	21
22510	88	26847	131
22511	88	26852	118
22512	88	26864	39
22596	90	26931	76
22597	90	27	
22598	90	27753	76
2599	90	27754	76
2600	90	27755	76
		27928	71
23145	90	27929	71
23145 23147	90	27929 27930	71 71
23145 23147 23149	90 90	27929 27930 27931	71 71 71
23145 23147 23149 23151	90 90 90	27929 27930 27931 27932	71 71 71 71
23145 23147 23149 23151 23195	90 90 90 90	27929 27930 27931 27932 27933	71 71 71 71 71 71
23145 23147 23149 23151 23195 23197	90 90 90 90 90	27929 27930 27931 27932 27933 27933	71 71 71 71 71 71 71
23145 23147 23149 23151 23195 23197 23199	90 90 90 90 90 90	27929 27930 27931 27932 27933 27934 27935	71 71 71 71 71 71
23145 23147 23149 23151 23195 23197 23199 23201	90 90 90 90 90 90 90	27929 27930 27931 27932 27933 27934 27935 28	71 71 71 71 71 71 71 71
23145 23147 23149 23151 23195 23197 23199 23201 23203	90 90 90 90 90 90 90 90	27929 27930 27931 27932 27933 27934 27935 28 28481	71 71 71 71 71 71 71 71 90
23145 23147 23149 23151 23195 23195 23197 23199 23201 23203 23205	90 90 90 90 90 90 90 90 90	27929 27930 27931 27932 27933 27934 27935 28 28481 28691	71 71 71 71 71 71 71 71
23145 23147 23149 23151 23195 23197 23199 23201 23203 23205 23207	90 90 90 90 90 90 90 90 90 90	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29	71 71 71 71 71 71 71 90 49
23145 23147 23149 23151 23195 23197 23199 23201 23203 23205 23207 23209	90 90 90 90 90 90 90 90 90 90 90 90	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29 29416	71 71 71 71 71 71 71 90 49 86
23145 23147 23149 23151 23195 23197 23199 23201 23203 23205 23207 23209 23211	90 90 90 90 90 90 90 90 90 90 90 90 90	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29 29416 29417	71 71 71 71 71 71 71 90 49 86 86
23145 23147 23149 23151 23195 23197 23199 23201 23203 23205 23207 23209 23211 23213	90 90 90 90 90 90 90 90 90 90 90 90 90 9	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29 29416 29417 29466	71 71 71 71 71 71 71 90 49 86
23145 23147 23149 23151 23195 23197 23199 23201 23203 23205 23205 23207 23209 23211 23213 23215	90 90 90 90 90 90 90 90 90 90 90 90 90 9	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29 29416 29417 29466 30	71 71 71 71 71 71 71 90 49 86 86 69
23145 23147 23149 23151 23195 23197 23199 23201 23203 23205 23207 23209 23211 23213 23215 23217	90 90 90 90 90 90 90 90 90 90 90 90 88 88 88	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29 29416 29416 29416 30 30361	71 71 71 71 71 71 71 90 49 86 86 69 68
23145 23147 23149 23151 23195 23197 23199 23201 23203 23205 23207 23209 23211 23213 23215 23217 23219	90 90 90 90 90 90 90 90 90 90 90 90 88 88 88 88	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29 29416 29417 29466 30 30361 30362	71 71 71 71 71 71 71 90 49 86 86 86 69 68 68
23145 23147 23149 23151 23195 23197 23199 23201 23203 23205 23207 23209 23211 23213 23215 23217 23219 23221	90 90 90 90 90 90 90 90 90 90 90 90 88 88 88 88 88	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29 29416 29416 29417 29466 30 30361 30362 30363	71 71 71 71 71 71 90 49 86 87 88 88 89 80 81 82 83 84 85 86 86 86
23145 23147 23149 23151 23195 23197 23199 23201 23203 23205 23207 23209 23211 23213 23215 23215 23217 23219 23221 23223	90 90 90 90 90 90 90 90 90 90 90 90 88 88 88 88 88 88 88	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29 29416 29417 29466 30 30361 30362 30363 30364	71 71 71 71 71 71 90 49 86 87 88 88 89 88 89 80 81 82 83 84 85 86
23145 23147 23149 23151 23195 23197 23199 23201 23203 23205 23207 23209 23211 23213 23215 23215 23217 23219 23221 23221 23223 23225	90 90 90 90 90 90 90 90 90 90 90 90 90 88 88 88 88 88 88 88 88 88 88 88 88 88	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29 29416 29417 29466 30 30361 30362 30363 30364 30365	71 71 71 71 71 71 90 49 86 87 88 88 88 88 88 88 89 89 80 81 82 83 84 85 86 86 86 86
23145 23147 23149 23151 23195 23197 23199 23201 23203 23205 23207 23209 23211 23213 23215 23215 23217 23219 23221 23221 23223 23225 23226	90 90 90 90 90 90 90 90 90 90 90 90 90 9	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29 29416 29417 29466 30 30361 30362 30362 30363 30364 30365 30366	71 71 71 71 71 71 71 90 49 86 86 86 86 86 86 86 86 86 86 86 86 86 86 86 86 86 86 86 88 68 68 68 68 68 68
23145 23147 23149 23151 23195 23197 23199 23201 23203 23205 23207 23209 23211 23213 23215 23217 23219 23221 23221 23222 23225 23225 23226 23227	90 90 90 90 90 90 90 90 90 90 90 90 90 9	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29 29416 29416 29417 29466 30 30361 30362 30363 30362 30363 30364 30365 30366 30700	71 71 71 71 71 71 71 90 49 86 86 69 68
23195 23197 23199 23201 23203 23205 23207 23209 23211 23213 23215 23217 23219 23221 23223 23225 23226 23226 23227 23228	90 90 90 90 90 90 90 90 90 90 90 90 90 9	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29 29416 29416 29417 29466 30 30361 30361 30362 30363 30363 30364 30365 30366 30700 30701	71 71 71 71 71 71 71 90 49 86 68
23145 23147 23149 23151 23195 23197 23199 23201 23203 23205 23207 23209 23211 23213 23215 23215 23217 23219 23221 23223 23225 23226 23227	90 90 90 90 90 90 90 90 90 90 90 90 90 9	27929 27930 27931 27932 27933 27934 27935 28 28481 28691 29 29416 29416 29417 29466 30 30361 30362 30363 30364 30365 30366 30366 30700	71 71 71 71 71 71 71 90 49 86 86 69 68



Order no.	Page	Order no.	Page	Order no.	Page	Order no.	Page
31		33709	89	34555	90	35508	46, 61
31863	68	33710	89	34556	90	35509	46, 61
31957	88	33711	89	34557	90	35510	46, 61
1958	88	33712	89	34558	90	35511	46, 61
1959	88	33713	89	34559	90	35861	137
1960	88	33714	89	34560	90	35862	137
31961	88	33715	89	34578	46, 61	35870	47
1962	88	33716	89	34579	46, 61	36	
32		33717	89	34580	46, 61	36053	134
32105	88	33718	89	34581	46, 61	36071	46, 61
2299	89	33719	89	34582	46, 61	36092	87
2302	89	33720	89	34583	46, 61	36093	87
2303	89	33721	89	34584	46, 61	36094	87
	89						75
2304		33722	89	34585	46, 61	36114	
2305	89	33723	89	34586	46, 61	36189	114
2306	89	33724	89	34587	46, 61	36327	89
2307	89	33725	89	34588	46	36329	66
2308	89	33726	89	34589	46, 61	36330	66
2309	89	33727	89	34590	46, 61	36389	22
2310	87	33728	89	34688	125	36455	65
2383	76	33729	89	34689	125	36536	66
2384	76	33730	89	34690	125	36537	66
2396	68	33731	89	34691	125	36538	66
2397	68	33732	89	34692	125	36539	66
2399	76	33738	77	34693	125	36540	66
2400	76	33741	77	34694	125	36541	66
32410	89	33744	77	34695	125	36542	66
2411	89	33746	77	34696	125	36558	65
2412	89	33841	135	34697	125	36791	36
2413	89	33842	135	34698	125	37	
32414	89	33843	135	34699	125	37067	157
32415	89	33920	89	34700	125	37147	46, 61
2416	89	33921	89	34701	125	37222	46, 61
2417	89	33922	89	34702	125	37223	46, 61
		33923	89	34702	125	37223	
2418	89						46, 61
2419	89	33924	89	34704	125	37225	46, 61
2421	89	33925	89	34705	125	37226	46, 61
2423	89	33926	89	34706	125	37227	46, 61
2477	87	33927	89	34707	125	37402	114
2490	88	33928	89	34708	124	37403	114
2491	88	33929	89	34745	157	37450	120
2492	88	33930	89	35		38	
2493	88	33931	89	35389	65	38020	21
2494	88	33932	89	35390	66	38074	39
2495	88	33961	88	35391	66	38191	110
2496	88	33962	88	35392	66	38362	65
2497	88	33963	88	35393	66	38370	89
2686	88	33964	88	35394	66	38371	89
2687	88	33965	88	35395	66	38372	89
2688	88	33966	88	35396	66	38552	111, 130
2689	88	33969	20	35446	66	38605	77
3		34		35456	88	38606	77
- 3251	157	34306	87	35457	88	38612	52
3520	120	34452	89	35501	66	38613	52
3703	88	34452	89	35502	66	38798	134
3704	88	34454	89	35503	66	38918	48
3705	88	34455	89	35504	66	38919	48
3706	88	34456	89	35505	66	38920	48
33707	88	34457	89	35506	46, 61	38921	48
33708	88	34554	90	35507	46, 61	38925	48



Wiha Order number register

Order no.	Page	Order no.	Page	Order no.	Page	Order no.	Page
38926	48	41232	55	42989	70	43088	47, 73
38927	48	41233	55	43		43089	47, 73
38928	48	41235	52	43022	25	43090	47, 73
38929	48	41241	22	43023	24	43091	47, 73
8930	48	41246	136	43024	24	43092	47, 73
8931	48	41274	112	43025	25	43093	47, 73
38932	48	41279	112	43026	72	43094	47, 73
38933	48	41286	154	43027	72	43095	47, 73
38934	48	41289	162	43028	72	43096	47, 73
38935	48	41341	42	43029	72	43097	47, 73
38936	48	41342	42	43030	72	43098	47, 73
39		41343	42	43031	72	43099	47, 73
39041	86	41344	42	43032	72	43100	74
39045	87	41345	42	43033	72	43101	74
39049	86	41476	42	43034	72	43102	74
39056	87	41477	42	43035	72	43103	74
39057	87	41478	42	43036	72	43104	74
39059	87	41479	42	43037	72	43105	74
39059	86	41479	83	43037	72	43105	74
	86	41824	83	43038	72	43106	74
39083							
39134	87	41826	83	43040	72	43108	74
39178	90	41827	85	43041	72	43109	74
39179	90	41828	85	43042	72	43110	74
39180	90	41829	85	43043	72	43111	74
39181	90	41830	82	43044	72	43112	74
39182	90	41831	82	43052	73	43113	74
39183	90	41832	84	43053	73	43114	46, 61
39184	89	41833	84	43054	73	43115	46, 61
39185	89	41834	84	43055	74	43116	46, 61
39186	89	41914	32	43056	74	43117	46, 61
39187	89	41915	32	43057	74	43125	114
39188	89	41923	114	43058	74	43126	38
39189	89	41979	94	43059	74	43128	47
39190	89	42		43060	74	43139	62
39191	89	42062	134	43061	72	43140	46, 61
39192	89	42068	157	43062	72	43141	46, 61
39193	89	42071	162	43063	72	43142	46, 61
39194	89	42074	157	43065	73	43143	46, 61
39206	90	42086	41, 155	43066	73	43144	46, 61
39207	90	42098	81	43067	73	43145	46, 61
39208	90	42099	80	43068	73	43146	46, 61
40		42114	80	43069	73	43147	46, 61
10342	135	42115	80	43070	73	43148	46, 61
10523	17	42116	80	43071	73	43149	46, 61
10674	37	42110	80	43072	73	43150	46, 61
10074 10921	112	42118	80	43072	73	43151	46, 61
+0921 +1	112	42118		43073	73	43151	40, 01
+1 11003	64		81	_	73		
		42136		43075		43153	44, 59
11141	66	42137	81	43076	73	43154	44, 59
1142	66	42138	81	43077	73	43155	44, 59
1143	66	42139	81	43078	73	43156	44, 59
1144	66	42162	134	43079	73	43157	44, 59
1145	66	42374	70	43080	73	43158	44, 59
1146	66	42375	70	43081	73	43159	44, 59
1147	66	42376	70	43082	73	43160	33, 44, 59
41158	52	42377	70	43083	73	43161	43, 58
41159	46, 61	42378	70	43084	73	43162	43, 58
11160	46, 61	42379	70	43085	73	43163	45,60
41230	57	42380	70	43086	73	43164	45,60
41231	54	42471	70	43087	73	43167	57



	Order	no.	Page	Or
1	43177		48	439
ļ	43292		62	439
ł	43326		112	439
ļ	43335		112	439
ł	43340		112	439
	43449		57	439
1	43465		19	439
ļ	43466		38	439
ì	43467		56	439
	43474		20	439
ì	43660		112	439
	43662		112	439
ì	43797		156	439
	43798		156	439
ì	43847 43848		96 97	439
ľ	43851		94, 95	43
ì	43879		18	439
1	43899		141	439
Ì	43900		141	439
ľ	43903		141	439
Ì	43904		141	439
ľ	43905		141	44
1	43907		141	44(
j	43908		142	44(
1	43909		142	44(
ĺ	43910		142	44(
	43911		142	44
1	43912		142	44
	43913		142	44
	43915		142	44
	43916		142	442
	43917		142	442
	43918		142	442
1	43919		142	443
ļ	43927		142	443
ì	43928		142	443
	43932		142	443
ì	43933		142	443
	43934		142	443
ì	43935		144	443
	43936 43937		144 144	443
ì	43937		144	443
1	43930		144	44
ì	43940		144	44
1	43941		144	446
Ì	43942		144	446
ľ	43947		144	446
Ì	43948		144	446
ľ	43951		144	446
J	43952		144	446
1	43953		144	446
	43954		146	446
1	43955		146	44
	43956		146	45
1	43957		146	452
	43958		146	452
	43959		146	452
	43960		146	452

Order no.	Page
3961	146
3962	146
3963	146
3964	146
3965	147
3966	147
3967	147
3968	147
3969	147
3970	147
3971	148
3972	148
3973	148
3974	148
3975	148
3976	148
3982	138
3984	138
3985	139
3987	139
3995	139
3996	142
4	
4001	75
4005	140
4007	140
4008	163
4106	33, 45, 60
4107	33, 45, 60
4128	15
4163	38
4240	132
4241	133
4242	132
4309	156
4314	121
4318	30
4319	156
4351	30
4355	74
4363	32
4364	32
4366	33, 44, 59
4367	31
4385	46, 61
4574	23
4617	133
4619	132
4620	132
4661	102
4664	104
4665	102
4684	101
4685	100
4753	103
.5	
5223	136
5244	103
5292	77
5296	53



Wiha Article number register

Article no.	Page
2	1 4 90
- 2270P	70
2270PK601	70
2271P	70
246	157
246176	114
24618T	72
24628	87
24667	75
24670	154
24678	134
24680	134
24682	75
25511	157
25513	156
25513	156
25514	156
2822	38
2822	62
283110	46, 61
283111 283112	46, 61
283112	46, 61
	46, 61
283114	46, 61
283115	46, 61
283116	46, 61
283117	46, 61
283118	46, 61
2831T18	54
2831T901	55
2831T902	55
283793	48
283794	48
283795	48
283799	74
2859	39
2872	39
2872T13	37
2872T18	36
28799	47
2899	49
2909	41, 155
2933	48
2970	42
29701080S4	42
29701200S4	42
29701280S4	42
29701S5	42
3	
302	76
3022	76
303190	102
30390	104
30391	102
30396	103
3201	66
3201K12	64
3201K6	65
3201K601	65
3201ZK6	65

Article no.	Page
320N	68
320NK6	67
320NK7	67
320NZK6SO	67
3211	66
321N	68
322	69
322K5	69
323N	68
324	68
3241	66
325	68
3251	66
3251K6	65
3251TR	66
327	68
3271	66
328	68
3281	66
33394	101
33394	100
33397 334N	71
334N 336N	
336N 358N	71 68
369RE9F	94
4	07
40511	97
4102005	157
4102008	157
5	
530	75
531	75
532	75
5590N	72
5590NA	72
5590NT20	25
590T401	30
591T101	30
599001	32
599002	32
599006	32
599007	32
7	
7040ZL	88
7041Z	88
7042Z	88
7043Z	90
7043ZR	90
7045BE	89
7045R	89
7045Z	89
7045ZH	89
7046Z	90
7047ZR	90
7048Z	90
70402 7049PHM	88
7049PHM 7049PZM	88
7049PZIM 7049ZOTTS	00 90
7143	87

Autialaura	Dawa
Article no.	Page
7148	87
7148CS	87
7207NEX	74
7207NHS	74
7207NK2001	24
7207NRW	73
7207NS	73
7208NEX	74
7208NHS	74
7208NK2001	24
7208NS	73
7209NEX	31,74
7209NHS	74
7209NK2001	25
7209NK2002	19
7209NK2003	38
7209NK2004	56
7209NRW	20
7209NS	47, 73
7947905	86
7947995	87
7948005	86
7948927	86
8	
832B801	163
846	162
9	
9300018	20
9300025	22
9300031	21
9300035	22
9300040	18
93001001	139
93001003	139
93001011	138
93001013	138
93001911R	139
930050005	23
930070103	15
9300702	17
С	
C000A	142
C000A100	141
C000A400	141
C000AVH	140
C000C100	141
C000C400	141
C000CVH	140
C001A	144
C001A200	141
C001C200	141
C020	146
C040	146
C101	147
C141	147
C146	148
C161	148

Article no.	Page
SB	
SB28310101	57
SB28310301	57
SB28310401	57
SB283109020	52
SB283109021	
SB283109022	52
SB283109023	
SB283109040	53
SB2831B001	44, 59
SB2831B501	44, 59
SB2831B502	44, 59
SB2831B601	44, 59
SB2831B801	44, 59
SB2831B900	44, 59
SB2831B901	44, 59
SB2831B902	44, 59
SB2831B903	33, 44, 59
SB2831B904	33, 44, 59
SB2831B950	43, 58
SB2831B951 SB2831B991	43, 58
SB2831B991	45, 60
SB2831PB900	45,60
SB2831PB900	33, 45, 60 33, 45, 60
SB369H9	96
SB369RH901	95
SB380101	77
SB380102	77
SB380103	77
SB380104	77
SB380302020	77
SB380302021	77
SB3803050	77
SB534S5	162
SB7945TY202	81
SB7945TY303	81
SB7945TY505	81
SB7945TY903	81
SB7945TY904	81
SB7945TY905	81
SB7946TY202	80
SB7946TY303	80
SB7946TY505	80
SB7946TY903	80
SB7946TY904	80
SB7946TY905	80
SB7947005	86
SB7947505	87
SB7947505TR	87
SB7947902	87
SB7947904	86
SB7947999	86
SB7947T303	83
SB7947T906	83
SB7947T999	83
SB7947Y202 SB7947Y505	85 85
SB7947Y505 SB7947Y904	85 85
0013411904	



Article no.	Page
SB7948T950	82
SB7948T999	82
SB7948Y505	84
SB7948Y904	84
SB7948Y950	84
х	
XX2872S3	39
z	
Z 01 0 06	113, 119
Z 02 0 06	113, 119
Z 05 0 06	113, 119
Z 05 1 06	113, 119
Z 07 0 06	120
Z 09 0 06	120
Z 12 1 06	112
Z 14 0 06	131
Z 14 1 06	111, 130
Z 15 0 01	114
Z 16 3 06	112
Z 18 0 06	110
Z 21 0 06	120
Z 22 0 06	120
Z 25 0 06	121
Z 33 4 01	125
Z 33 5 01	125
Z 34 4 01	125
Z 34 5 01	125
Z 44 3 01	114
Z 50 3 06	112
Z 55 0 06	131
Z 57 0 06	134
Z 57 5 06	133
Z 60 0 06	137
Z 62 0 06	135, 136
Z 71 7 06	114
Z 72 0 06	132
Z 73 0 06	132
Z 73 2 06	133
Z 74 0 06	132
Z57000106K	
Z99000106	118
Z99000206	21
Z99000701	124

Overview of torque tools


Tools	Precision	Setting	Special feature	Nm range	Torque range	е			
					0,01 Nm	0,1 Nm	1 Nm	10 Nm	20 Nm
easyTorque adapter	± 10%	fixed	VDE certification Permanently preset in factory	5 versions 0,8 – 4,0					
TorqueVario®-S VDE				0,5 – 2,0					
	± 6 %	variable	VDE certification Numeric scale	0,8 – 5,0					
				2,0 - 7,0					
TorqueVario®-S T electric		variable	VDE certification Numeric scale	5 – 14					
Torque key, electric									
	±4 %	variable	VDE certification Numeric scale	5-25					

The cutting capacities for our pliers.

Soft wire Plastic, cop	per, aluminium ele	ectrical cable, e	electrical cable,		Medium-hard wire Iron nails, brass screws, wire-mesh fencing						
ا نې	2	3	4	5	≫ 6	7	8	9	10		
	Diagonal cutters			J	2	Precision mechan					



Interchangeable blades

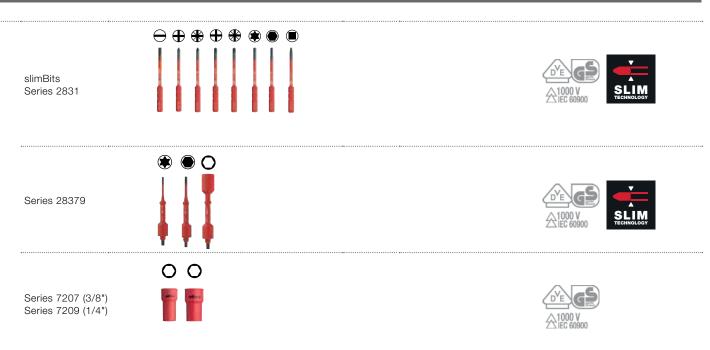

Hard wire Screws, wire r	Hard wire Screws, wire rope, wire basket, electric rail					Hardened spring steel Springs, hardened pins, chains						
¾ 11	12	13	14	15	16 🏹	17	18	19	20	≫ 2 1		
		TriCut installation	pliers		•			BiCut [®] Diagona 100 %/	l cutters	200 %		
		C-I						- Martin				
		Electrician's diago cutters	onal	-			High-leverage combination	je pliers				
				Combinatior	n pliers							
				Diagonal cut								
						Heavy-duty	diagonal cutte	rs				

Values may vary depending on leverage, material thickness and the specific product application.



Legend

Drives

Driv	es
٥	Triangular nut
0	Hexagon head
0	Square nut
۲	Internal hexagon
۲	Internal hexagon with drill hole (tamper-resistant)
0	Tamper Resistant hex
۲	Countersink
O	Combination drill bit
۲	Pentalobe PL
٩	Y-type
Ð	Phillips PH (cross-recessed)
*	Pozidriv PZ (Phillips)
	Internal square
•	Round tip
Θ	Slotted
٩	Slotted nut
۲	SIT
Θ	Spanner
0	Twist drill
Ð	Sliding sleeve
Ð	Torq-Set [®]
۲	TORX®
٢	TORX [®] with drill hole
	(tamper-resistant)
•	TORX PLUS®
≪ ⊛	Tri-Wing®
	Multitooth
	Square reaming blade
٠	Xeno SL/PZ

Screwdrivers [mm] ۵¢ Cut width $\overline{\ominus}$ Tip width •‡ Round blade dimension • Hex blade \bigcirc Hex bolster 1 Scraper width :3 Clip opening 1 Tip width ф-Head width, nut driver $\overline{\rightarrow}$ Blade length Shaft lengths ₽ Handle length ÷ Handle diameter Torque T-handle length -II Torque T-handle width max. Nm Max. torque value [Nm] max. in.lbs. Max. torque value [in.lbs] **#/-** % Accuracy [%] **₽** Cable key depth

Pliers [mm] Flat jaws Half round jaws • : Round jaws Cutter without bevel K K Cutter with small bevel X Cutter with bevel ł Anvil cutter ł Center cutter ١ Scissors cutter Front cutting edge in stripping pliers Ømm Max. diameter mm² Max. cross-section 0; Max. gripper pipe diameter Max. gripper width across 0; flats ပီ External retaining ring ൗ Internal retaining ring **3**, Clamping range Opening width flat ≫ Cutting force ww with opening spring

American Wire Gauge

Saw blade length

AWG

Measurement tools [mm]

Electro	
\≞J	Measurement capacity in Inch
_ /	Measurement capacity [mm]
~ C	Colour
‡ Luului	Width of segments

	Battery
LED	LED lumens
*	Laser light

Soft faced hammer [mm]

O I	Face diameter
 ‡	Hammer face width
•	Hammer head width

General symbols

€g€	Weight g
•‡	Diameter
SB)	Blister packed
mm	Total length
•	Total length inch
	Packaging unit

L-keys [mm]

•	Round blade dimension
• 1	Hex blade
\bigcirc	Hex bolster
	Shaft lengths
₩	Blade length
♣.	Side driver length T-handle
)1	Handle width
, ,	Diameter

Drives

0	Square nut
	Square
❶	G7 drive system
0	Threaded connector
۲	SDS-Plus®
۲	Square nut

Square nut


Bits [mm]

- ‡	Threaded connector
\leftrightarrow	Drill working length
	Screw size

TORX®, TORX PLUS®= Registered Trademarks of ACUMENT GlobalTechnologies B.V. ACR/AOT, Tri-Wing®, Torq-Set®= Registered Trademarks of Phillips Screw Company Pozidriv= Registered Trademark of European Industrial Services Ltd.



Legend

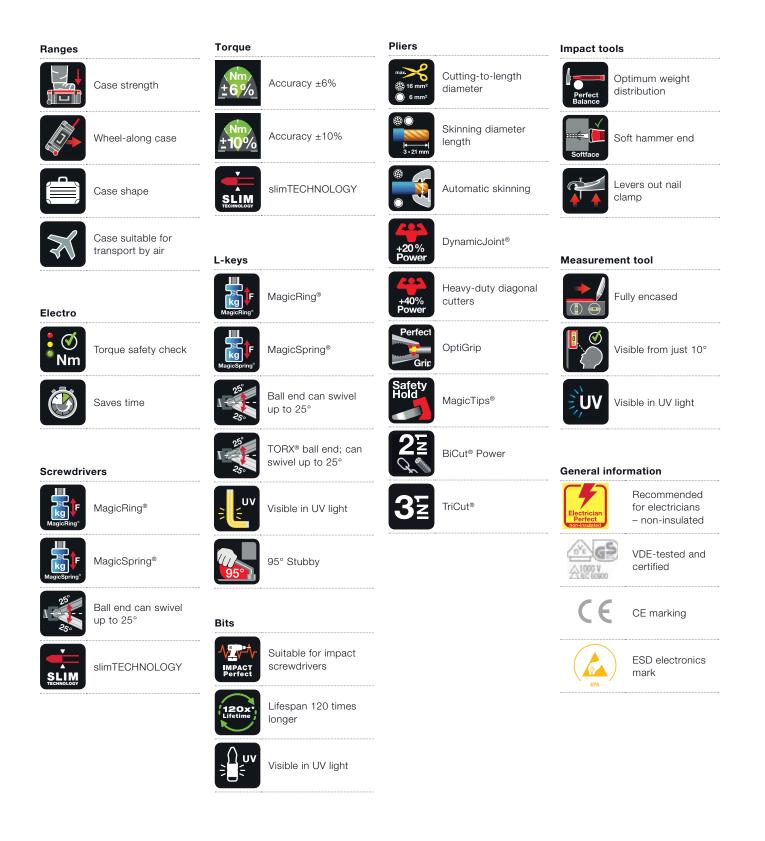

Subject to technical changes. All illustrations and graphics, specified dimensions and valuesand references to standards, e.g. DIN/EN, are nonbinding.Any liability claims based on this will therefore be rejected. No liability claims will be accepted for printing errors and mistakes which have occurred during the production of the catalogue. All property rights to the catalogue held by Wiha Werkzeuge GmbH are reserved. The printing or copying of the texts and illustrations contained in this catalogue or its design is prohibited. Our General Terms and Conditions (Terms of Sale, Deliveryand Payment) apply. You will find our general terms and conditions at www.wiha.com

Wiha Werkzeuge GmbH Obertalstraße 3–7

78136 Schonach/Germany Phone +49 77 22 959 0 Fax +49 77 22 959 159 Inland Fax +49 77 22 959 155 Export info.de@wiha.com www.wiha.com

Wiha Tools Ltd.

841 Birchwood Boulevard Warrington WA3 7QU Phone +44 15 27575 758 +44 15 27910 986 Fax +44 15 27910 023 info.uk@wiha.com www.wiha.com/en

Wiha France SARL

Z. A. de Terrefort 33520 Bruges/France Phone +33 55 6167 935 Fax +33 55 6167 936 servicecommercial@wiha.fr www.wiha.com/fr

Wiha Nordic A/S

Korskildelund 6 2670 Greve/Denmark Phone +45 70 238 045 info.nordic@wiha.com www.wiha.com

WIHA IBERIA / Willi Hahn S.A.

Avda. Sant Julia, 1 Edifici Tilma oficina 17 08400 Granollers / Barcelona / Spain Iberia@wiha.com Tel. +34 916938 511 www.wiha.com/es

Wiha Polska Sp. z o.o.

ul. Budowlanych 10 b 80-298 Gdańsk/Poland Phone +48 58 7623 830 Fax +48 58 7623 900 info.pl@wiha.com www.wiha.com/pl

Wiha in Russia

Phone +48 58 7623 830 Fax +48 58 7623 900 michal.moczynski@wiha.com www.wiha.com

Willi Hahn Corp.

1348, Dundas Circle Monticello, MN 55362/USA Phone +1 76 32956 591 Fax +1 76 32956 598 cservice@wihatools.com www.wihatools.com

Wiha Tools Canada Ltd.

394 Deerhurst Drive L6T 5H9, Brampton, ON Phone +1 86 64940 096 Fax +1 80 04947 456 info@wihatools.ca www.wihatools.ca

Wiha Tools (Shanghai) Co.Ltd.

Room No. 908 - 910, Building 10, Long 2777, East Jinxiu Road, Pudong New District Shanghai, China 201206 Phone +86 21 64401 119 Fax +86 21 64401 112 info.cn@wiha.com.cn www.wiha.com.cn

Wiha Finland Oy Mäkituvantie 9 FI-01510 Vantaa Finland Phone +358 44 231 9988 raija.heliin@wiha.com www.wiha.com

Wiha en Belgique

Phone +32 49 3505 450 info.belux@wiha.com www.wiha.com

Wiha in Nederland

Phone +31 64 6311 330 info.nl@wiha.com www.wiha.com/nl

Wiha in Italia

Thoelke Rappresentanze Srl Phone +39 03 32966 039 info.it@wiha.com www.wiha.com/it

Premium Tools Australia Pty Ltd.

PO Box 63 Bargo, NSW 2574 Phone +61 02 46841 460 Fax +61 02 80887 272 sales@wiha.com.au www.wiha.com.au

Premium Tools (NZ) Ltd.

Unit 5C 89 Ellice Road Wairau Valley Auckland, New Zealand Phone +64 09 4442 560 Fax +64 09 3550 411 sales@wiha.co.nz www.wiha.co.nz

